



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	MUSTANG ENERGY COPORATION	Company	MUSTANG ENERGY COPORATION
Well	DECHANT BROTHERS #1	Well	DECHANT BROTHERS #1
Field	WILDCAT	Field	WILDCAT
County	NESS	County	NESS
State	KANSAS	State	KANSAS
Location:	API # : 15-135-25807-00-00 1540' FSL & 1695' FEL SW - SE - NW - SE	Other Services CNL/CDL DIL/SON	
Permanent Datum	GROUND LEVEL	Elevation	
Log Measured From	KELLY BUSHING 8' A.G.L.	K.B. 2257 D.F. 2255 G.L. 2249	
Drilling Measured From	KELLY BUSHING		
SEC 2	TWP 20S	RGE 22W	
Date	8/26/14		
Run Number	TVMO		
Depth Driller	4510		
Depth Logger	4511		
Bottom Logged Interval	4493		
Top Log Interval	3650		
Casing Driller	8 5/8" @ 221		
Casing Logger	220		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 6000 PPM	
Density / Viscosity	9.2/50		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.50 @ 84F		
Rmf @ Meas. Temp	0.38 @ 84F		
Rmc @ Meas. Temp	0.60 @ 84F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	0.35 @ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	121F		
Equipment Number	3802		
Location	HAYS, KS.		
Recorded By	IAN MABB		
Witnessed By	JASON T ALM		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING NABORS COMPLETION & PRODUCTION SVCS. (785) 628-6395

DIRECTIONS:
BAZINE, KS. - 8 MILES SOUTH TO RD 50 - 1 1/2 MILES WEST - NORTH INTO

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

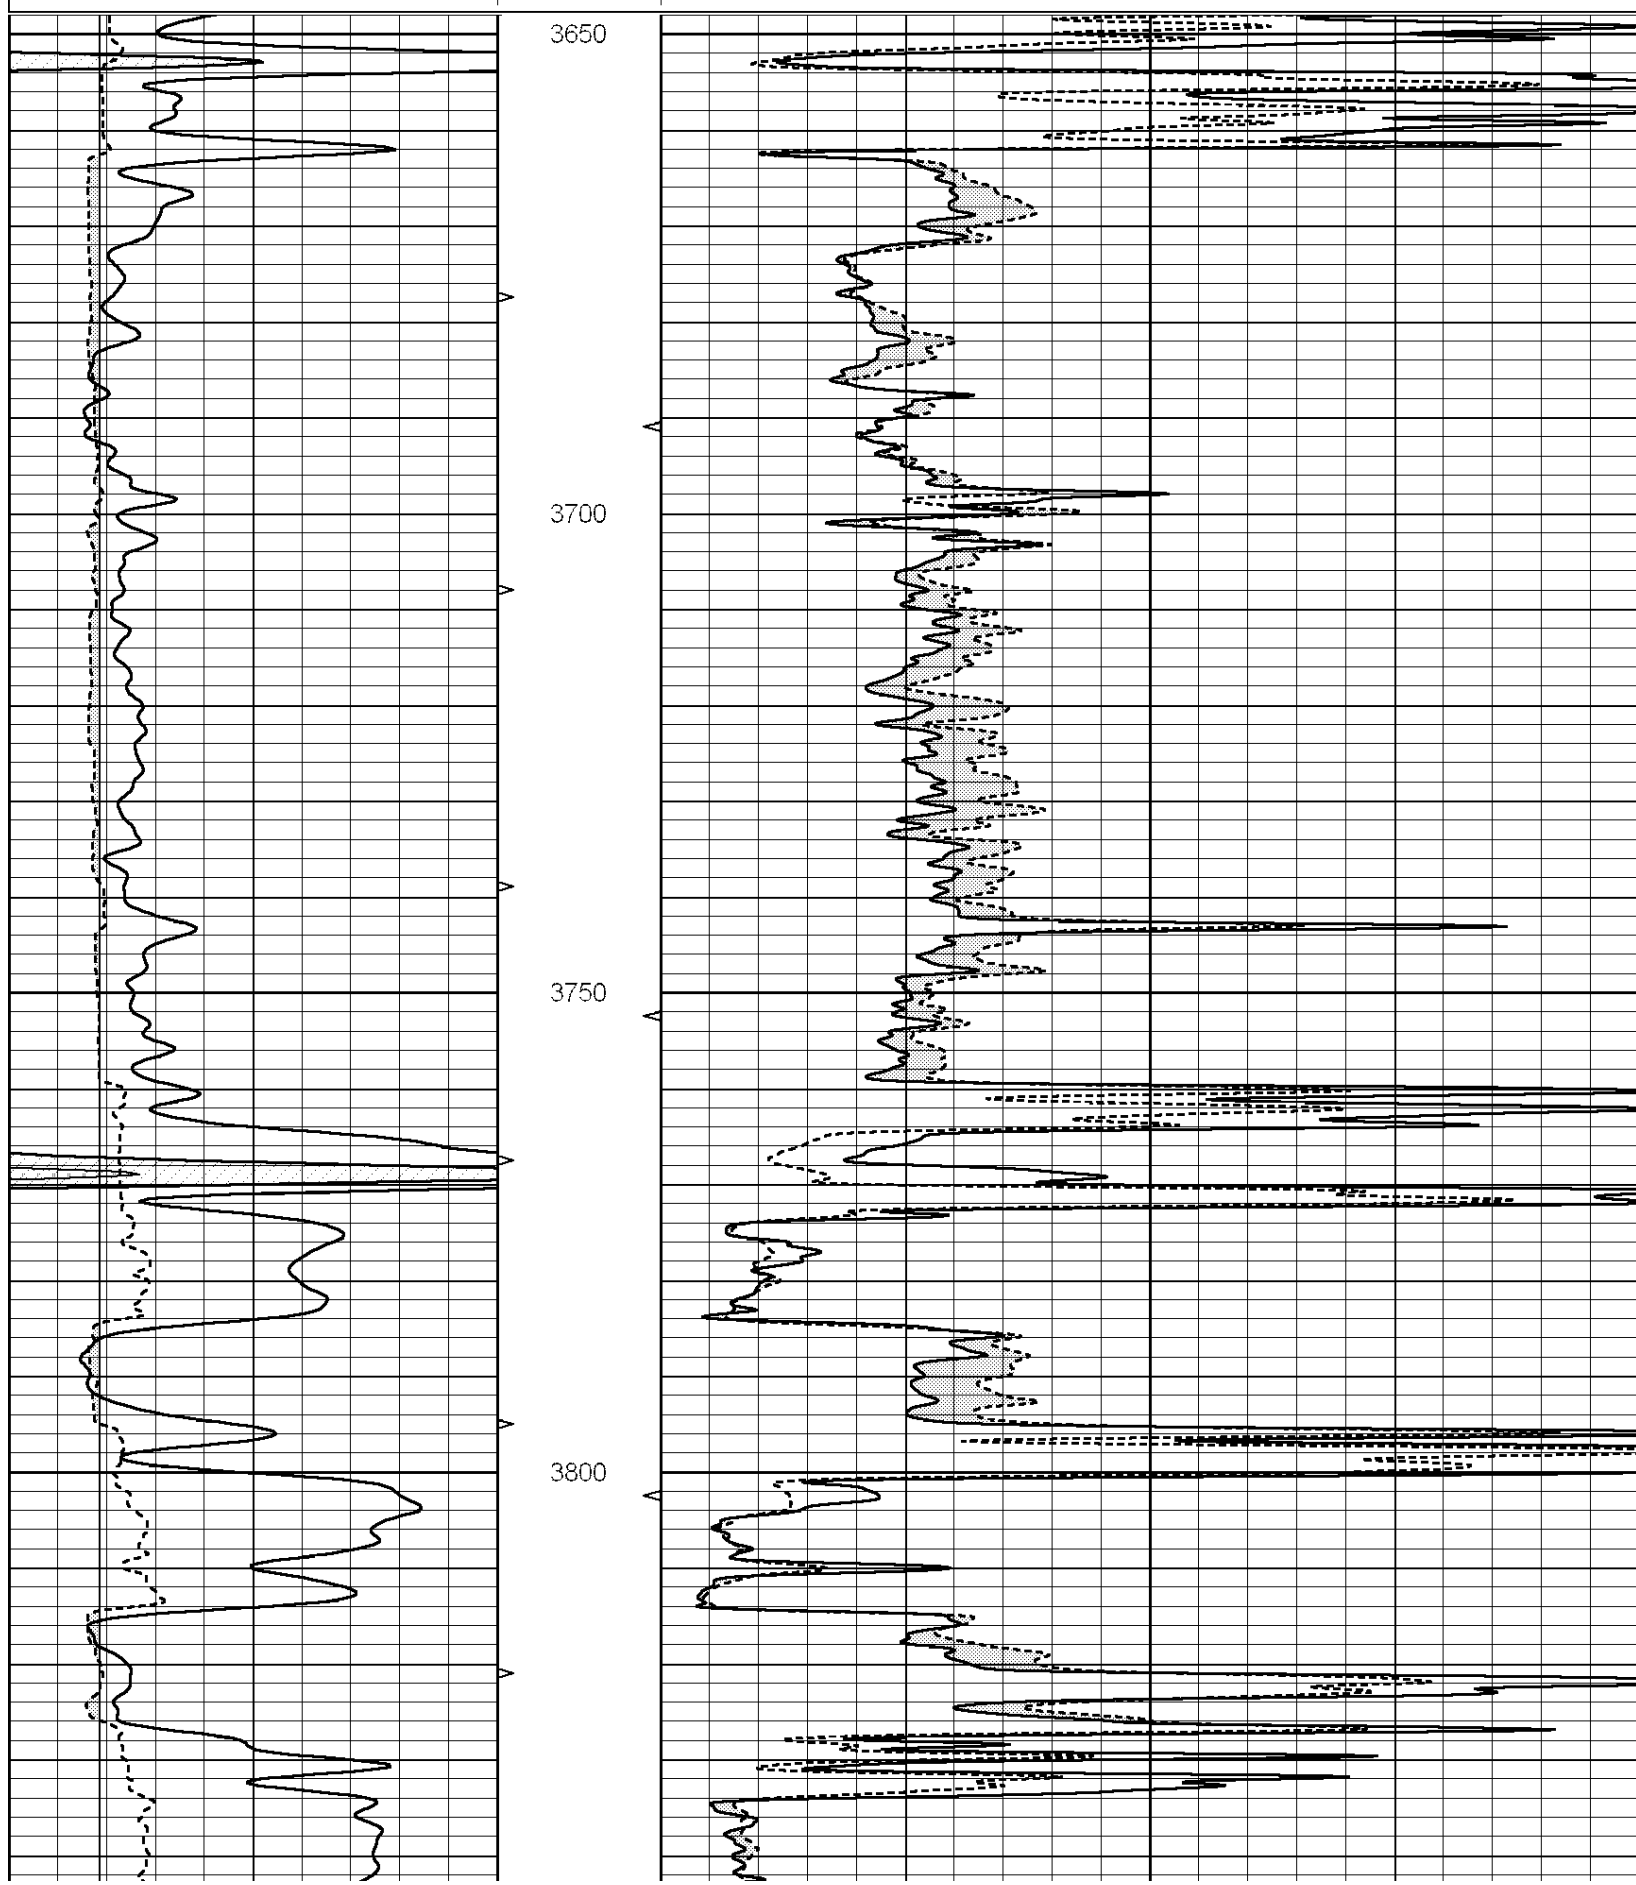

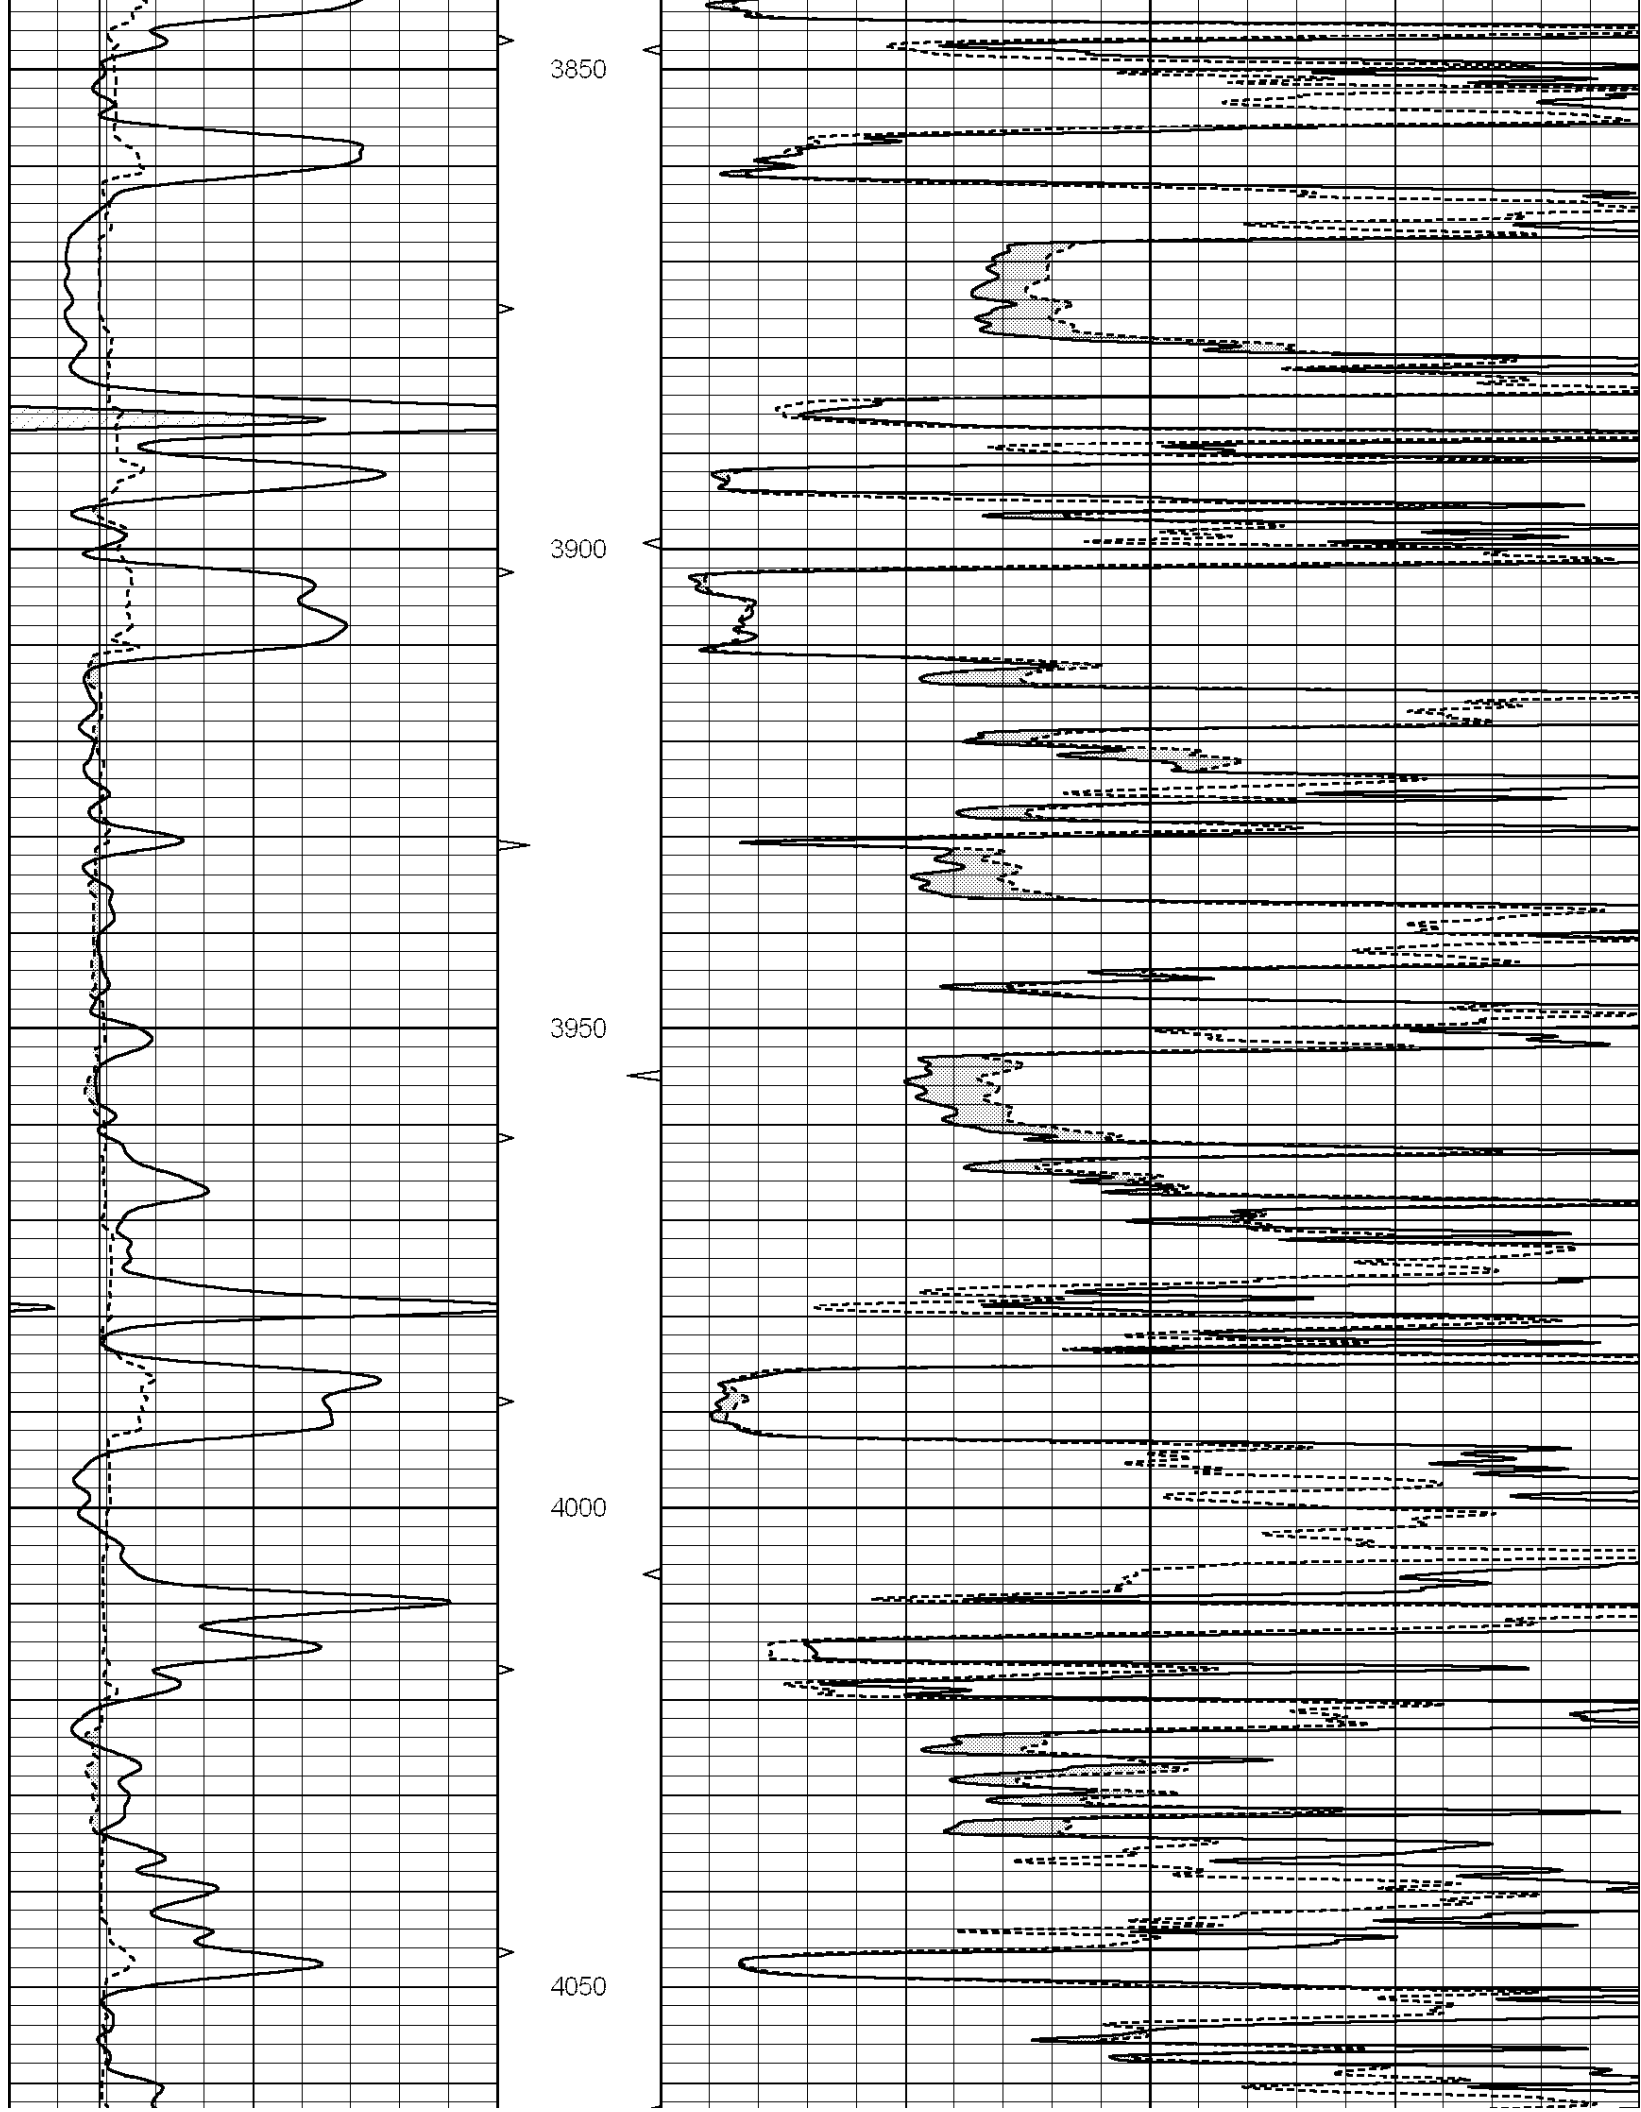

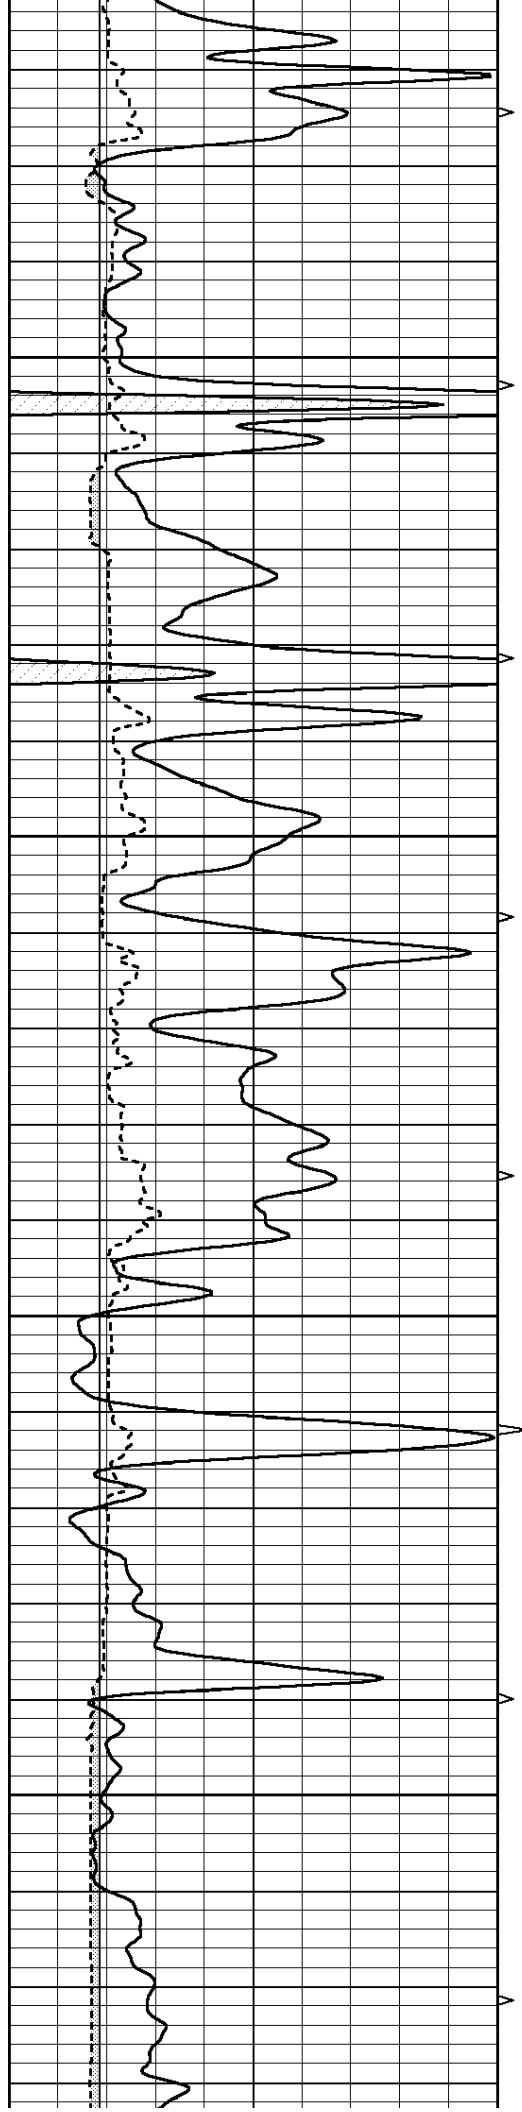



4100


4150

4200

4250

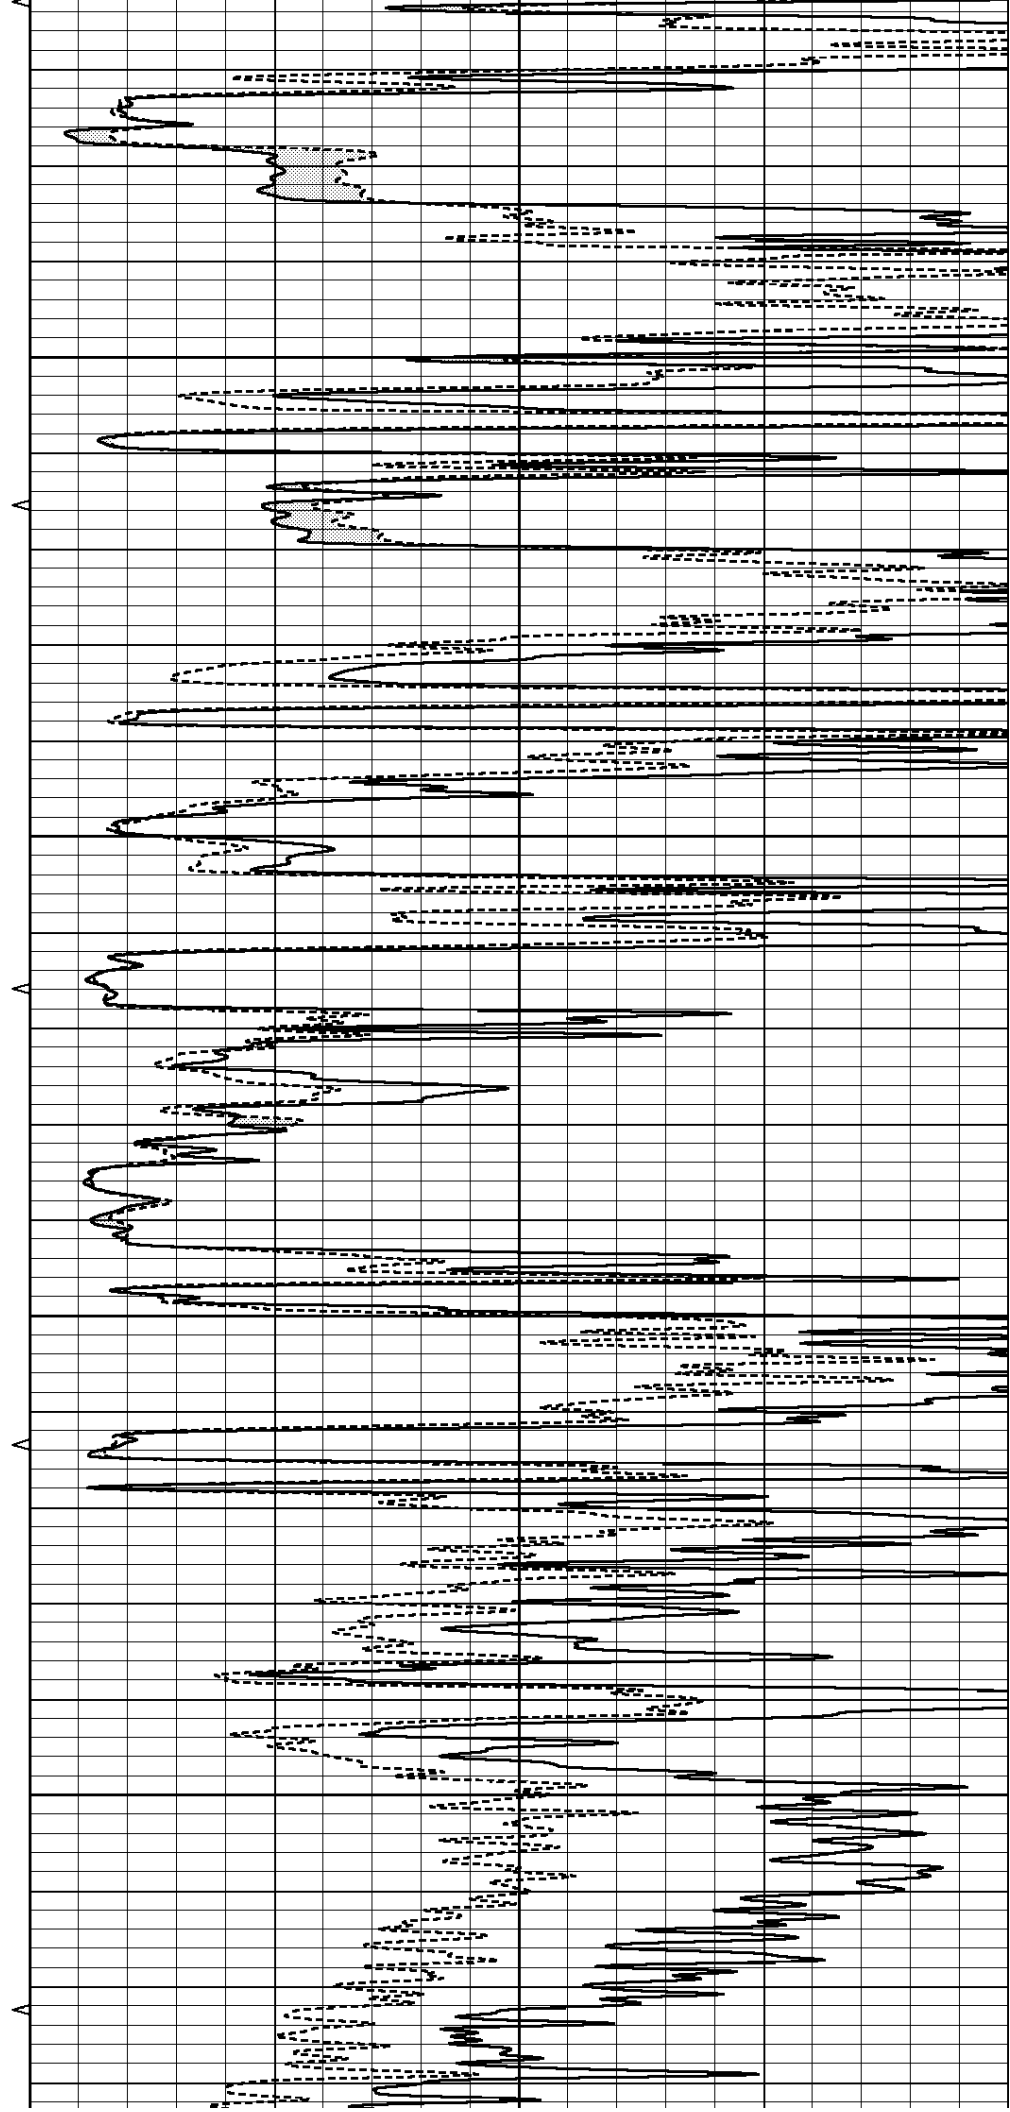

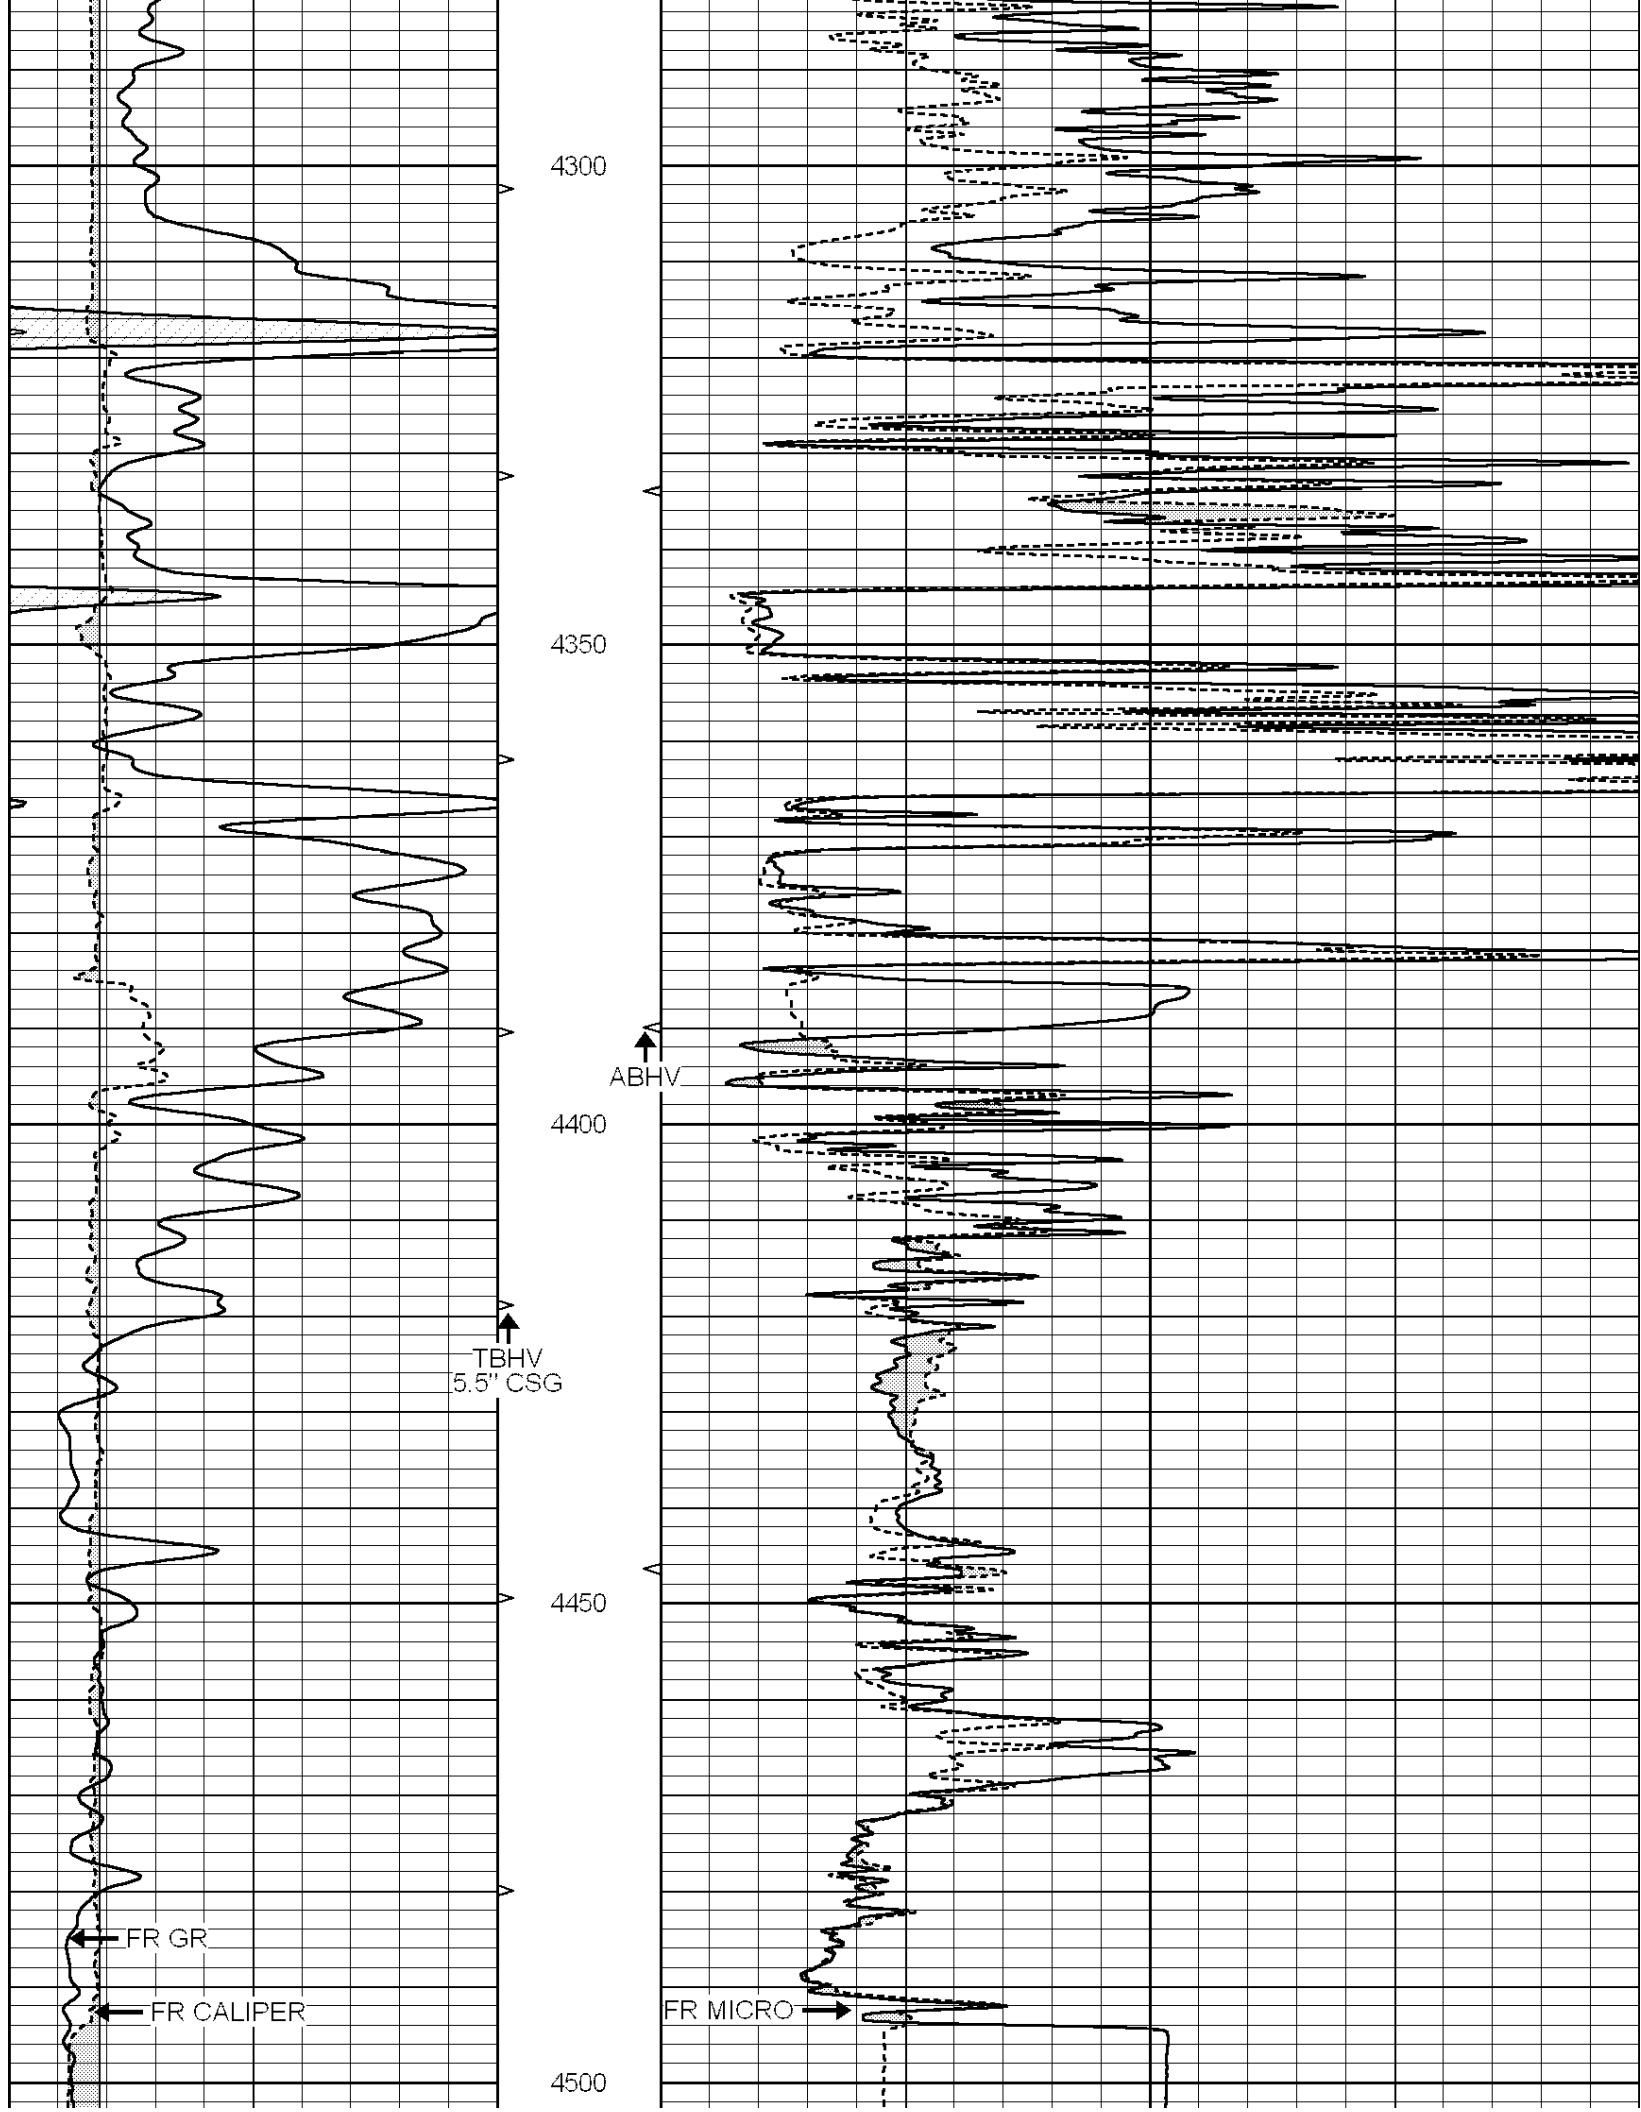

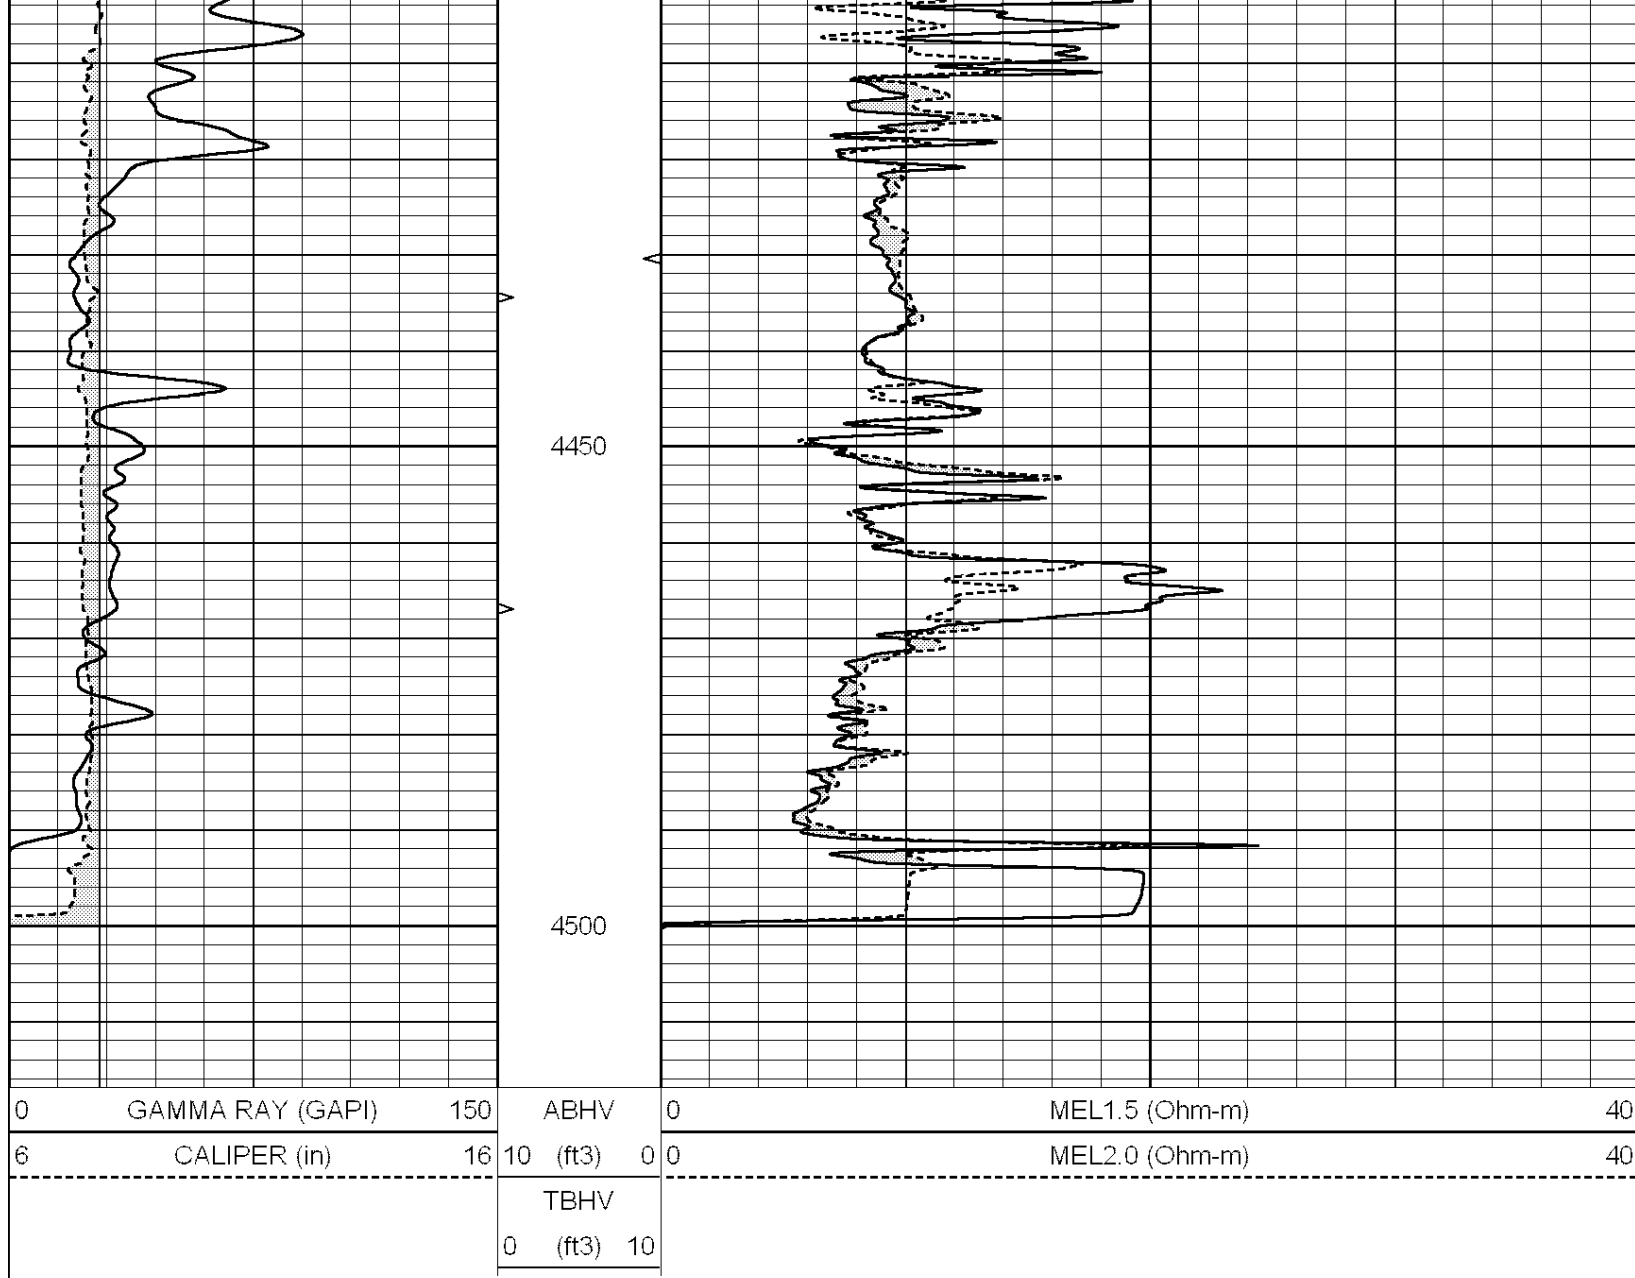

Calibration Report

Database File: 25808ddn.db
 Dataset Pathname: pass6.2
 Dataset Creation: Tue Aug 26 15:10:00 2014 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO4
 Tool Model: PROBE
 Performed: Wed Aug 13 17:16:52 2014

Caliper Calibration: Gain=2.000 Offset=-4.000

References	Low Cal	High Cal
Readings	8.600	14.000
	5.934	7.767

1.5" Calibration: Gain=39.000 Offset=-1.000

References	Low Cal	High Cal
Readings	0.000	20.000
	0.013	1.547

2" Calibration: Gain=45.000 Offset=0.000

References	Low Cal	High Cal
Readings	0.000	20.000
	0.017	1.202
Gamma Ray Calibration Report		
Serial Number:	GR2	
Tool Model:	OPEN	
Performed:	Sat Aug 02 03:42:50 2014	
Calibrator Value:	200.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	740.0	cps
Sensitivity:	0.3500	GAPI/cps