



SONIC LOG

Company	VINCENT OIL COMPANY	Company	VINCENT OIL COMPANY
Well	OVERMYER #3-9	Well	OVERMYER #3-9
Field	KINGSDOWN NORTHWEST	Field	KINGSDOWN NORTHWEST
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-21031-0000		Other Services CDL/CNL/DIL ML
Permanent Datum	1334' FNL & 1904 FWL		
Log Measured From	SEC 9 TWP 29S RGE 22W		
Drilling Measured From	GROUND LEVEL Elevation 2482 KELLY BUSHING 12' A.G.L. KELLY BUSHING	Elevation K.B. 2494 D.F. 2492 G.L. 2482	
Date	11/23/19		
Run Number	TWO		
Depth Driller	5305		
Depth Logger	5306		
Bottom Logged Interval	5296		
Top Log Interval	00		
Casing Driller	8 5/8" @ 692		
Casing Logger	692		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.1/5.1		
pH / Fluid Loss	11.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.45 @ 55F		
Rmt @ Meas. Temp	.38 @ 55F		
Rmc @ Meas. Temp	.54 @ 55F		
Source of Rmt / Rmc	MEASURED		
Rm @ BHT	.19 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	128F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	TOM DUDGEON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS
KINGSDOWN NORTH 1 MILE, EAST 1.5, SOUTH INTO.




MAIN PASS

Database File: 4462pe.db
Dataset Pathname: pass7SON
Presentation Format: _slt
Dataset Creation: Sat Nov 23 12:55:34 2019
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	140	DELTA TIME (usec/ft)		40	
6	CALIPER (in)	16	10 (ft3)	0	30	SONIC POROSITY (pu)		-10
0	MINMK	20	TBHV	0	ITT (msec)		20	
			0 (ft3)	10				

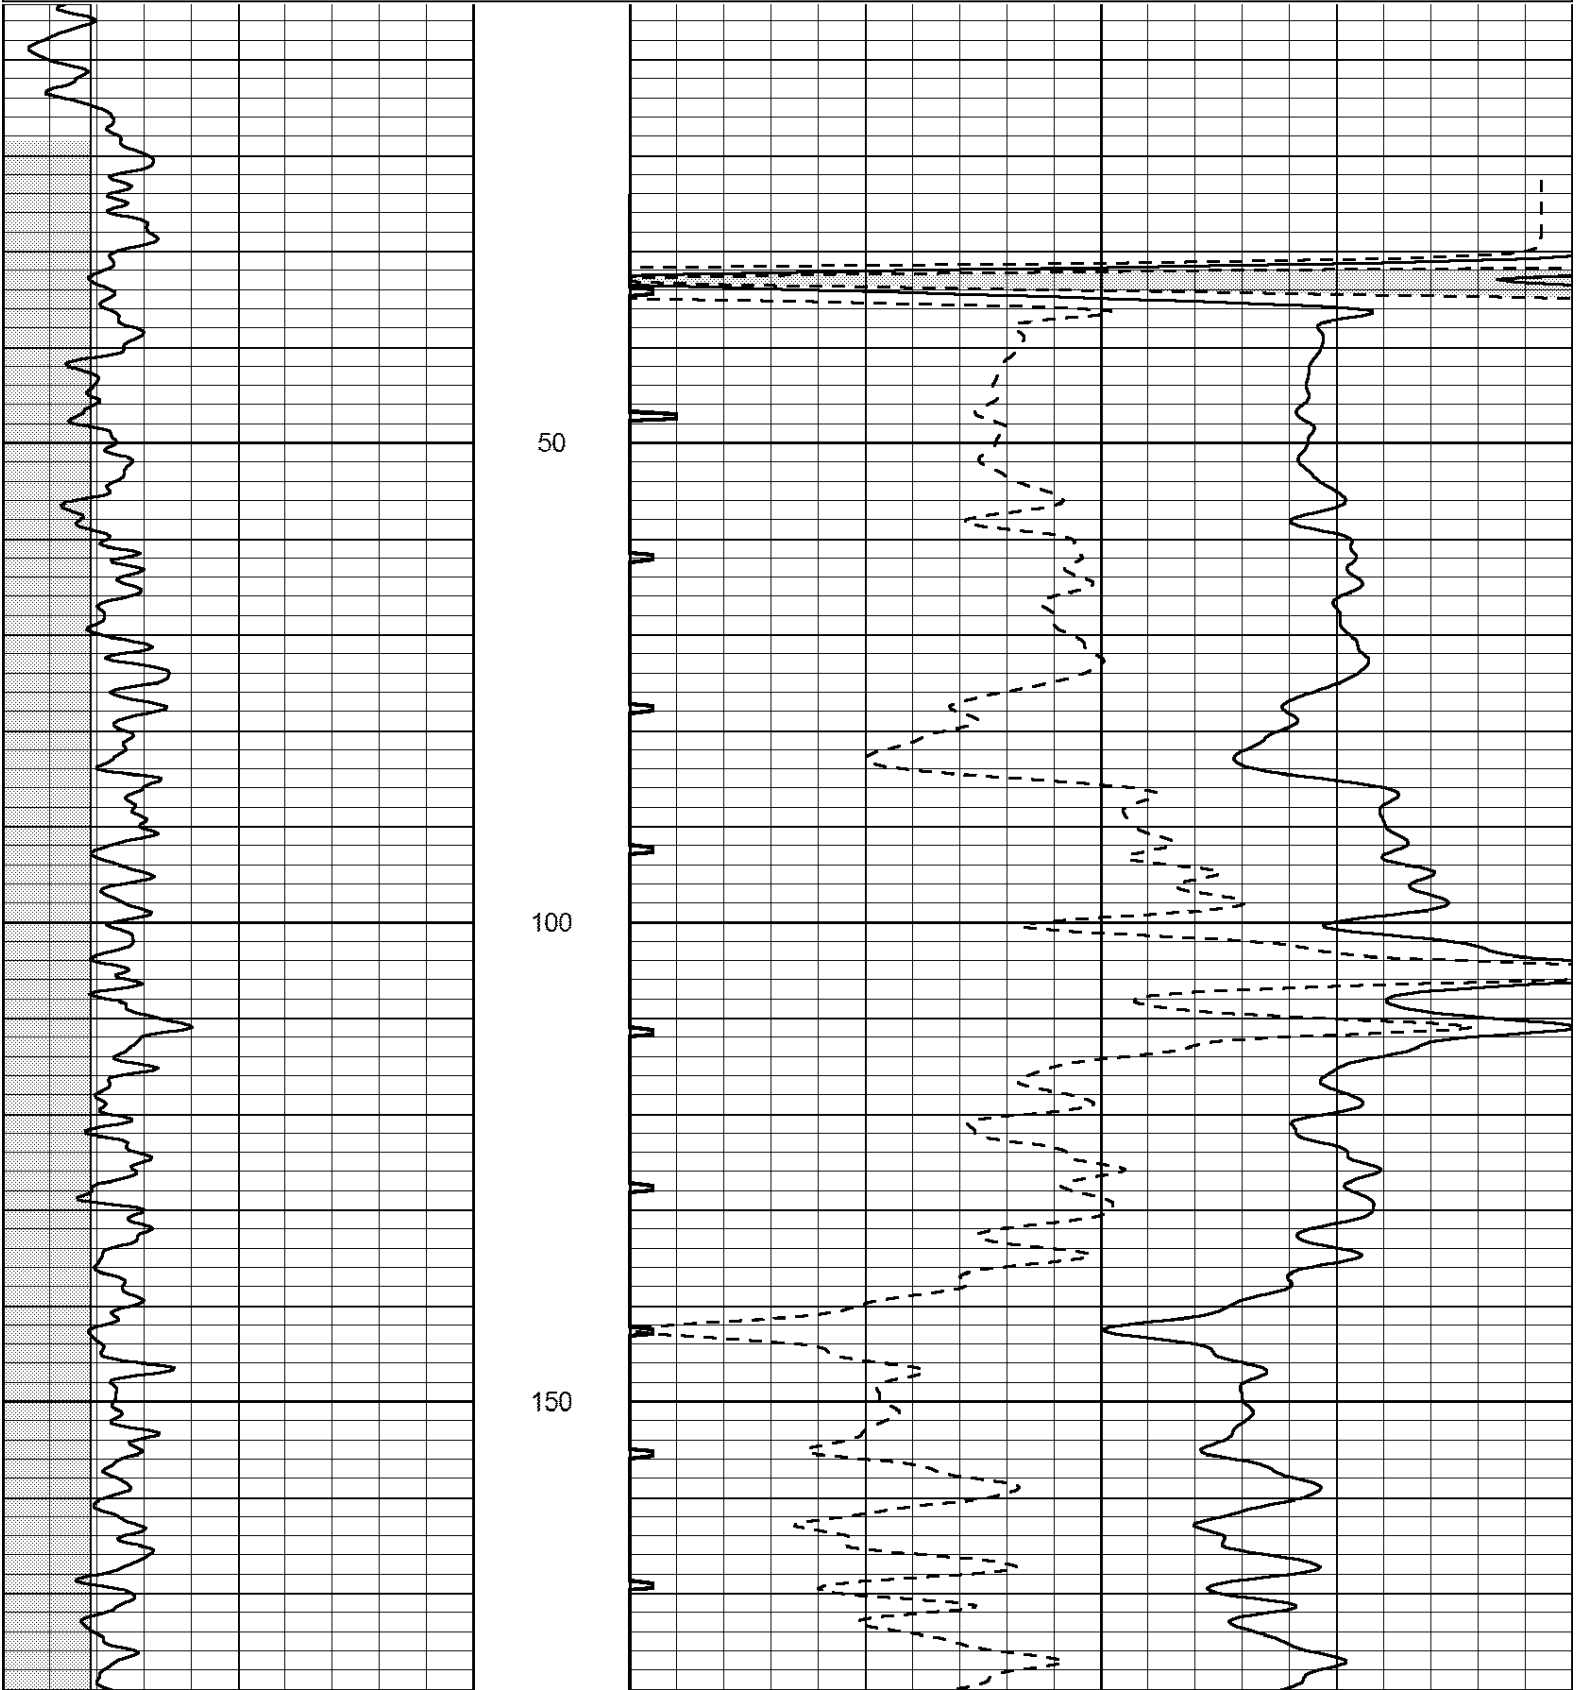

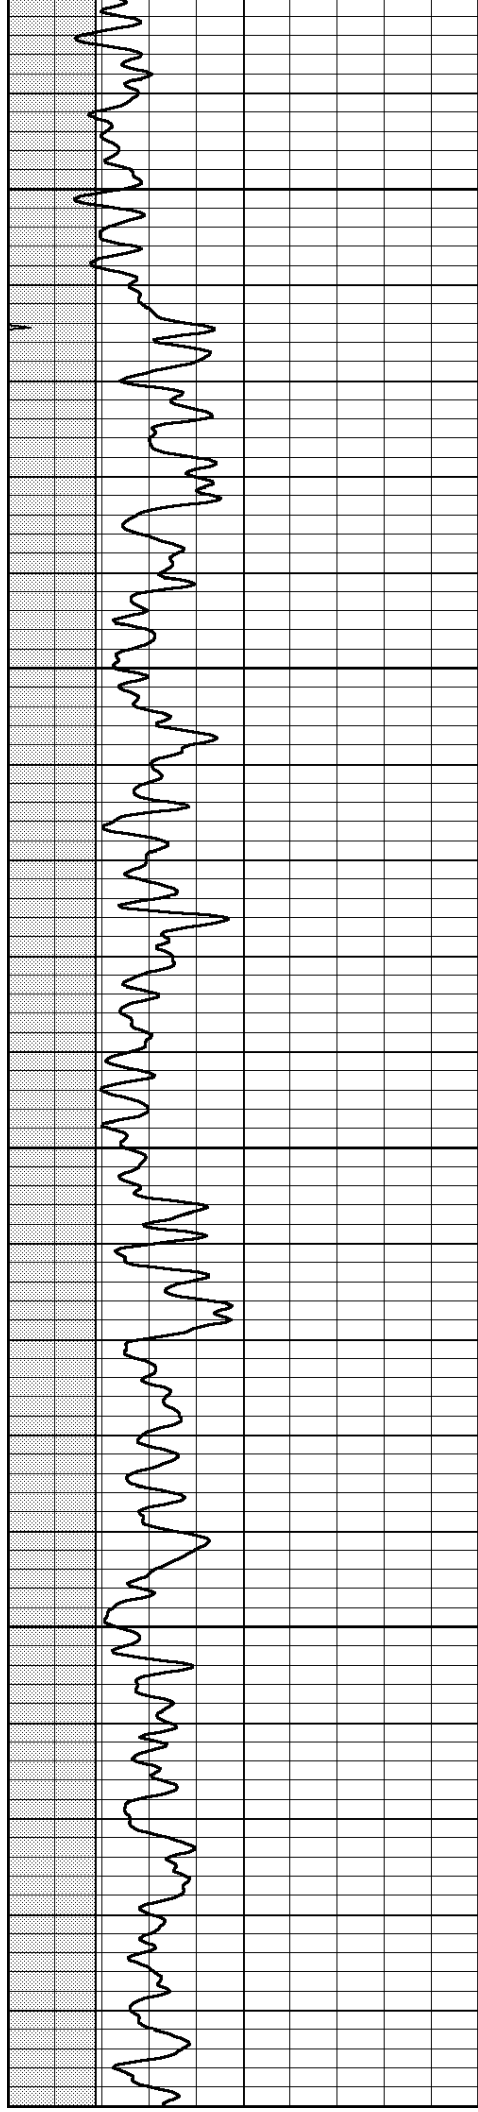


200


250


300

350

400

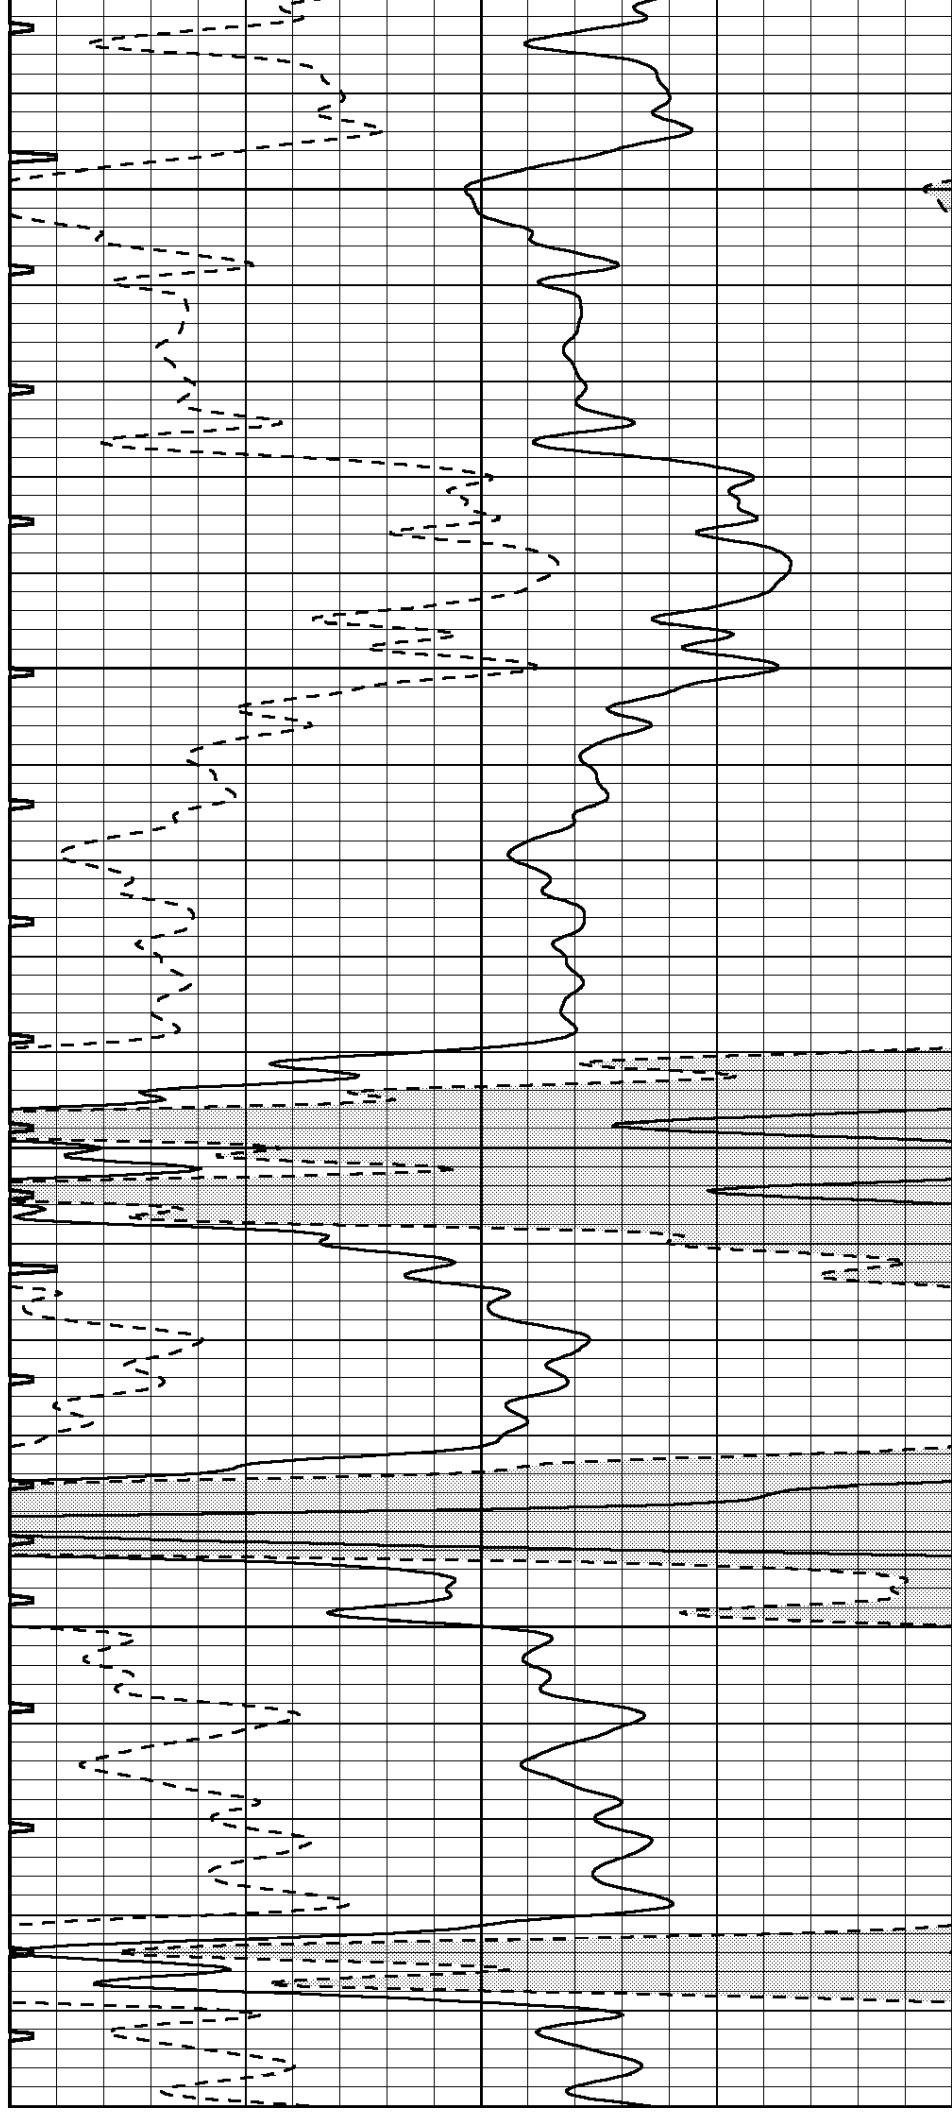

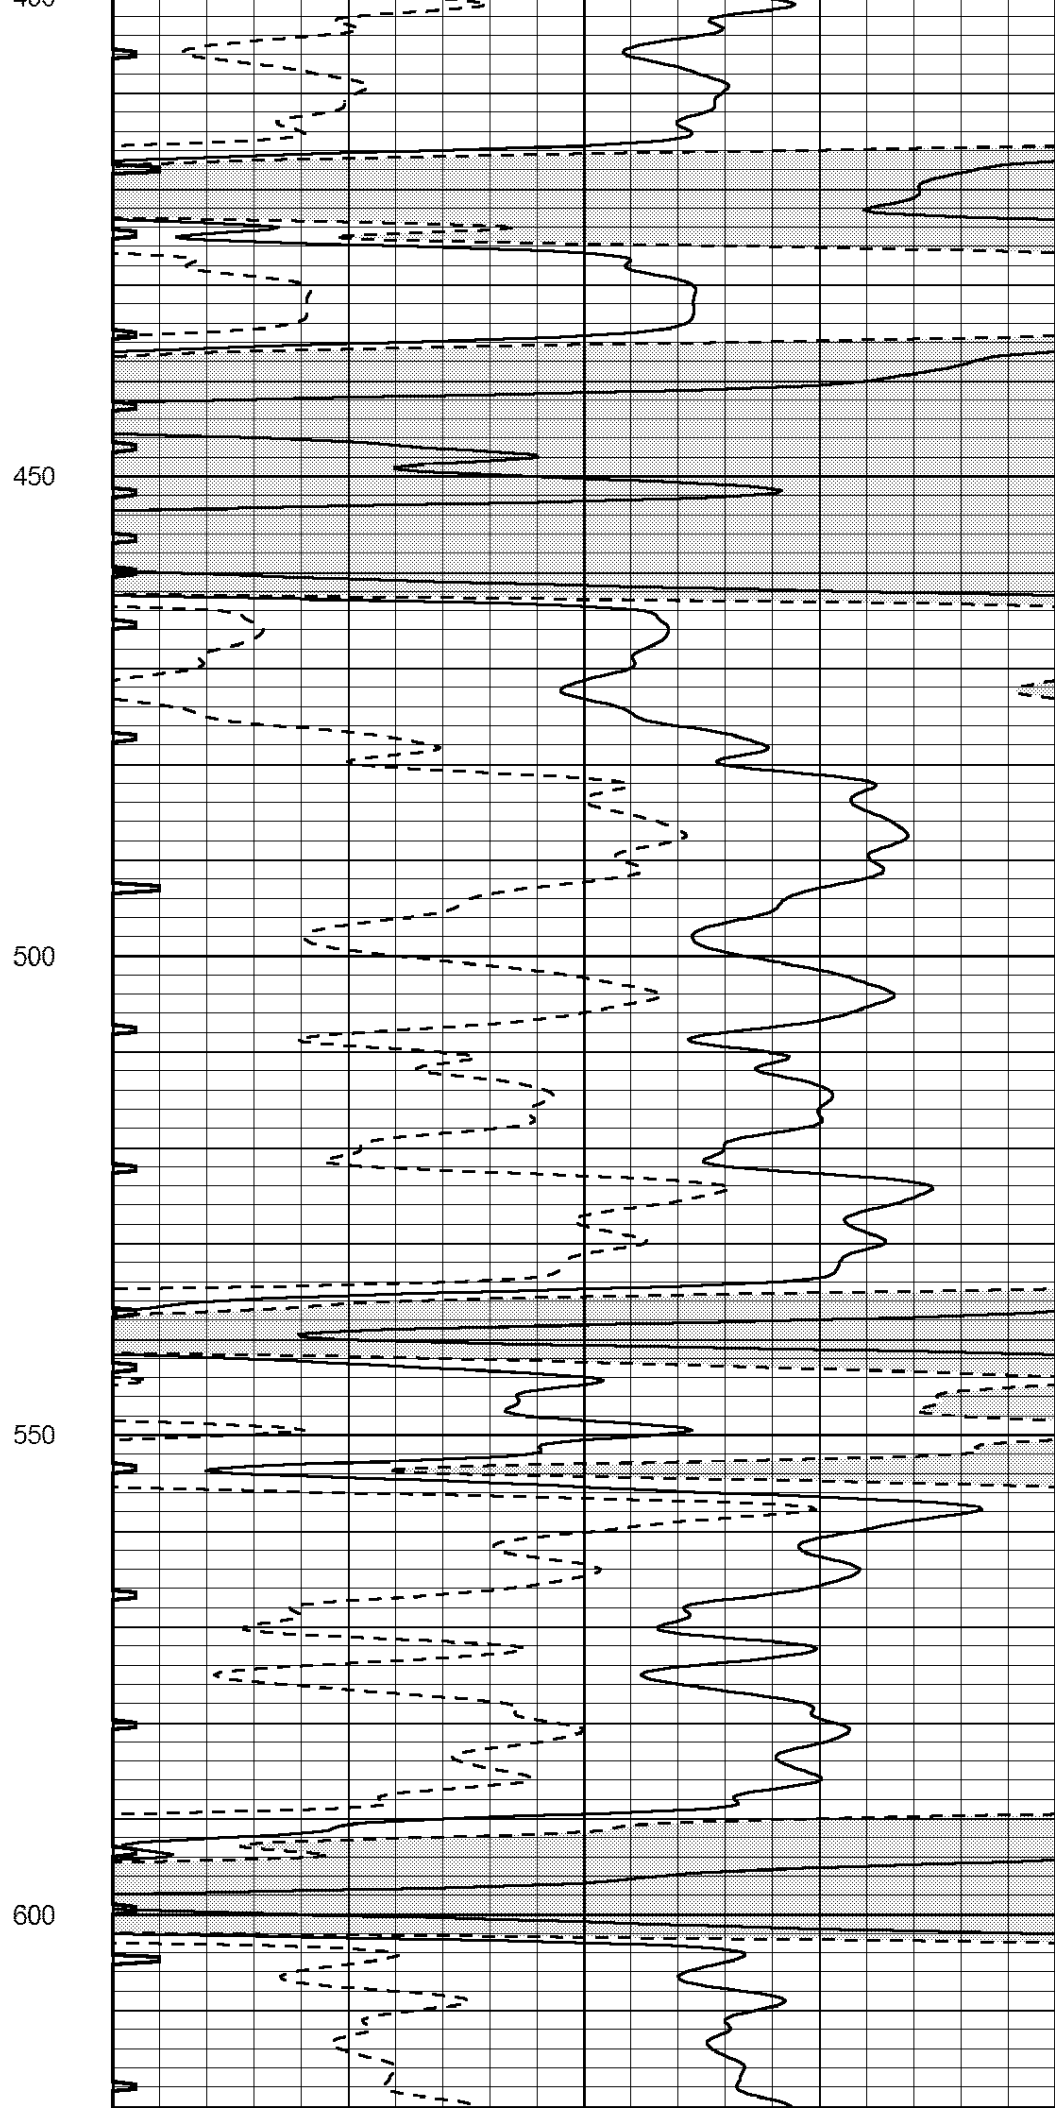

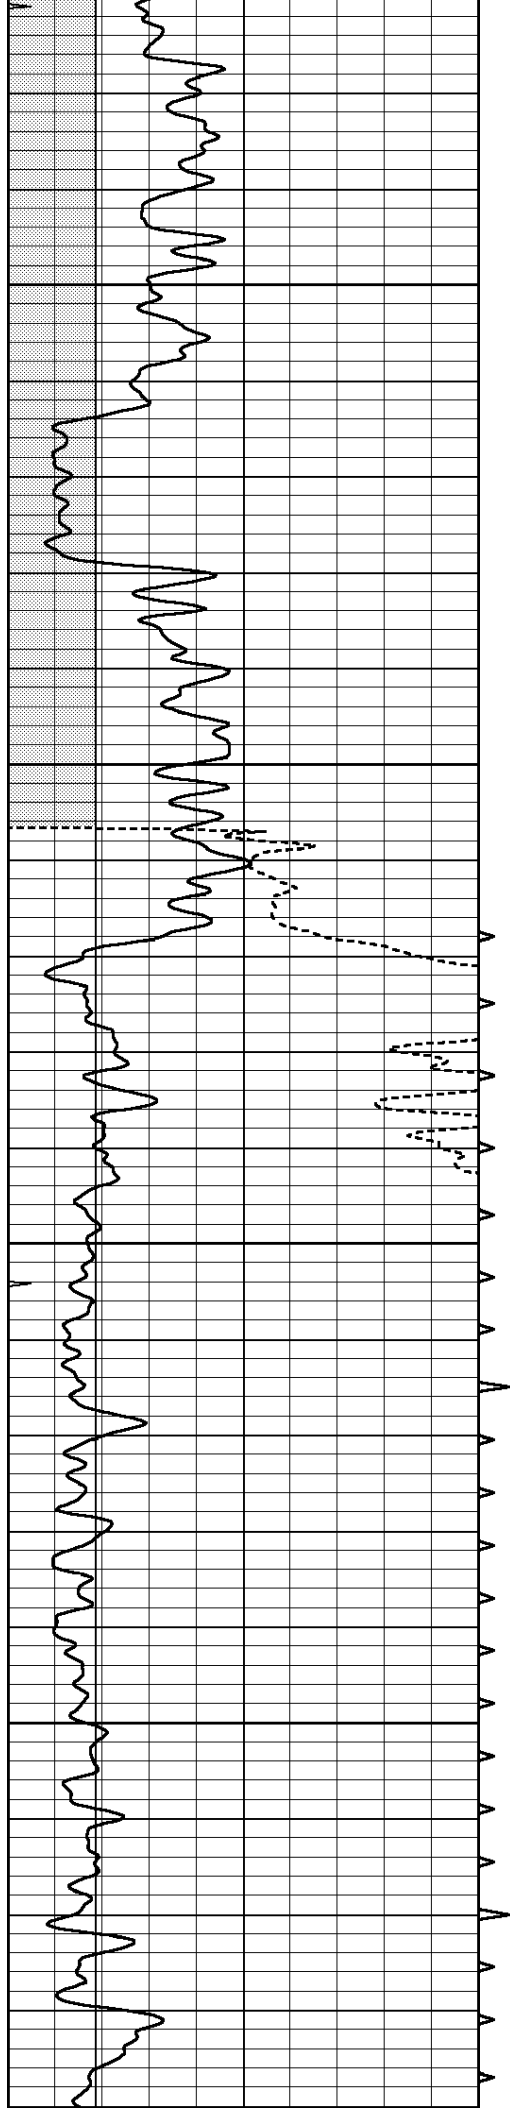




650



700



750



800

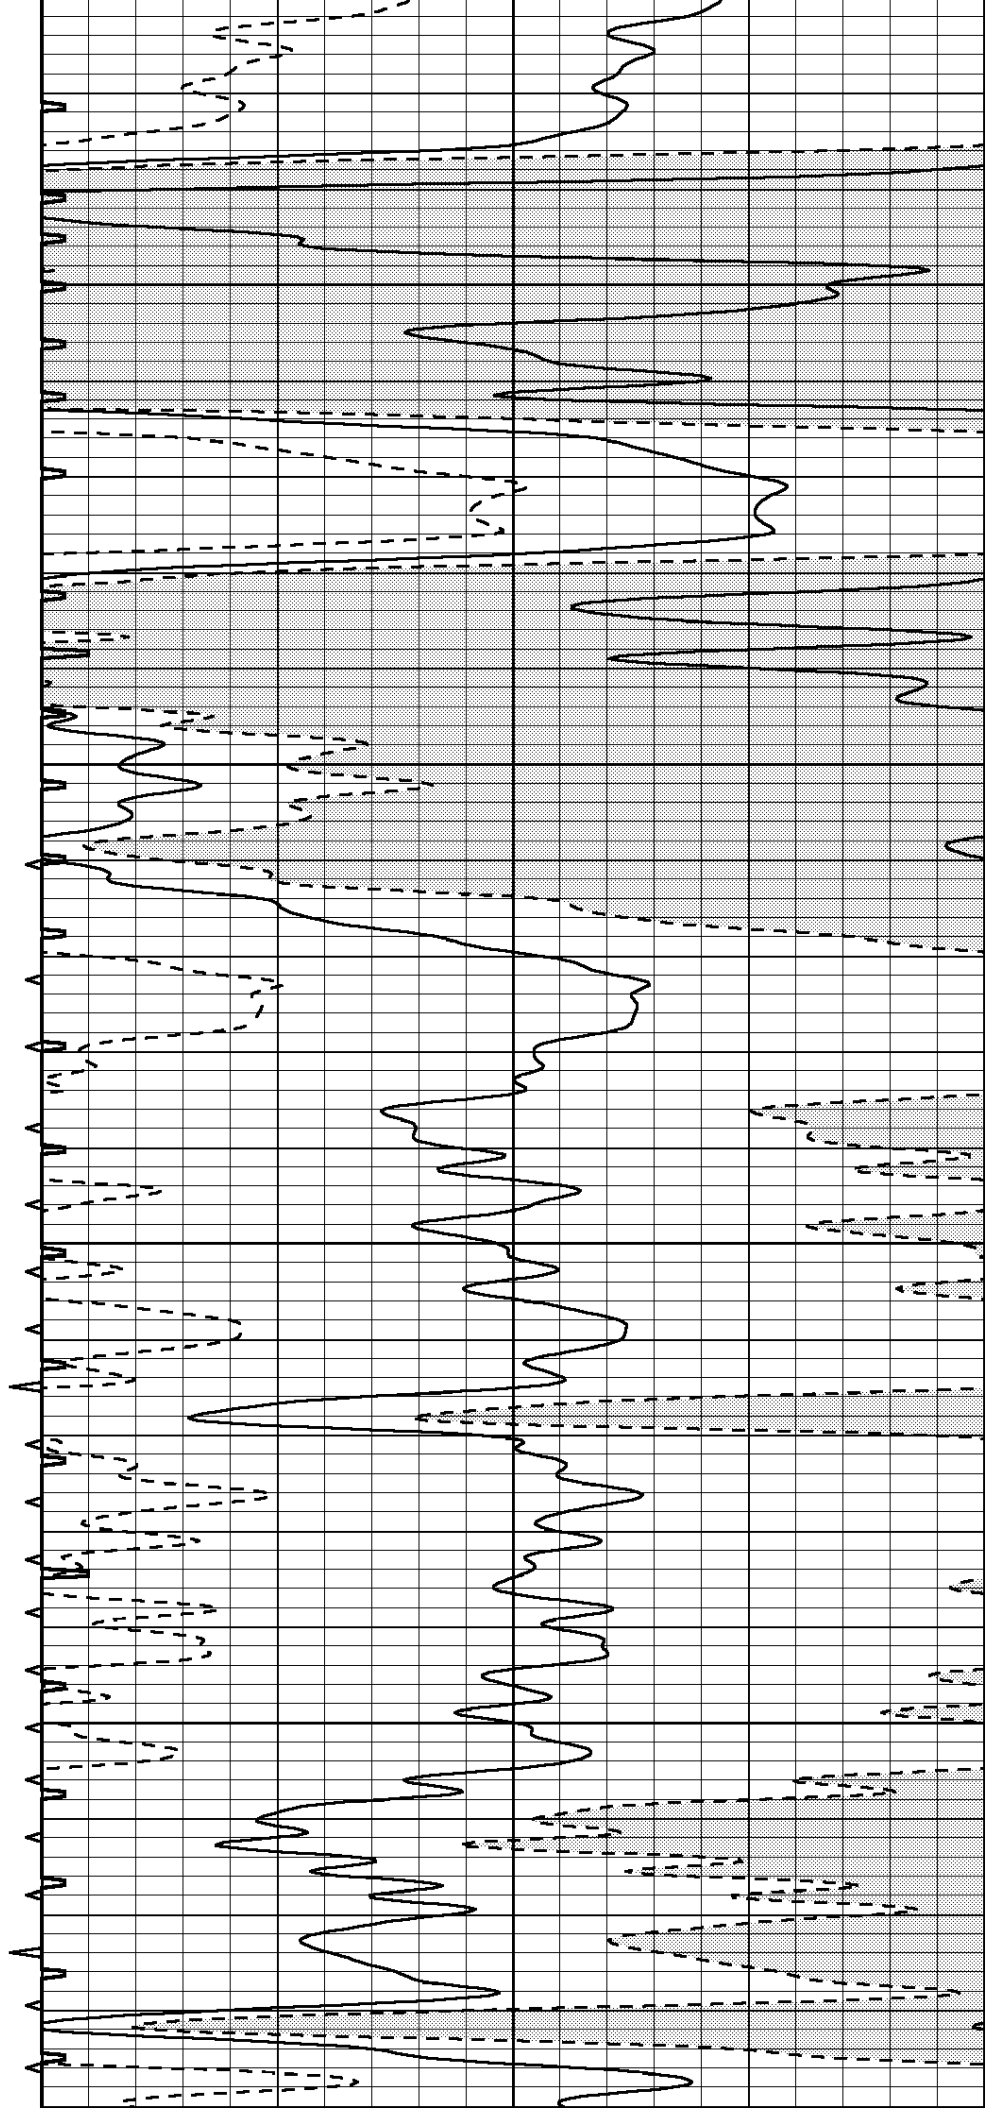


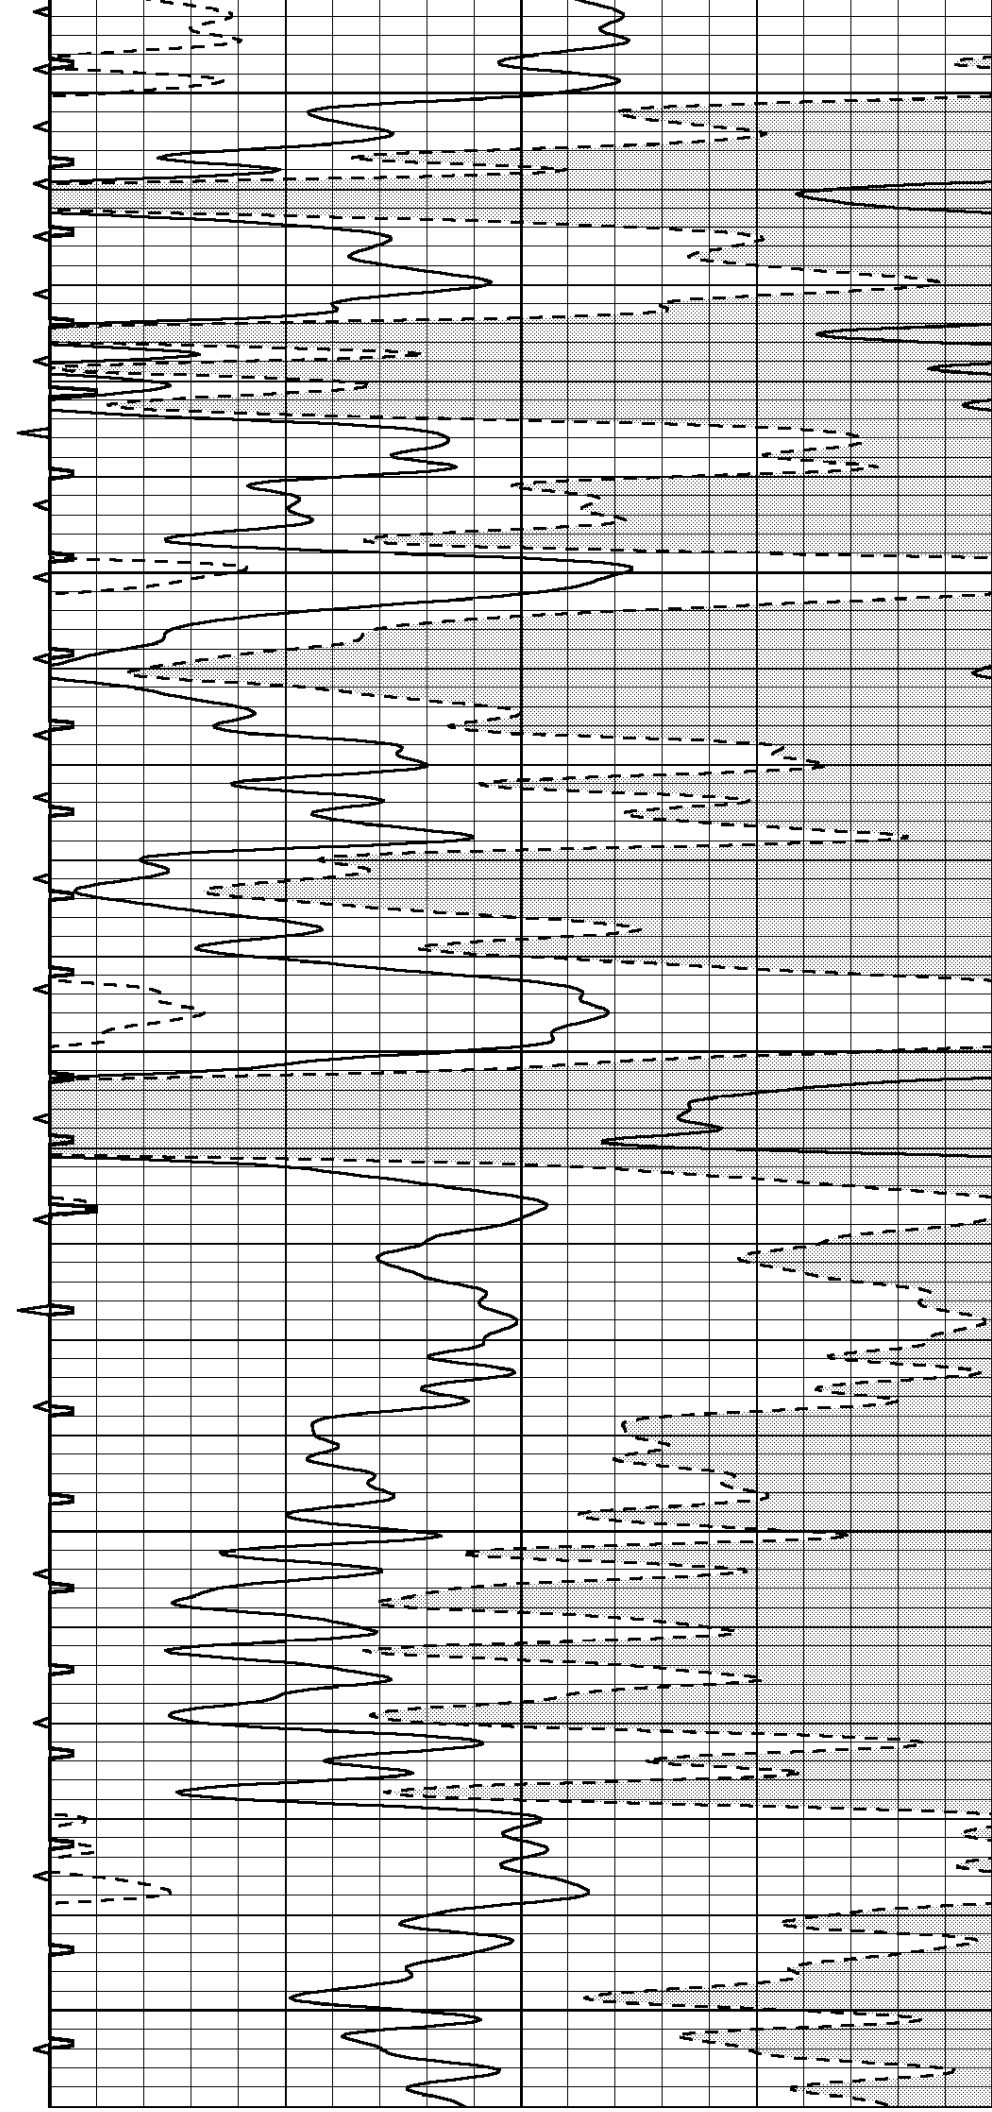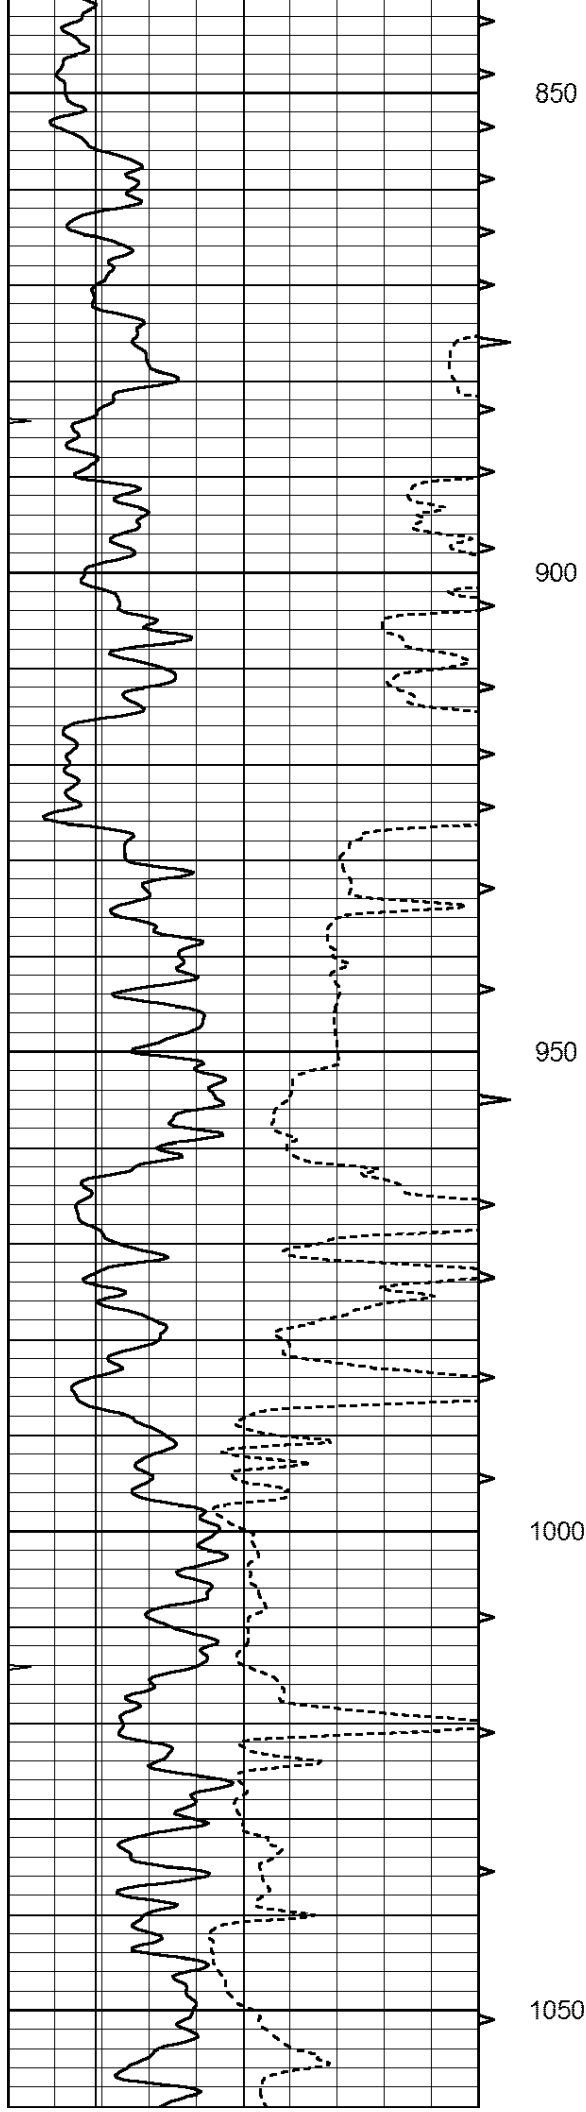

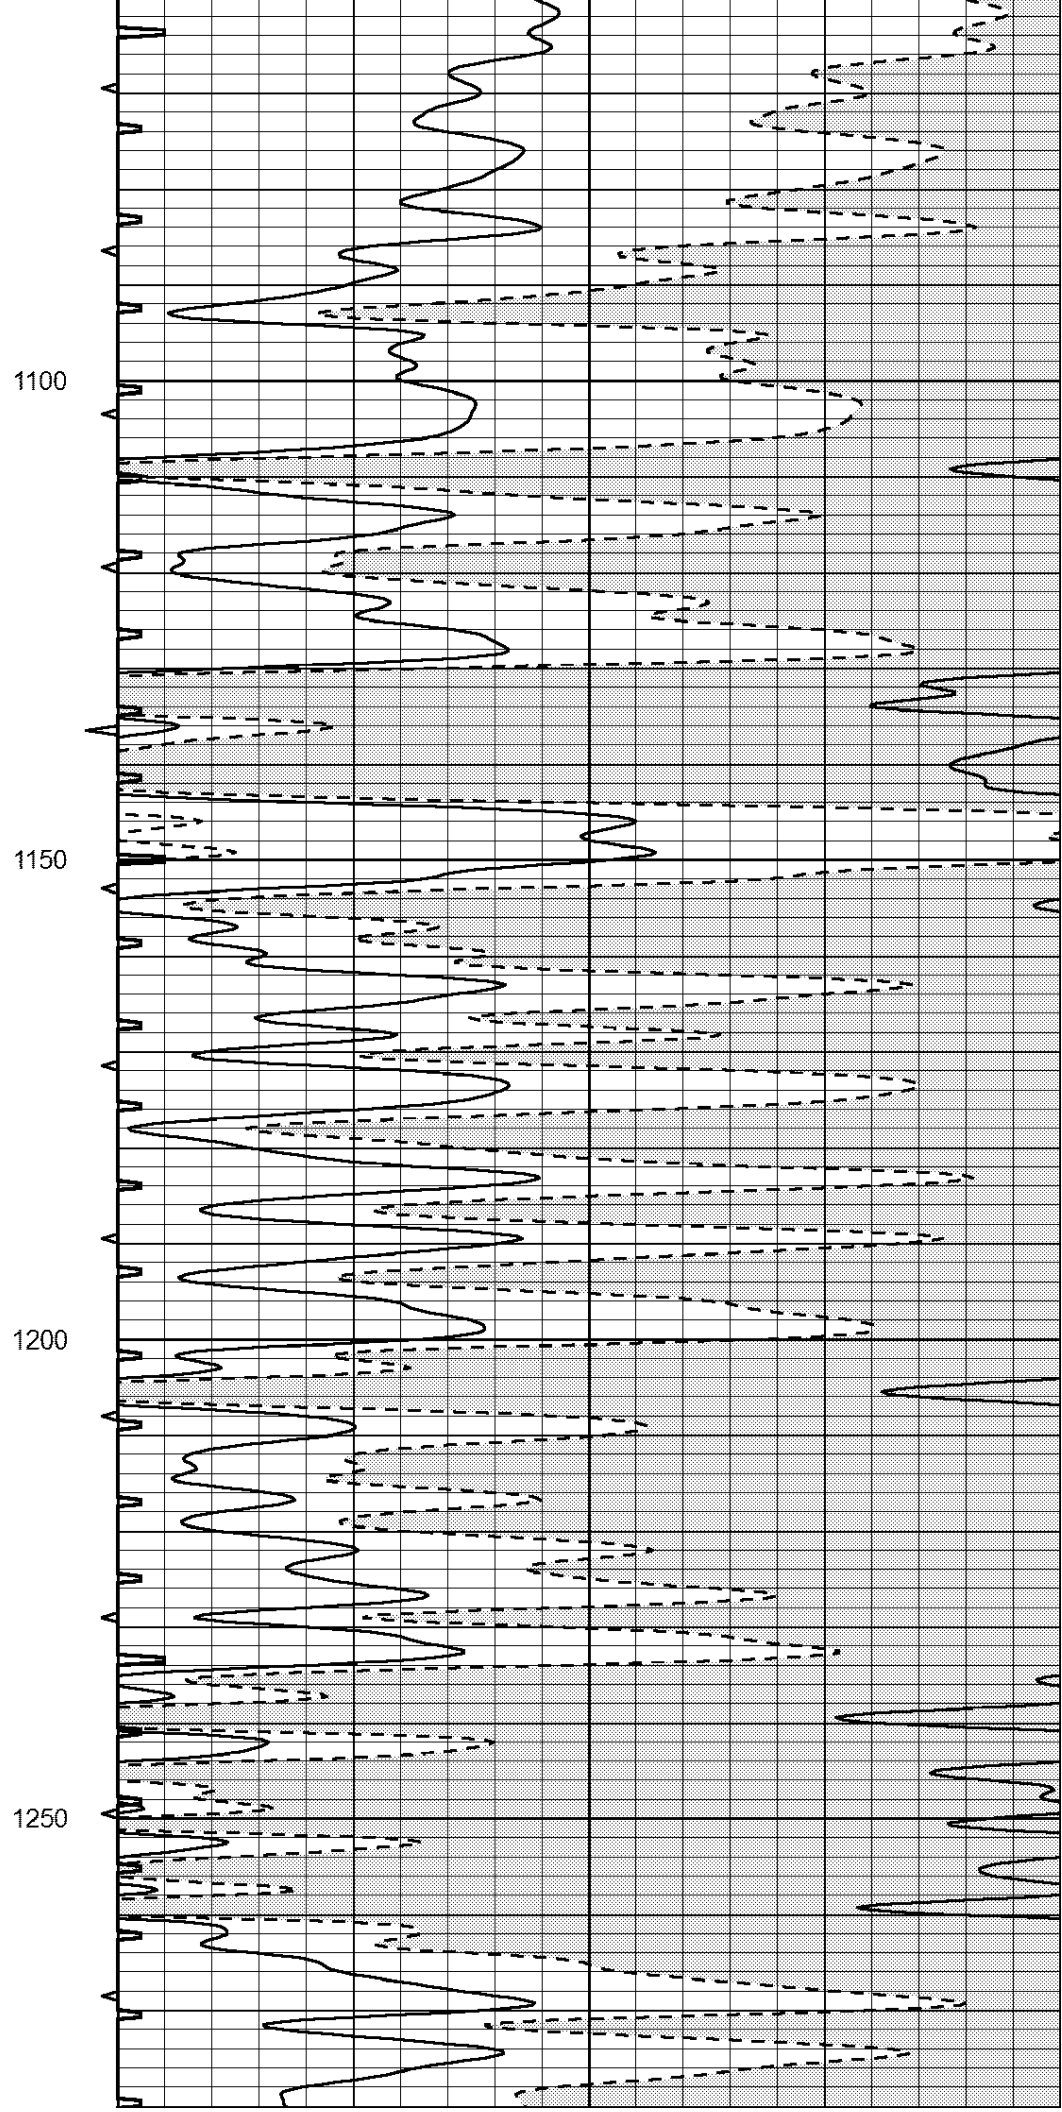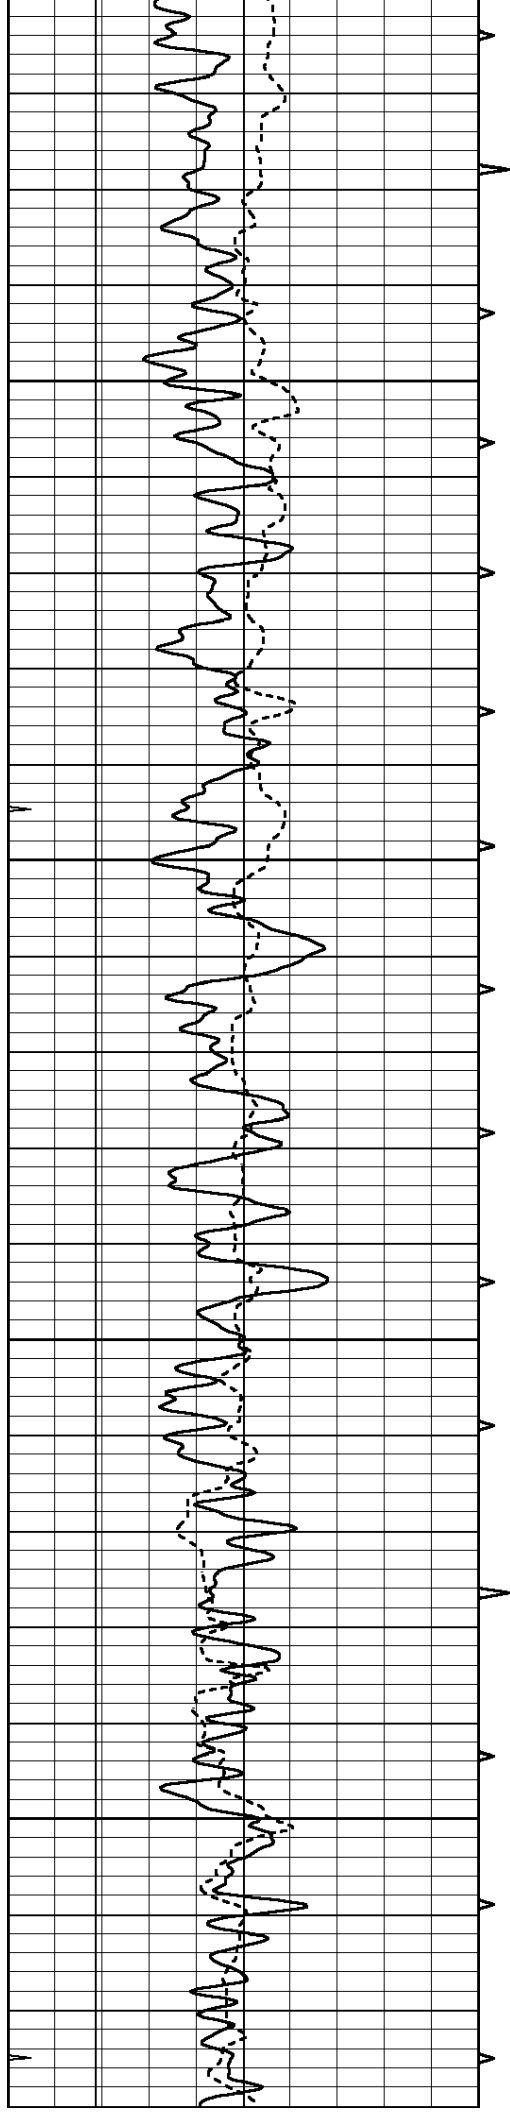

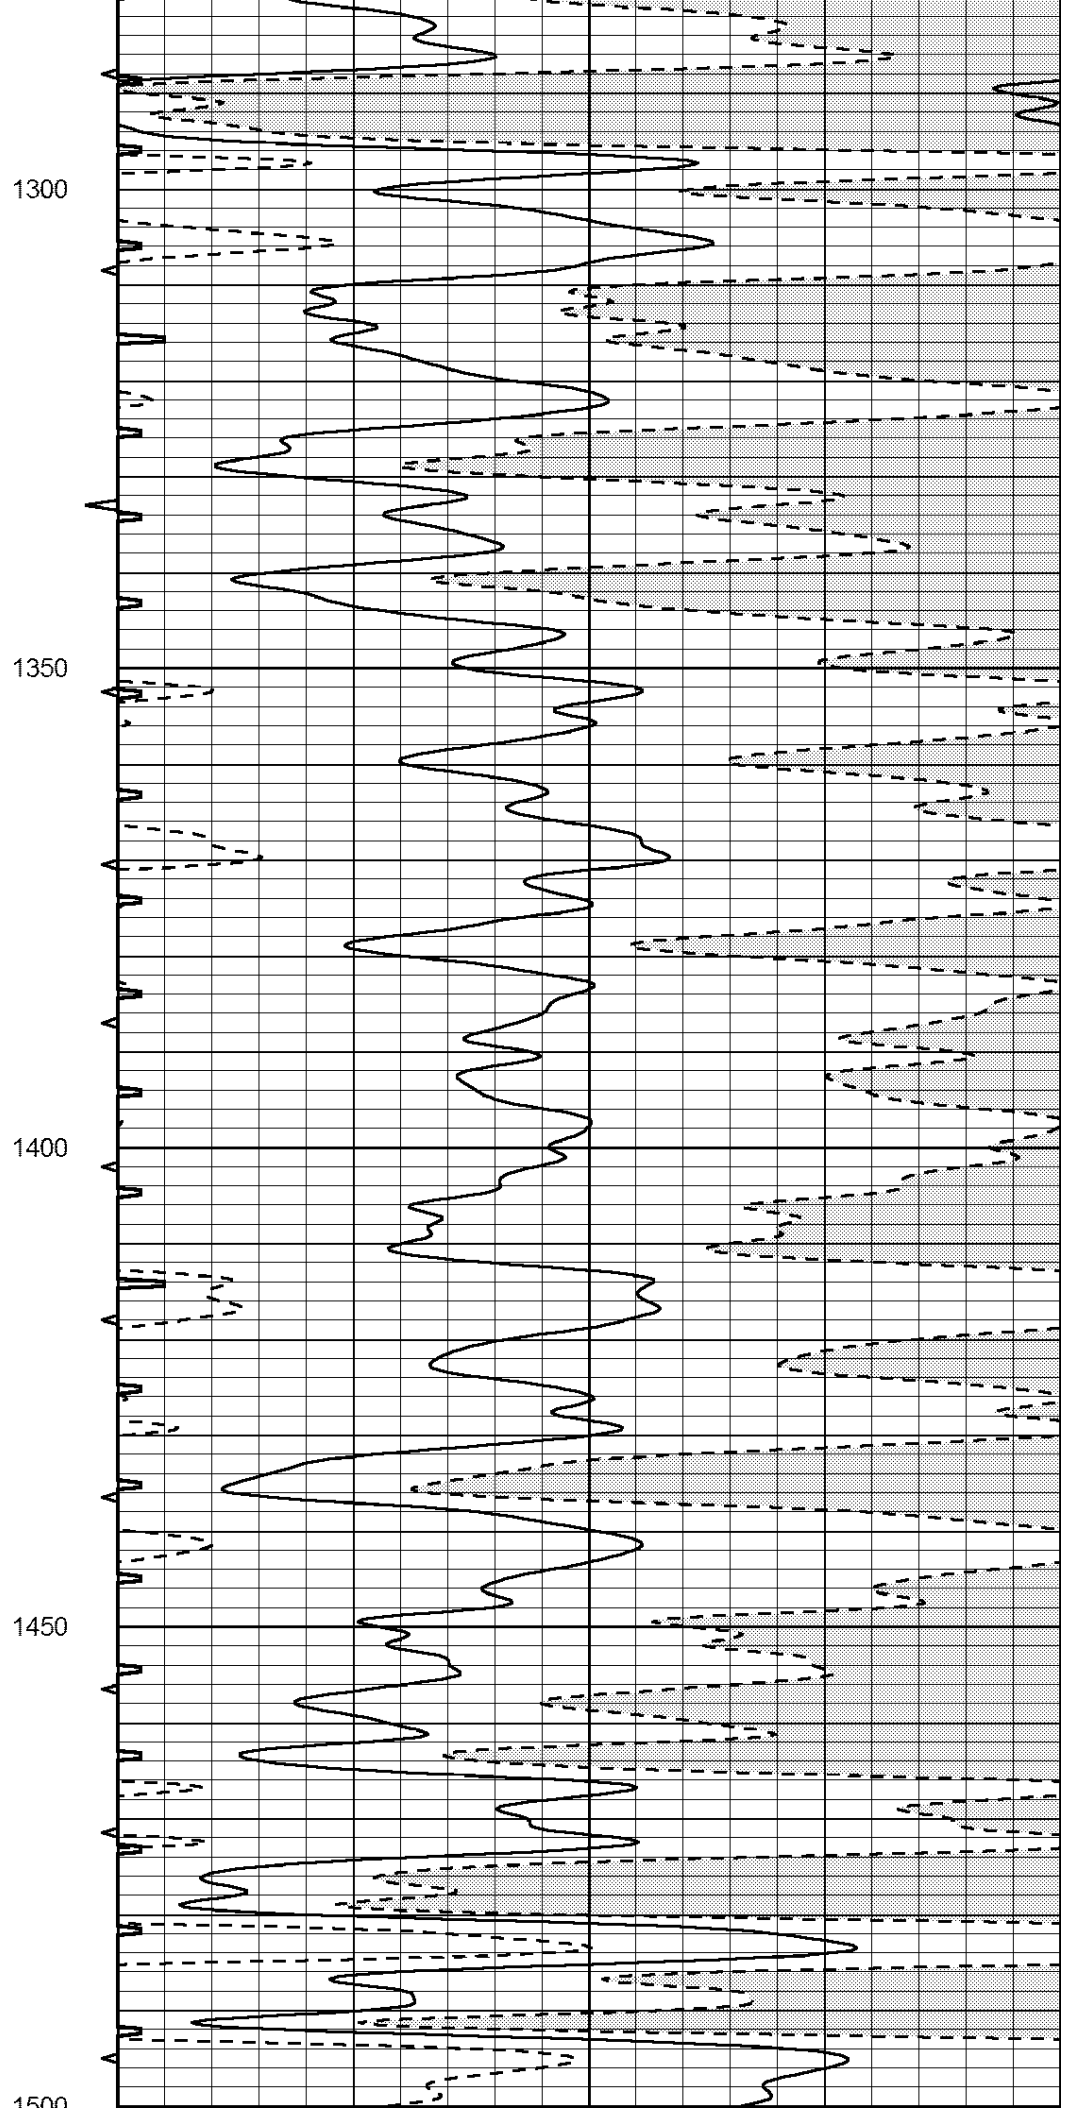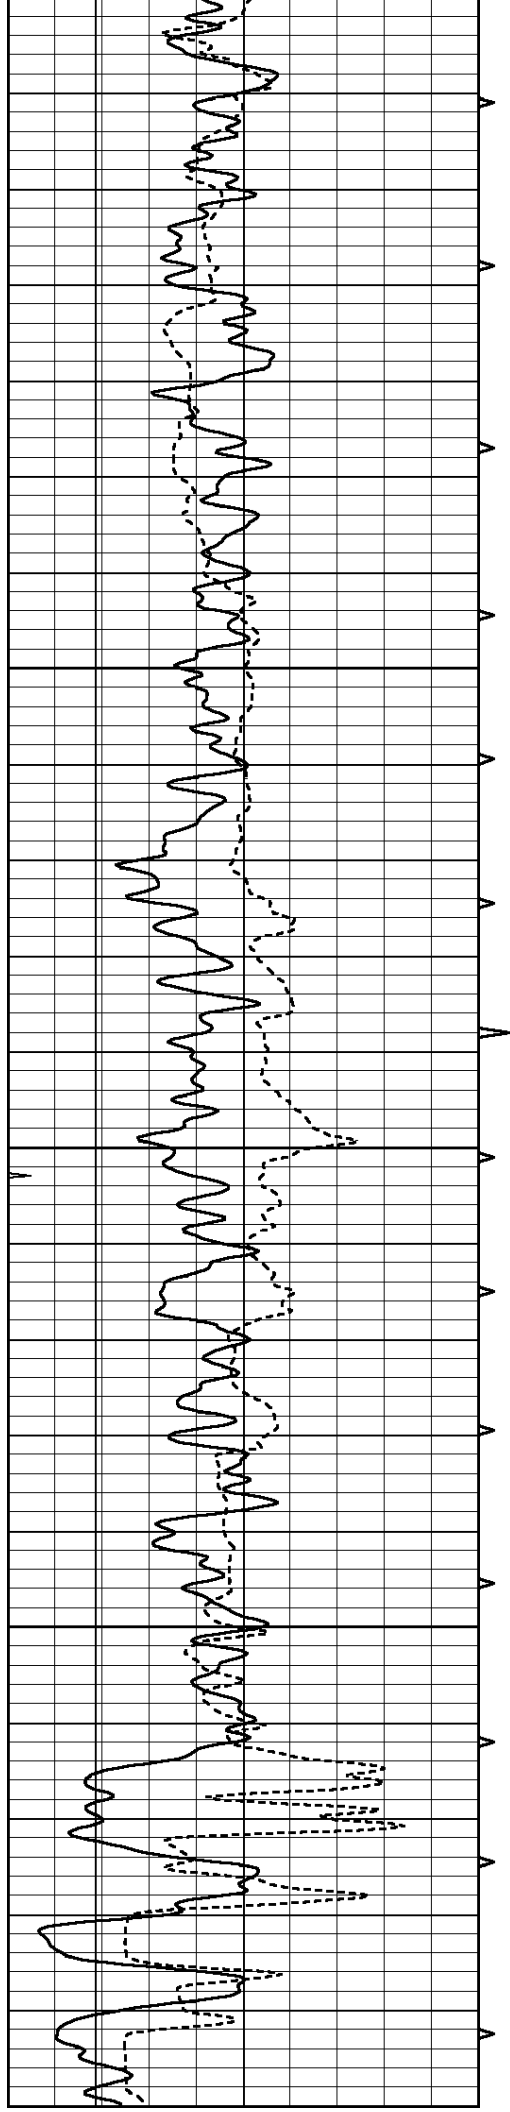

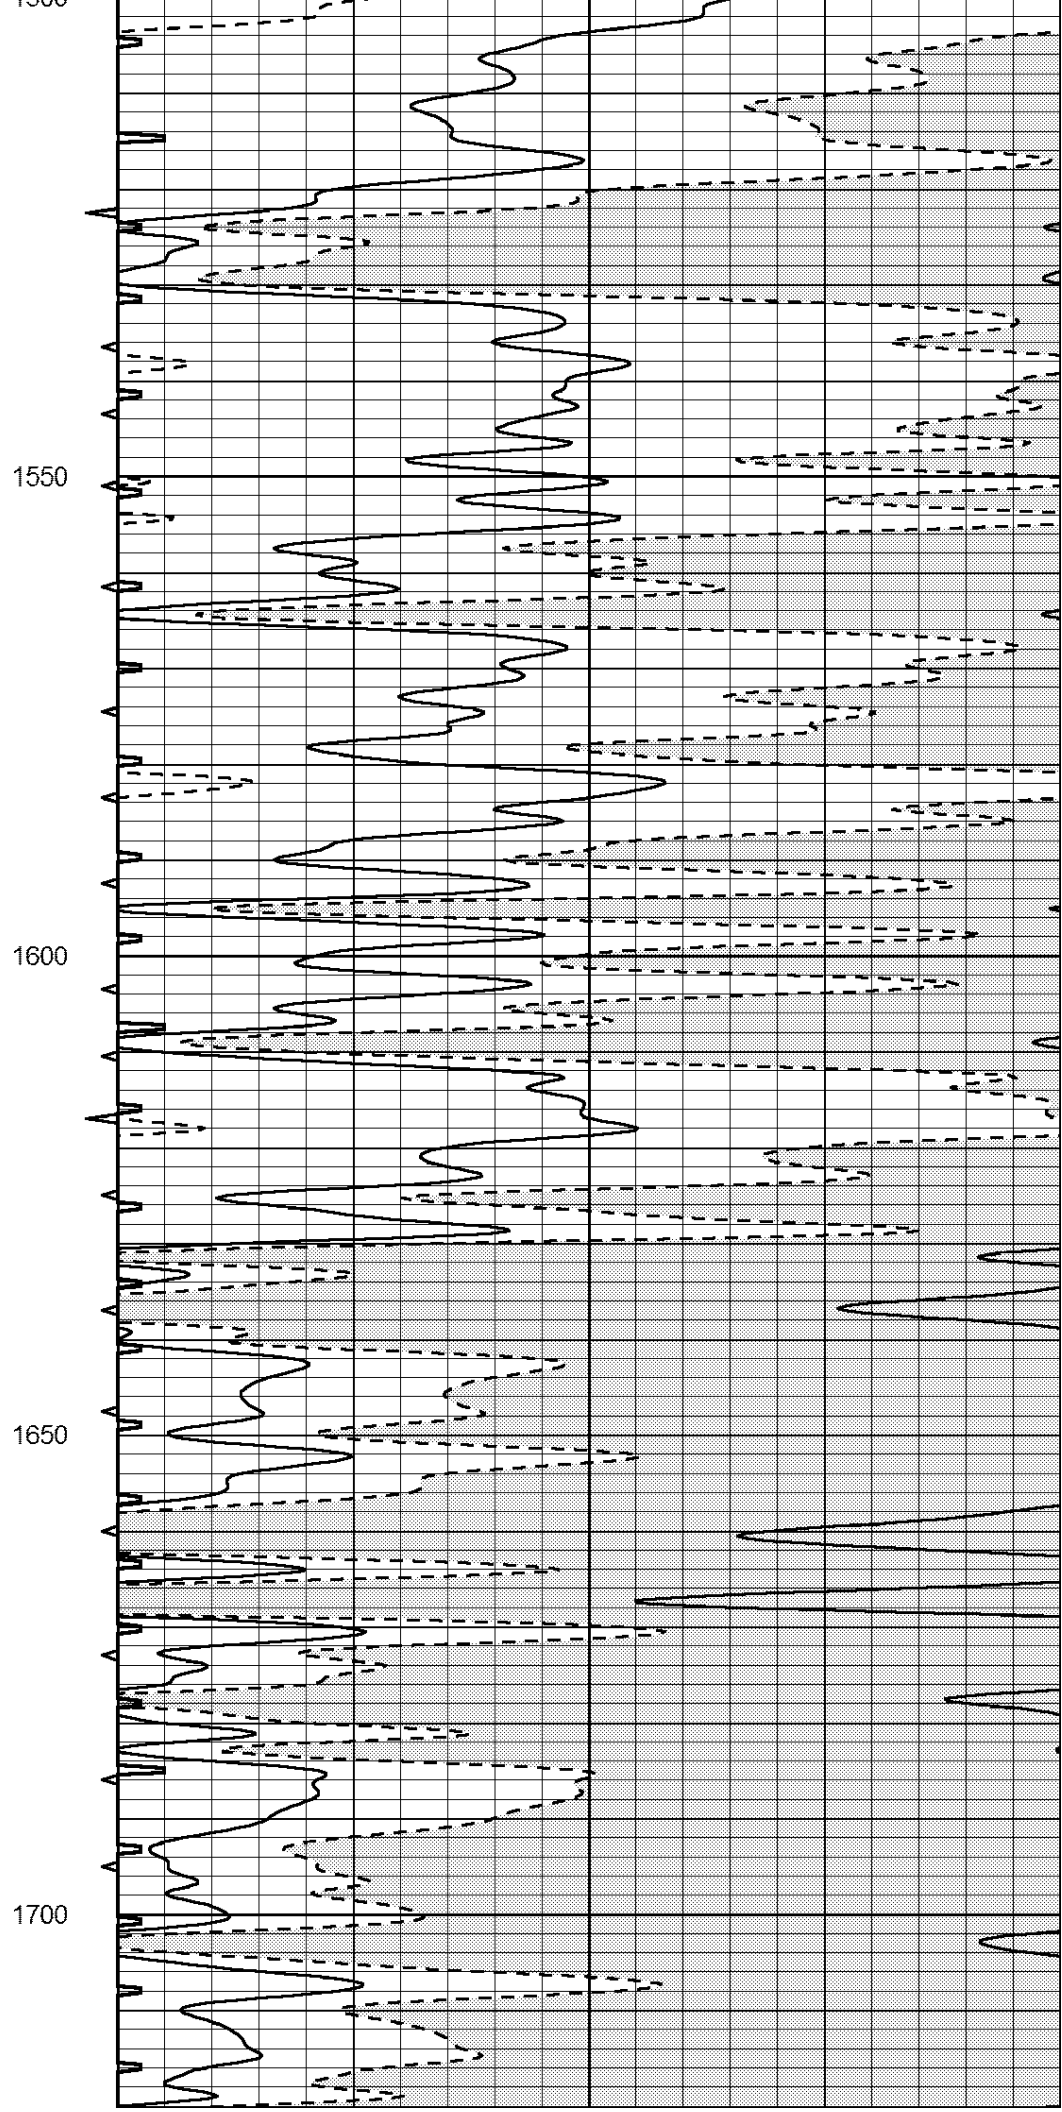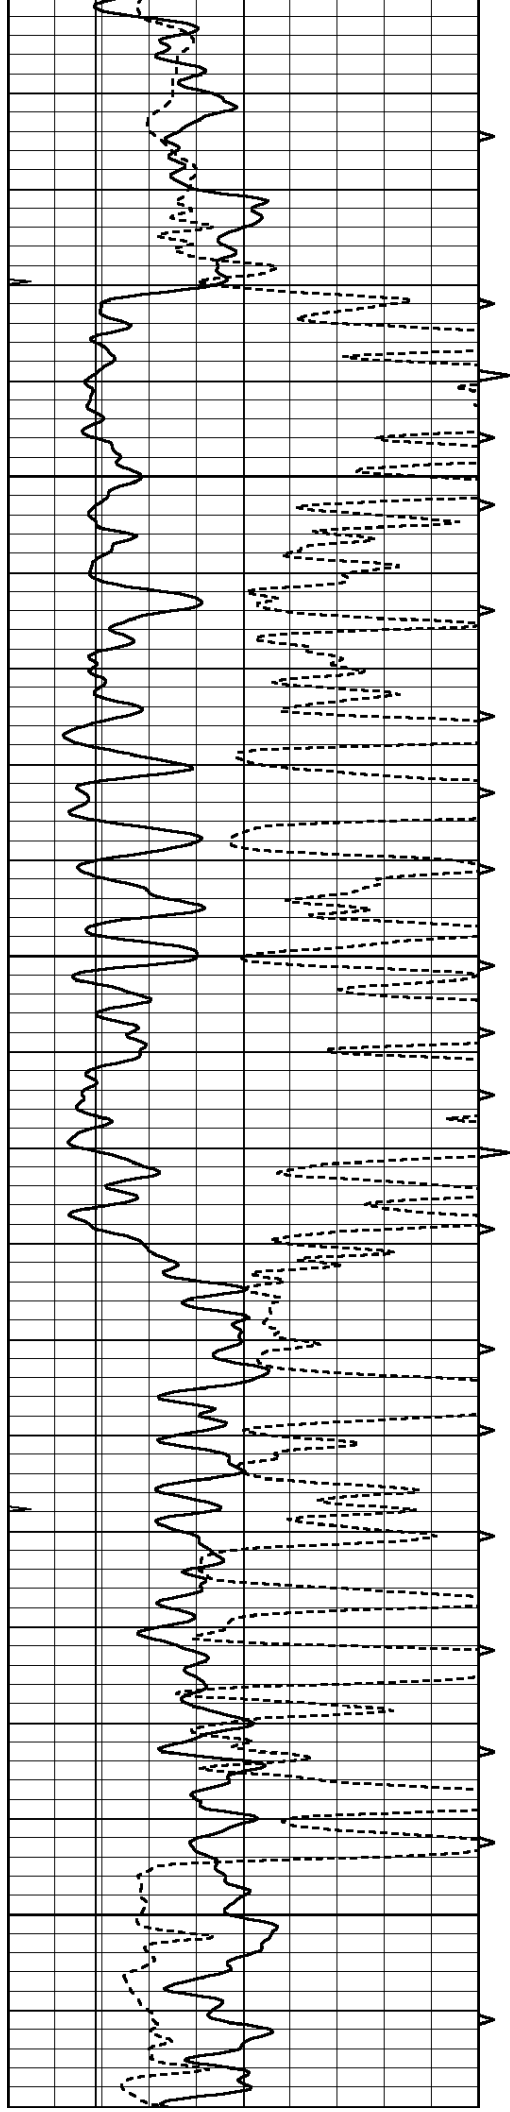

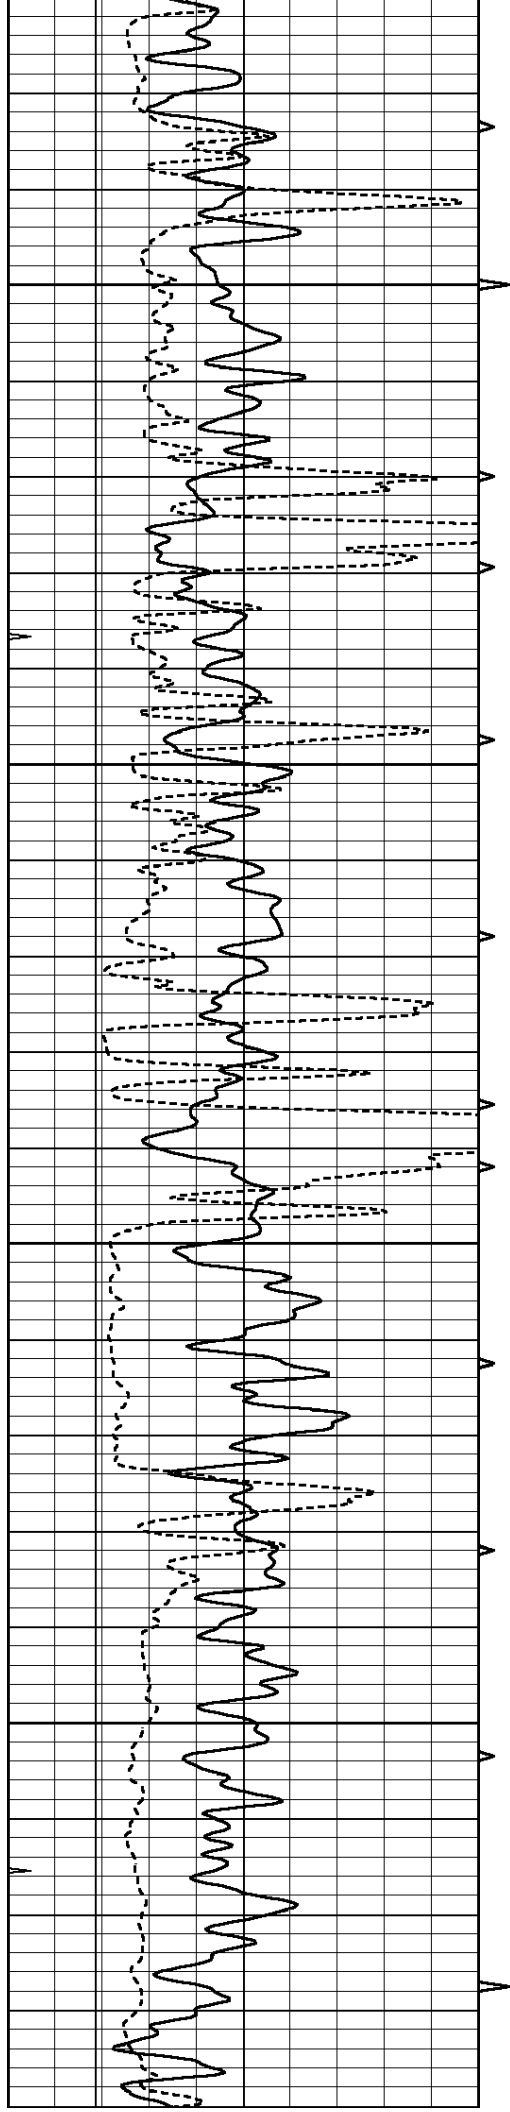




1750


1800

1850

1900

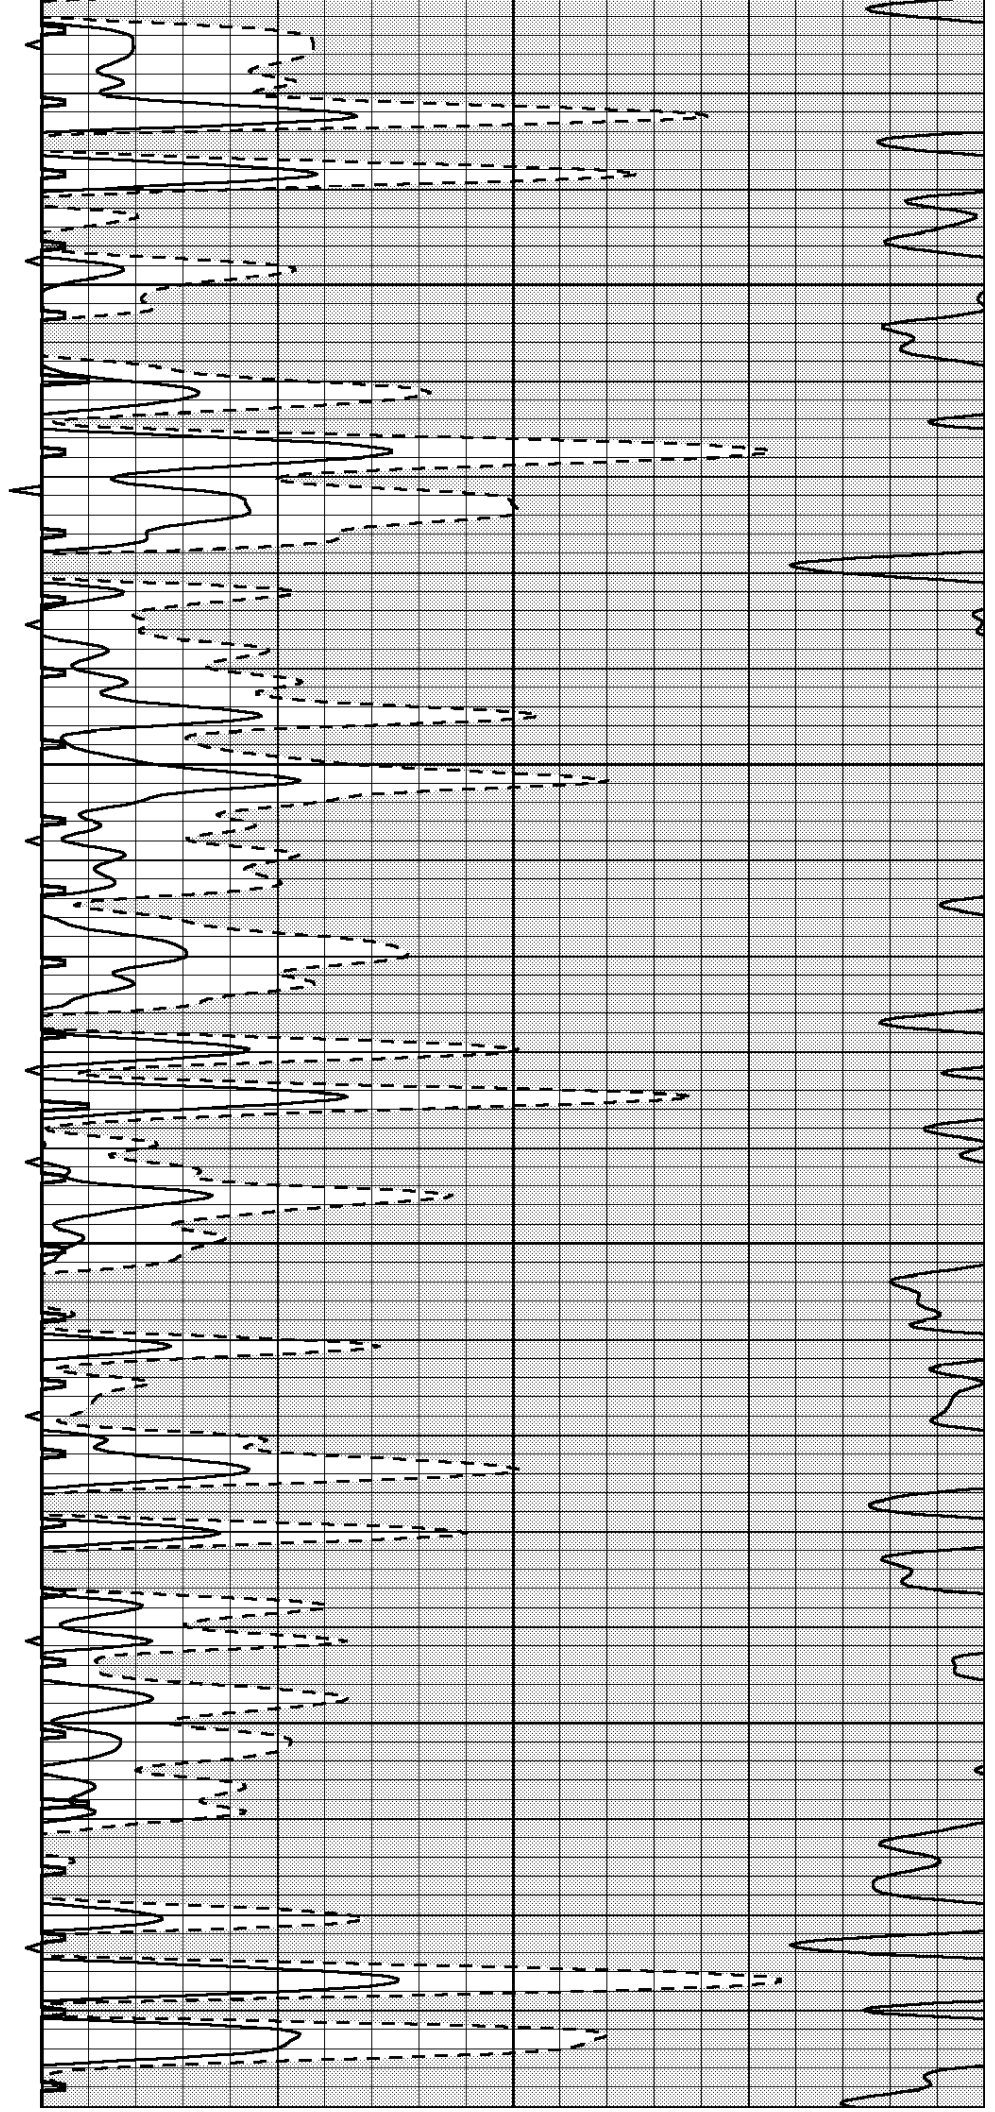

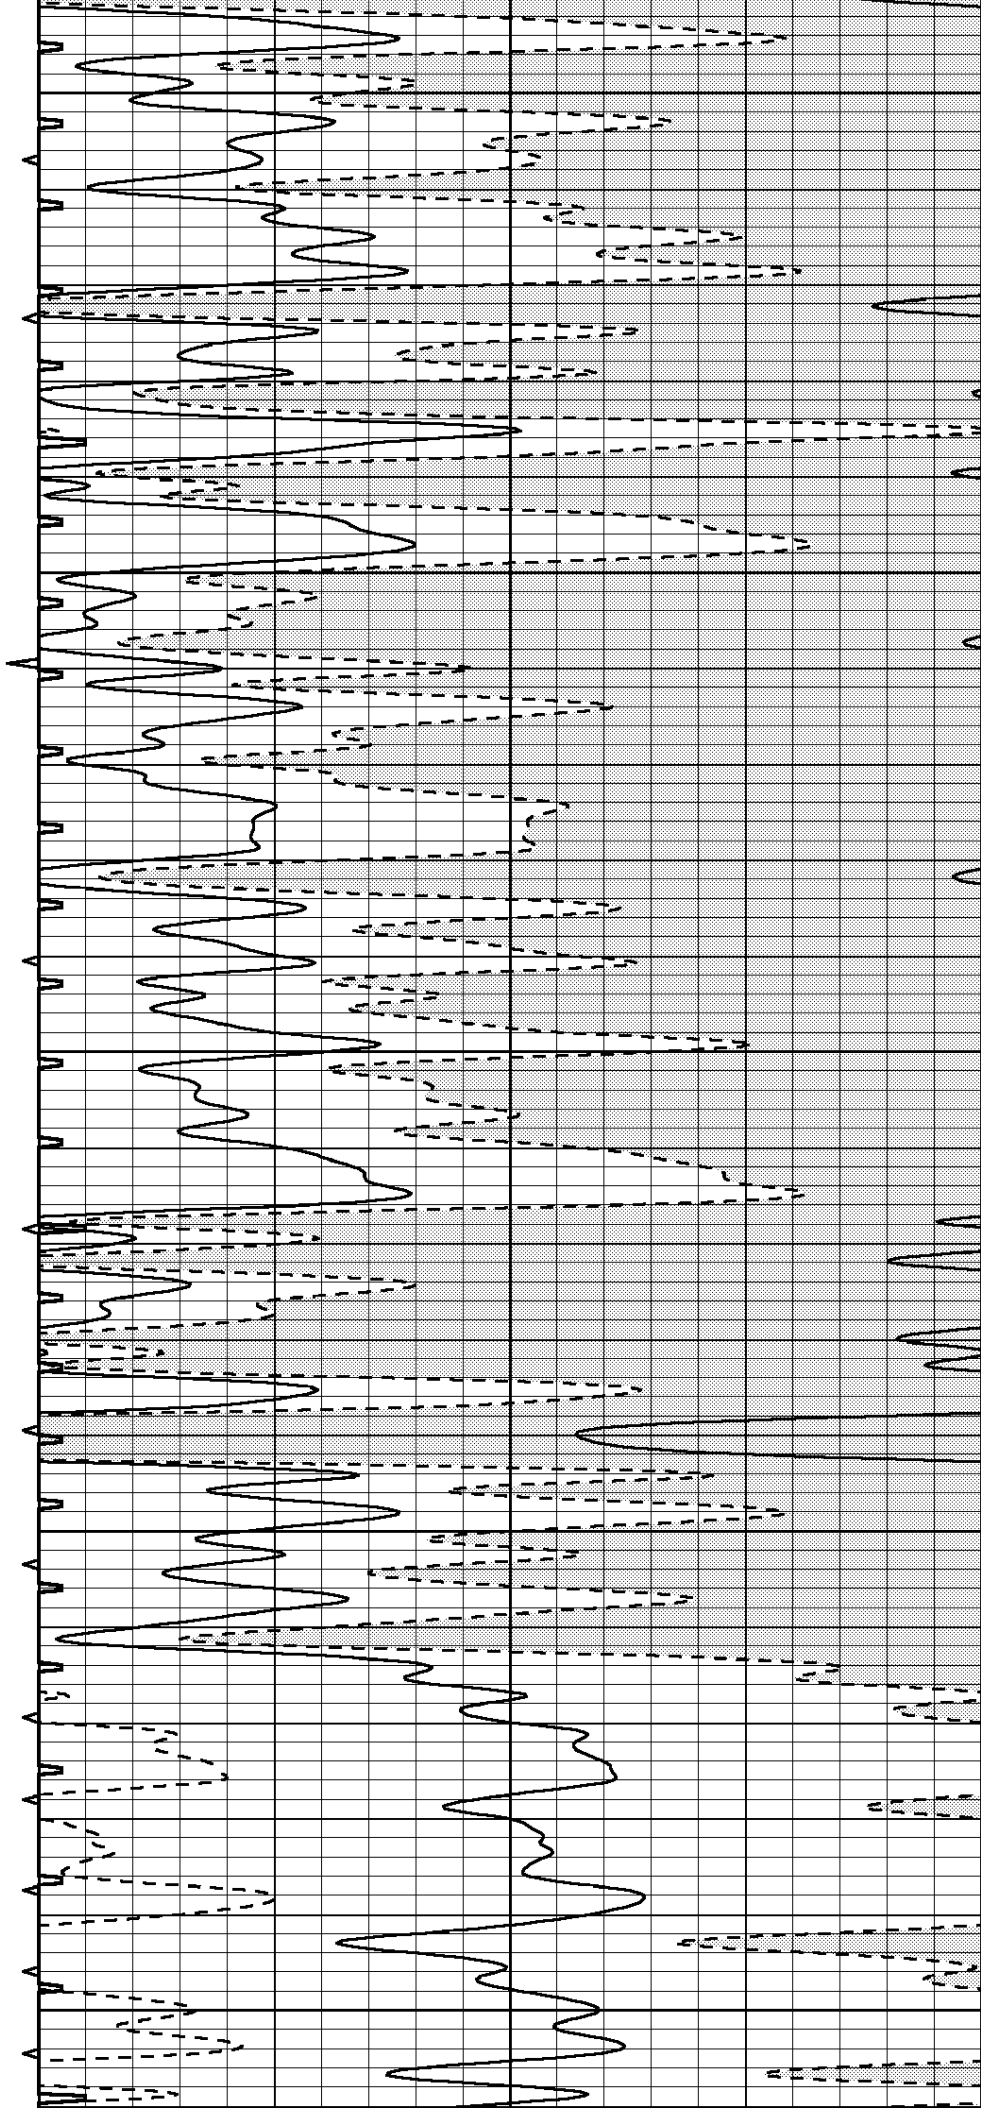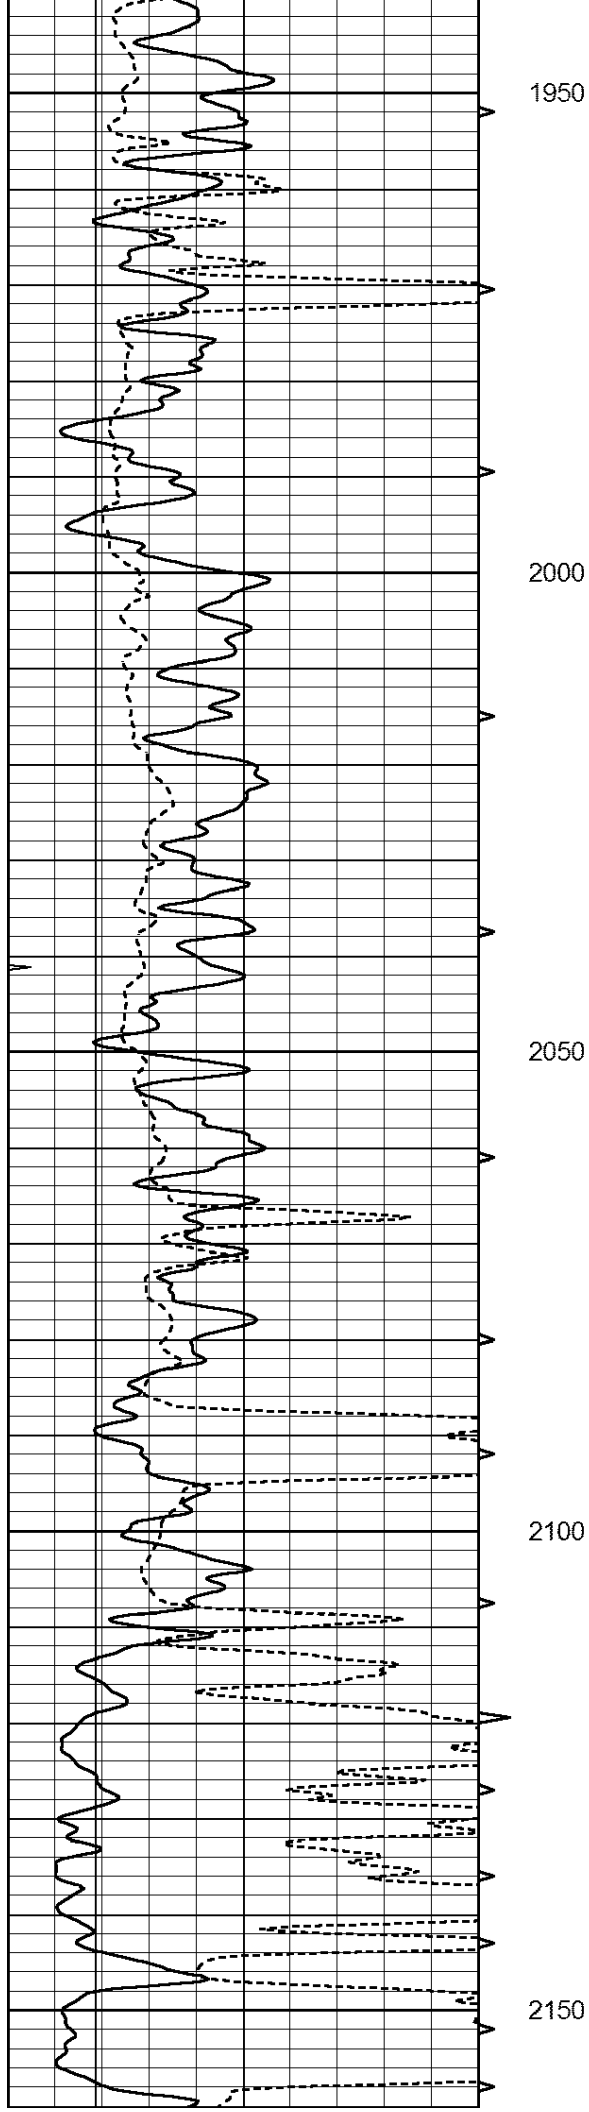

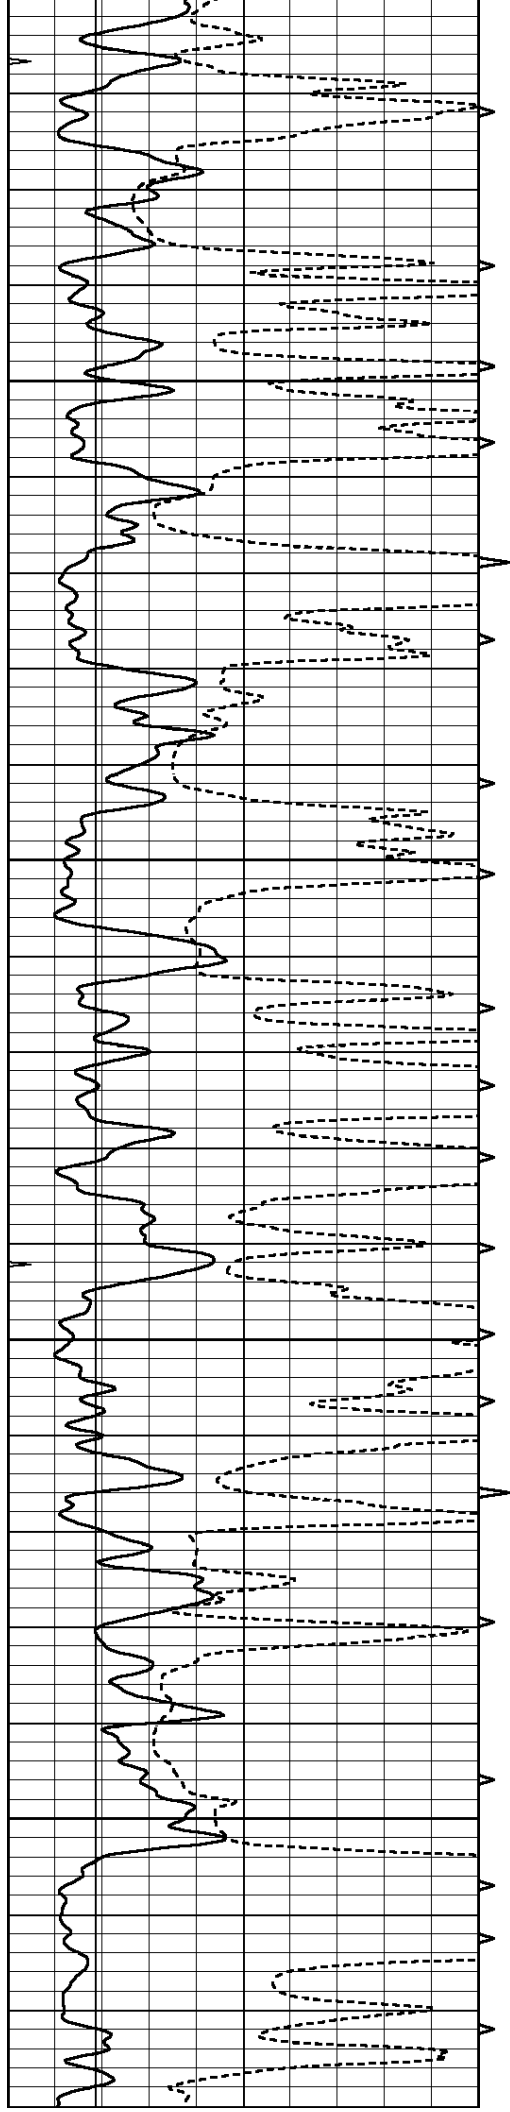




2200



2250



2300



2350

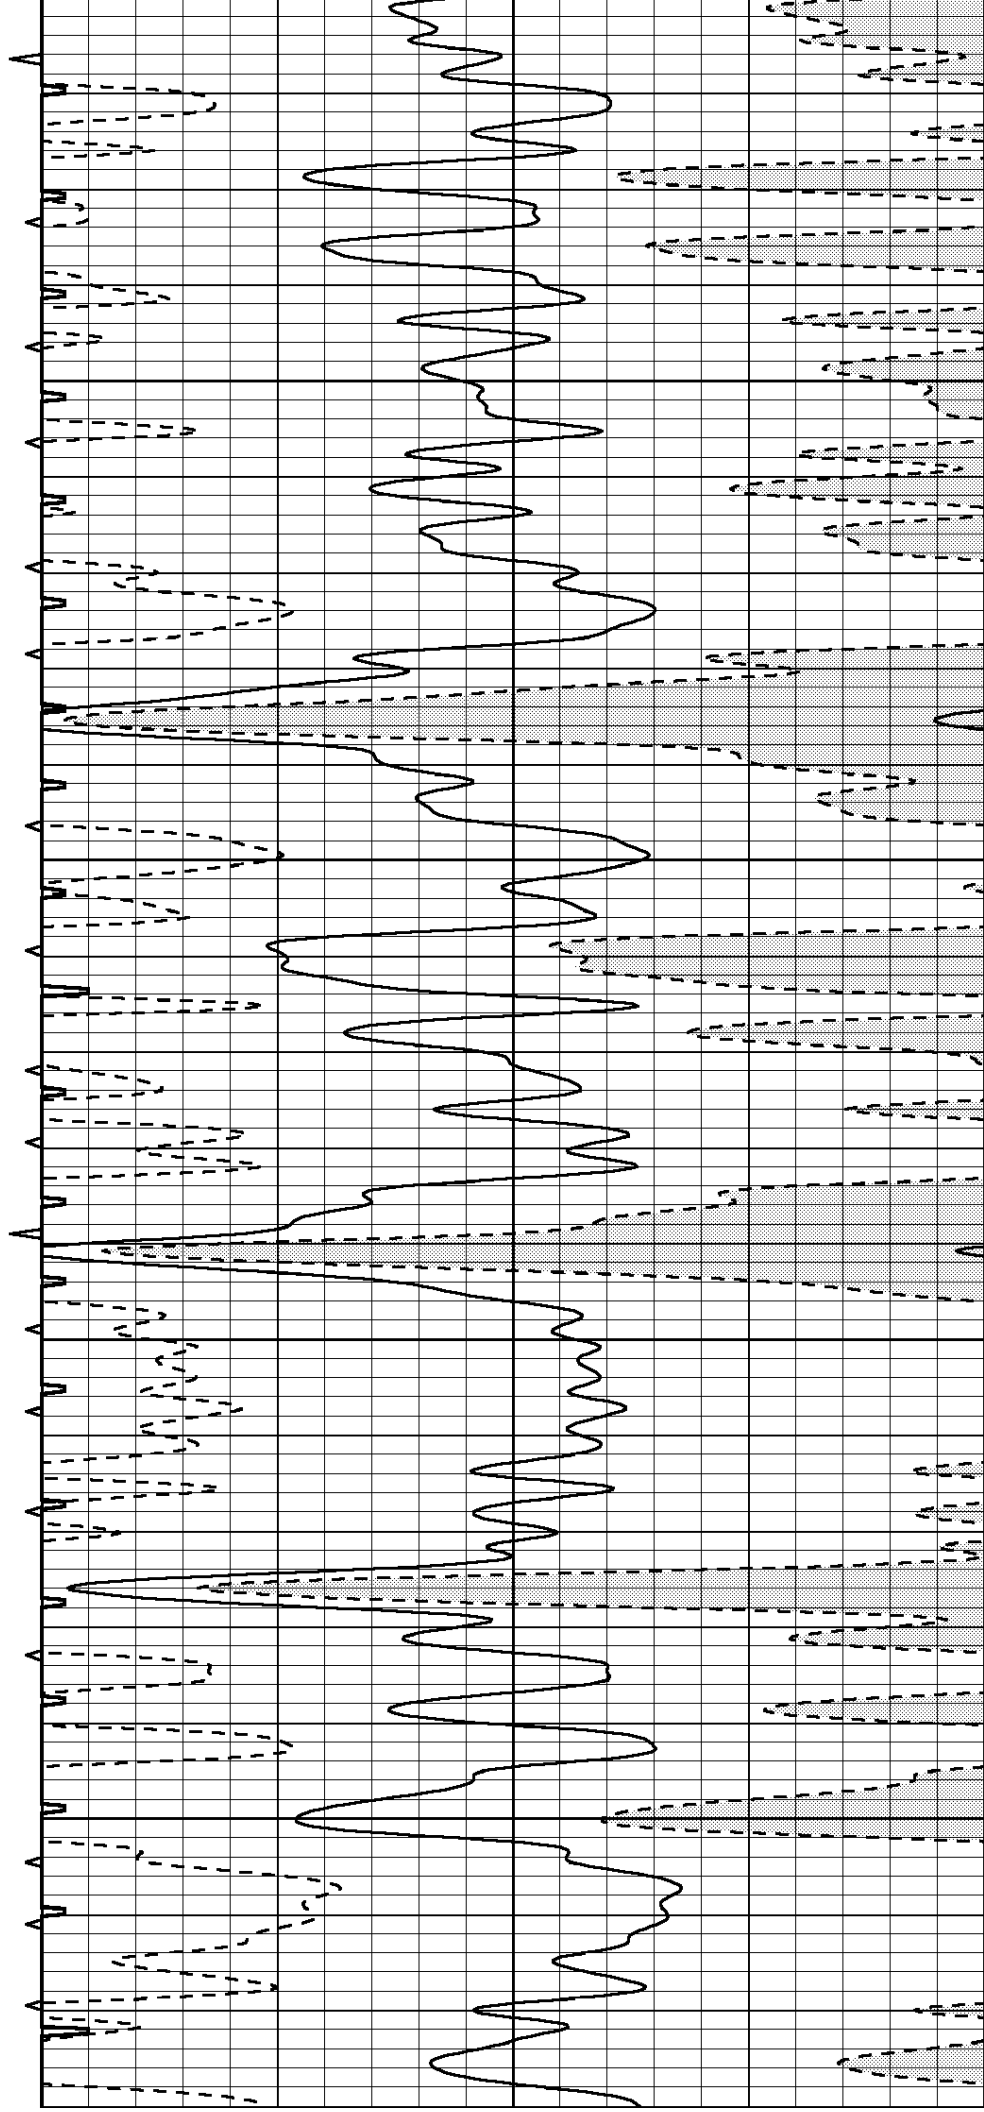


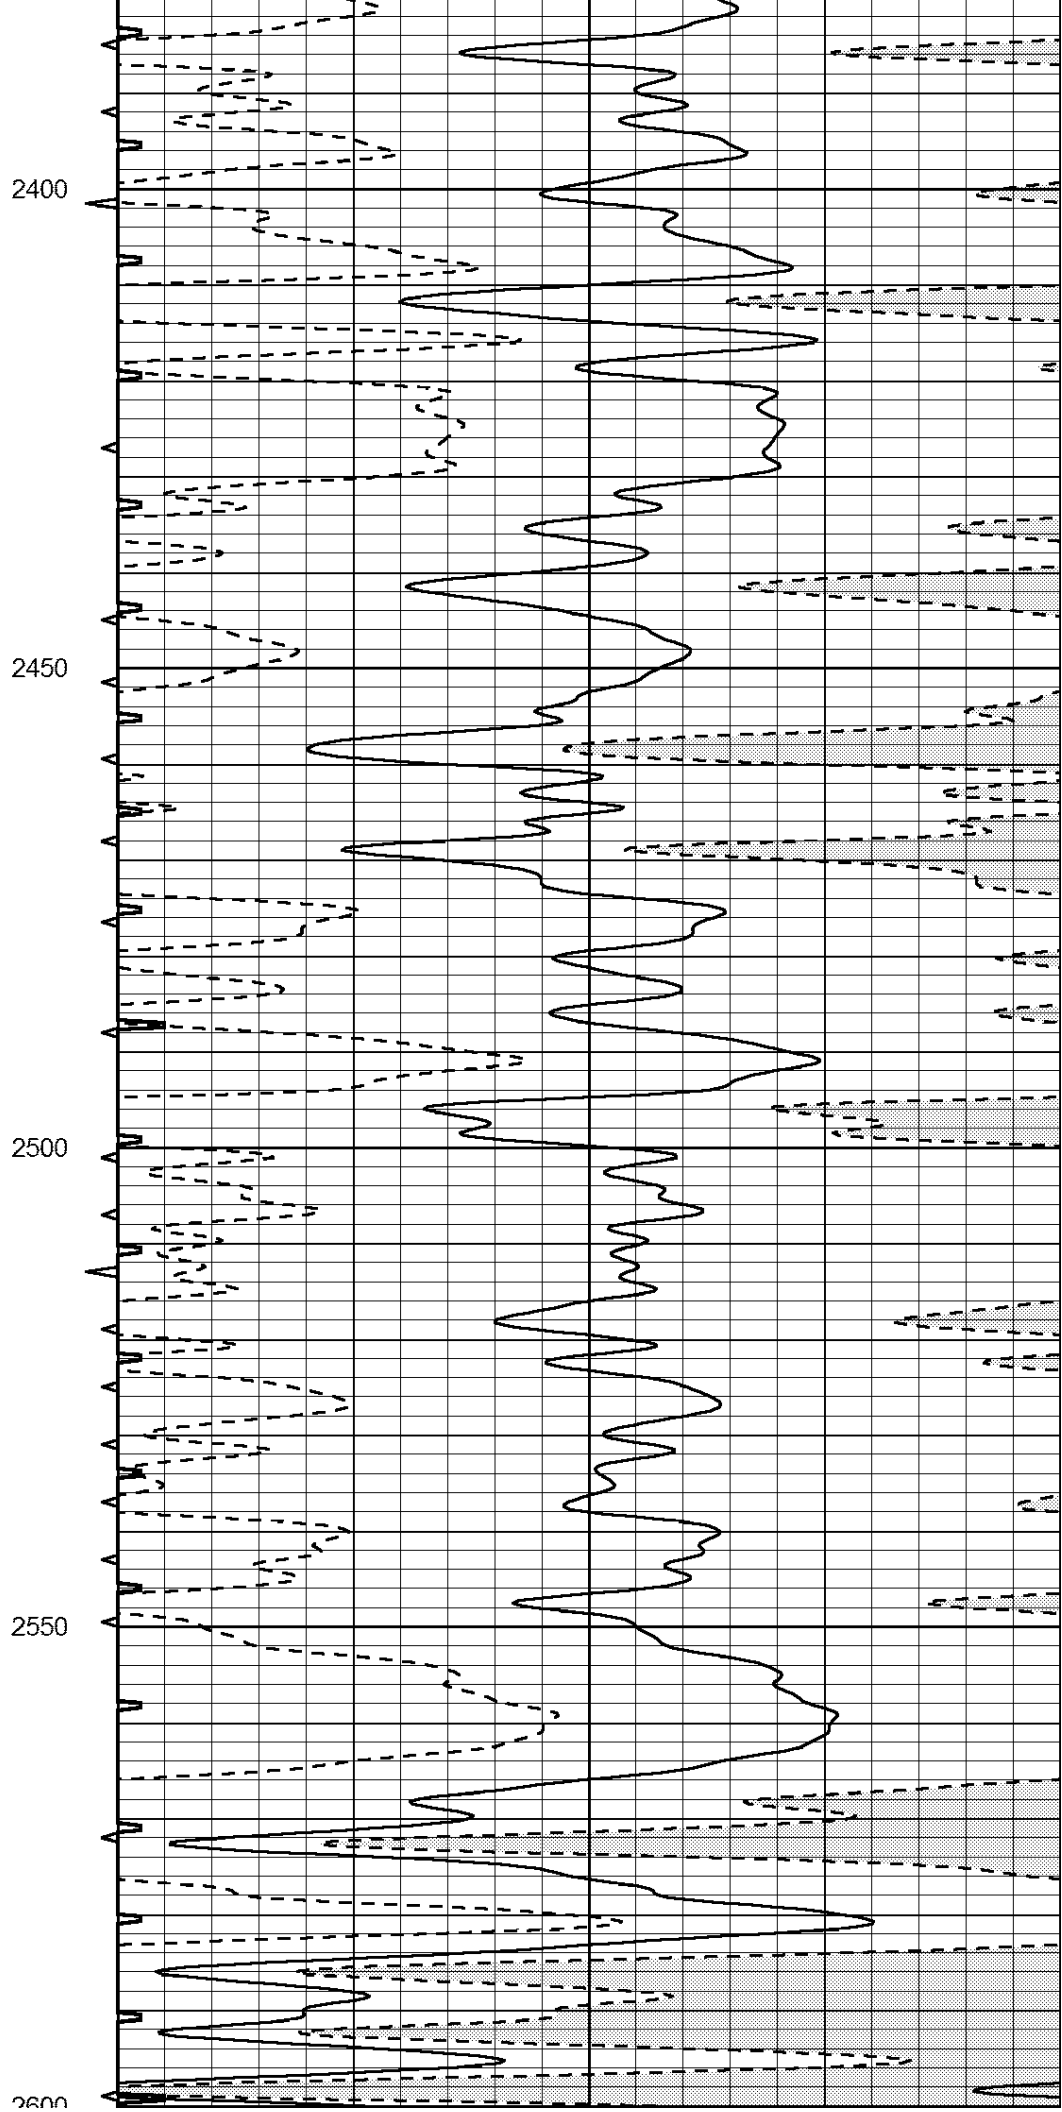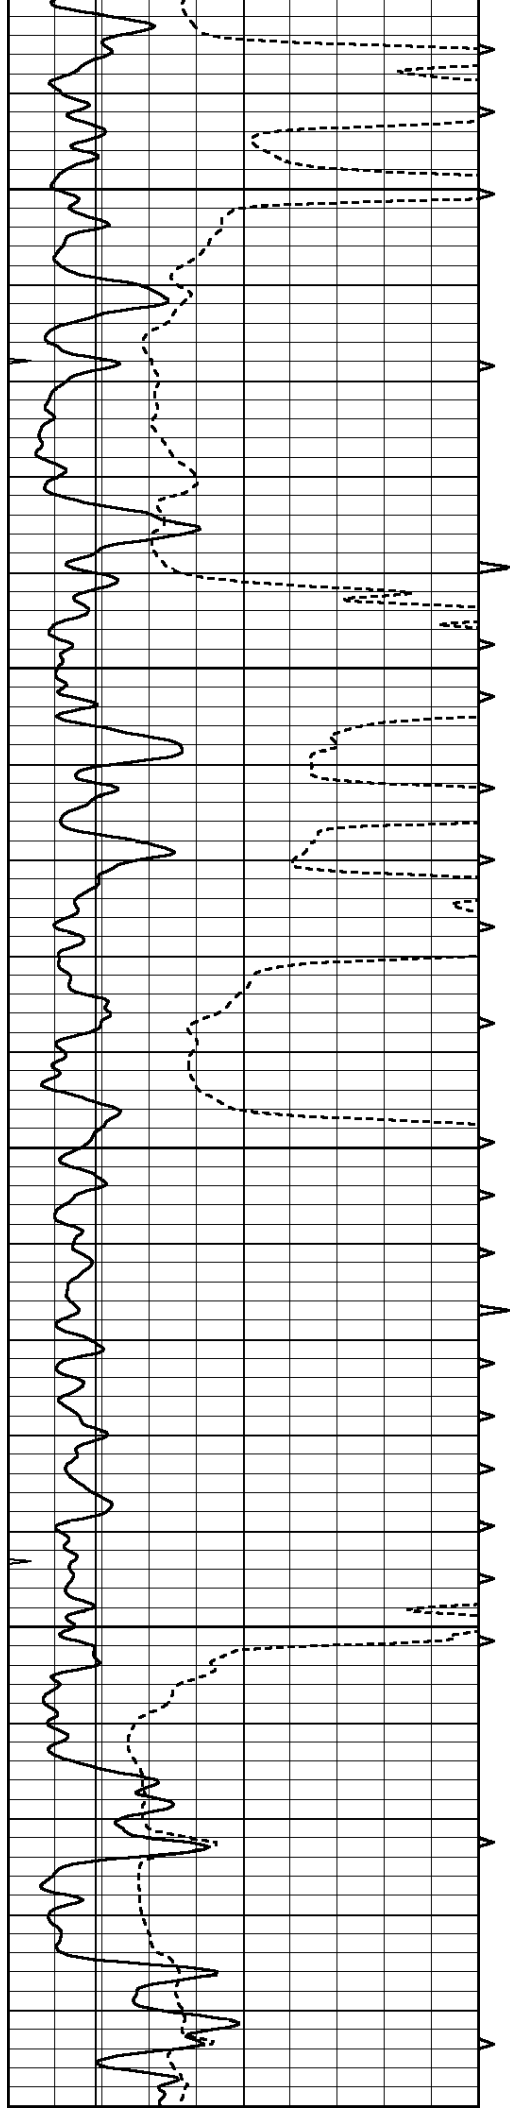

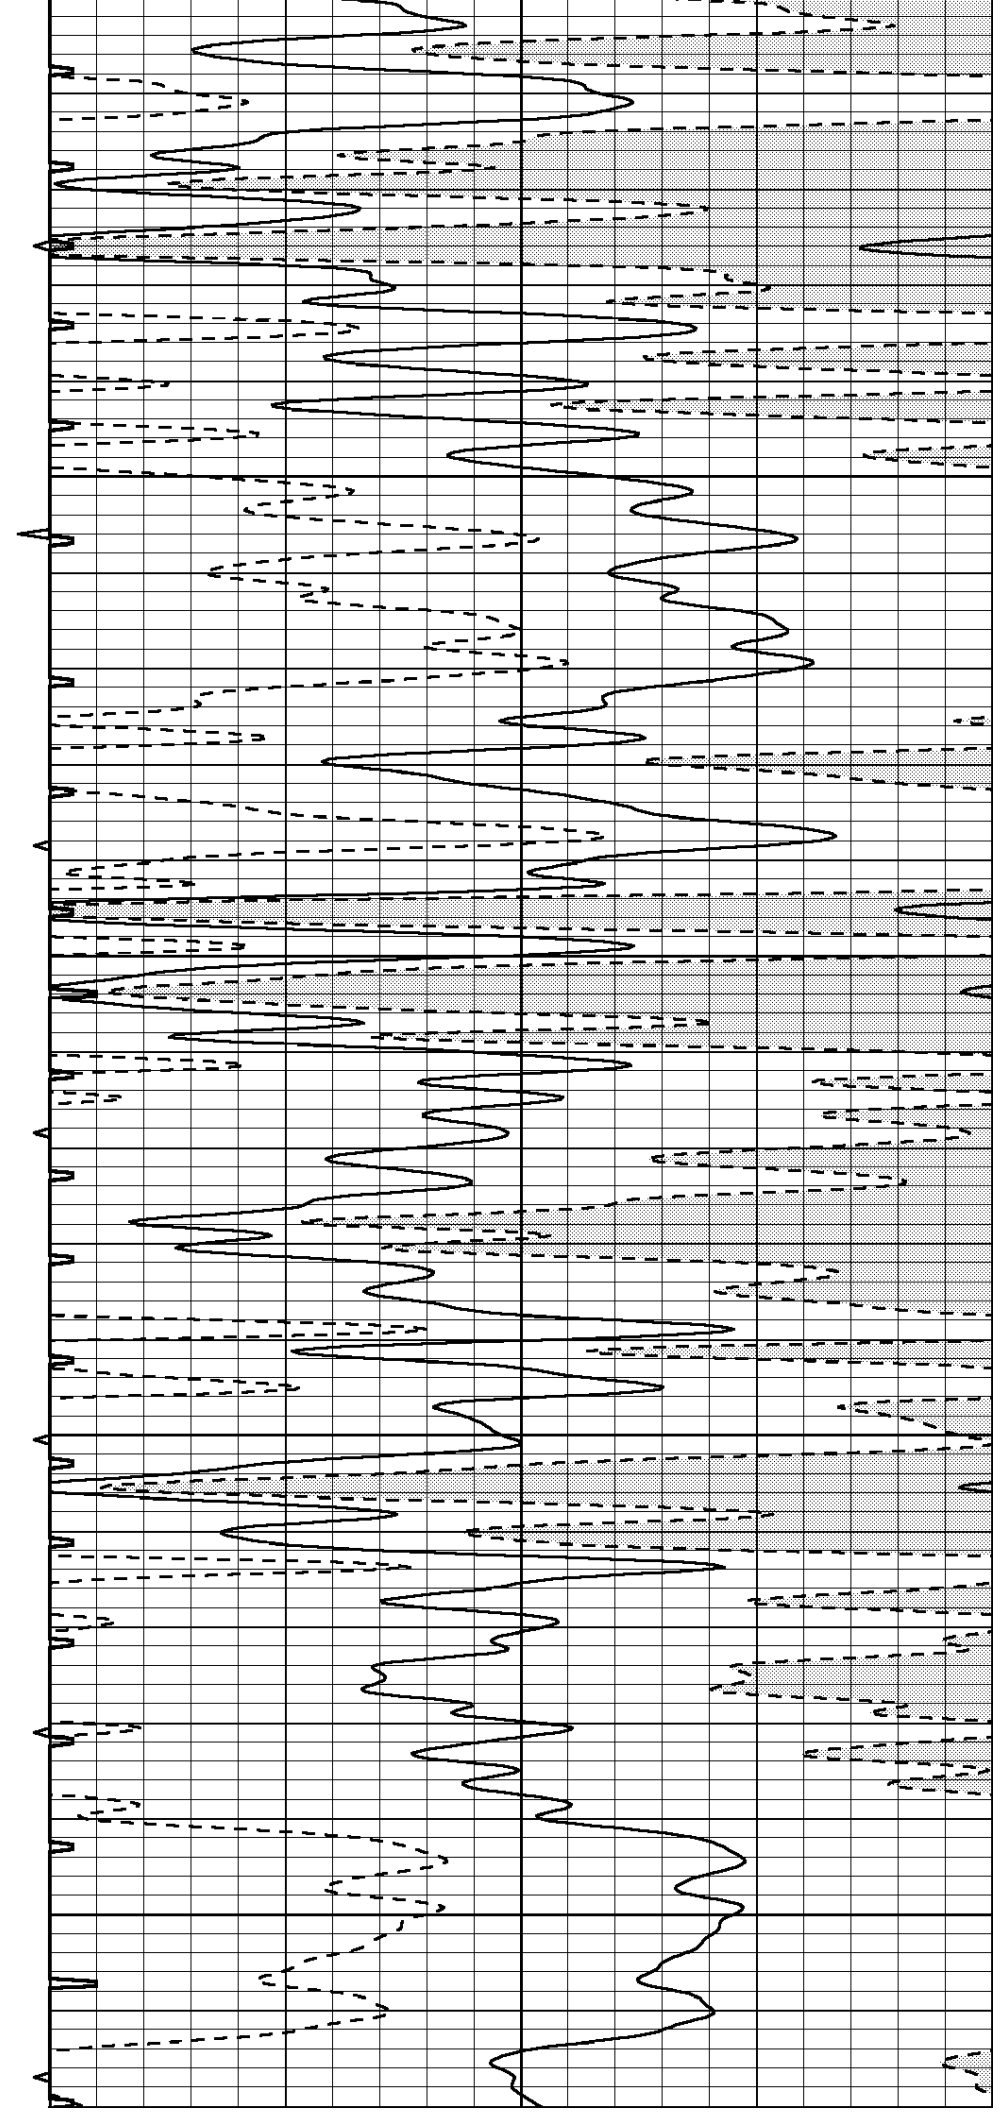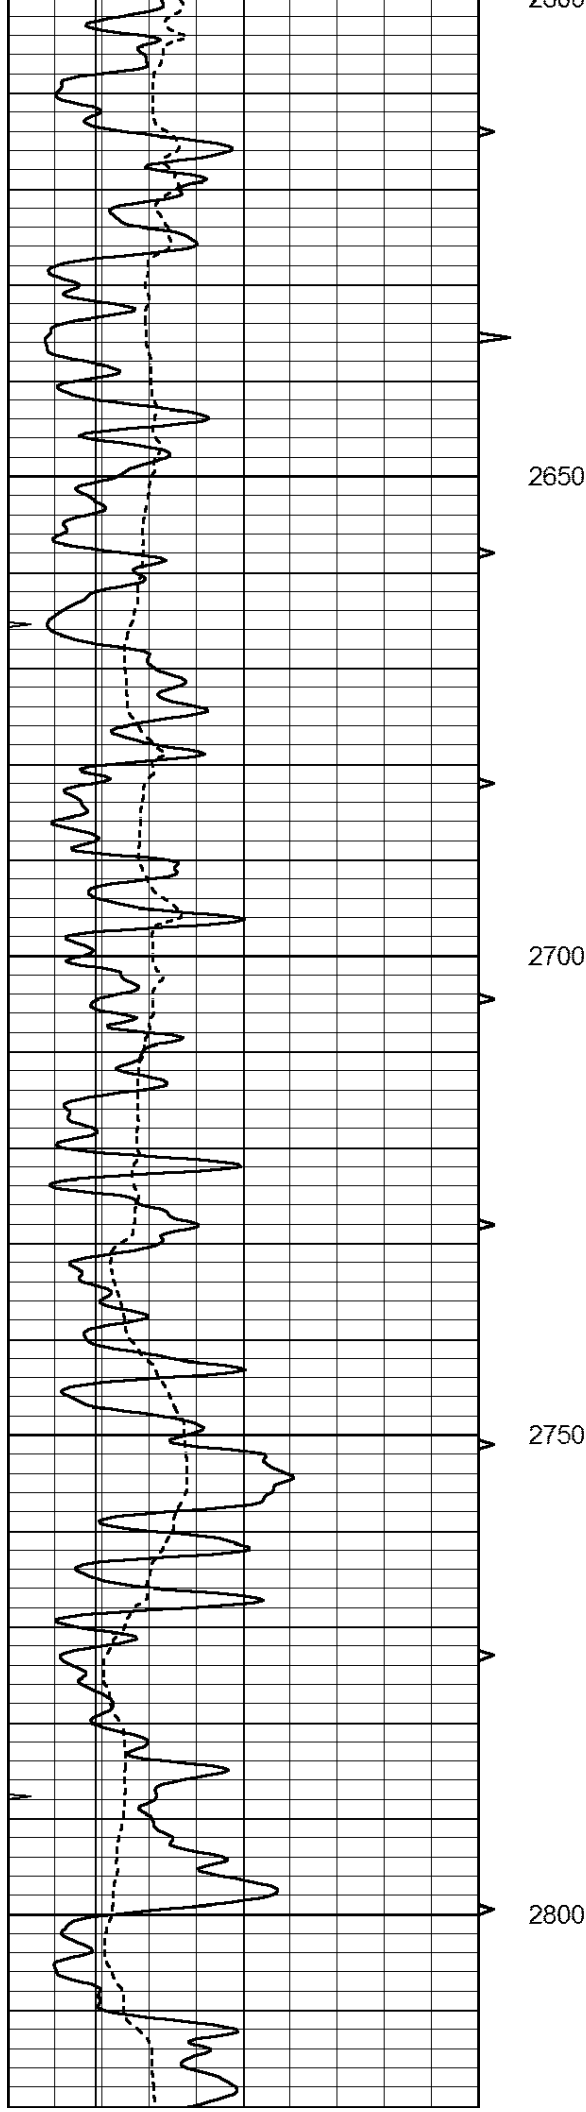

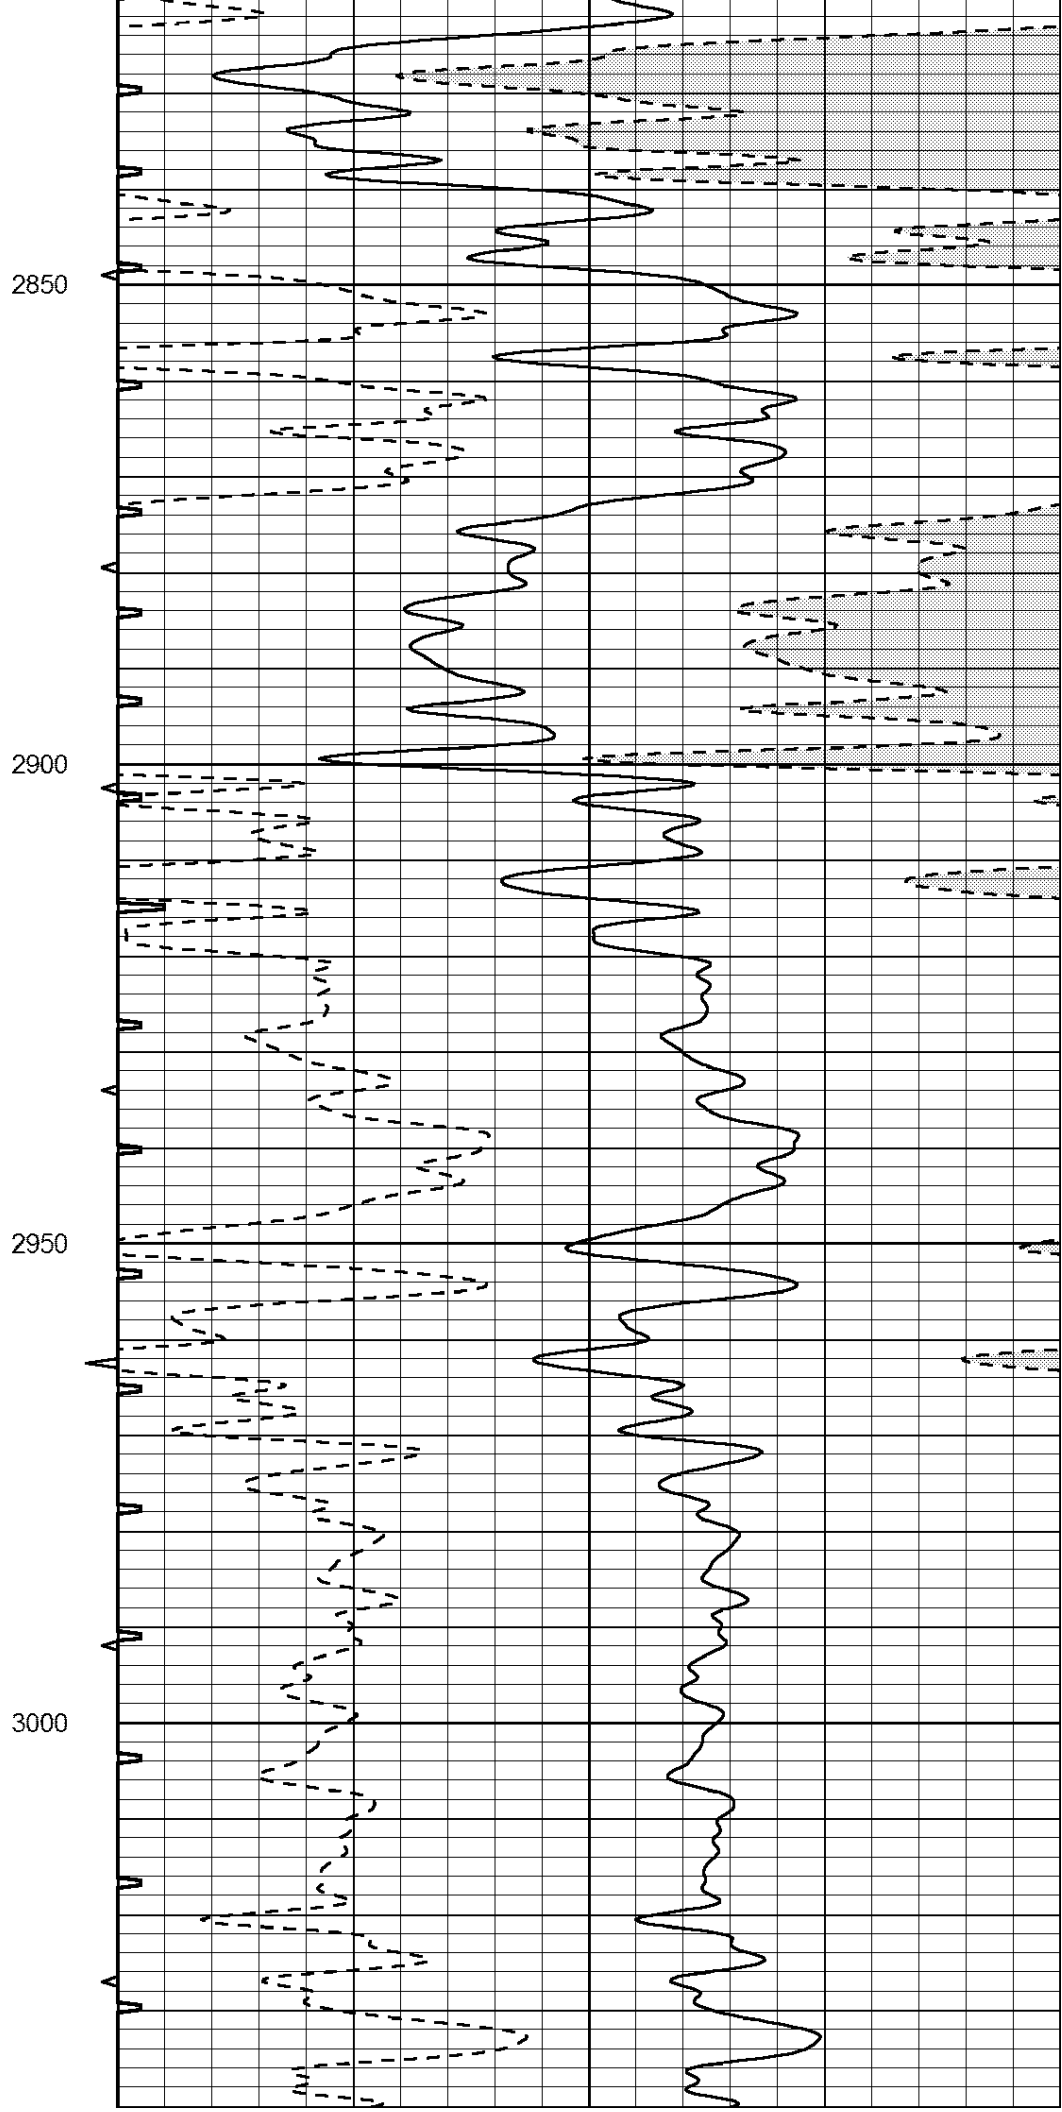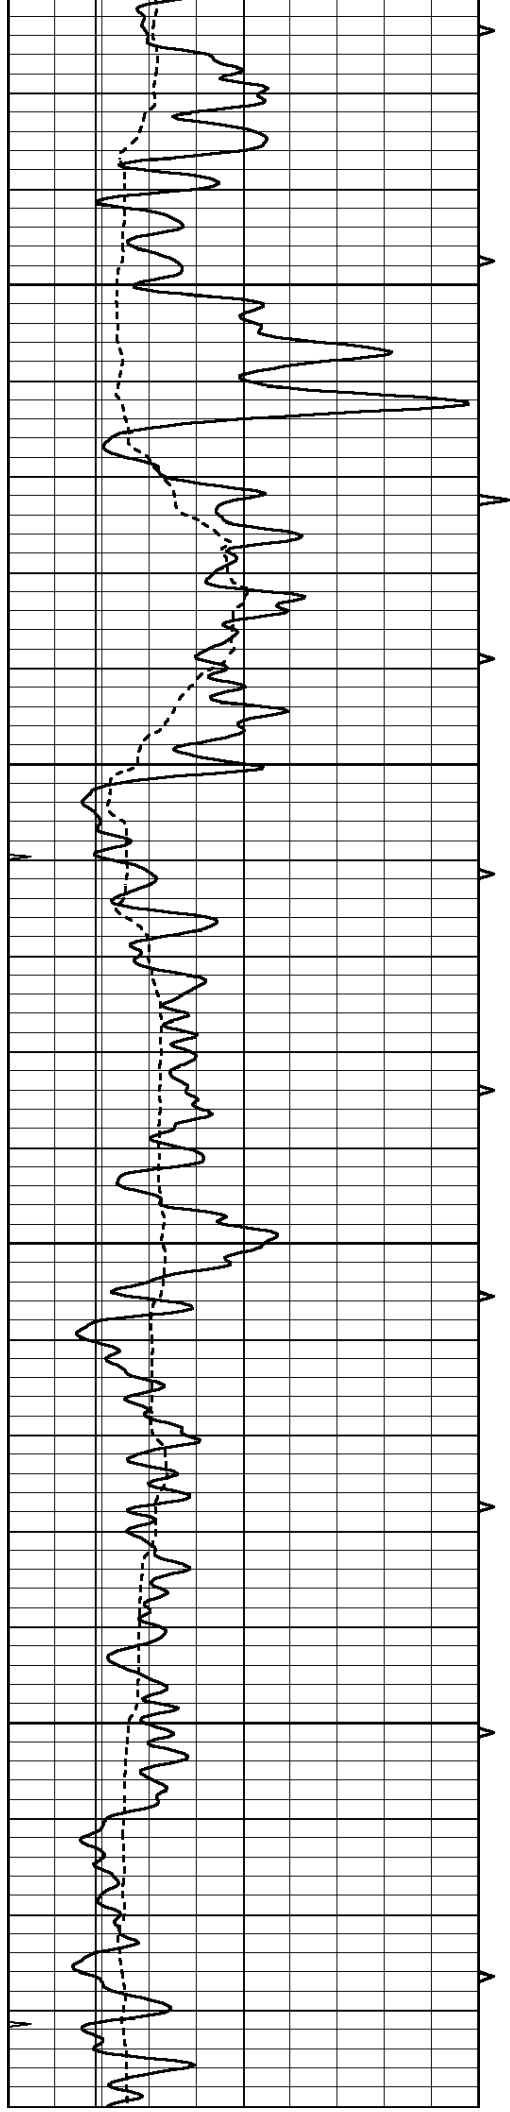

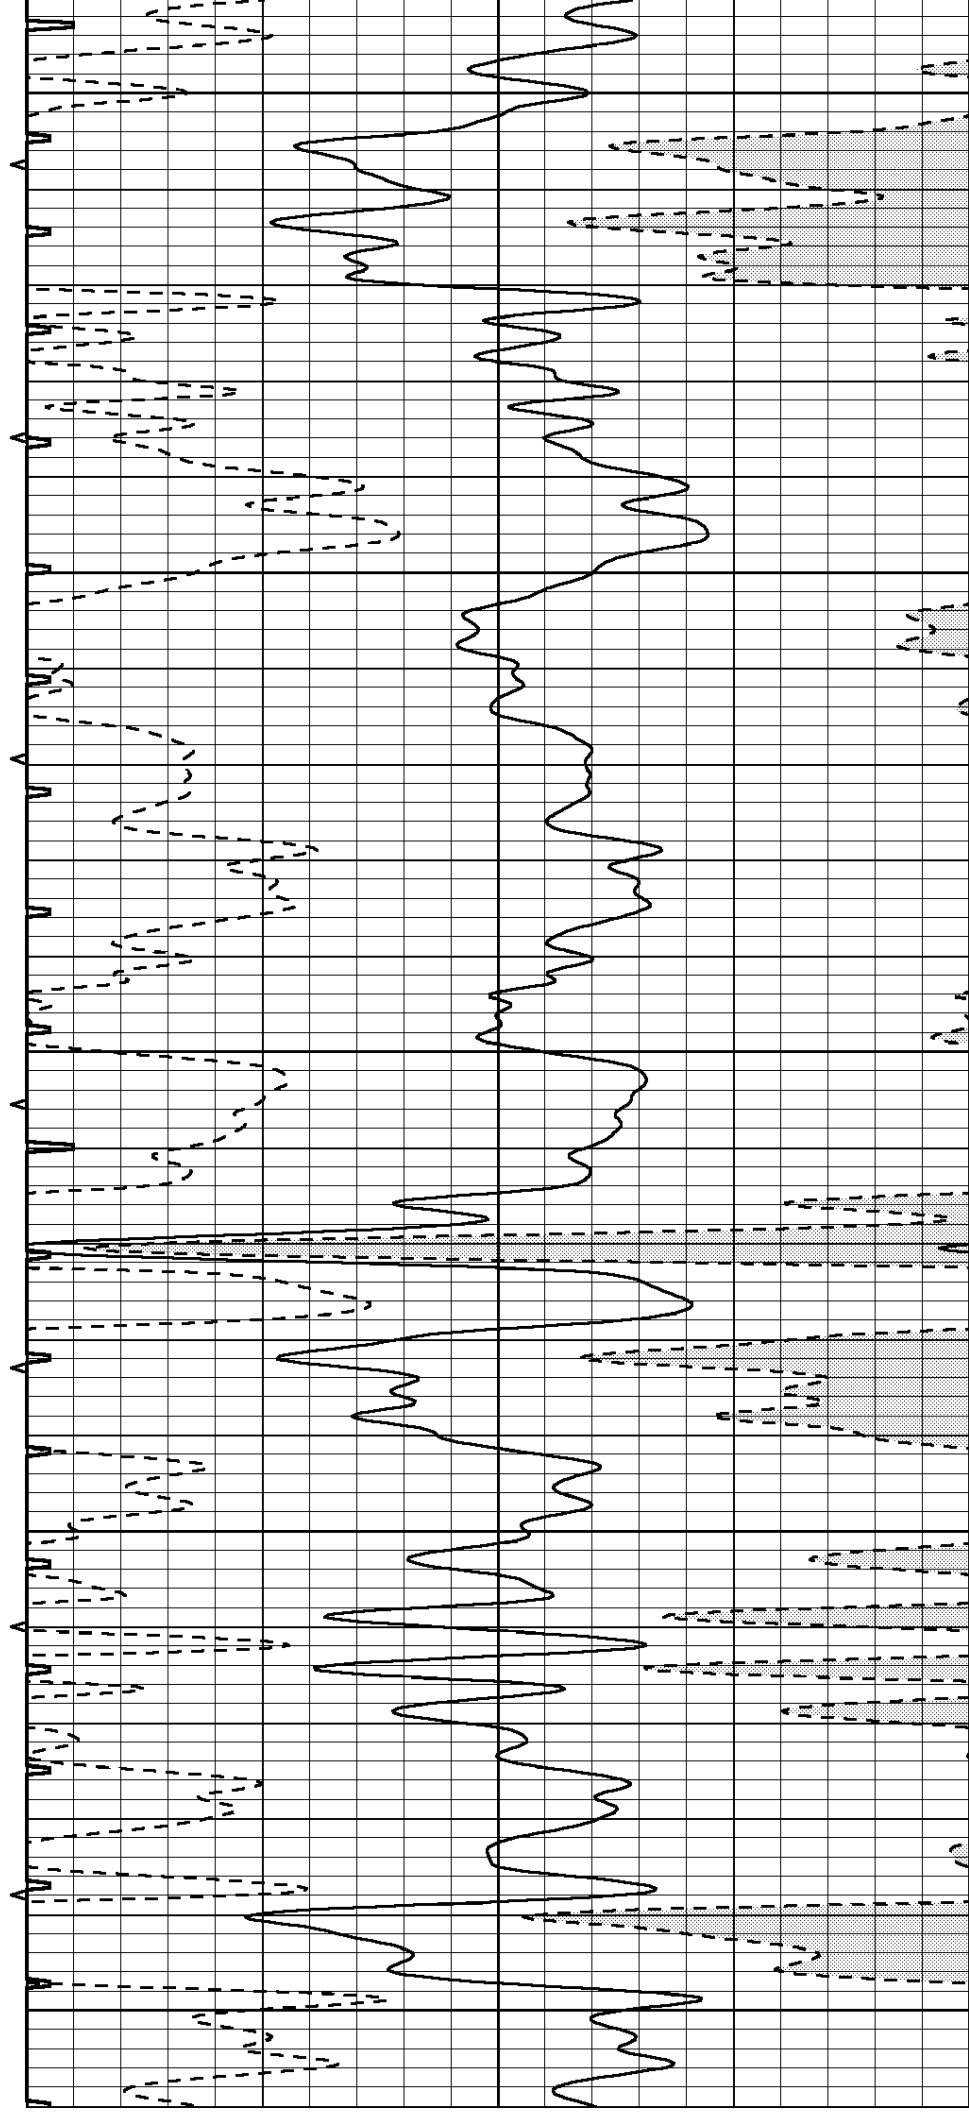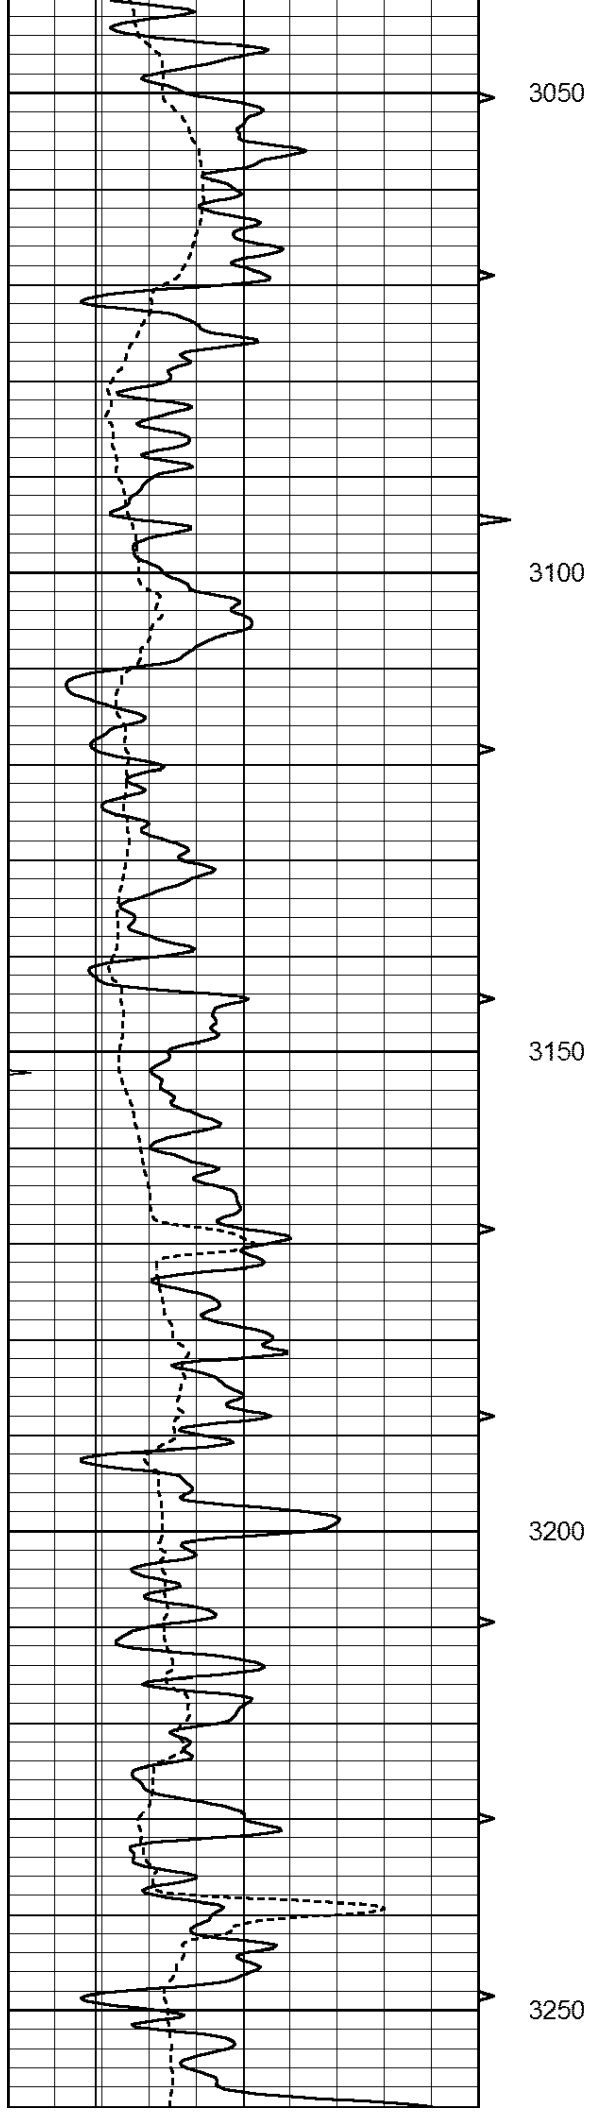

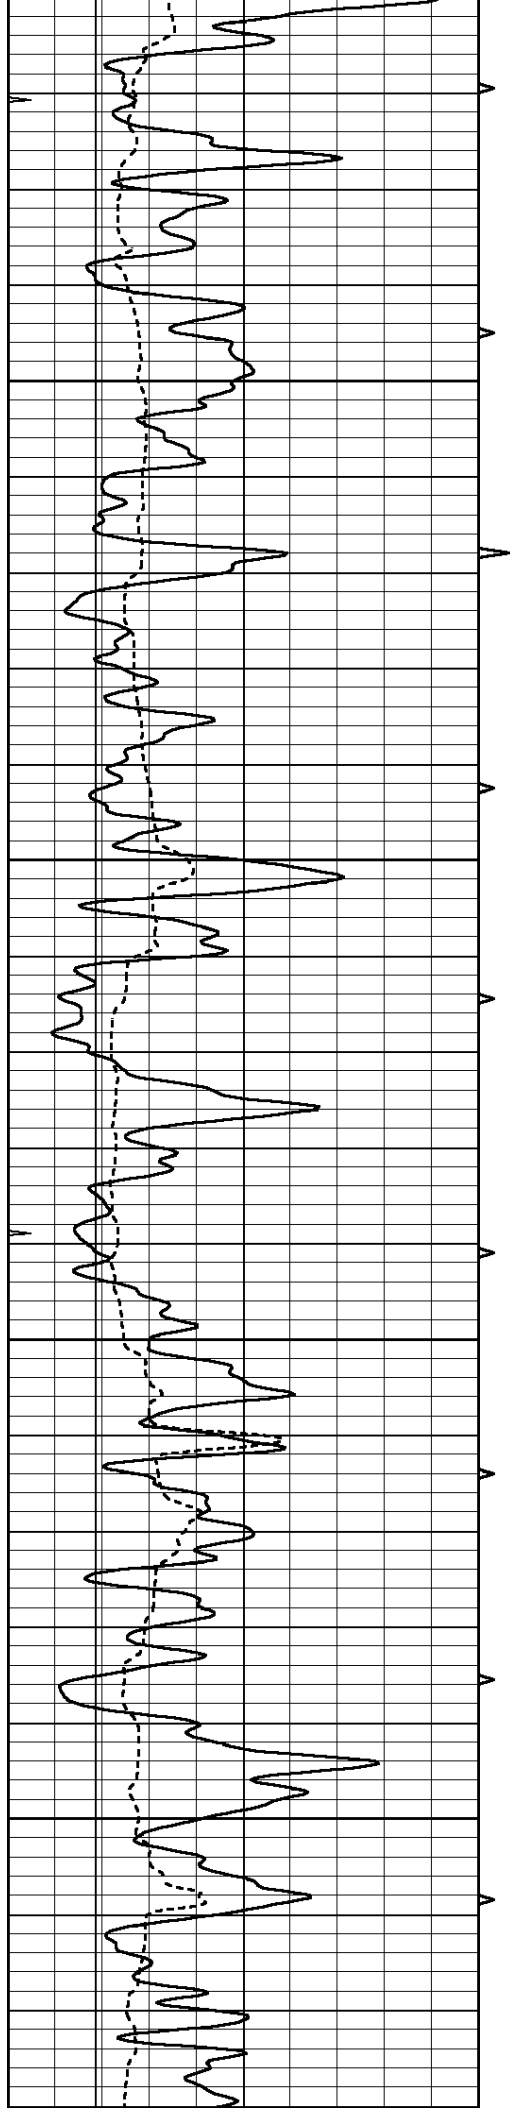




3300



3350


3400

3450

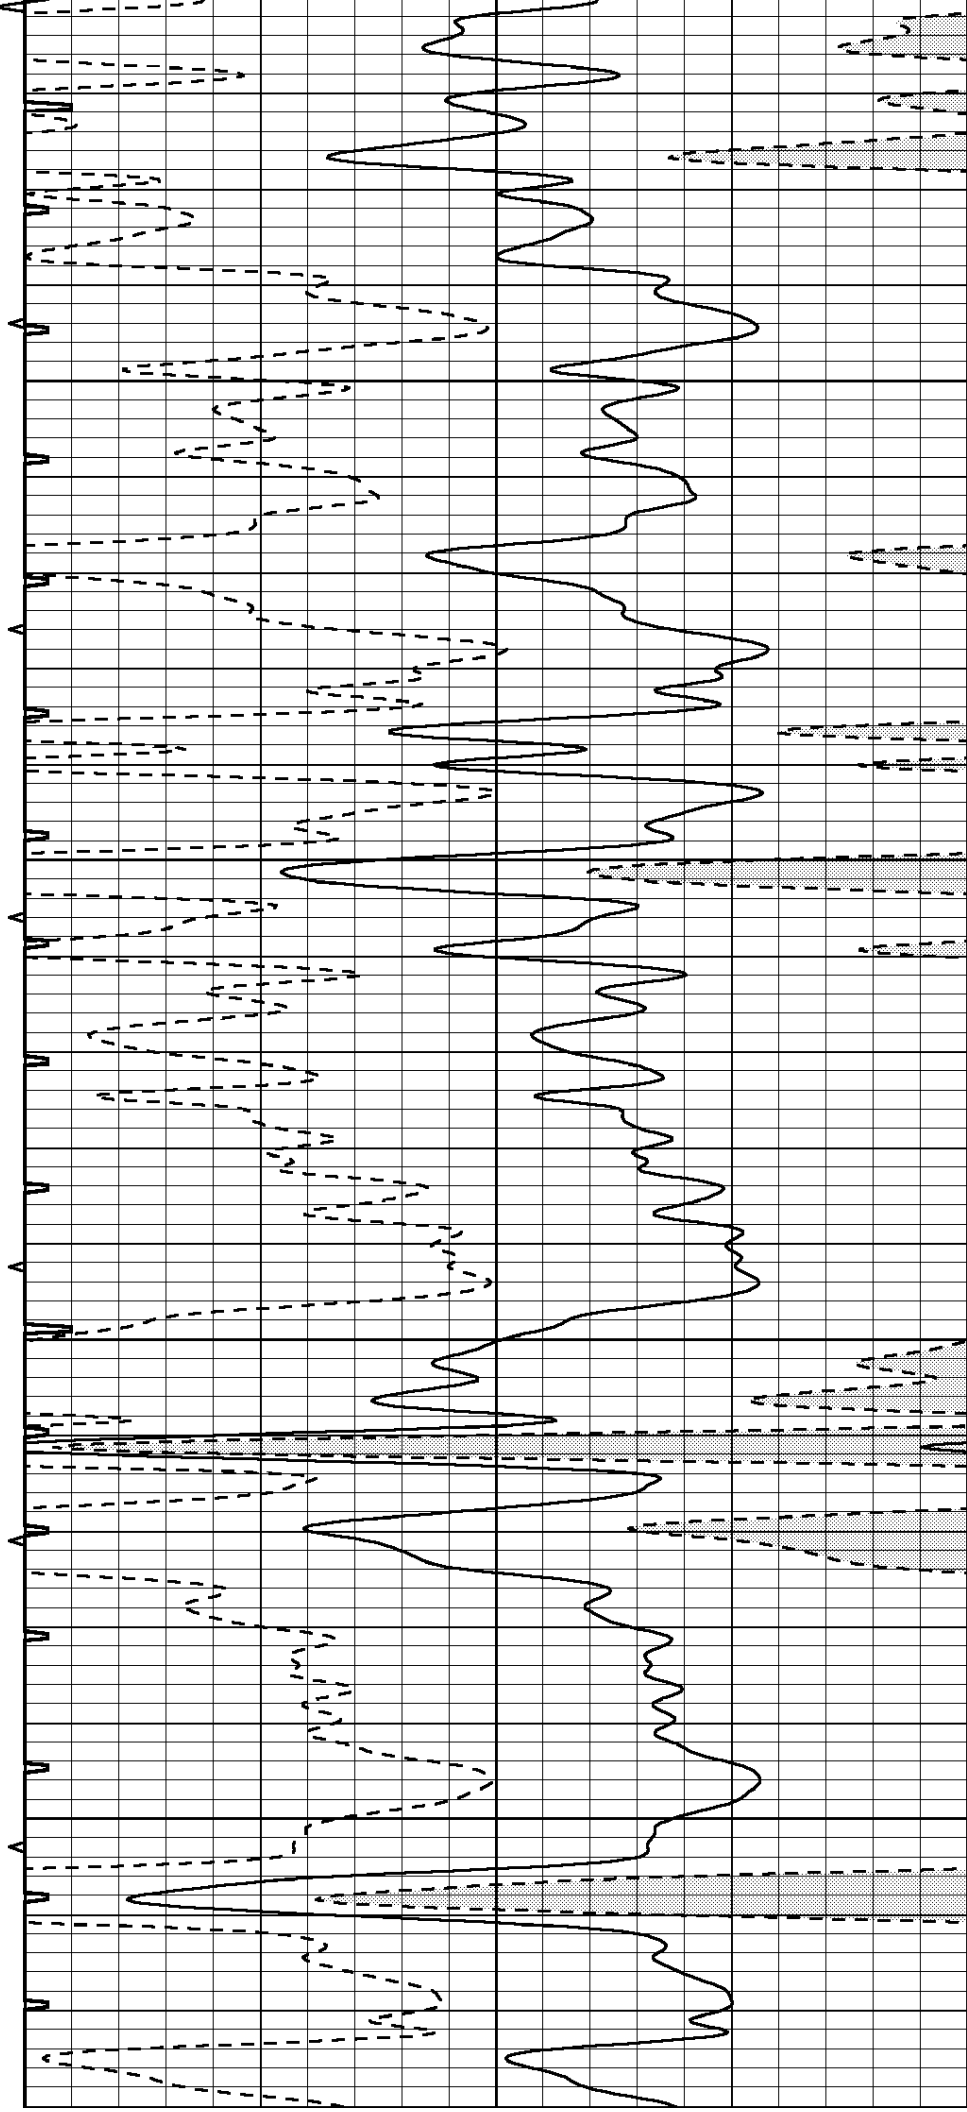

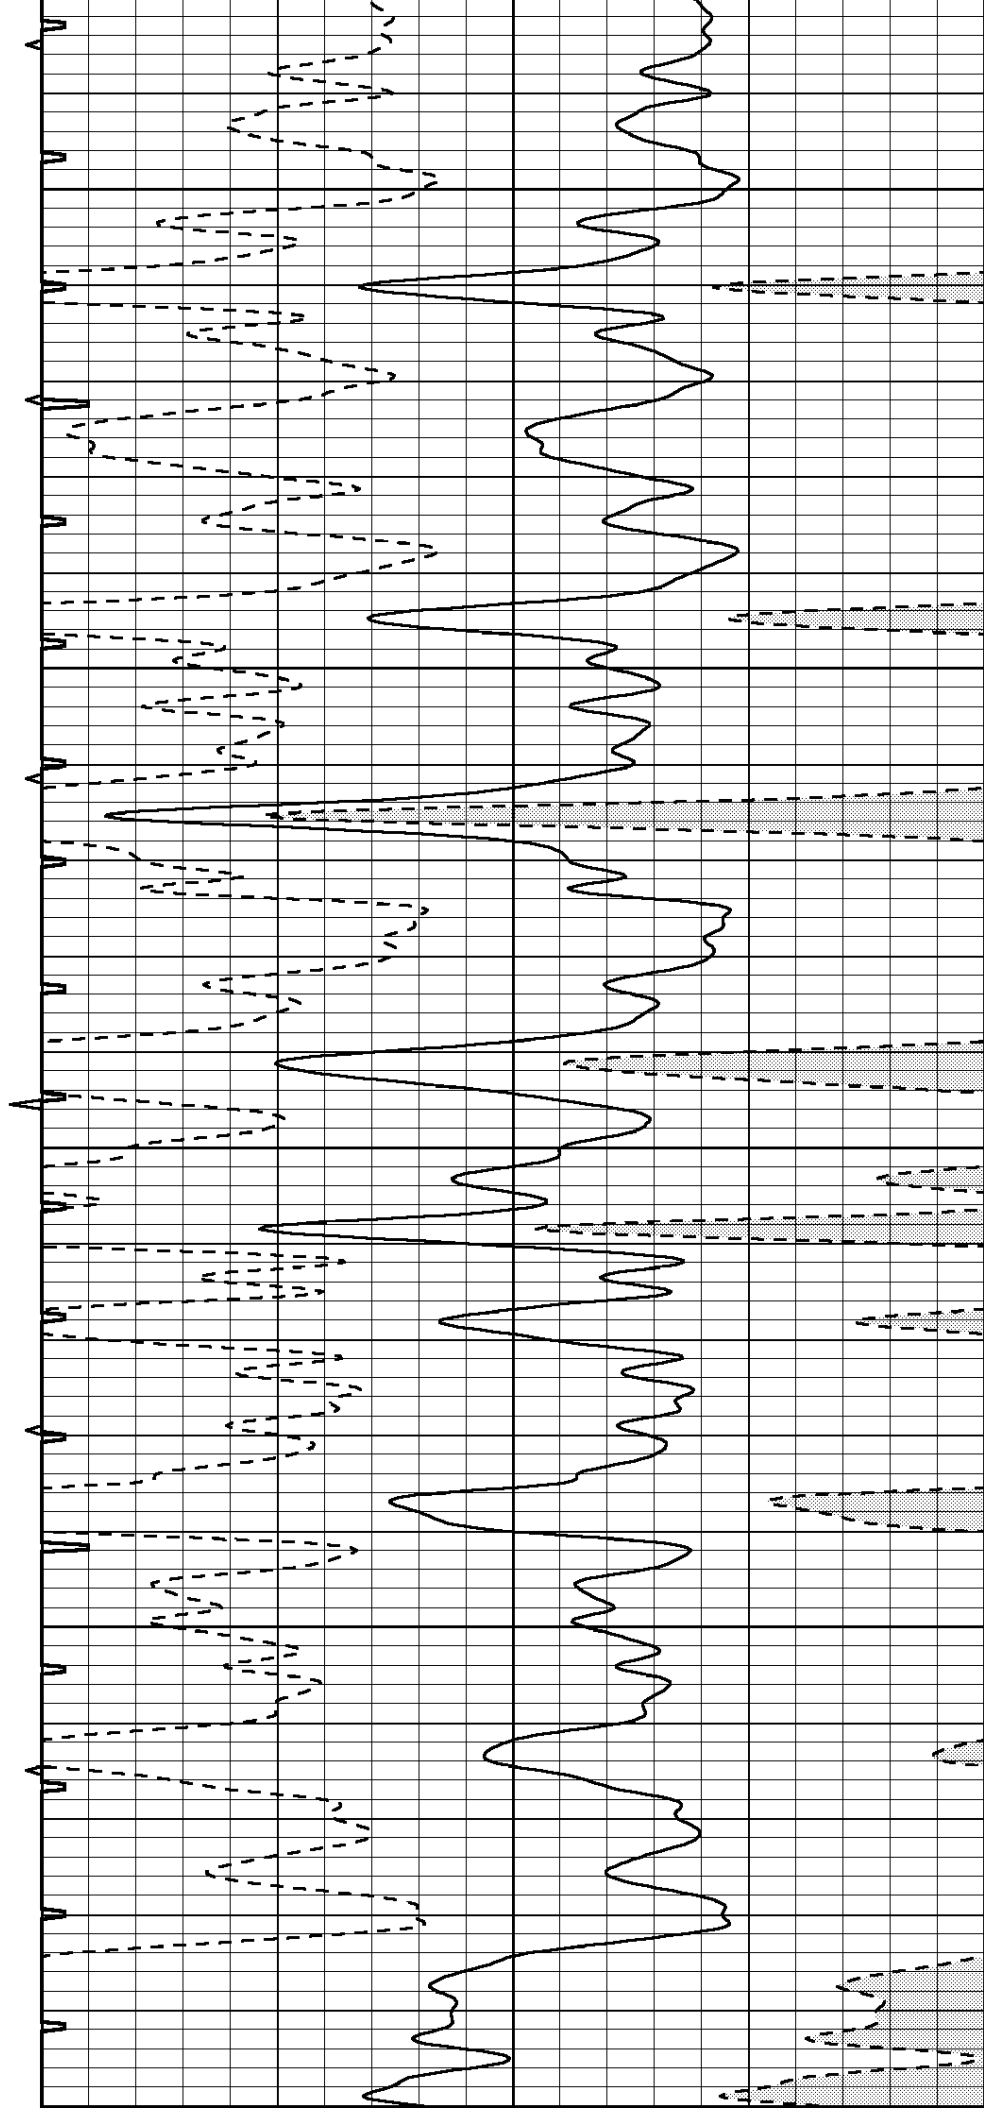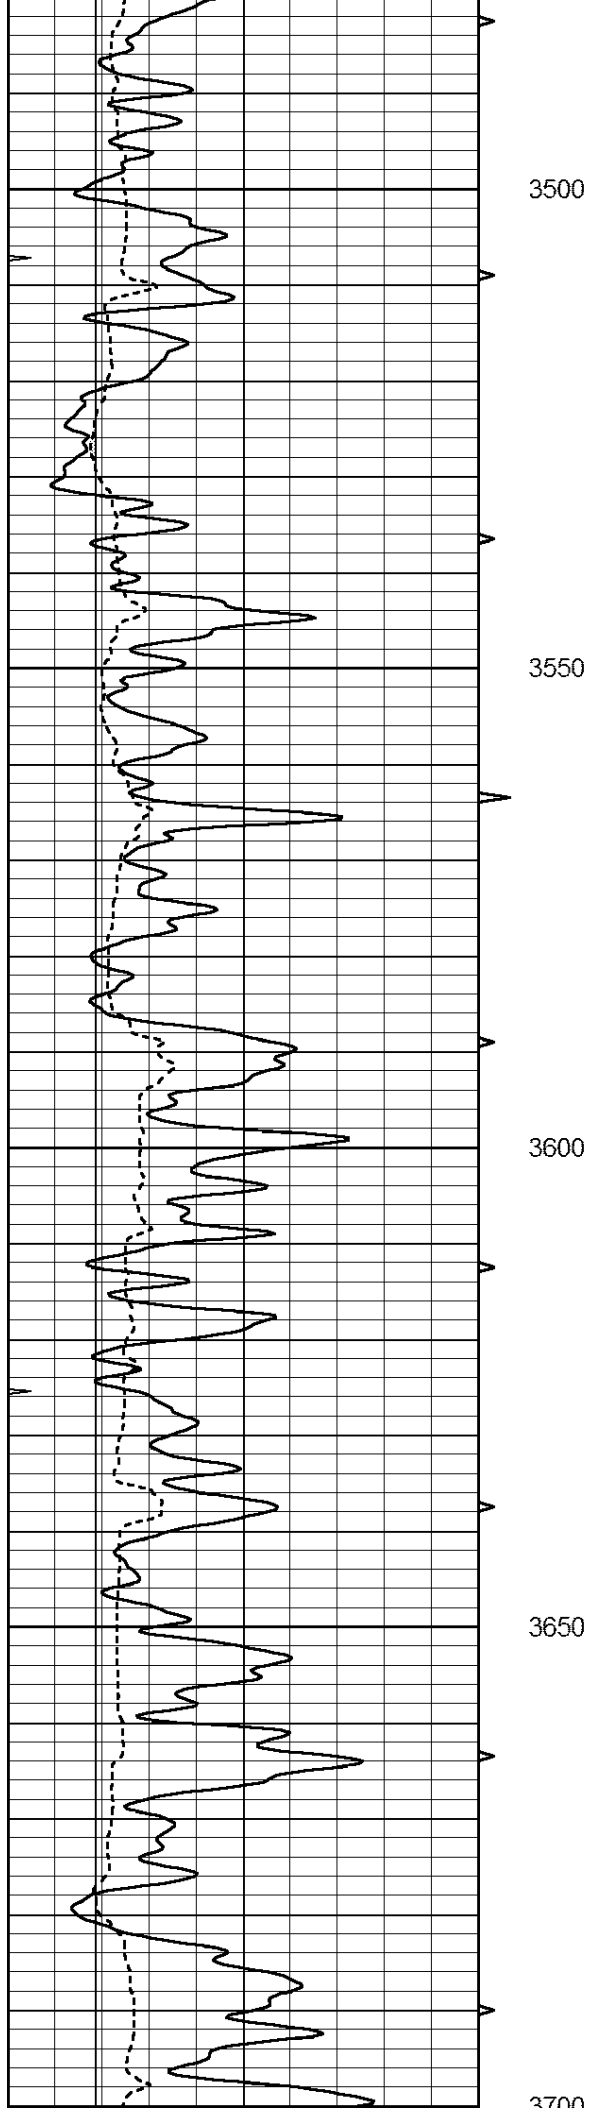

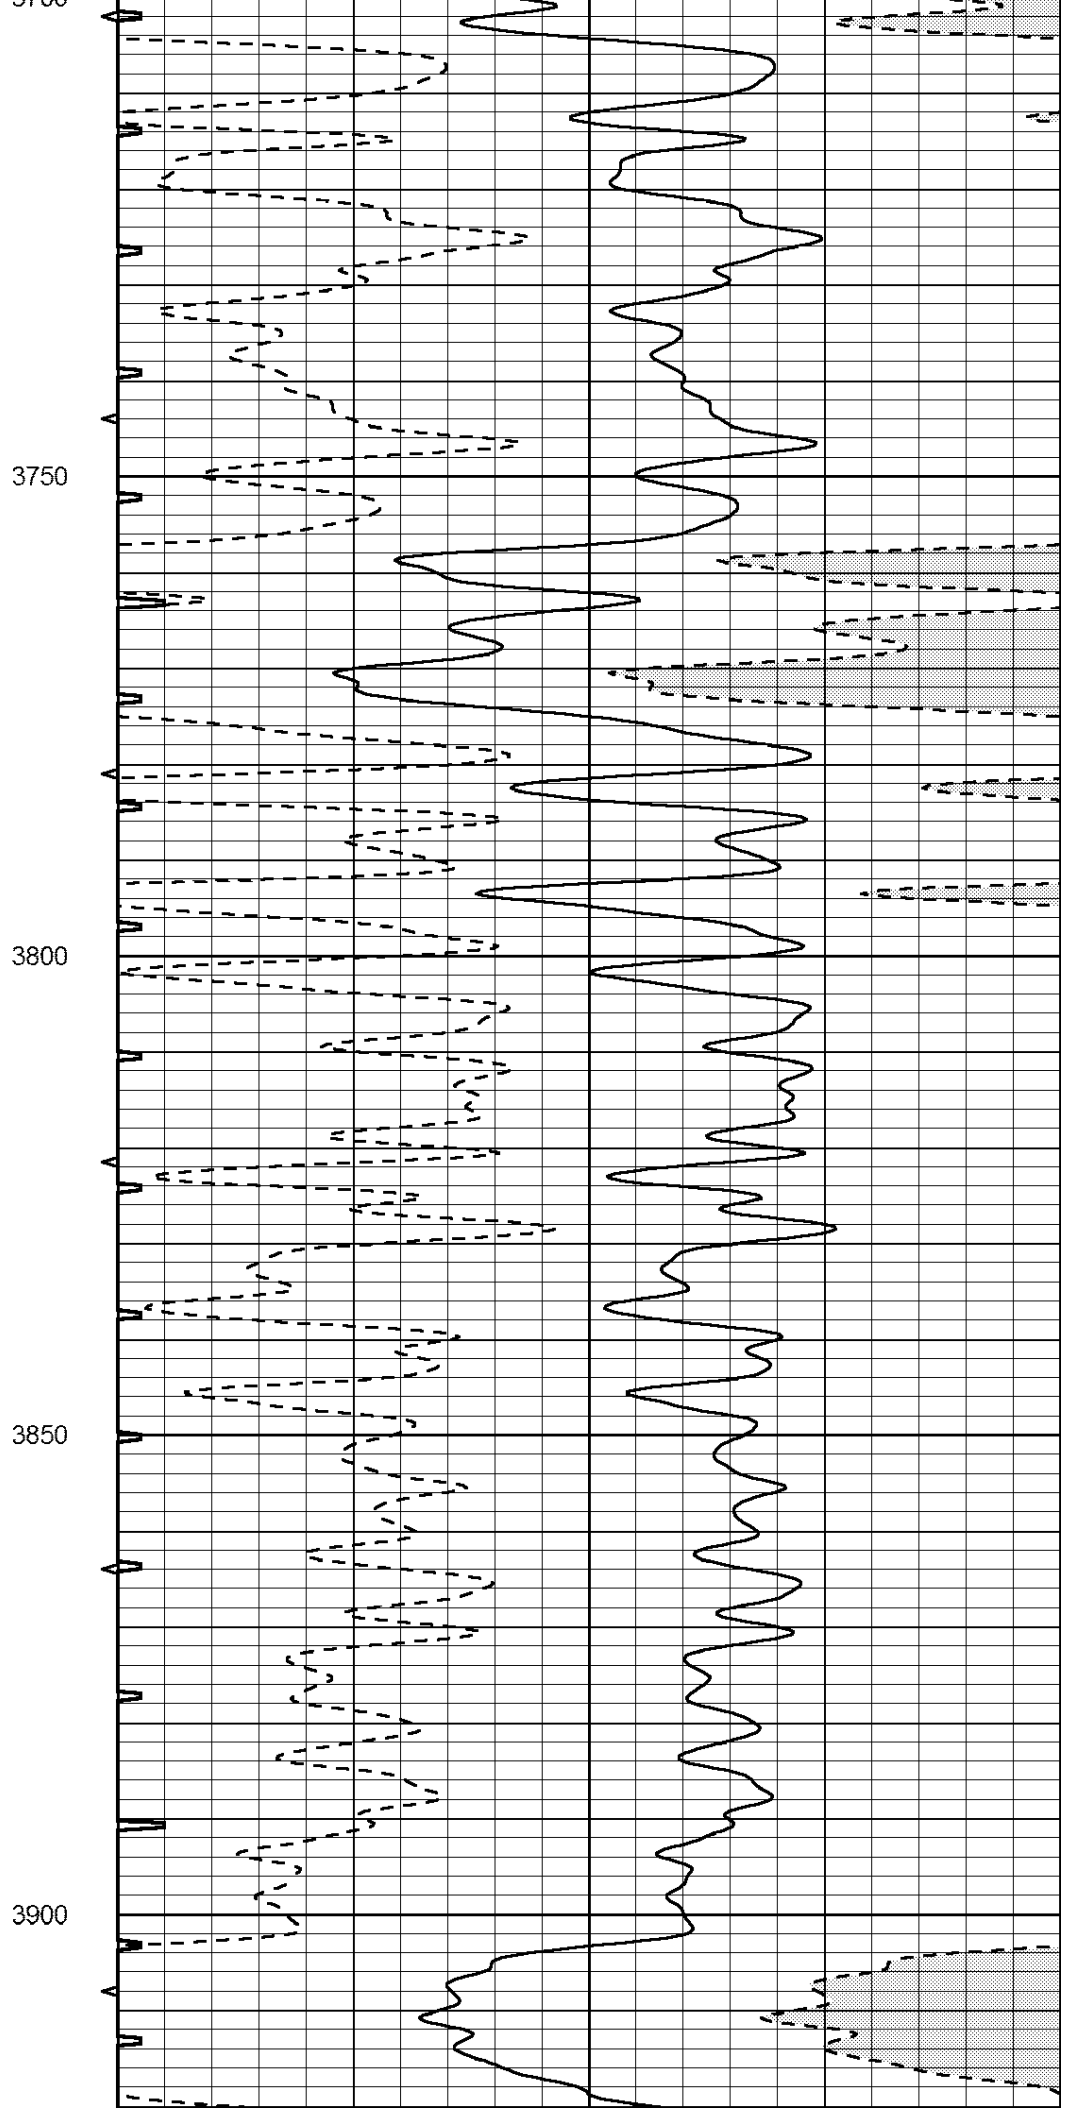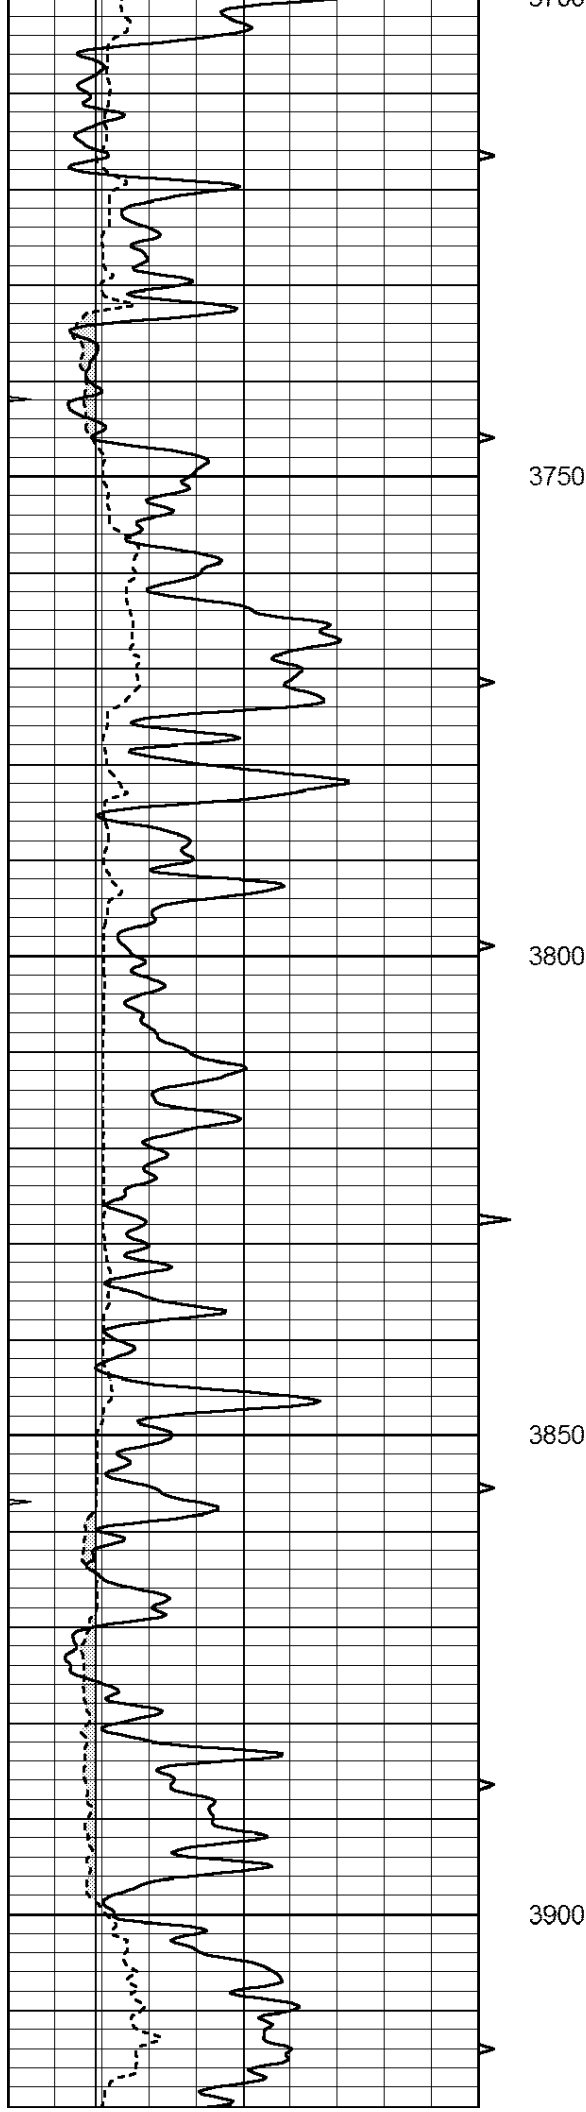

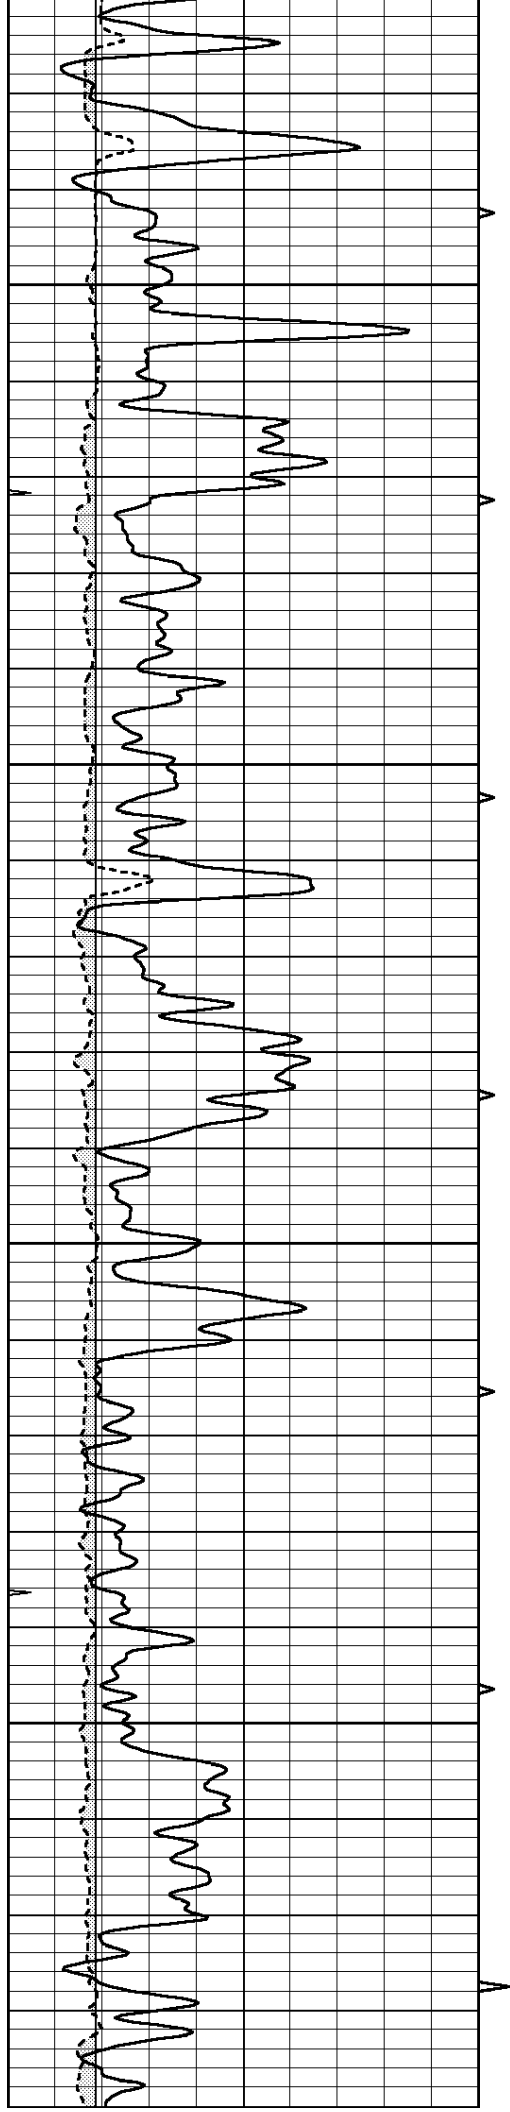



3950

4000

4050

4100

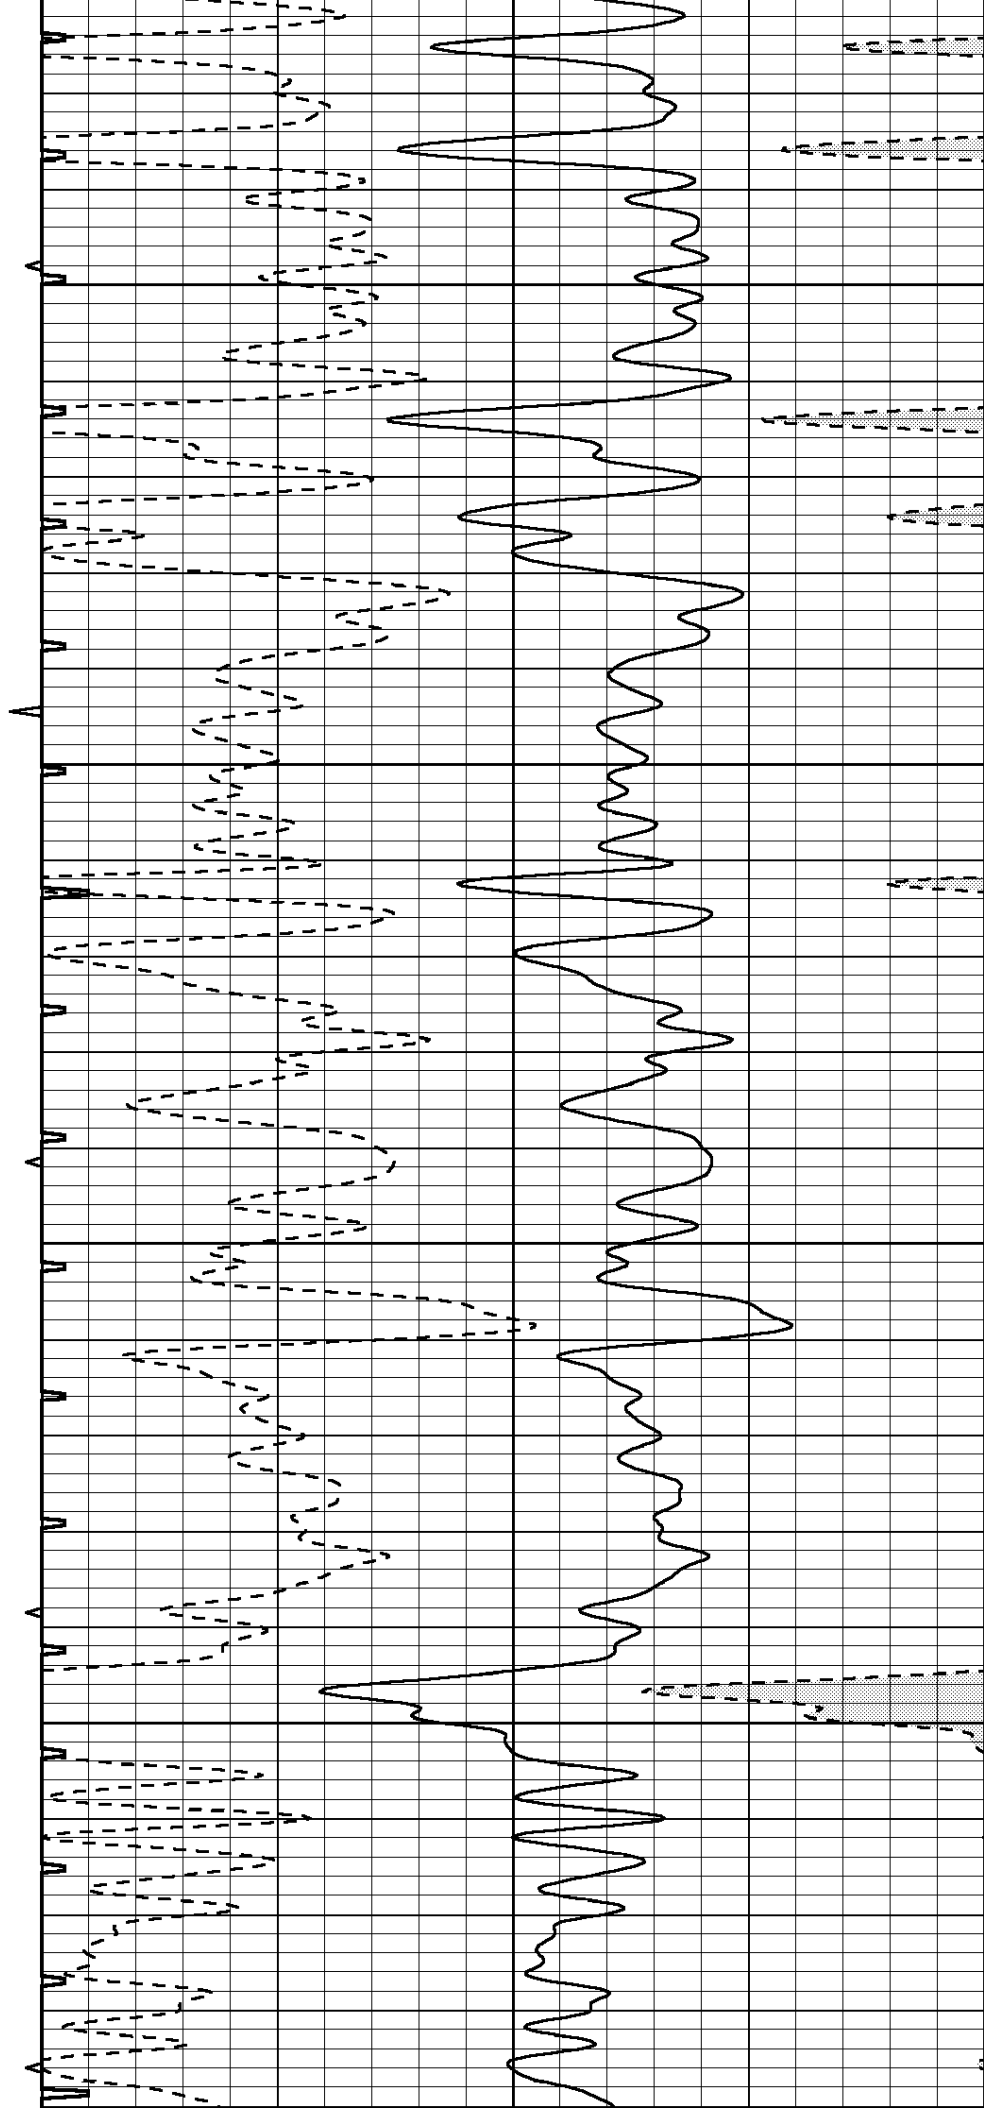

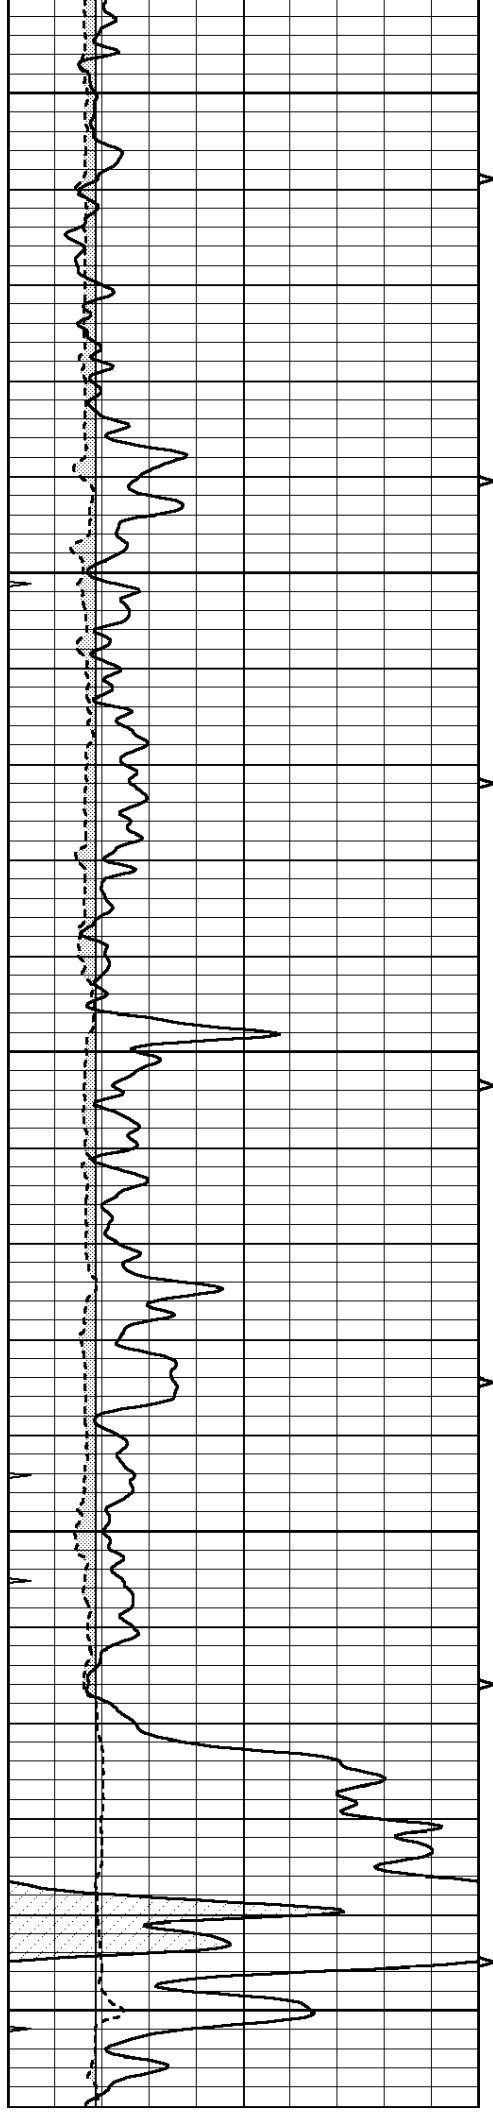


4150


4200

4250

4300

4350

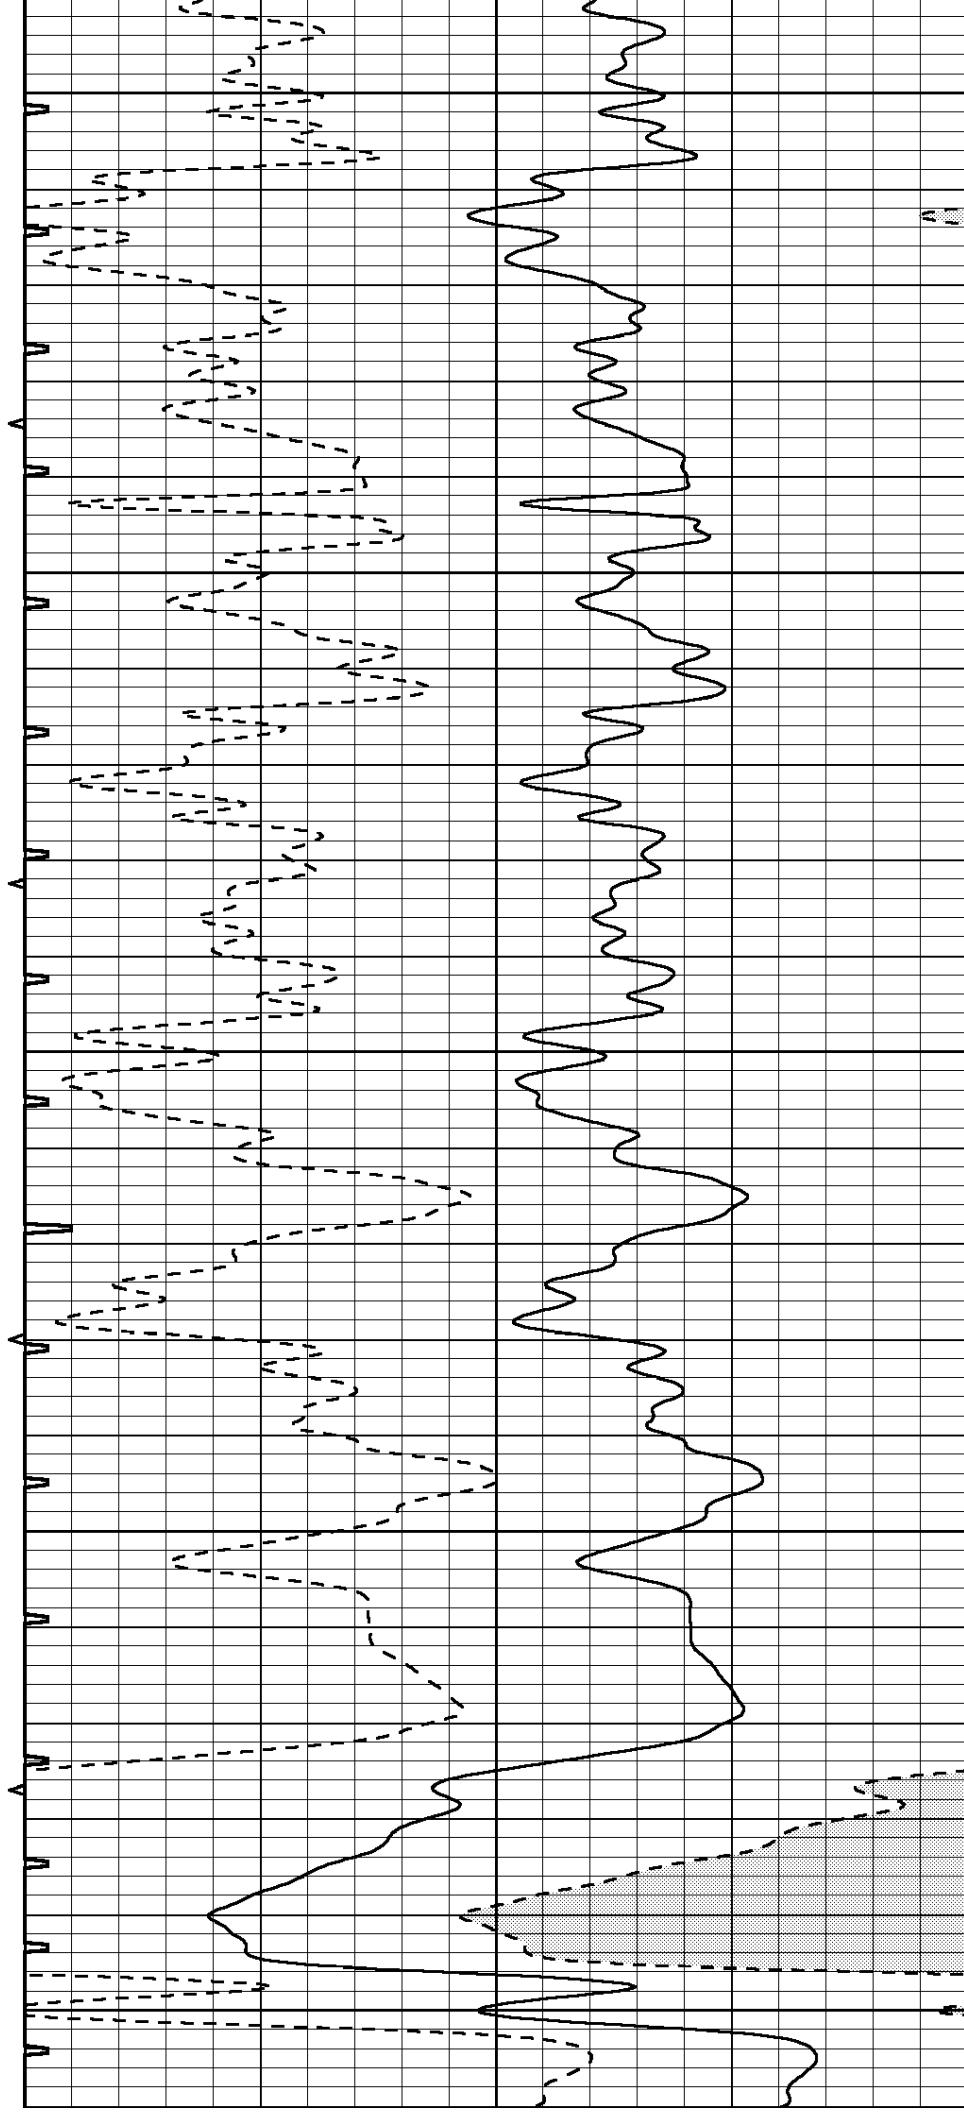

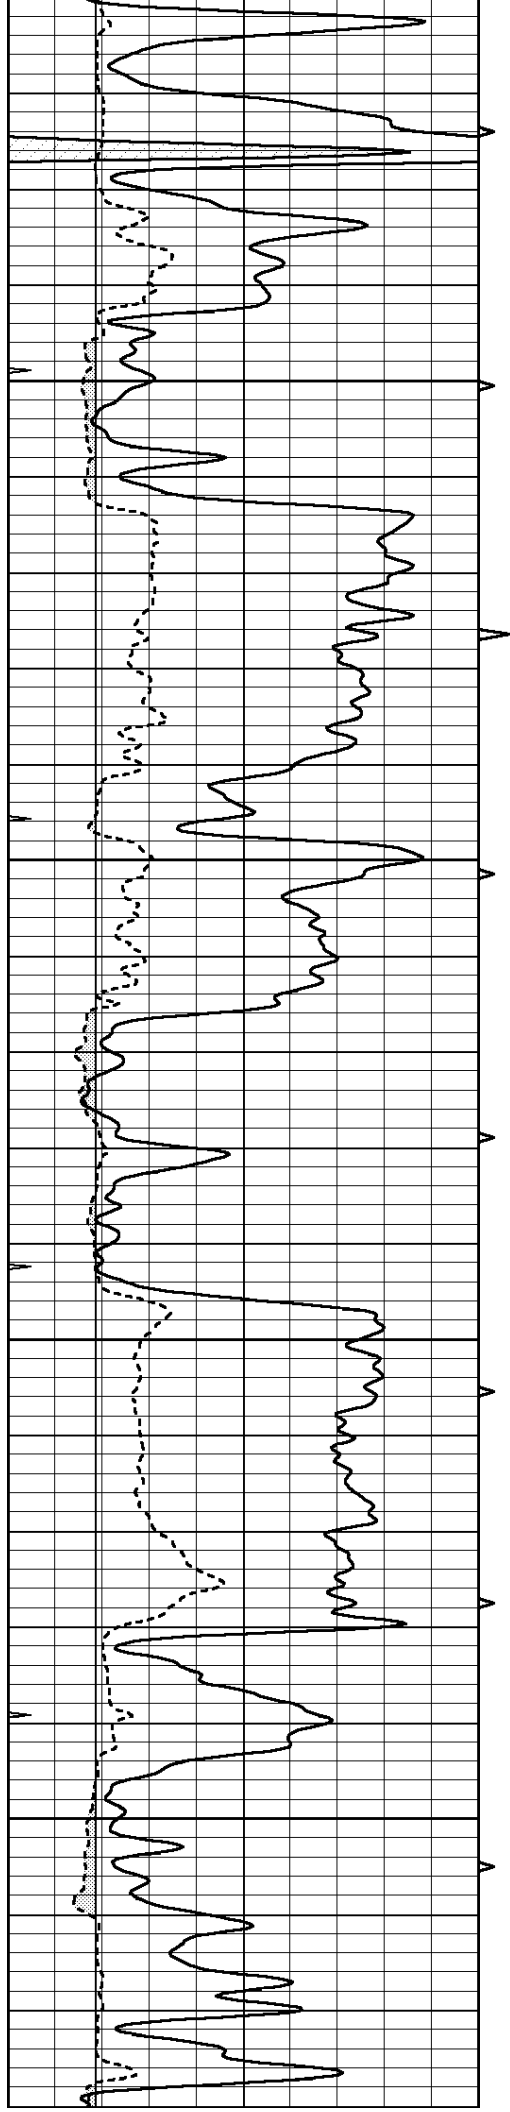



4400

4450

4500

4550

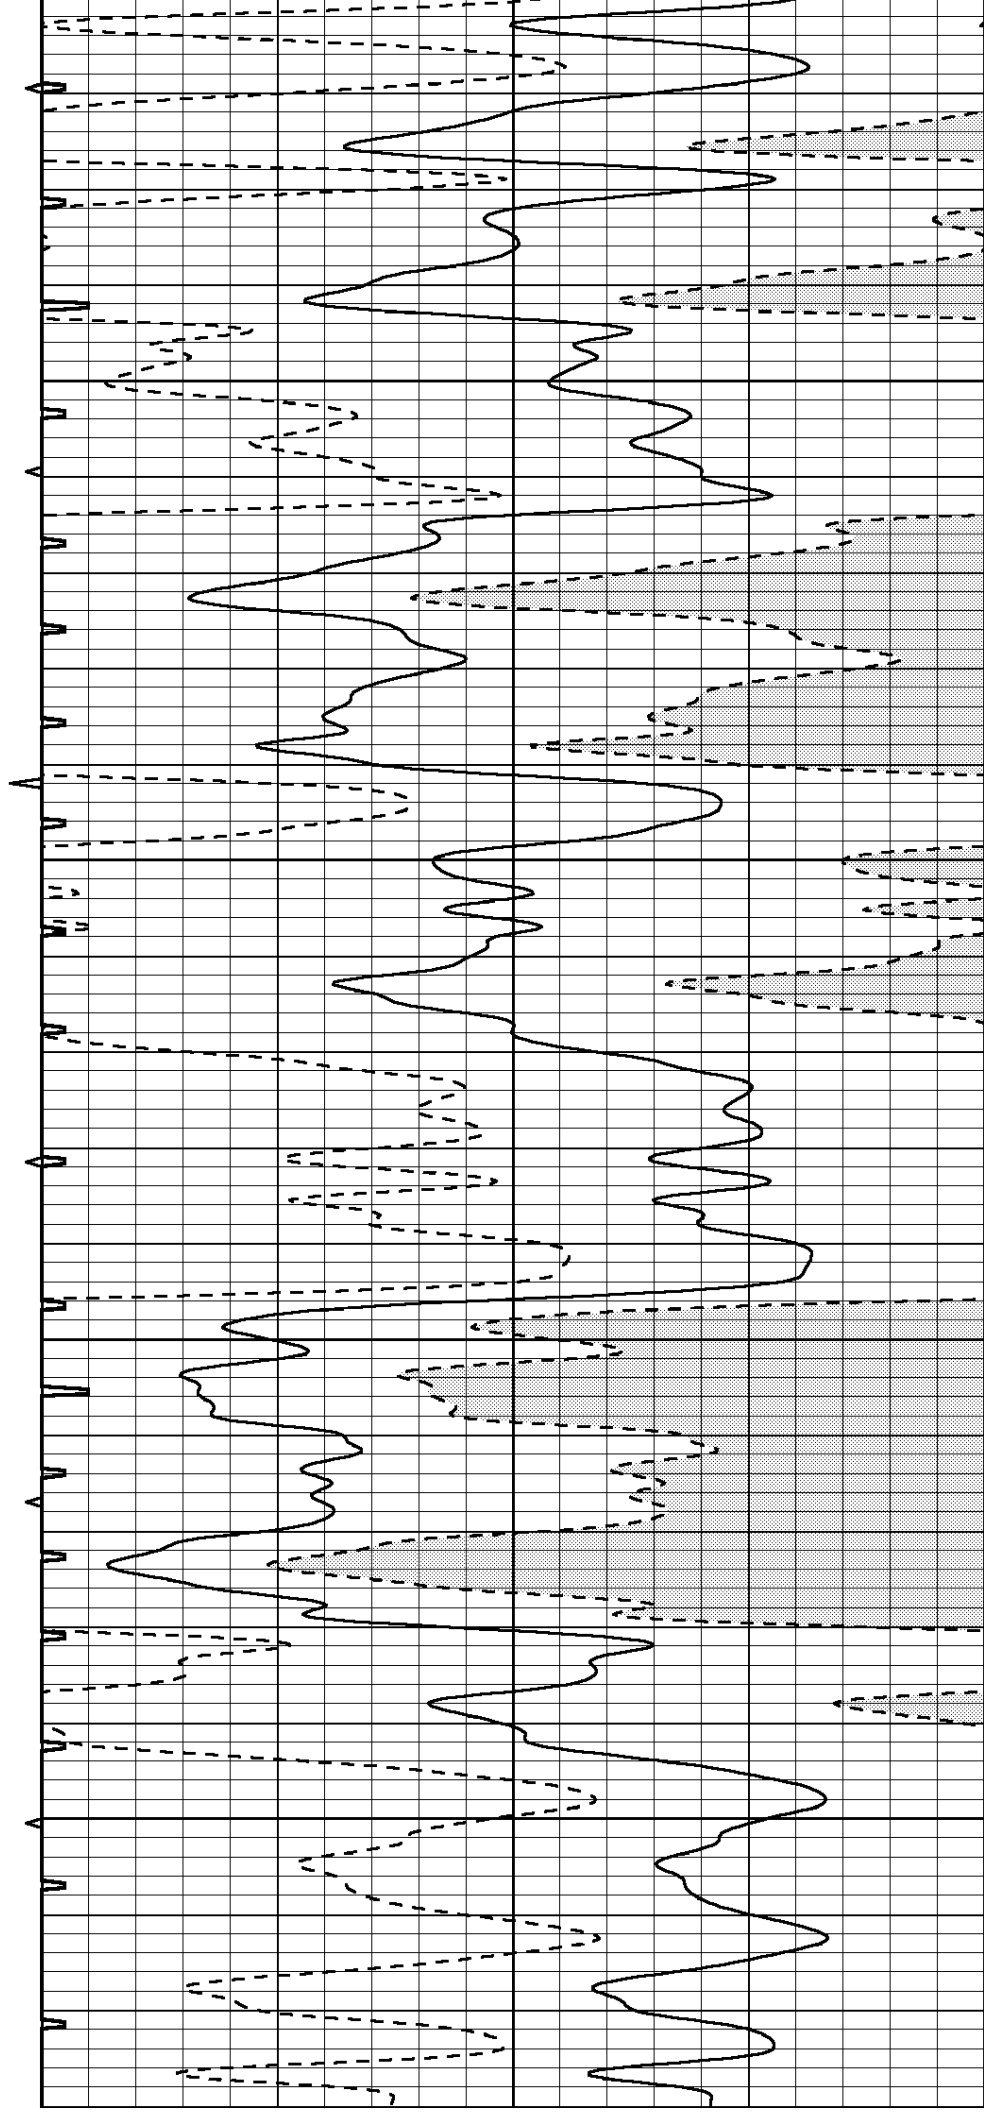

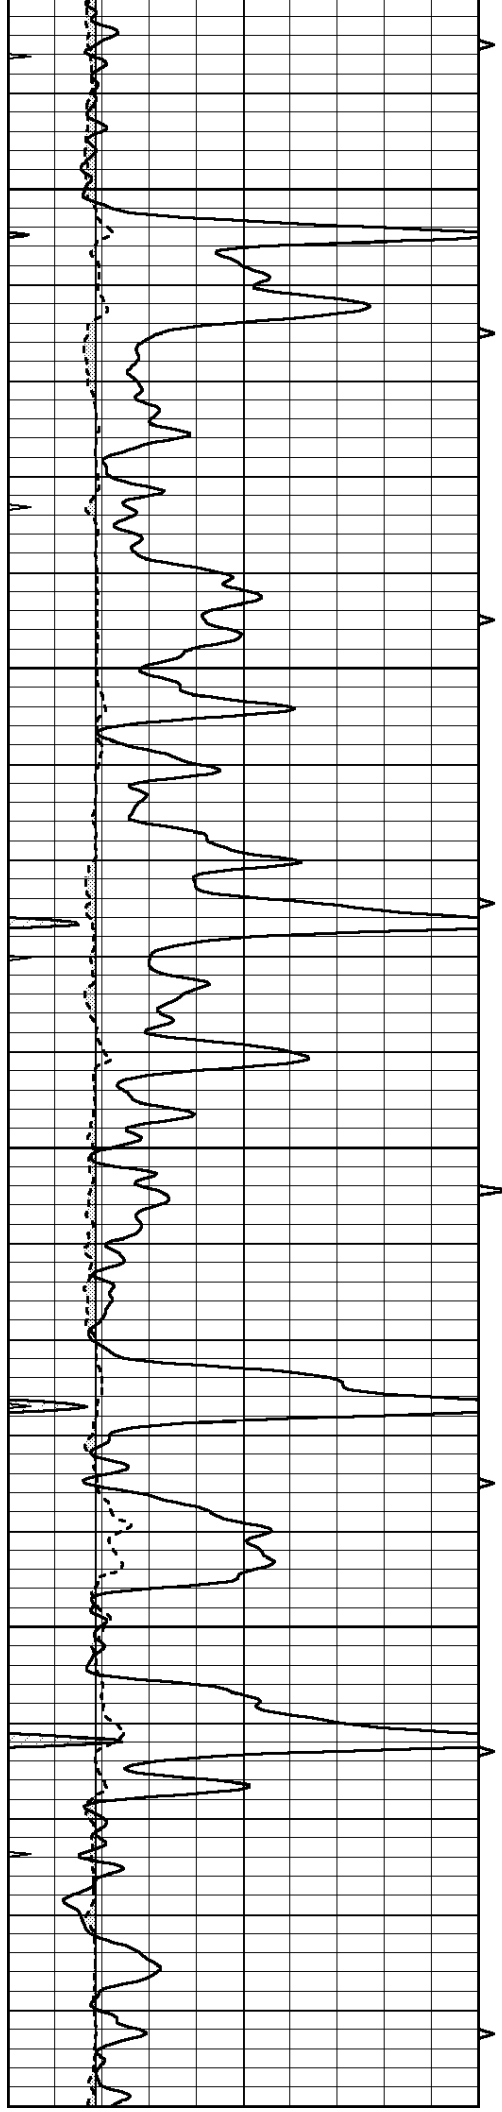


4600



4650

4700

4750

4800

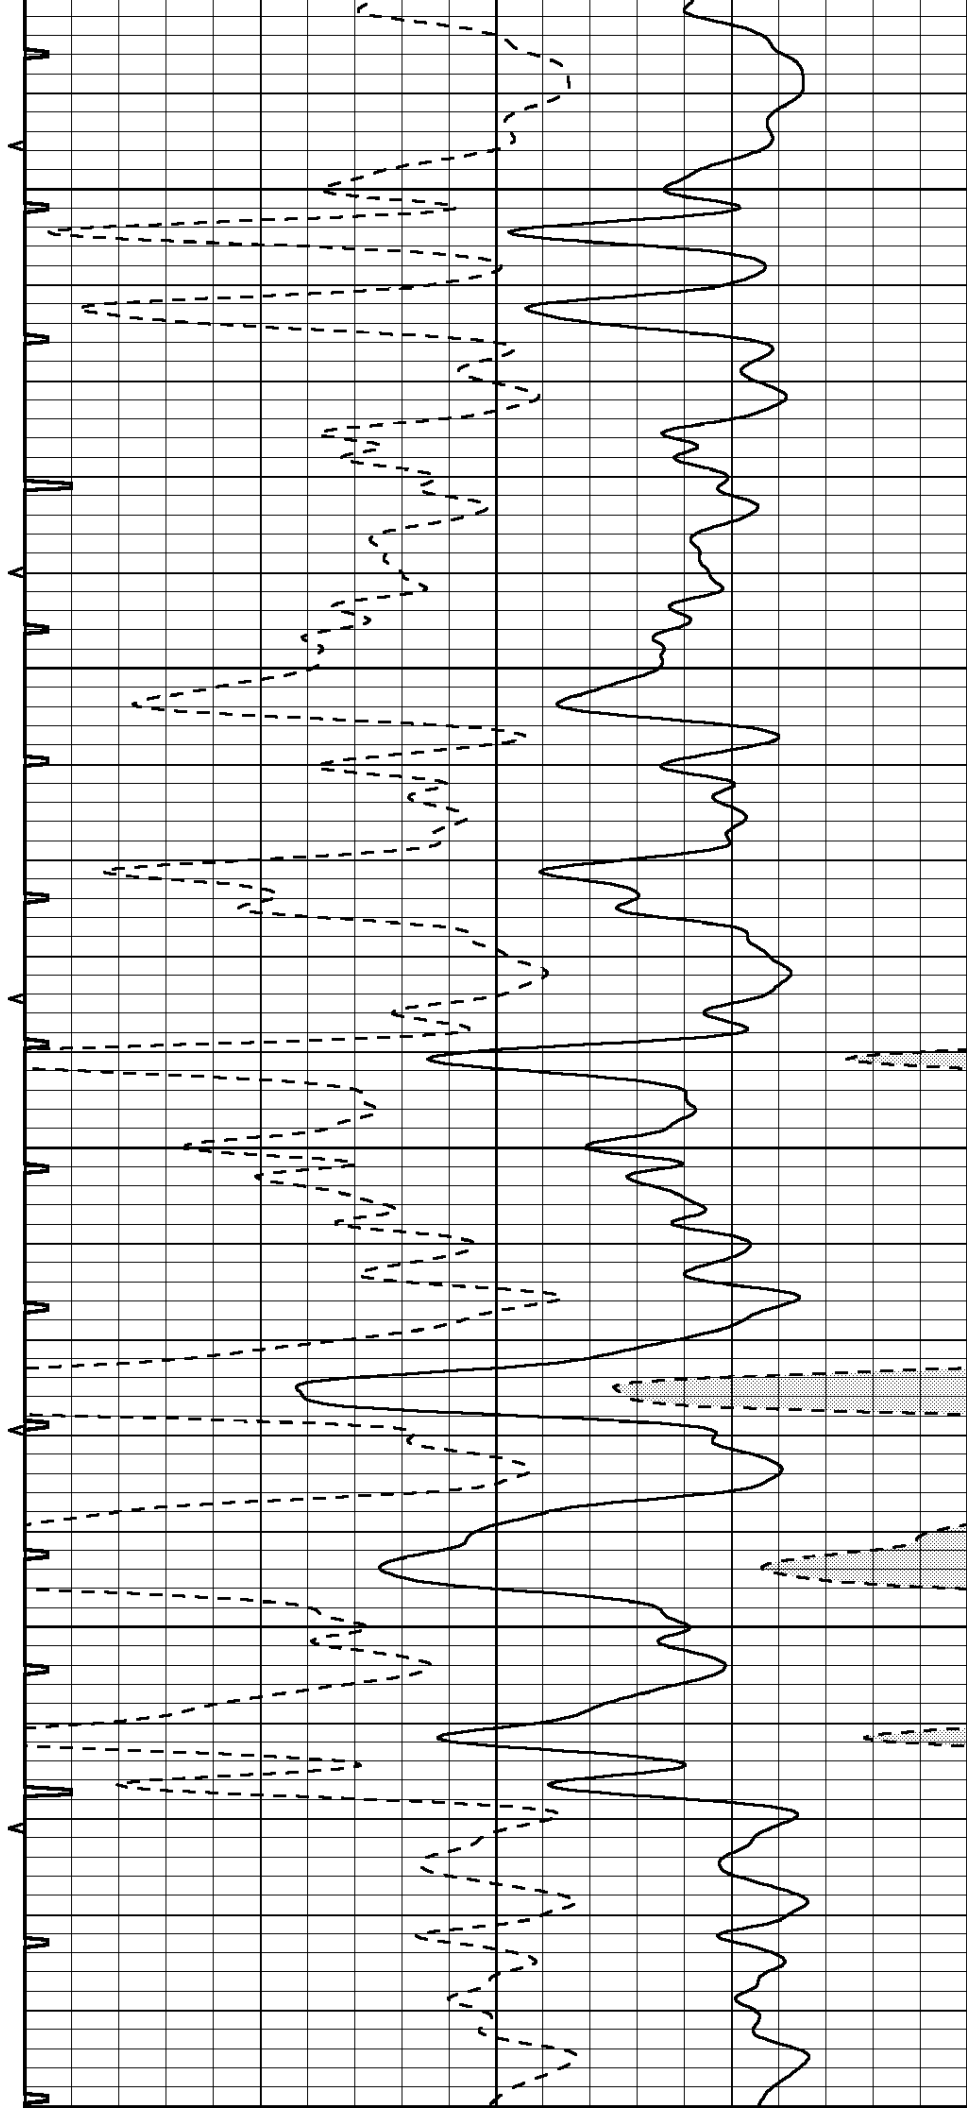

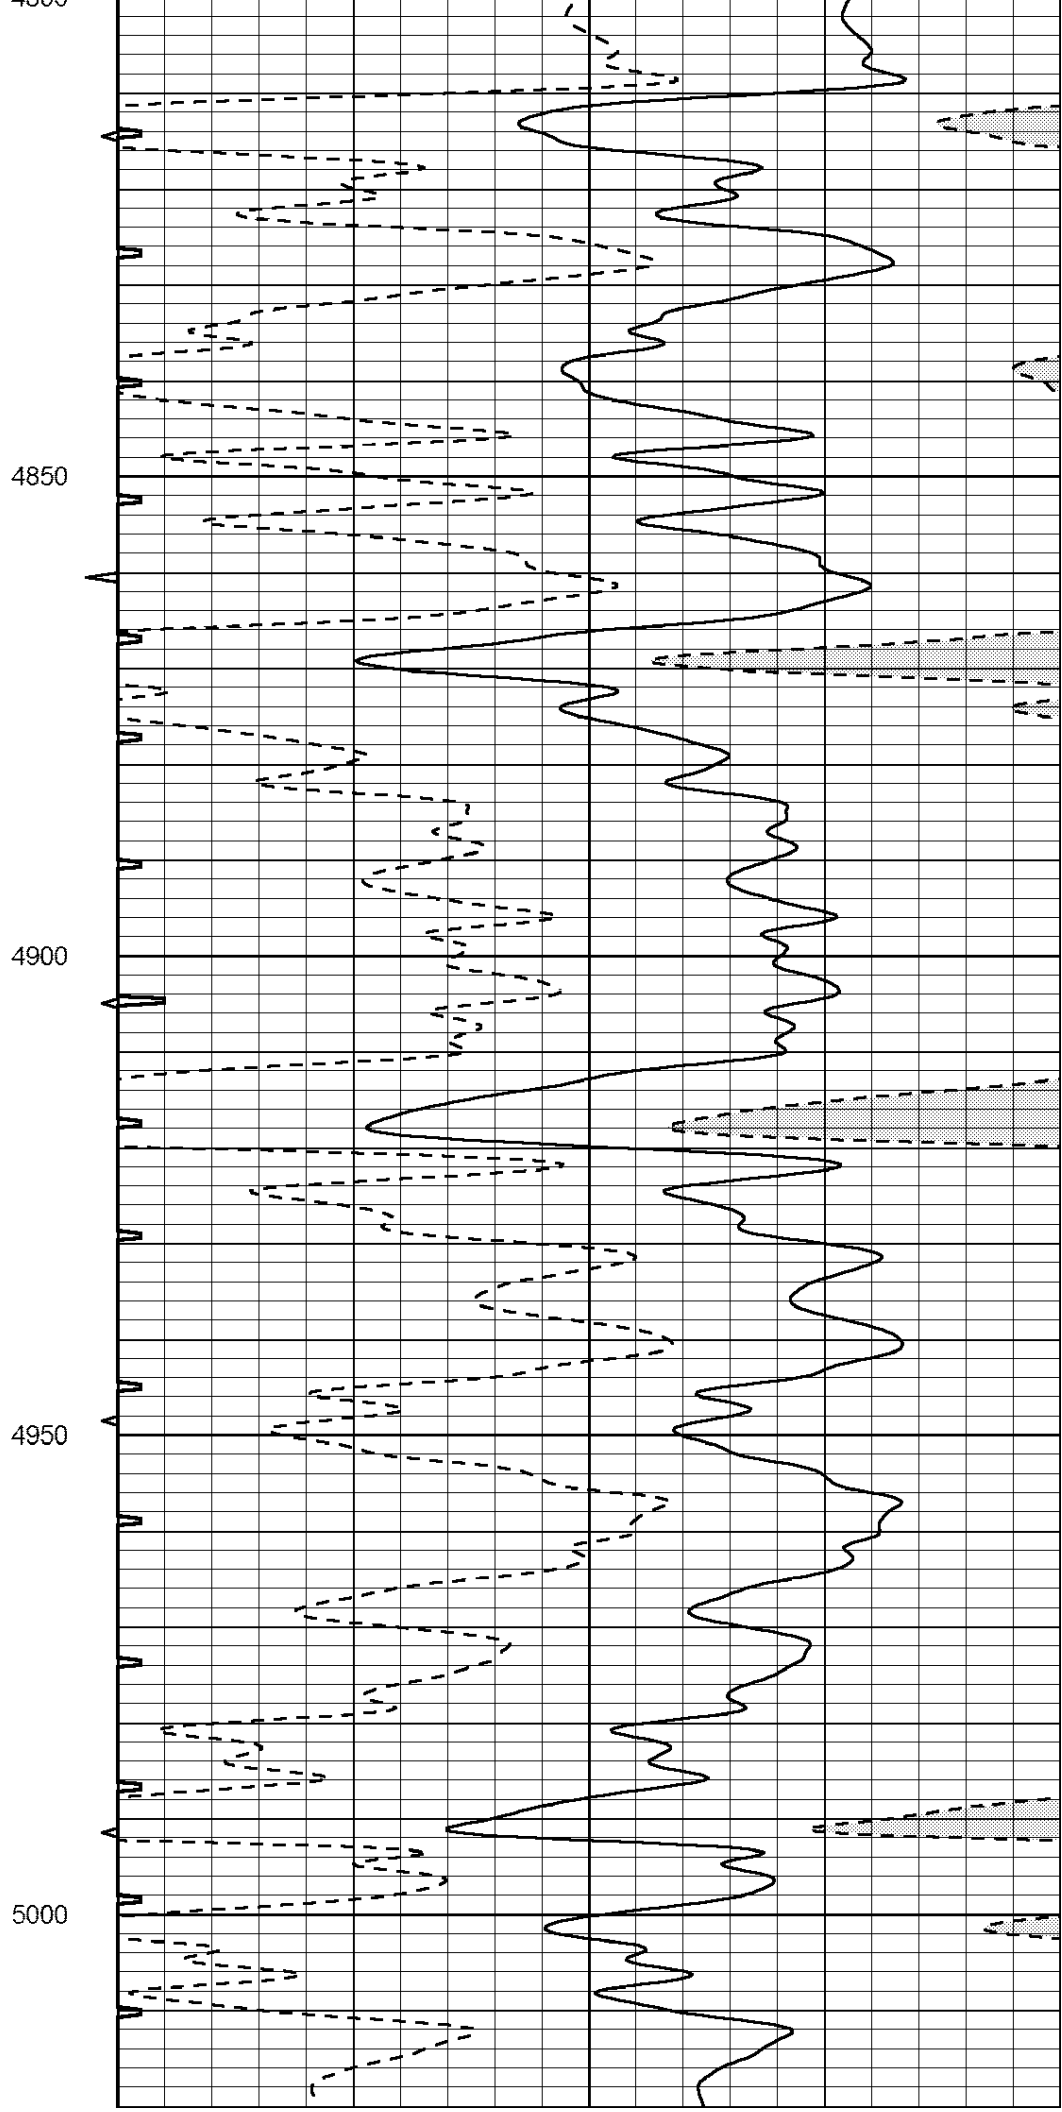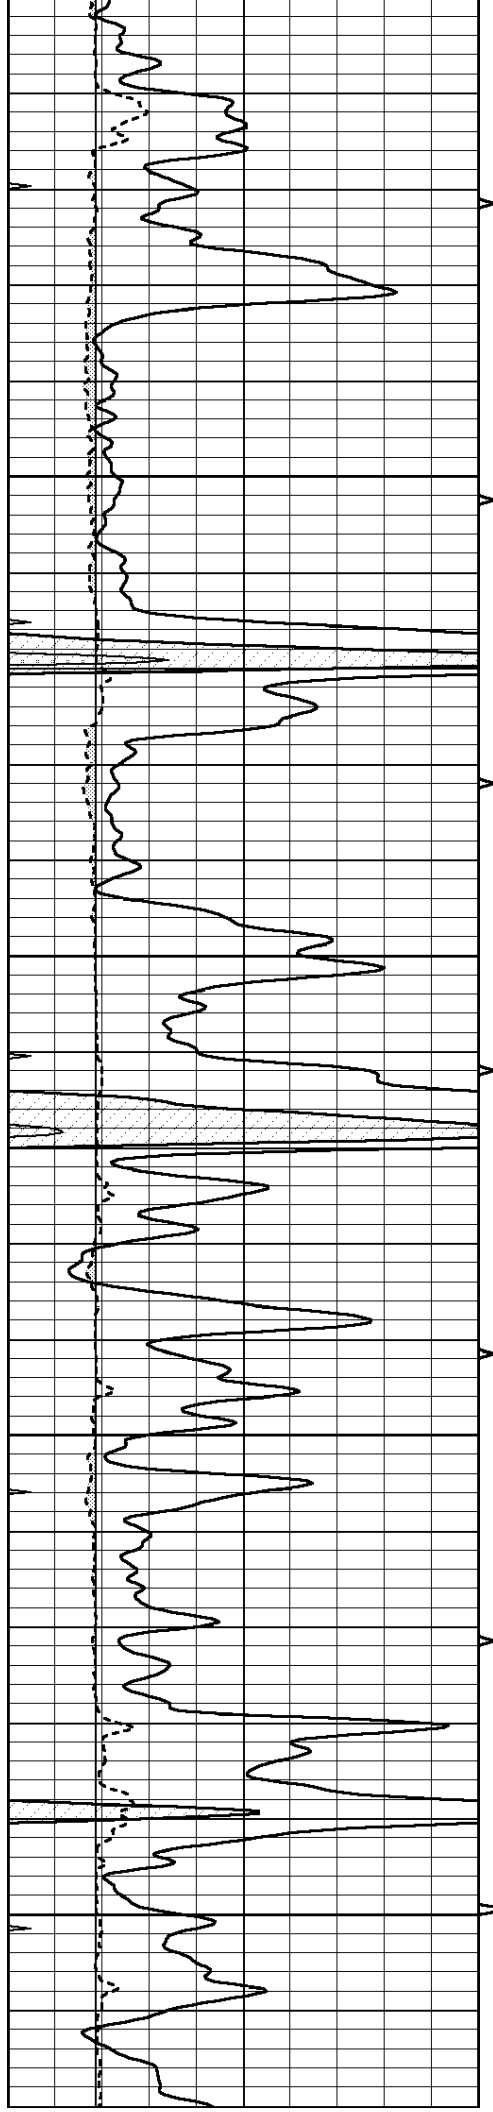






5050

5100

5150



5200

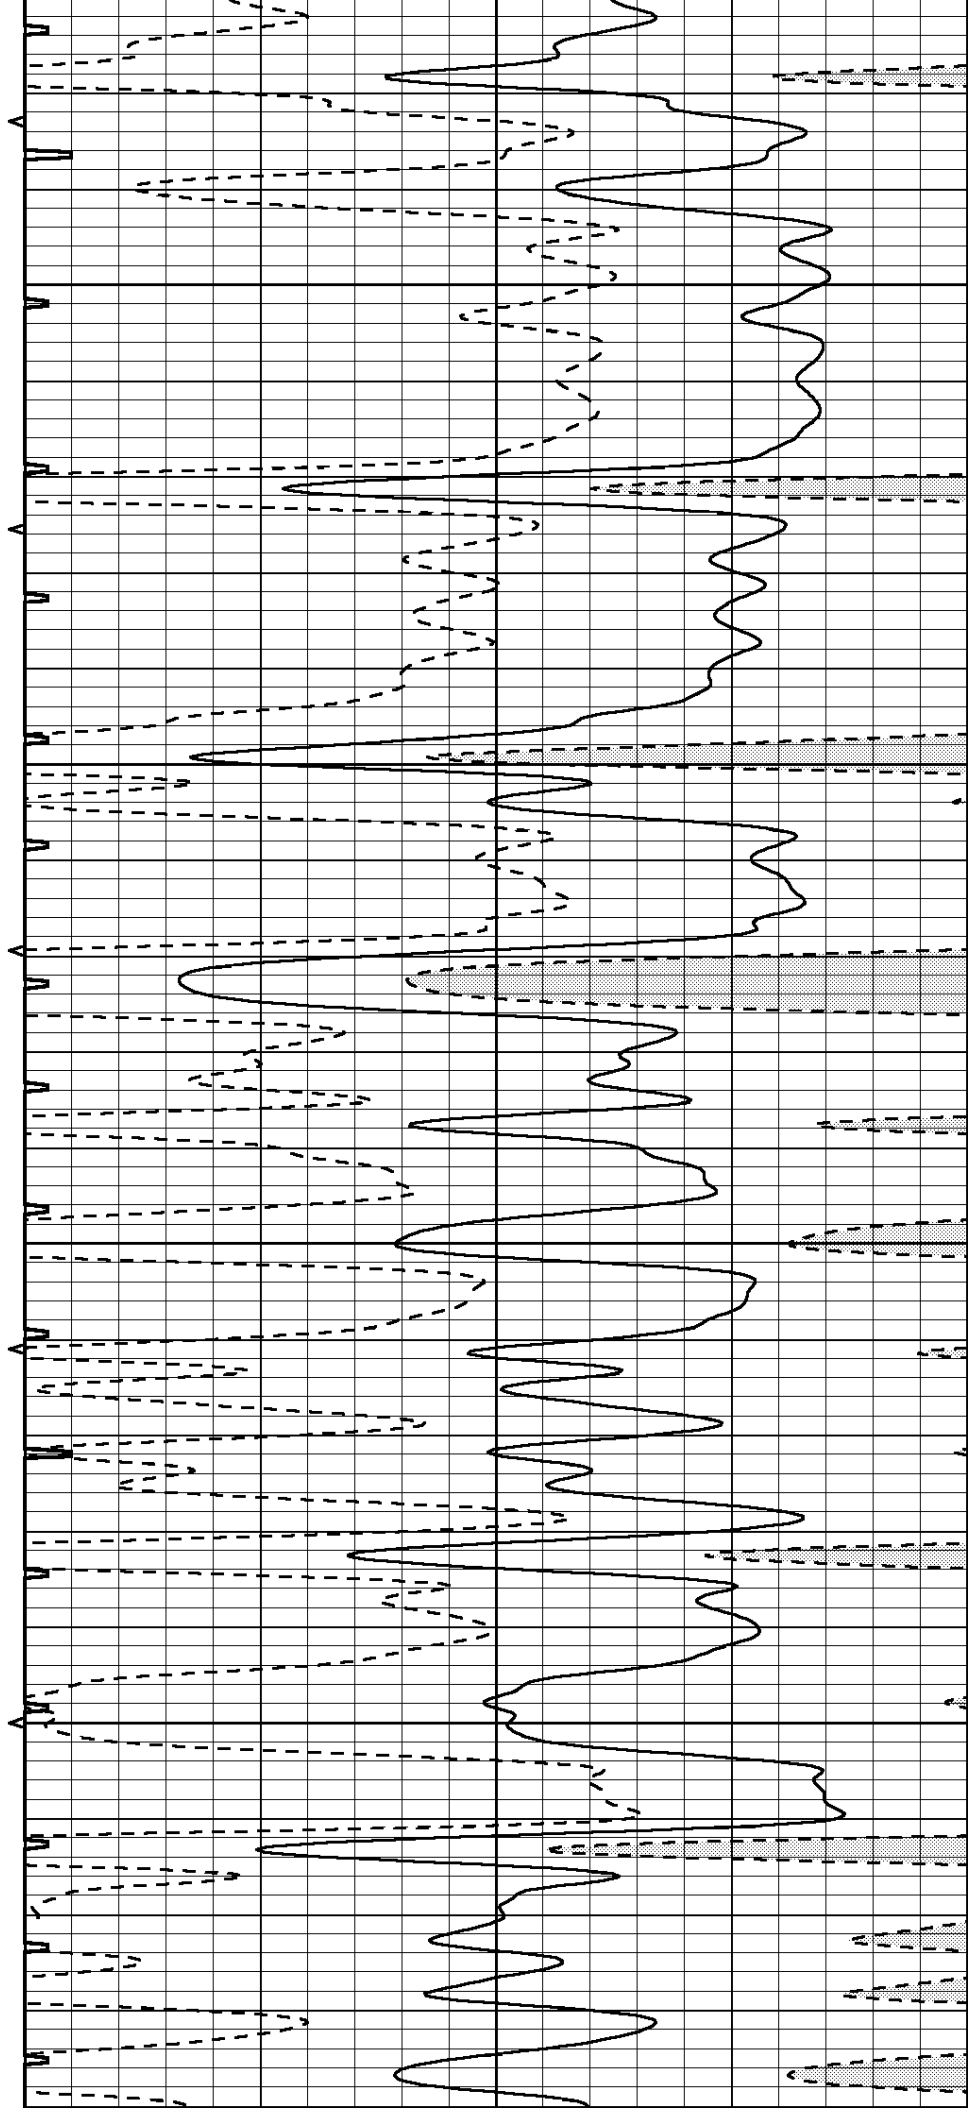


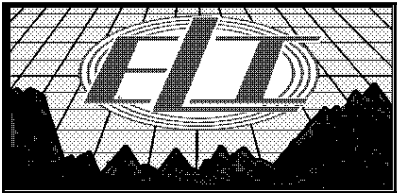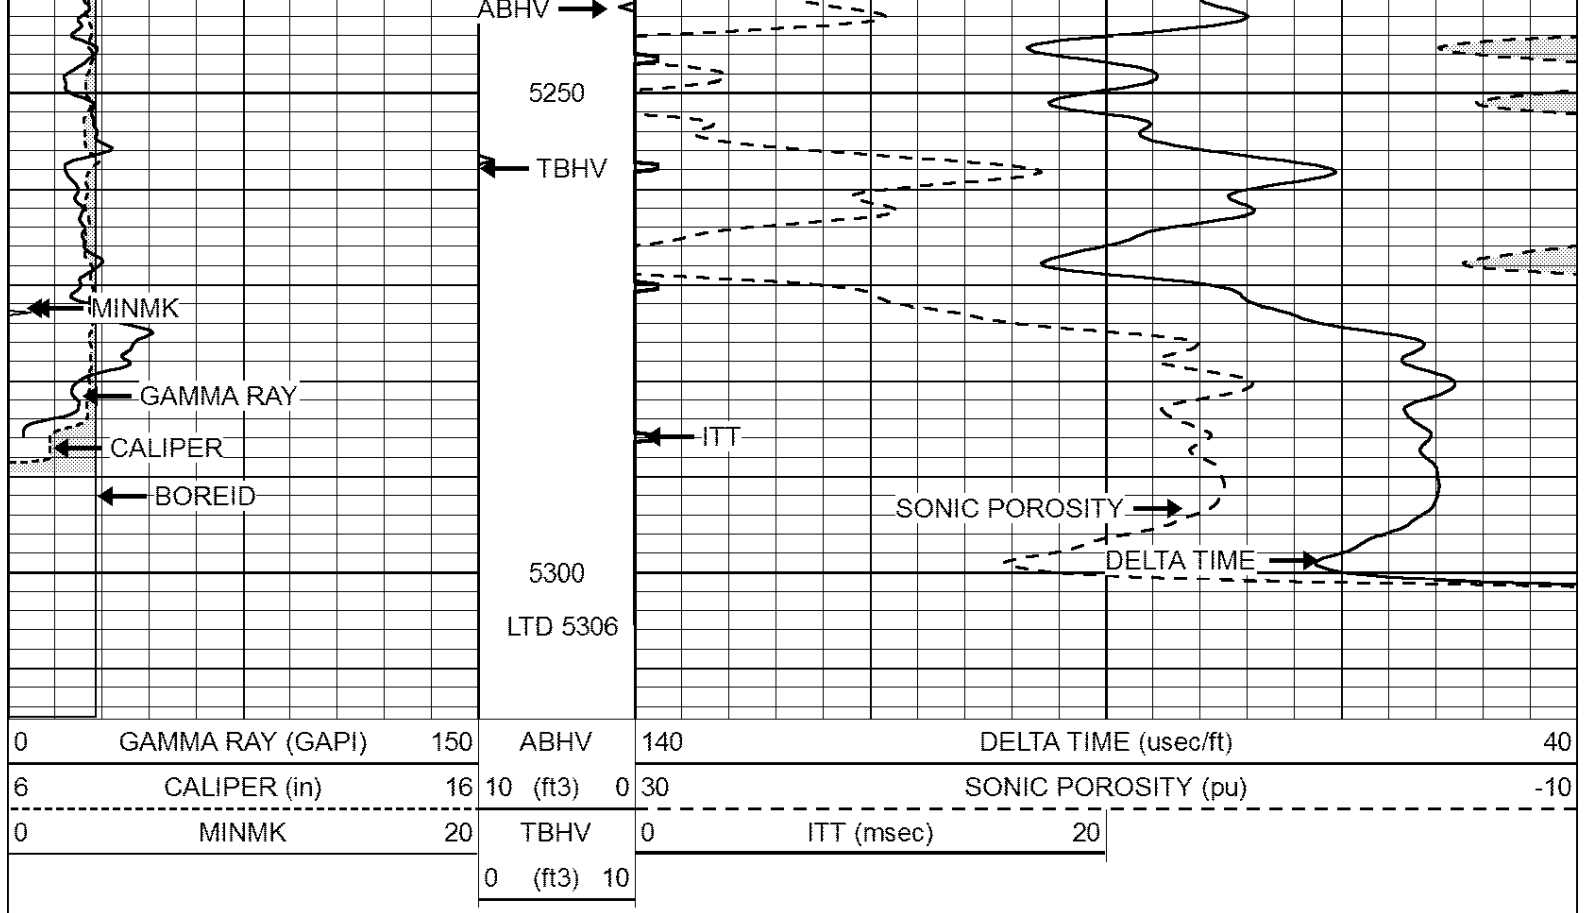

REPEAT SECTION

Database File: 4462pe.db
 Dataset Pathname: pass6REPEA
 Presentation Format: _slt
 Dataset Creation: Sat Nov 23 12:23:28 2019
 Charted by: Depth in Feet scaled 1:240

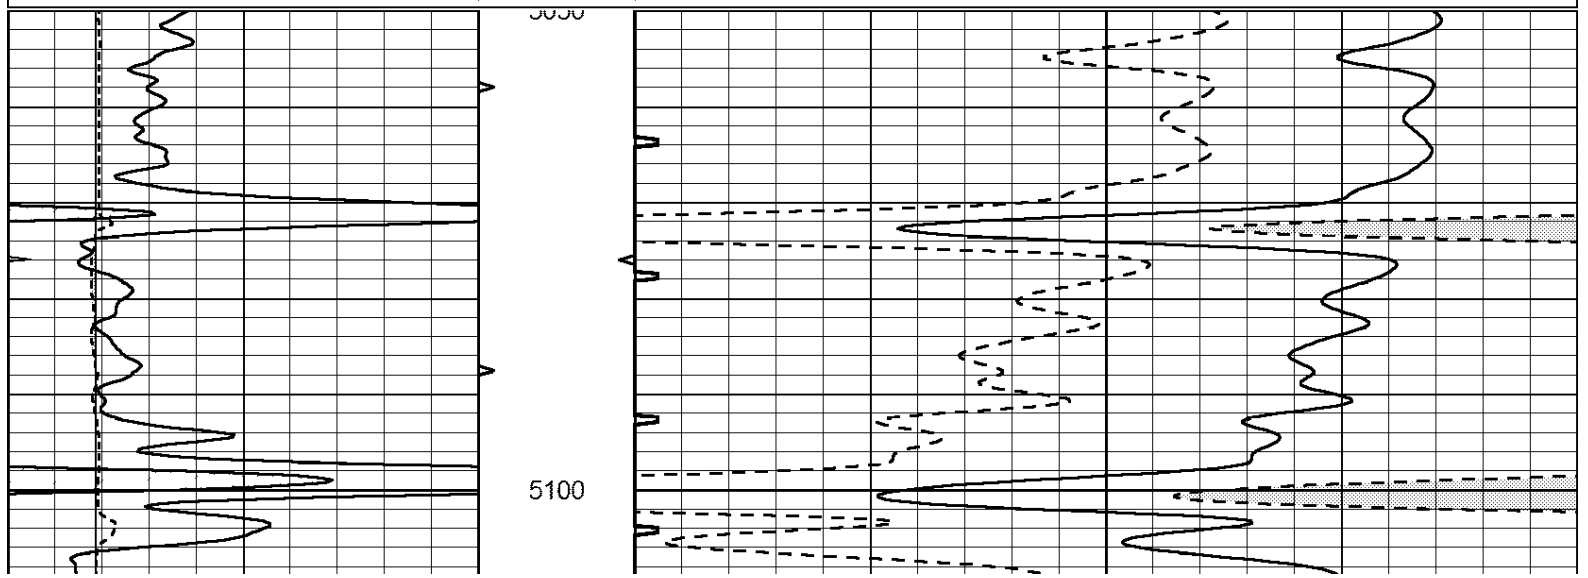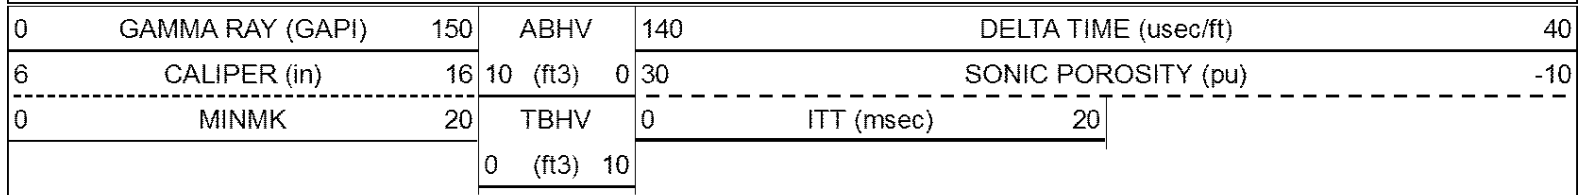

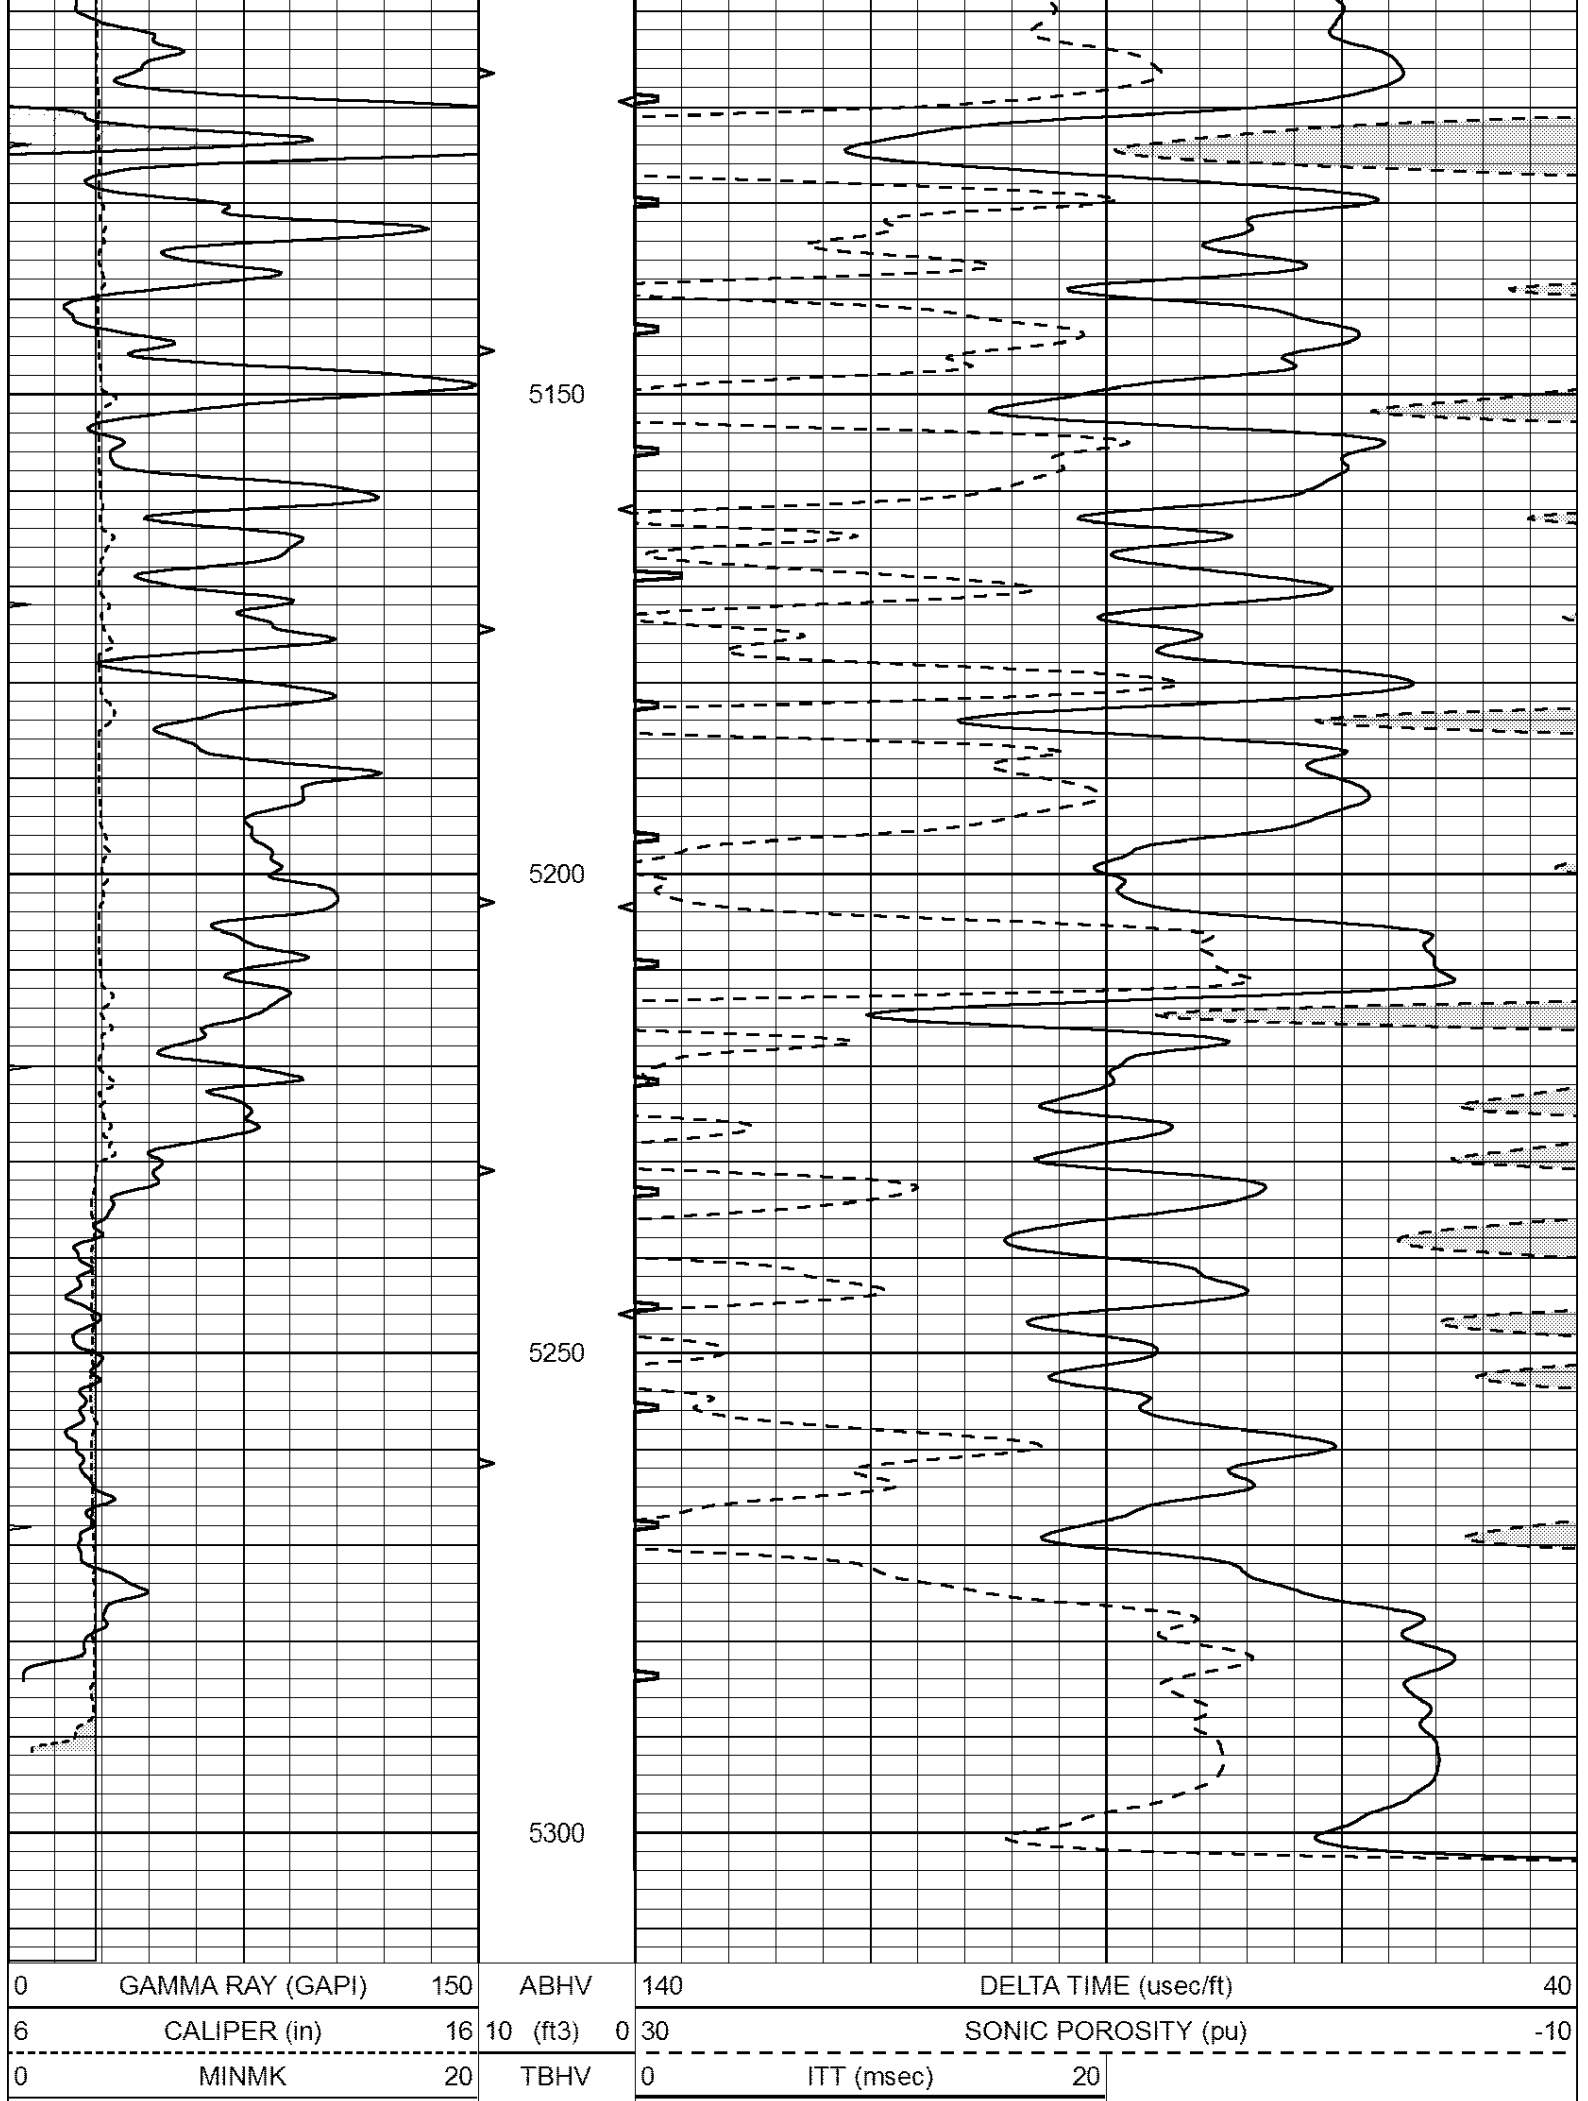

Calibration Report

Database File: 4462pe.db
 Dataset Pathname: pass6REPEA
 Dataset Creation: Sat Nov 23 12:23:28 2019

MICRO Calibration Report

Serial Number: Micro1
 Tool Model: ProbeL
 Performed: Sat Oct 26 06:47:35 2019

Caliper Calibration:	Gain=2.030	Offset=6.505
	Low Cal	High Cal
References	9.500	13.000
Readings	0.308	2.032

1.5" Calibration:	Gain=36.134	Offset=-1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832

2" Calibration:	Gain=38.000	Offset=0.300
	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Thu Oct 24 16:06:54 2019

Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5200	GAPI/cps