

MICRO
LOG

Company		WHITE EXPLORATION, INC.	
Well	LAWRENCE #2		
Field	WHELAN WEST		
County	BARBER	State	KANSAS
Location:		API # : 15-007-24445-0000	Other Services CDL/CNL/PE DIL/SON
Permanent Datum Log Measured From Drilling Measured From		660' FSL & 660' FEL SE - SE SEC 25 TWP 31S RGE 12W GROUND LEVEL Elevation 1514 KELLY BUSHING 13' A.G.L. KELLY BUSHING	
Date	10/18/22		
Run Number	TWO		
Depth Driller	4580		
Depth Logger	4582		
Bottom Logged Interval	4566		
Top Log Interval	3300		
Casing Driller	8 5/8" @ 394		
Casing Logger	394		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4.950 PPM	
Density / Viscosity	9.2/53		
pH / Fluid Loss	11.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.10 @ 60F		
Rmf @ Meas. Temp	.825 @ 60F		
Rmc @ Meas. Temp	1.32 @ 60F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.545 @ 121F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	1:00 A.M.		
Maximum Recorded Temperature	121F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	COLE ROBEN		
Witnessed By	ANDY WHITE		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


TWO MILES NORTH OF MEDICINE LODGE ON HIGHWAY 281, EAST ON WELL ROAD FOR 1/2 MILE,
ONE MILE SOUTH, EAST INTO


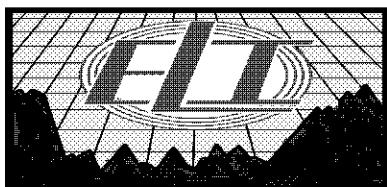



MAIN SECTION

Database File	7236pe.db
Dataset Pathname	pass26D
Presentation Format	_micro
Dataset Creation	Tue Oct 18 02:40:36 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

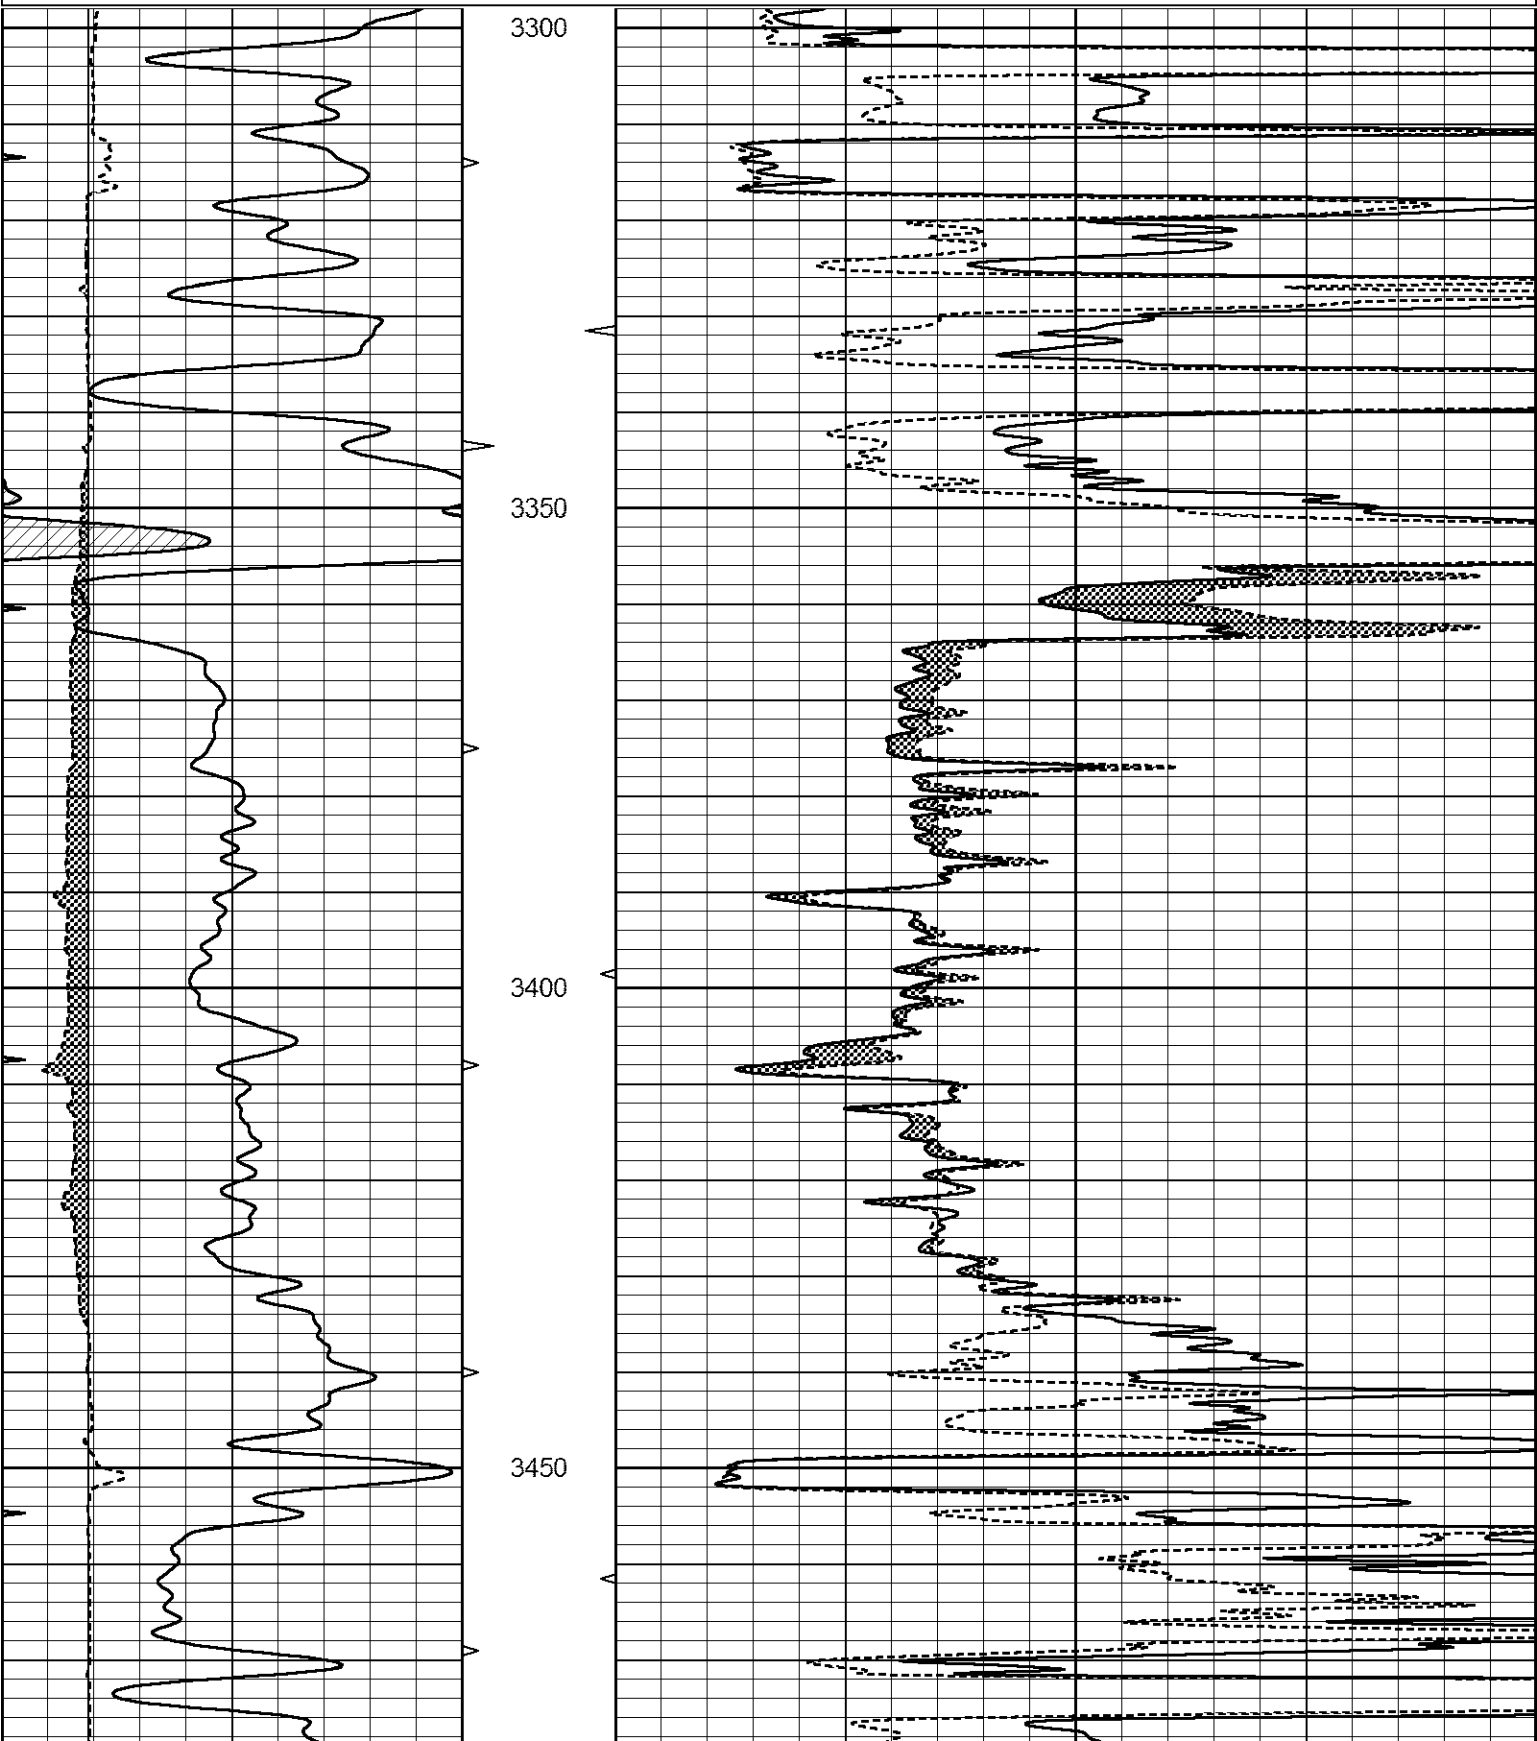

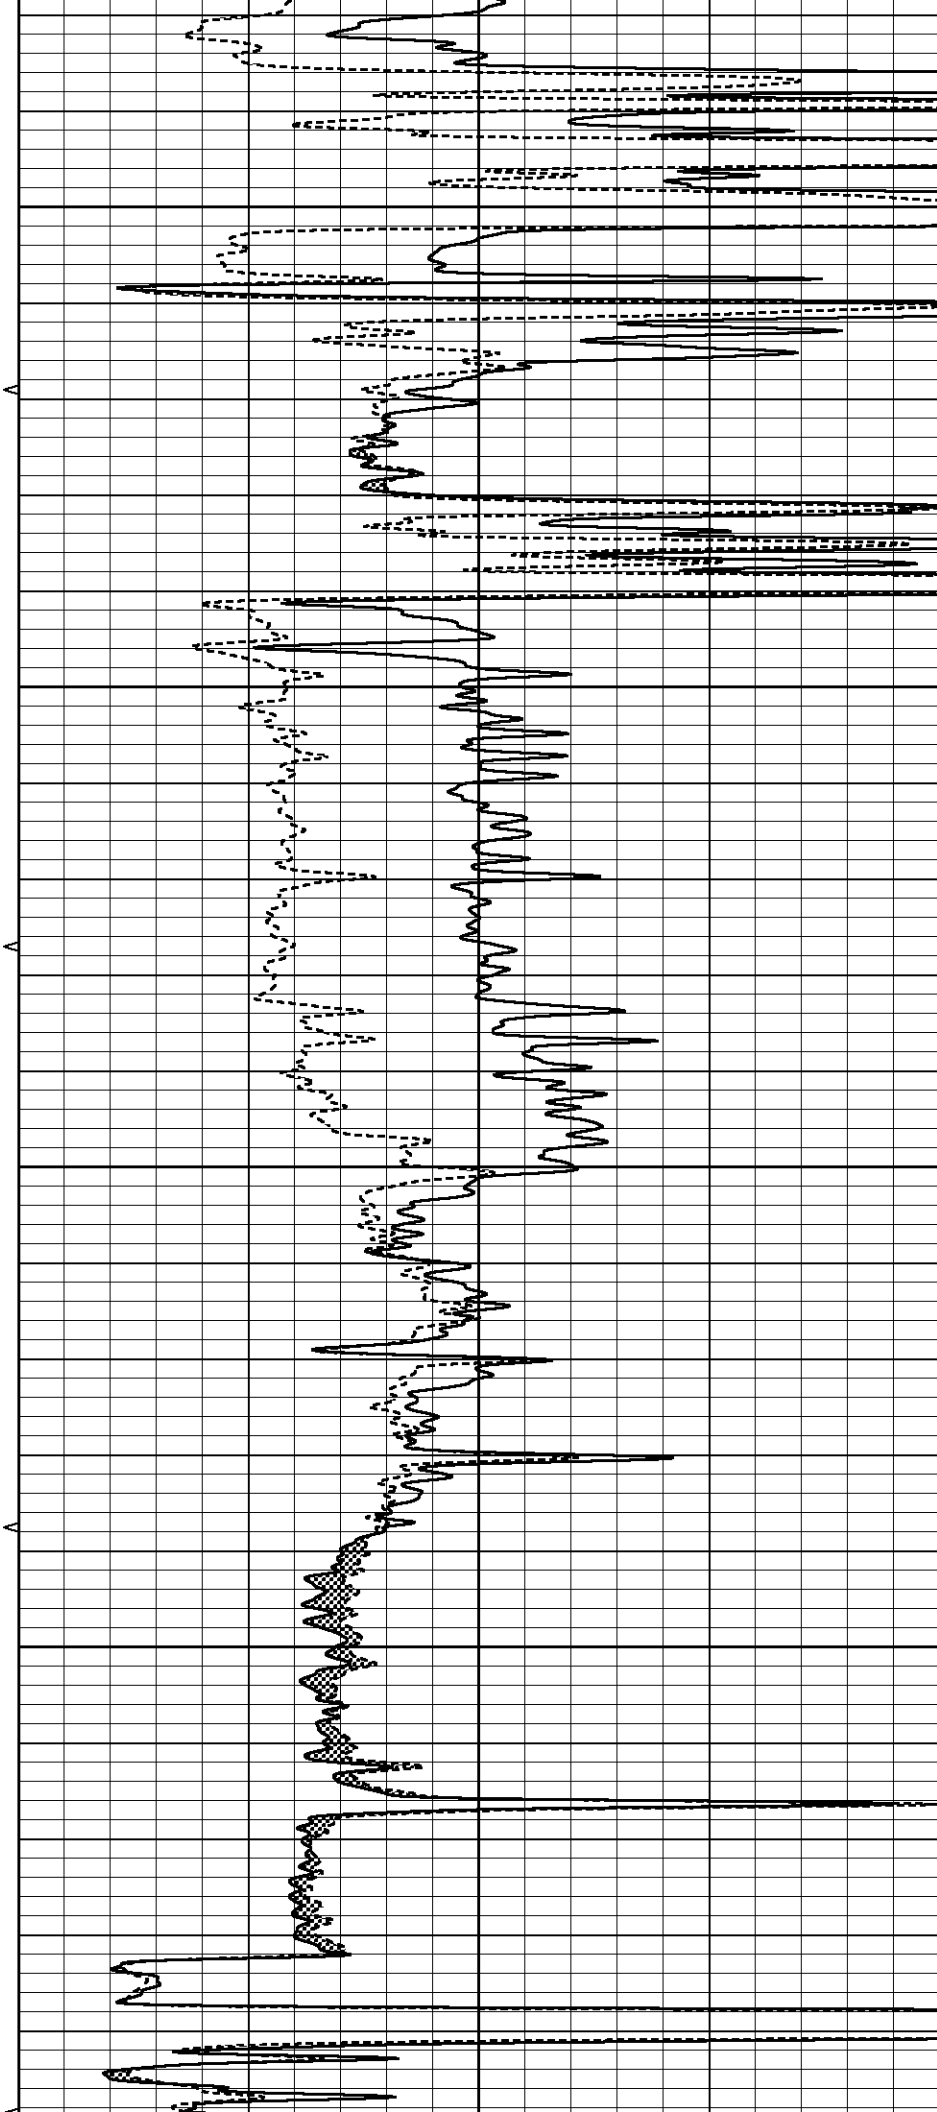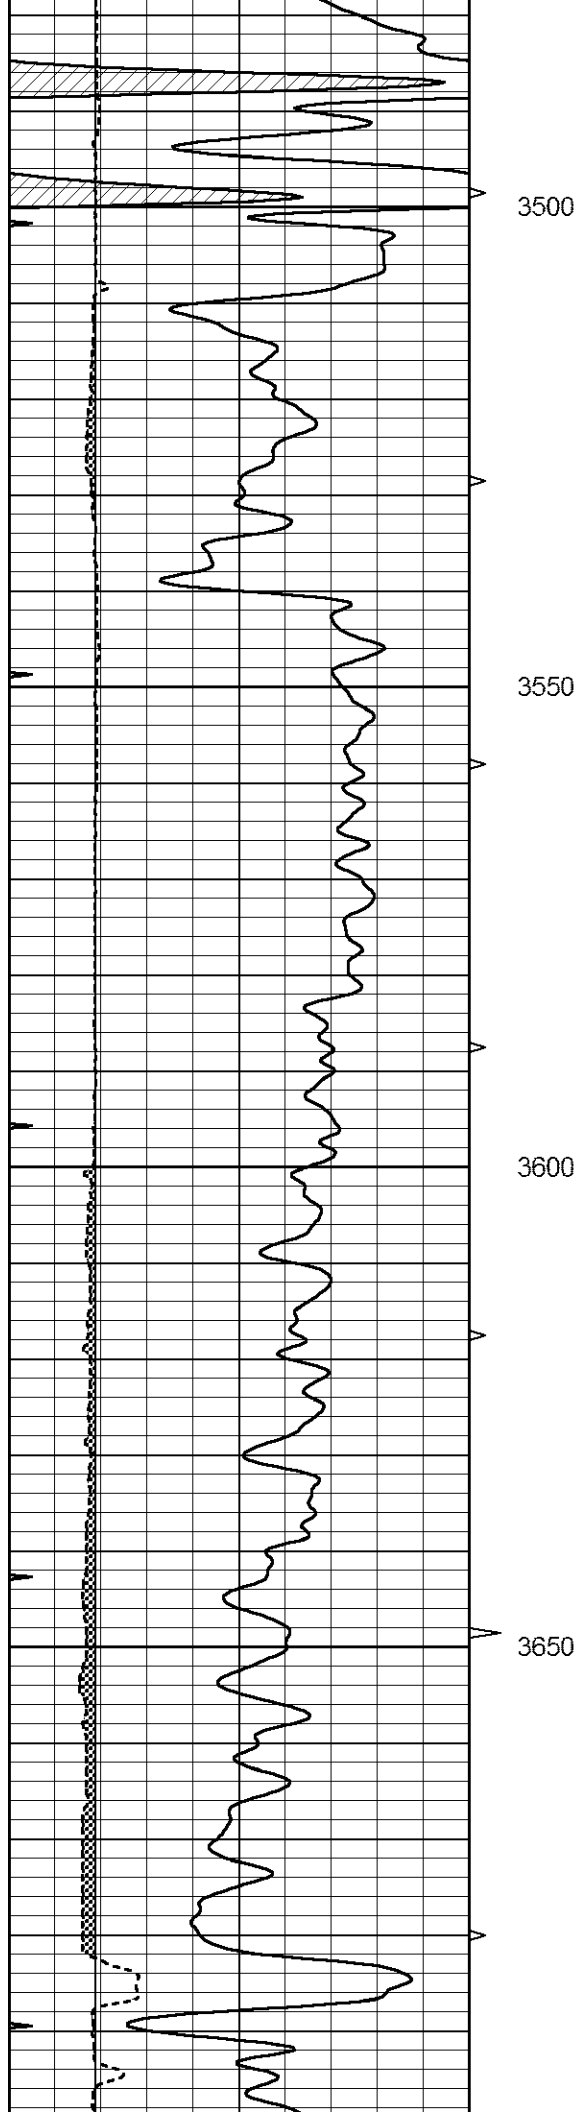

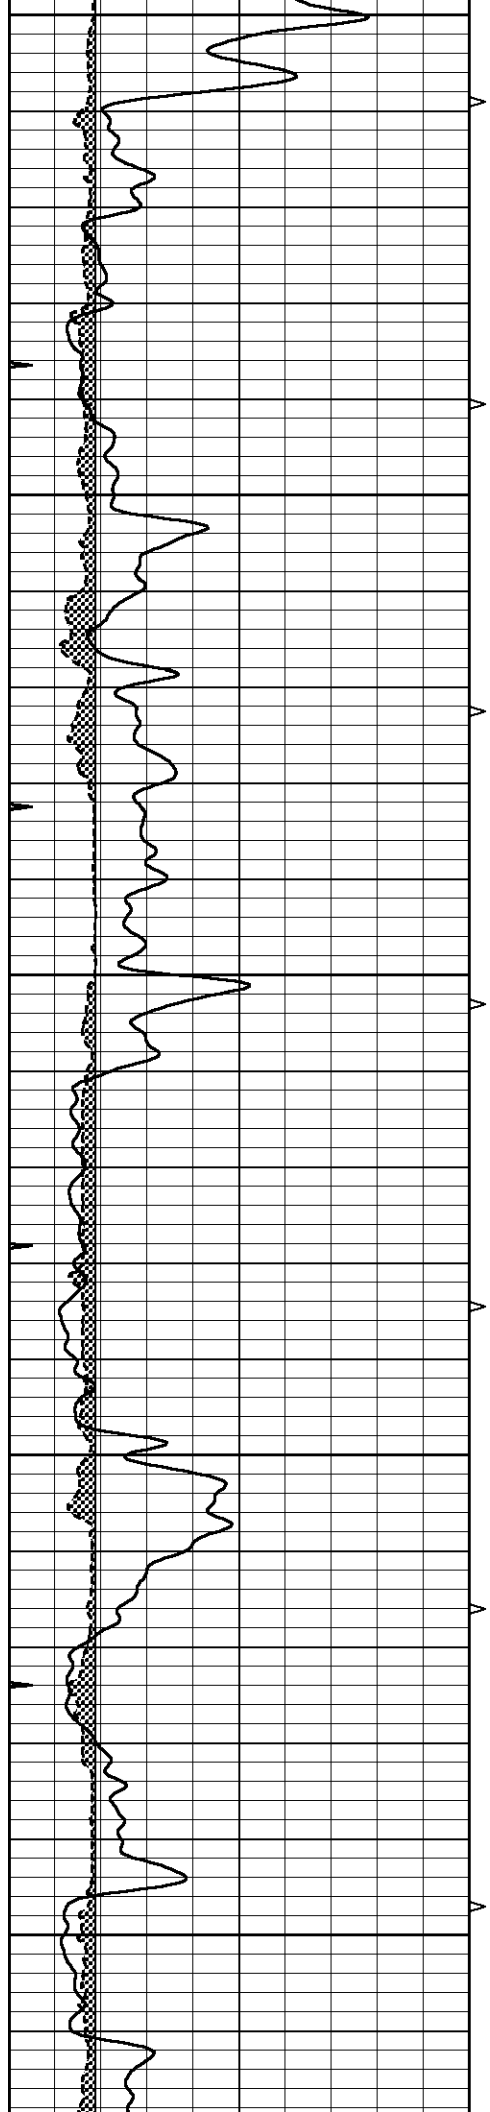


3700


3750


3800


3850

3900

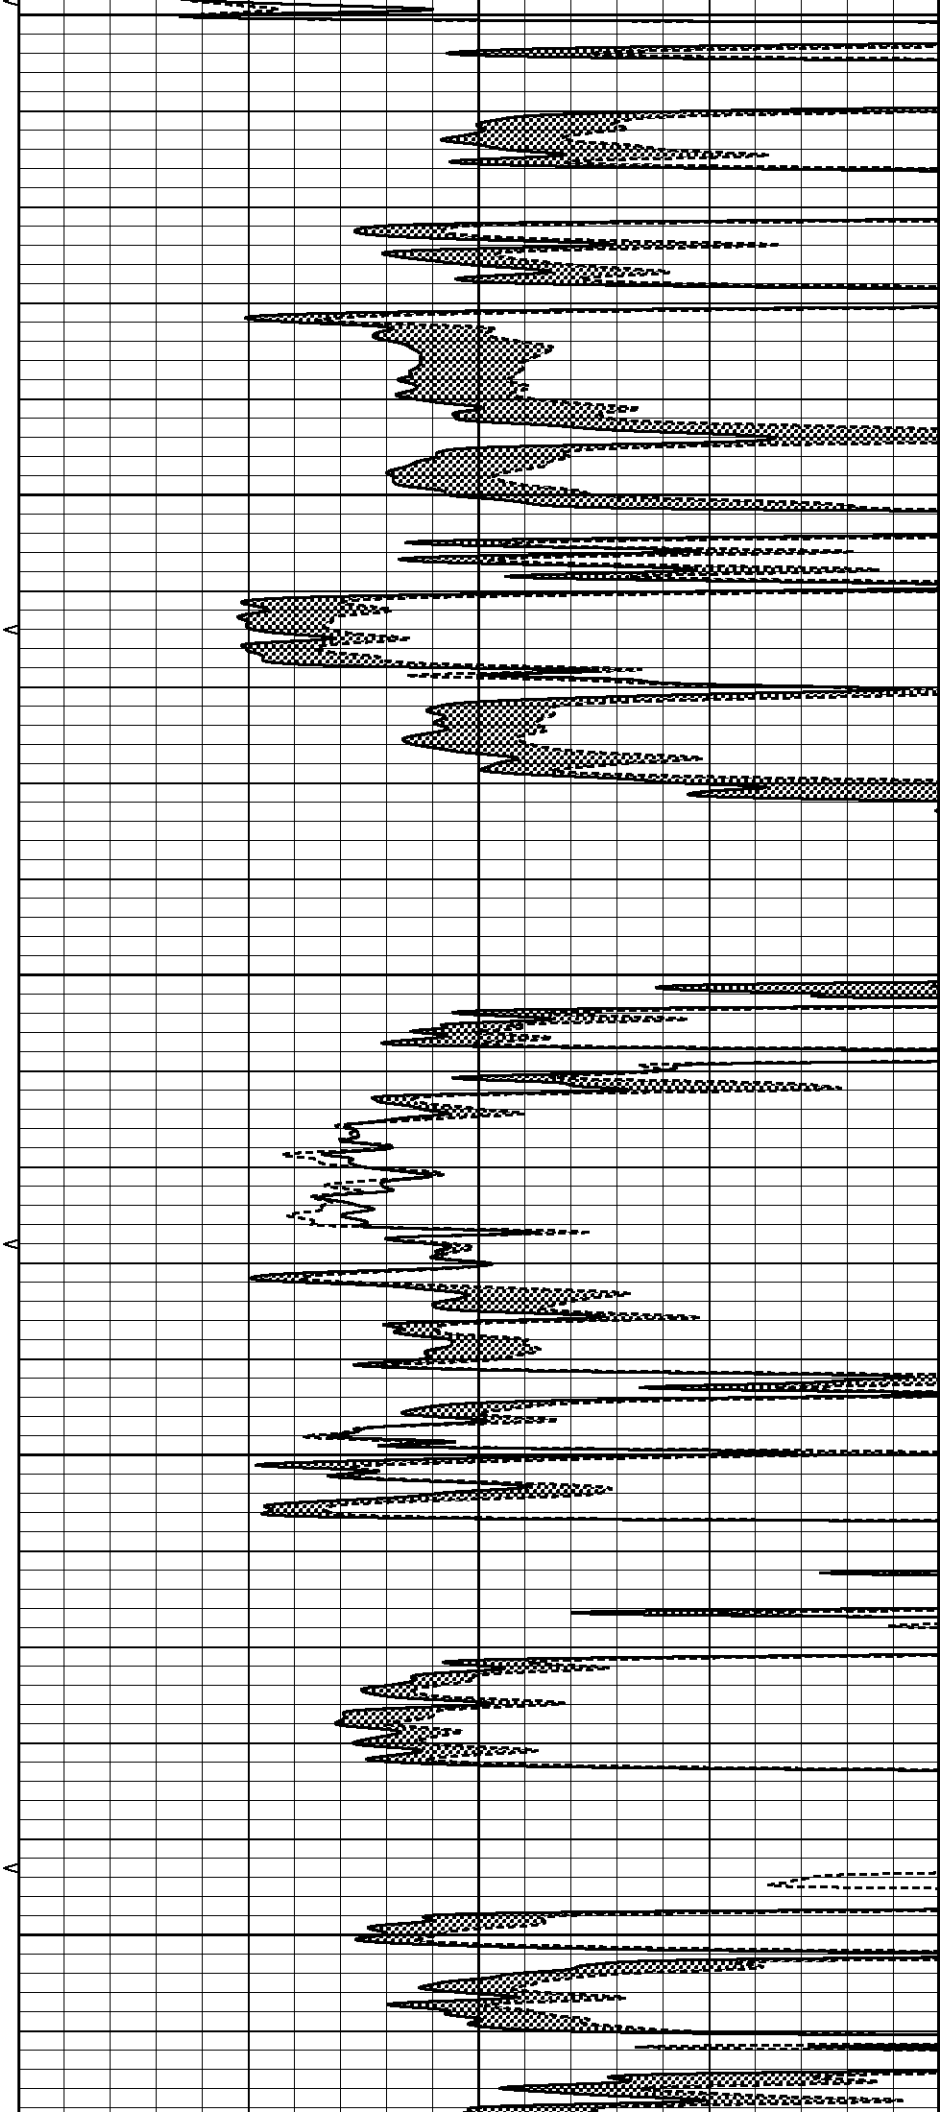

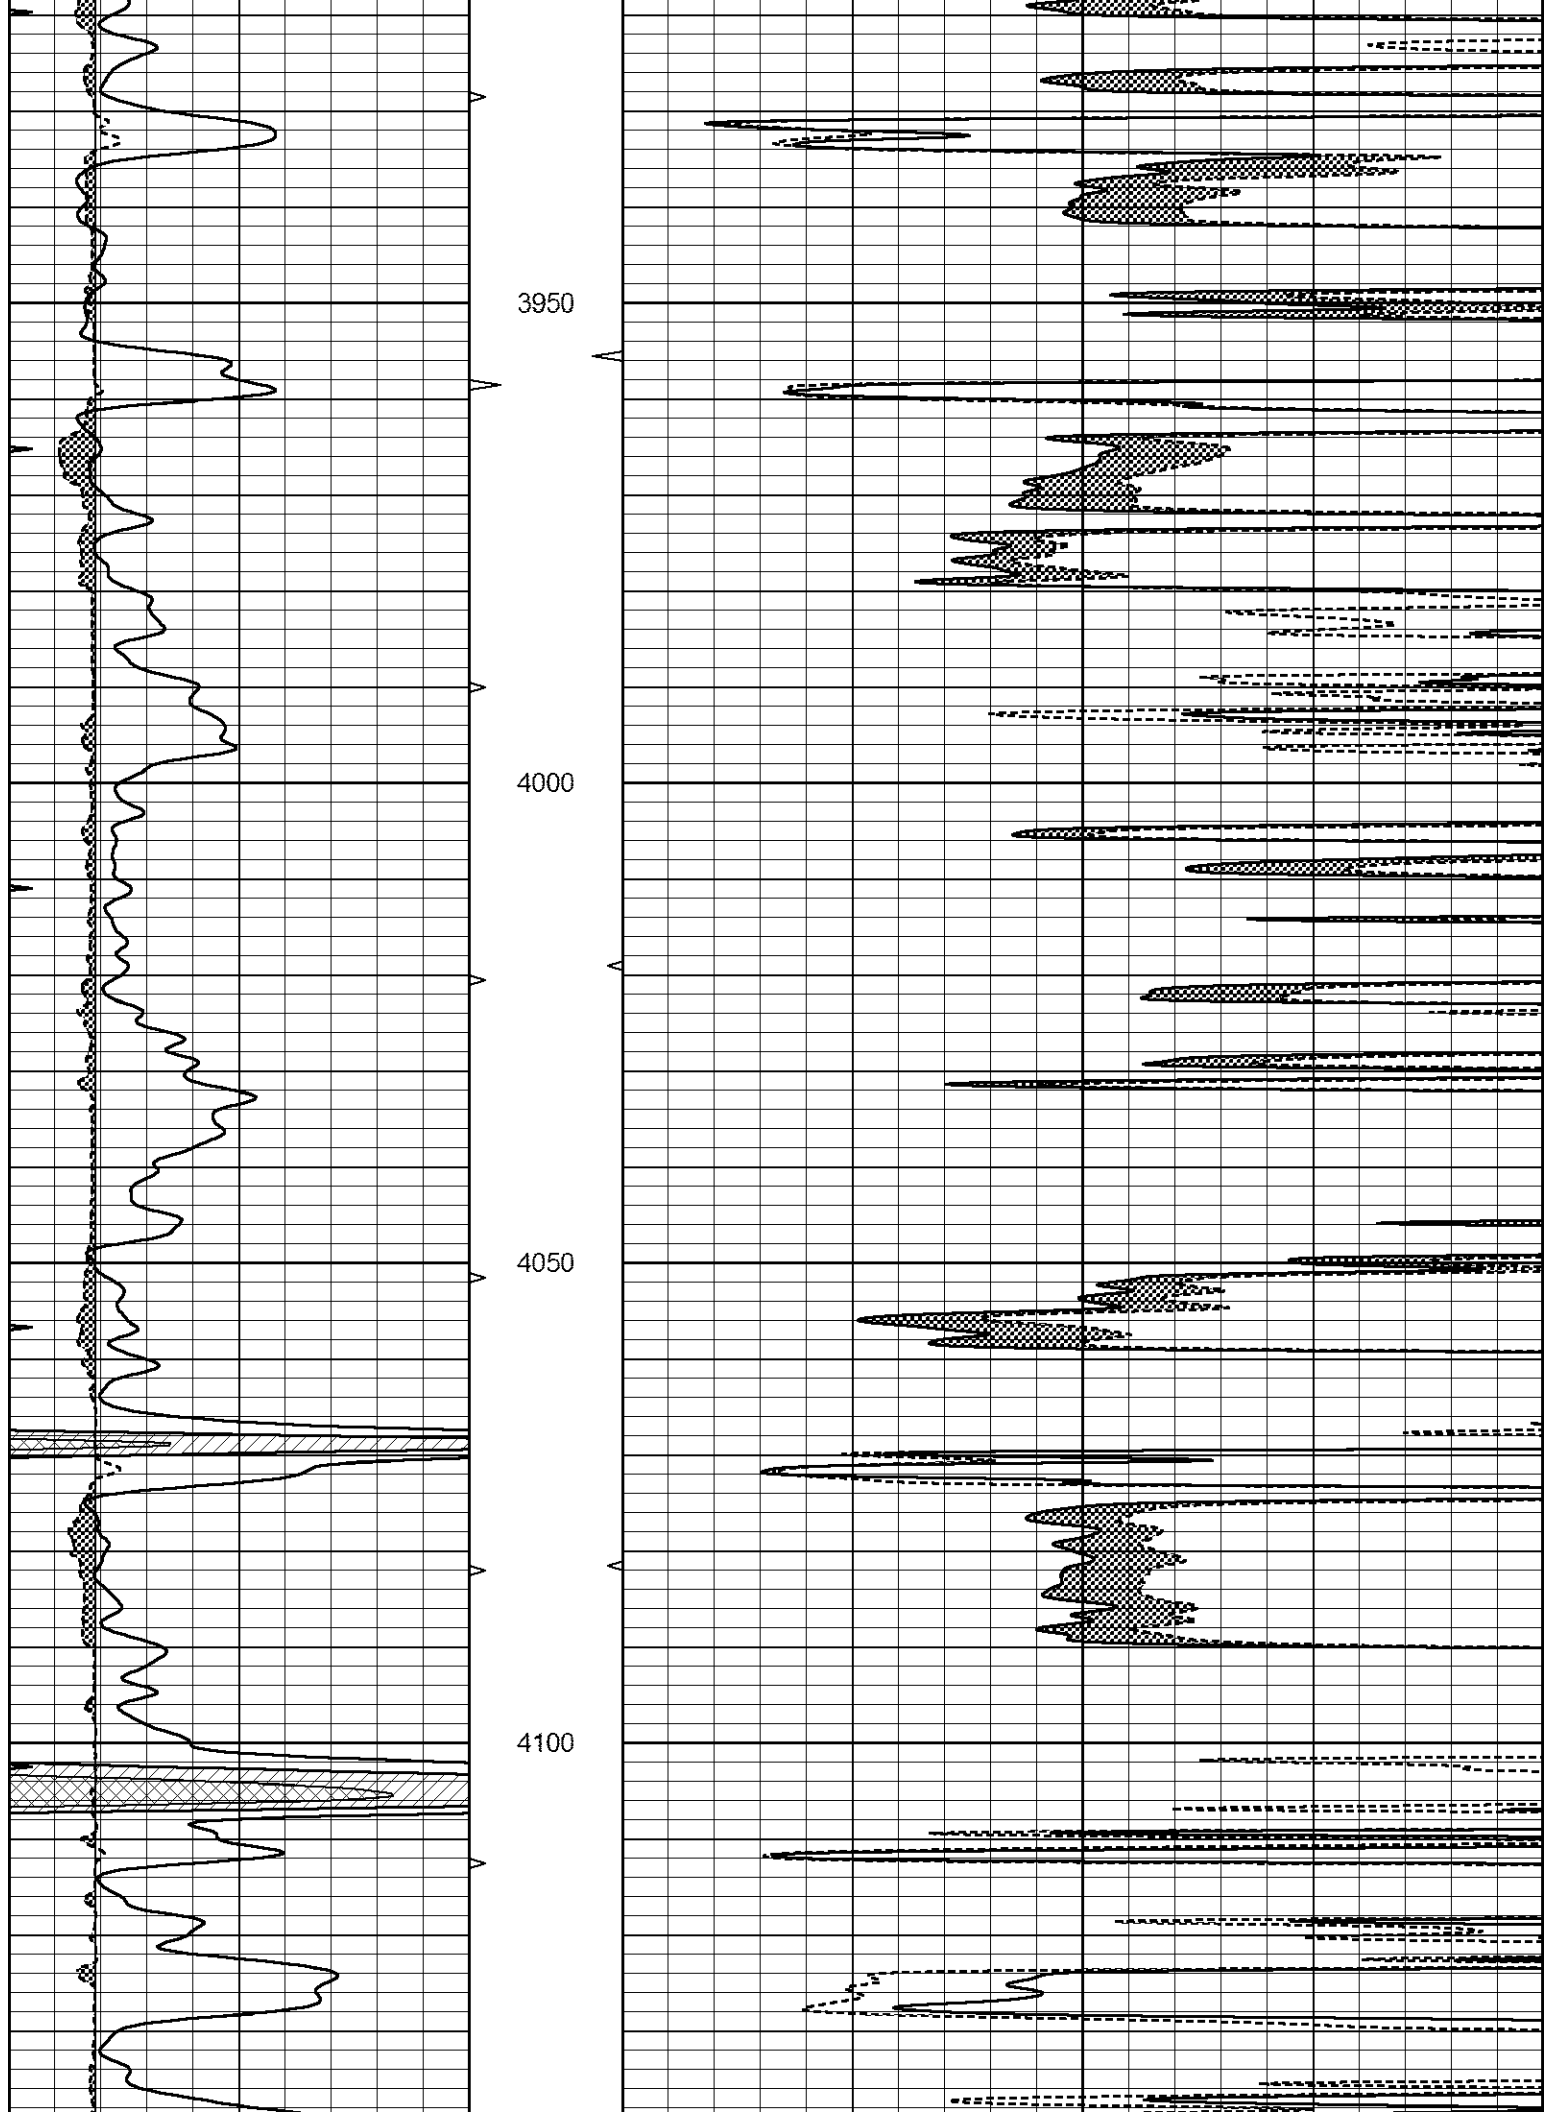

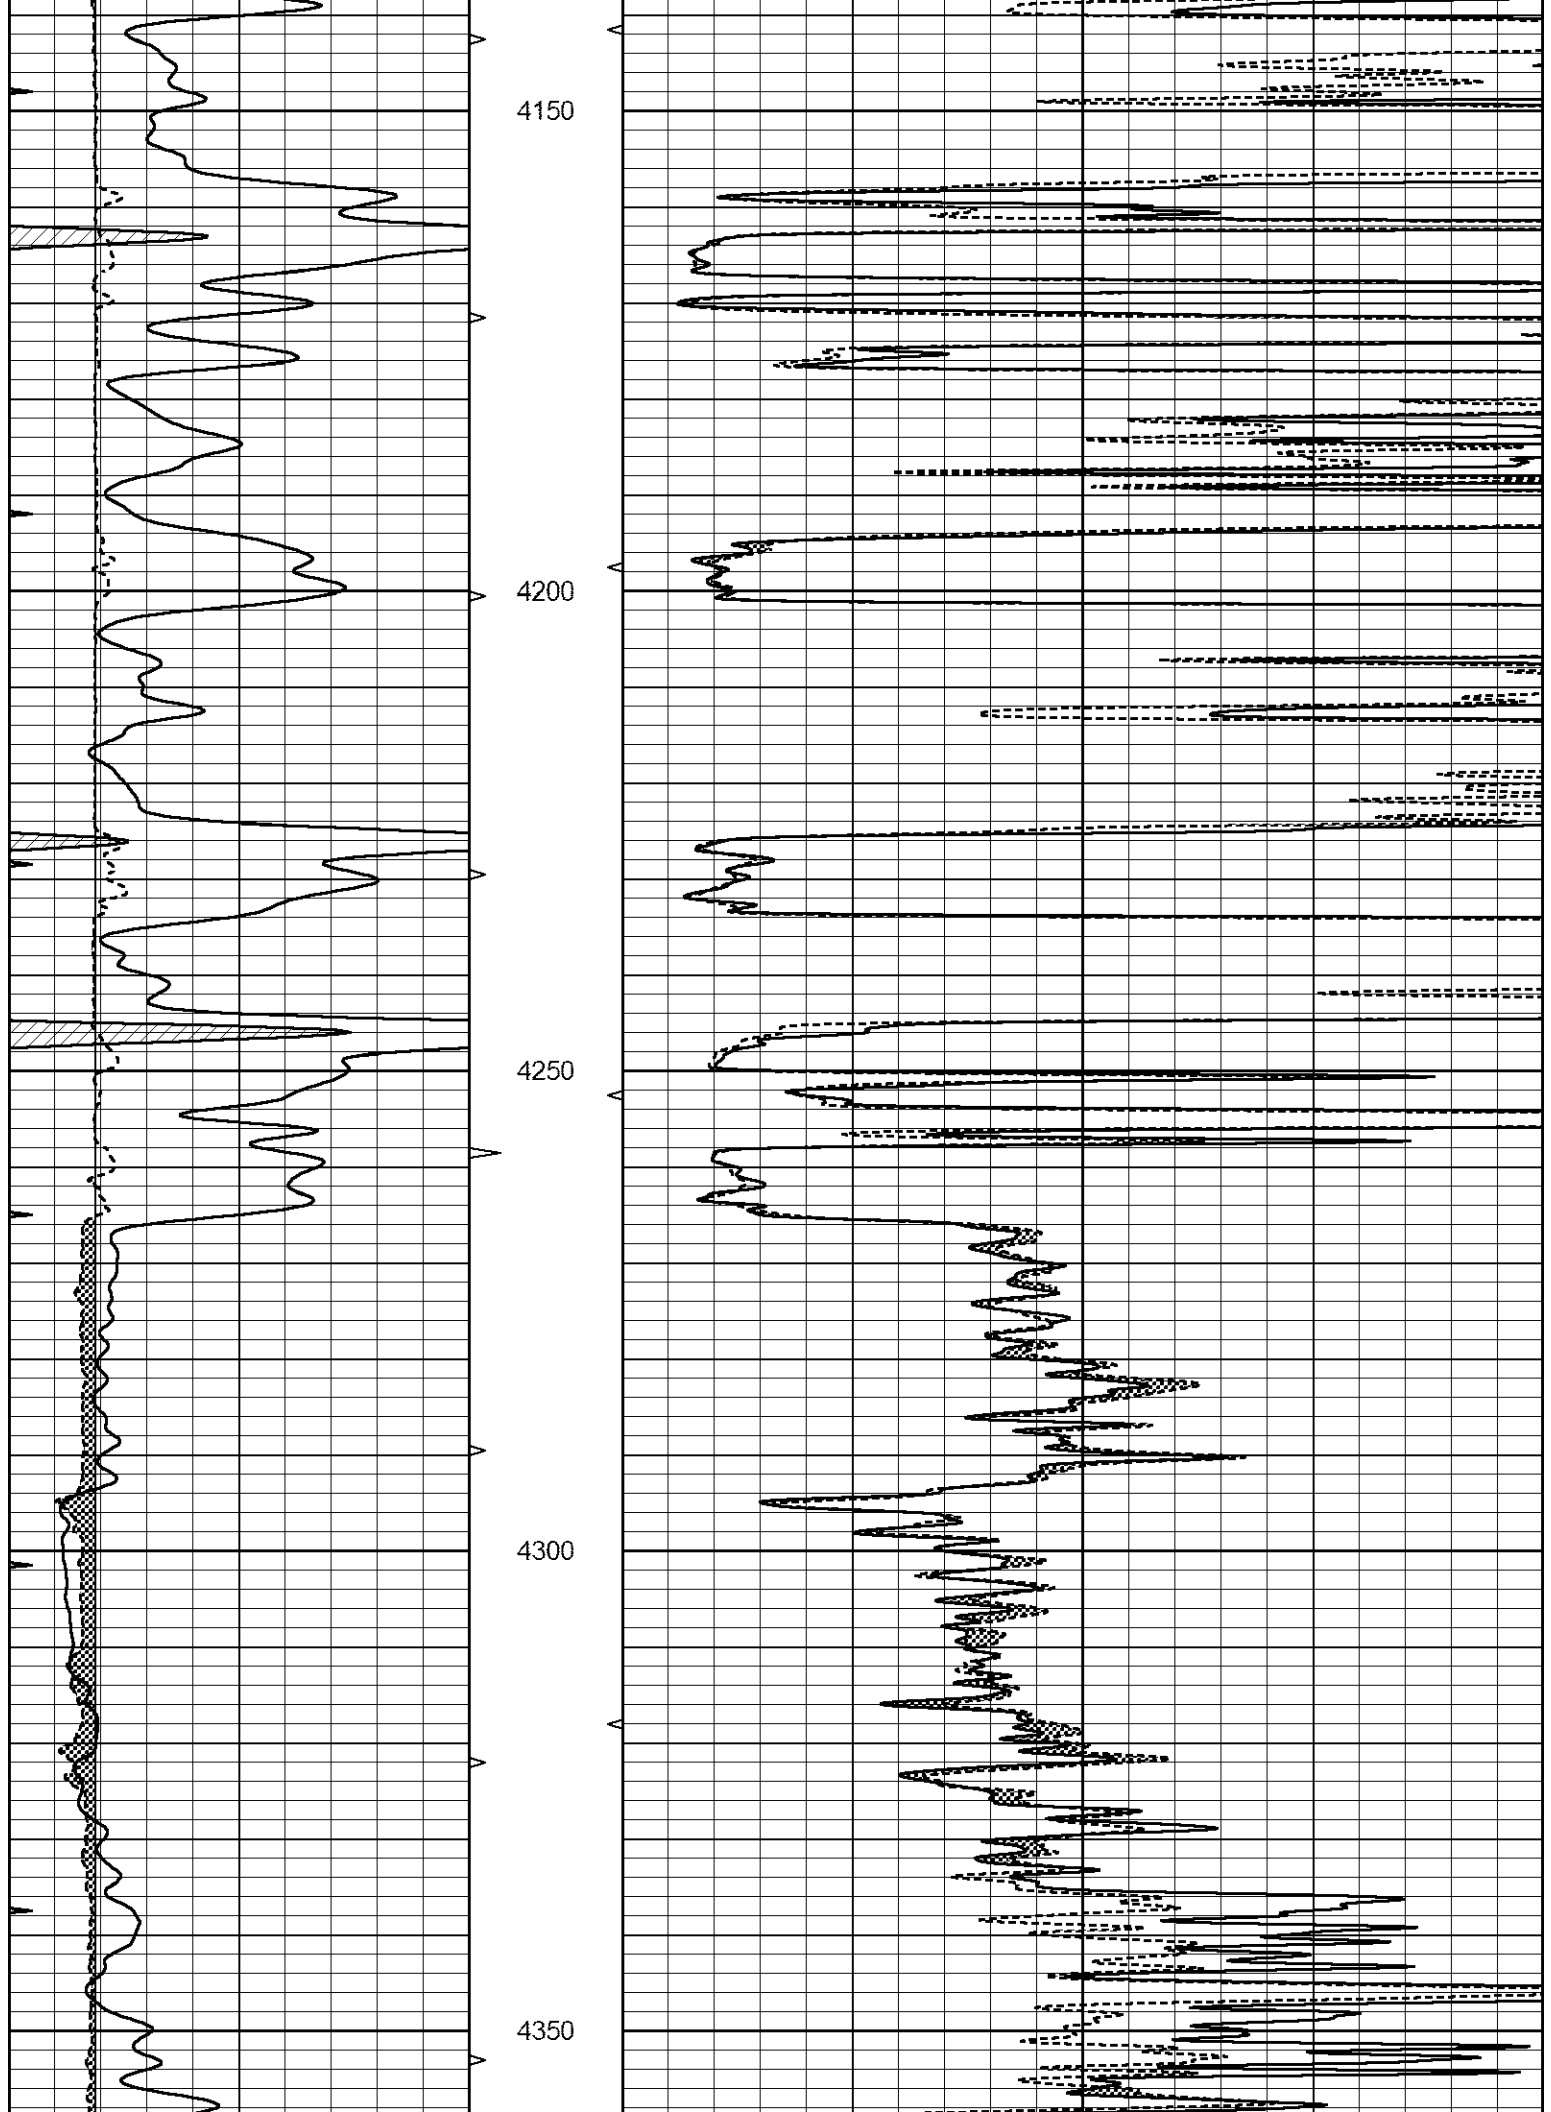

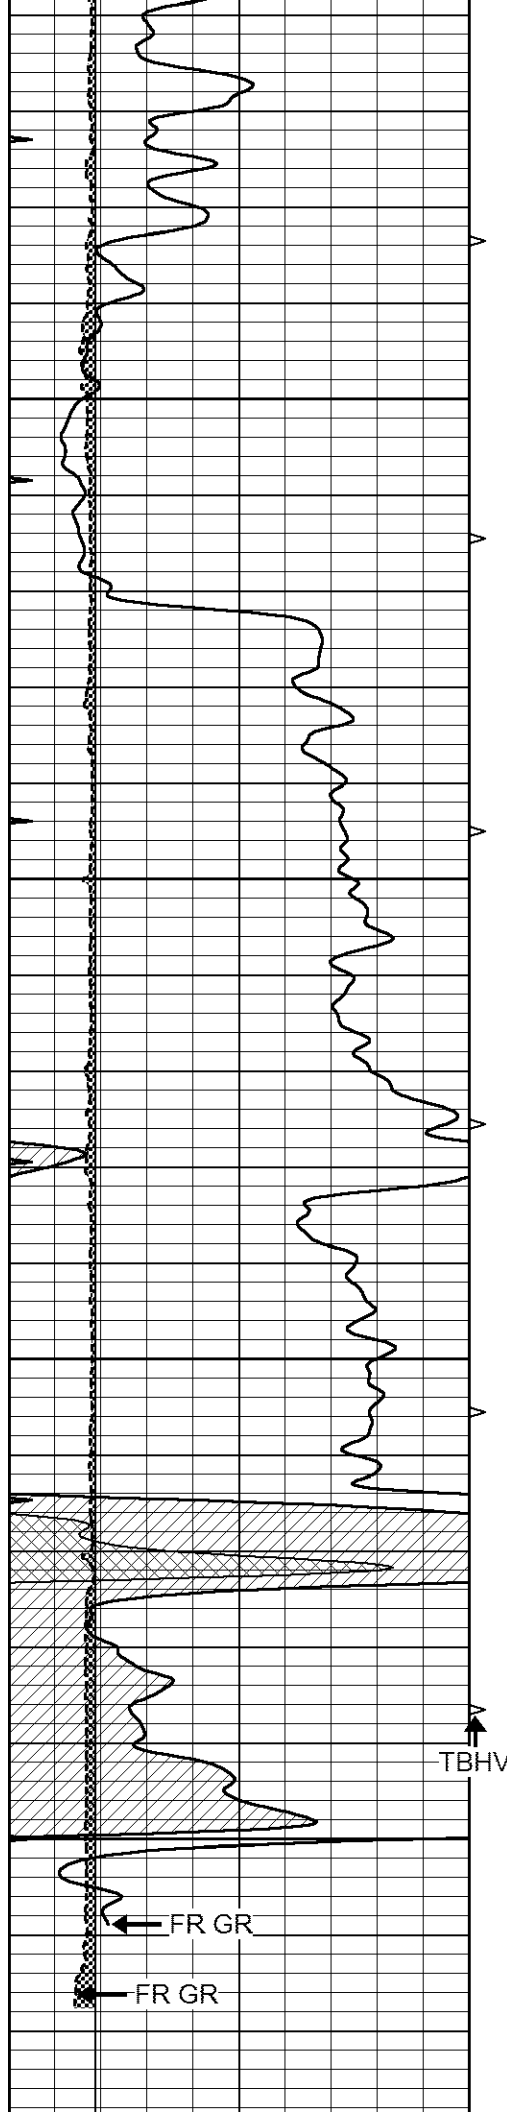

4400

4450

4500


5.5" ABHV

TBHV

4550

FR GR

FR GR

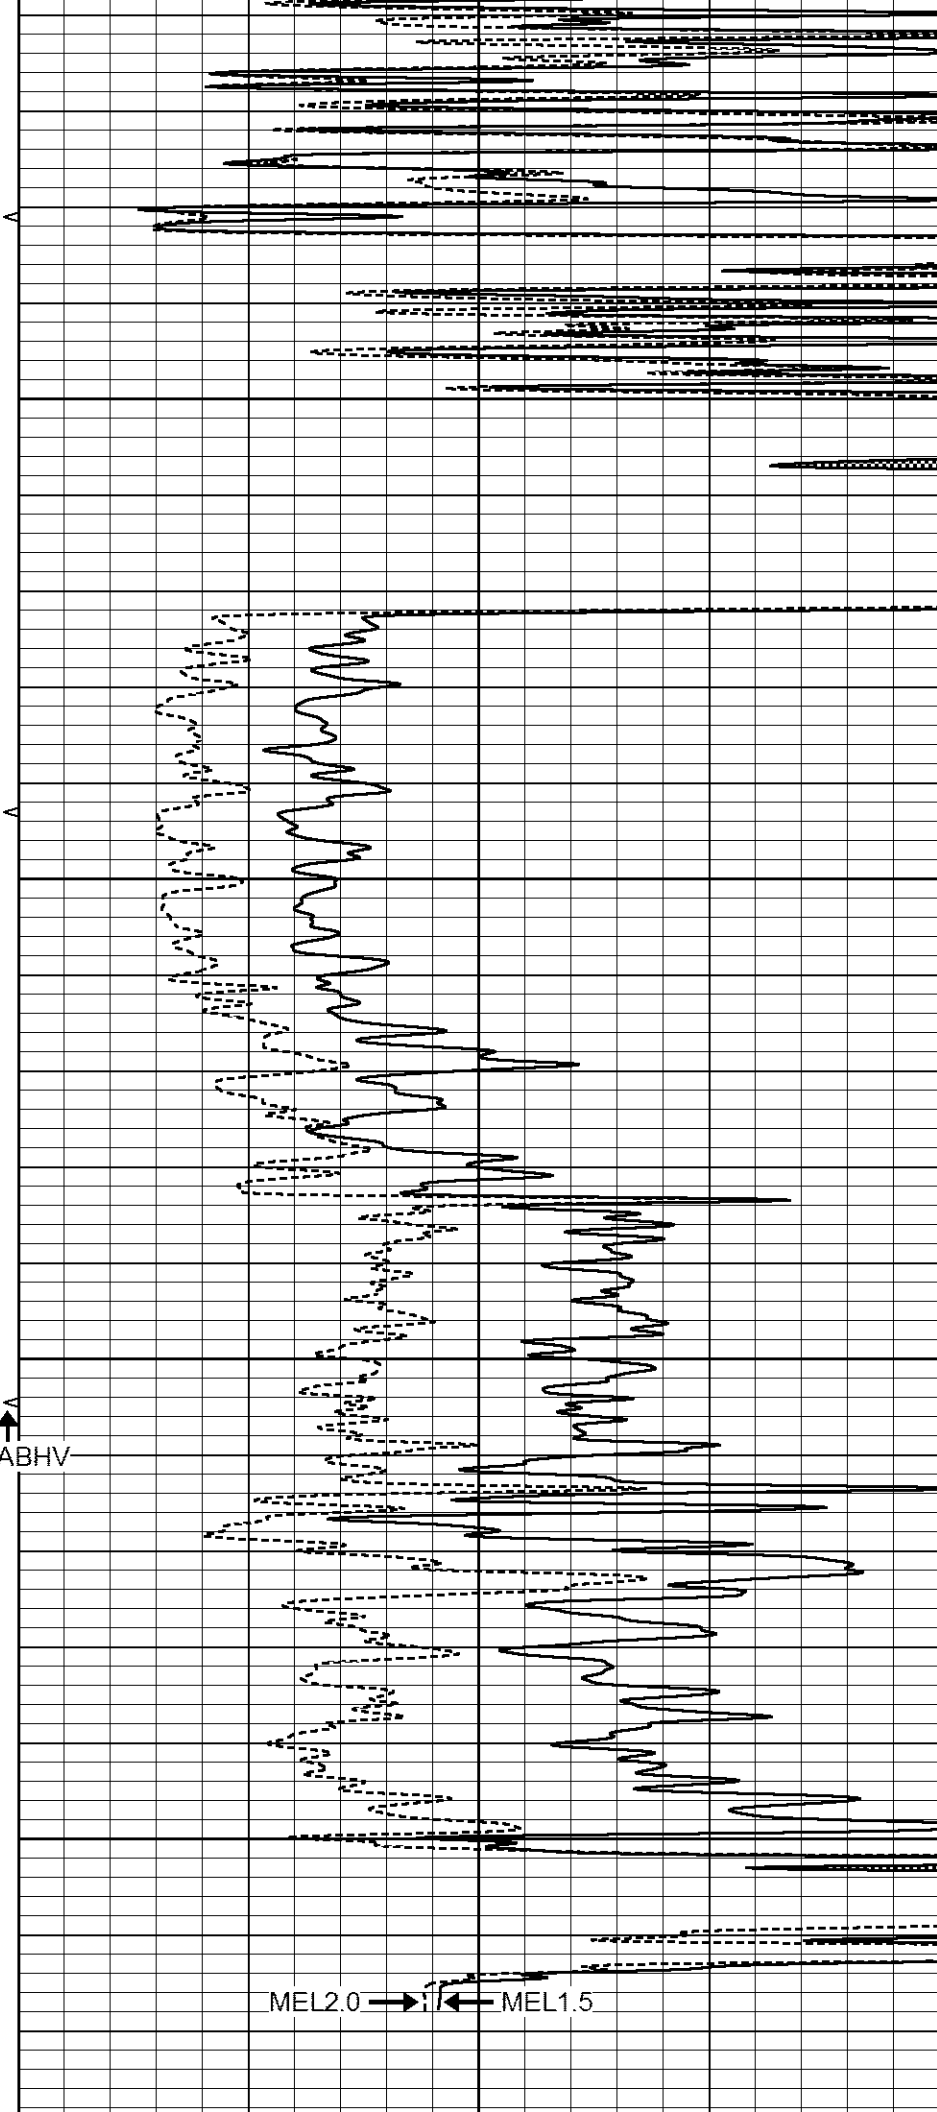



MEL2.0 MEL1.5



Database File	7236pe.db
Dataset Pathname	pass25R
Presentation Format	_micro
Dataset Creation	Tue Oct 18 02:44:57 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

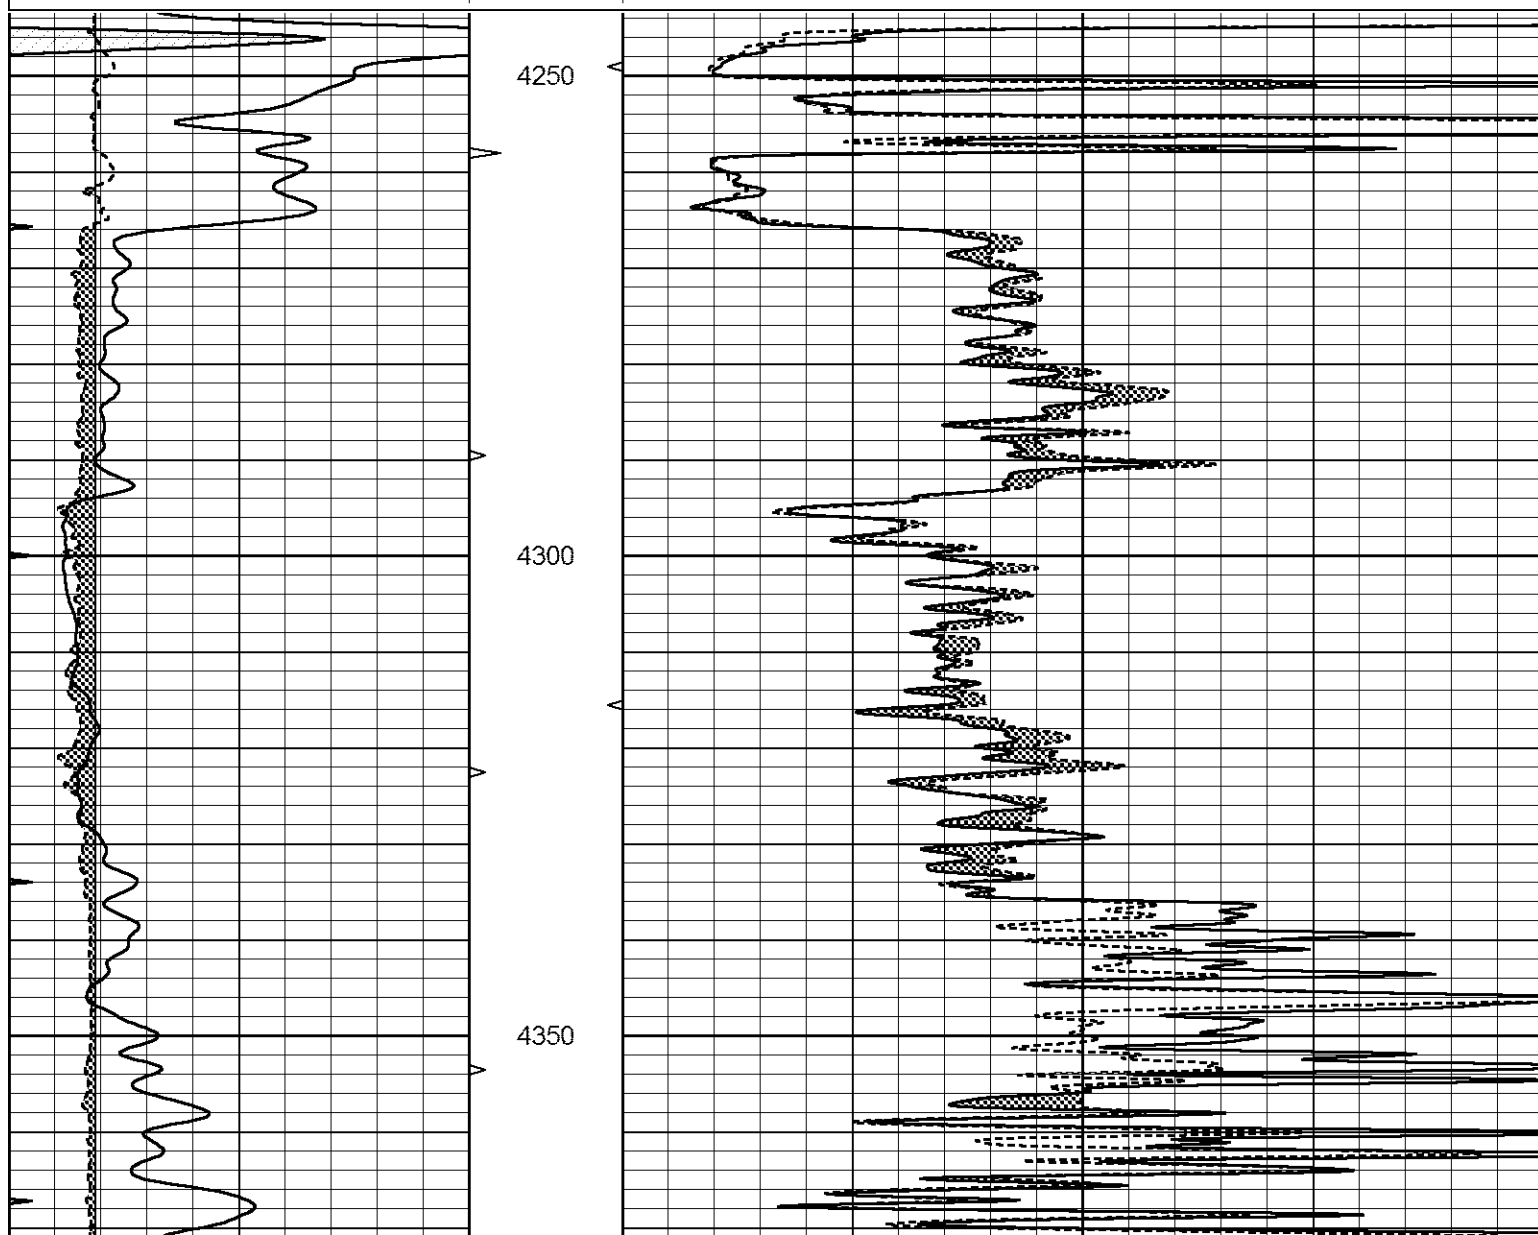

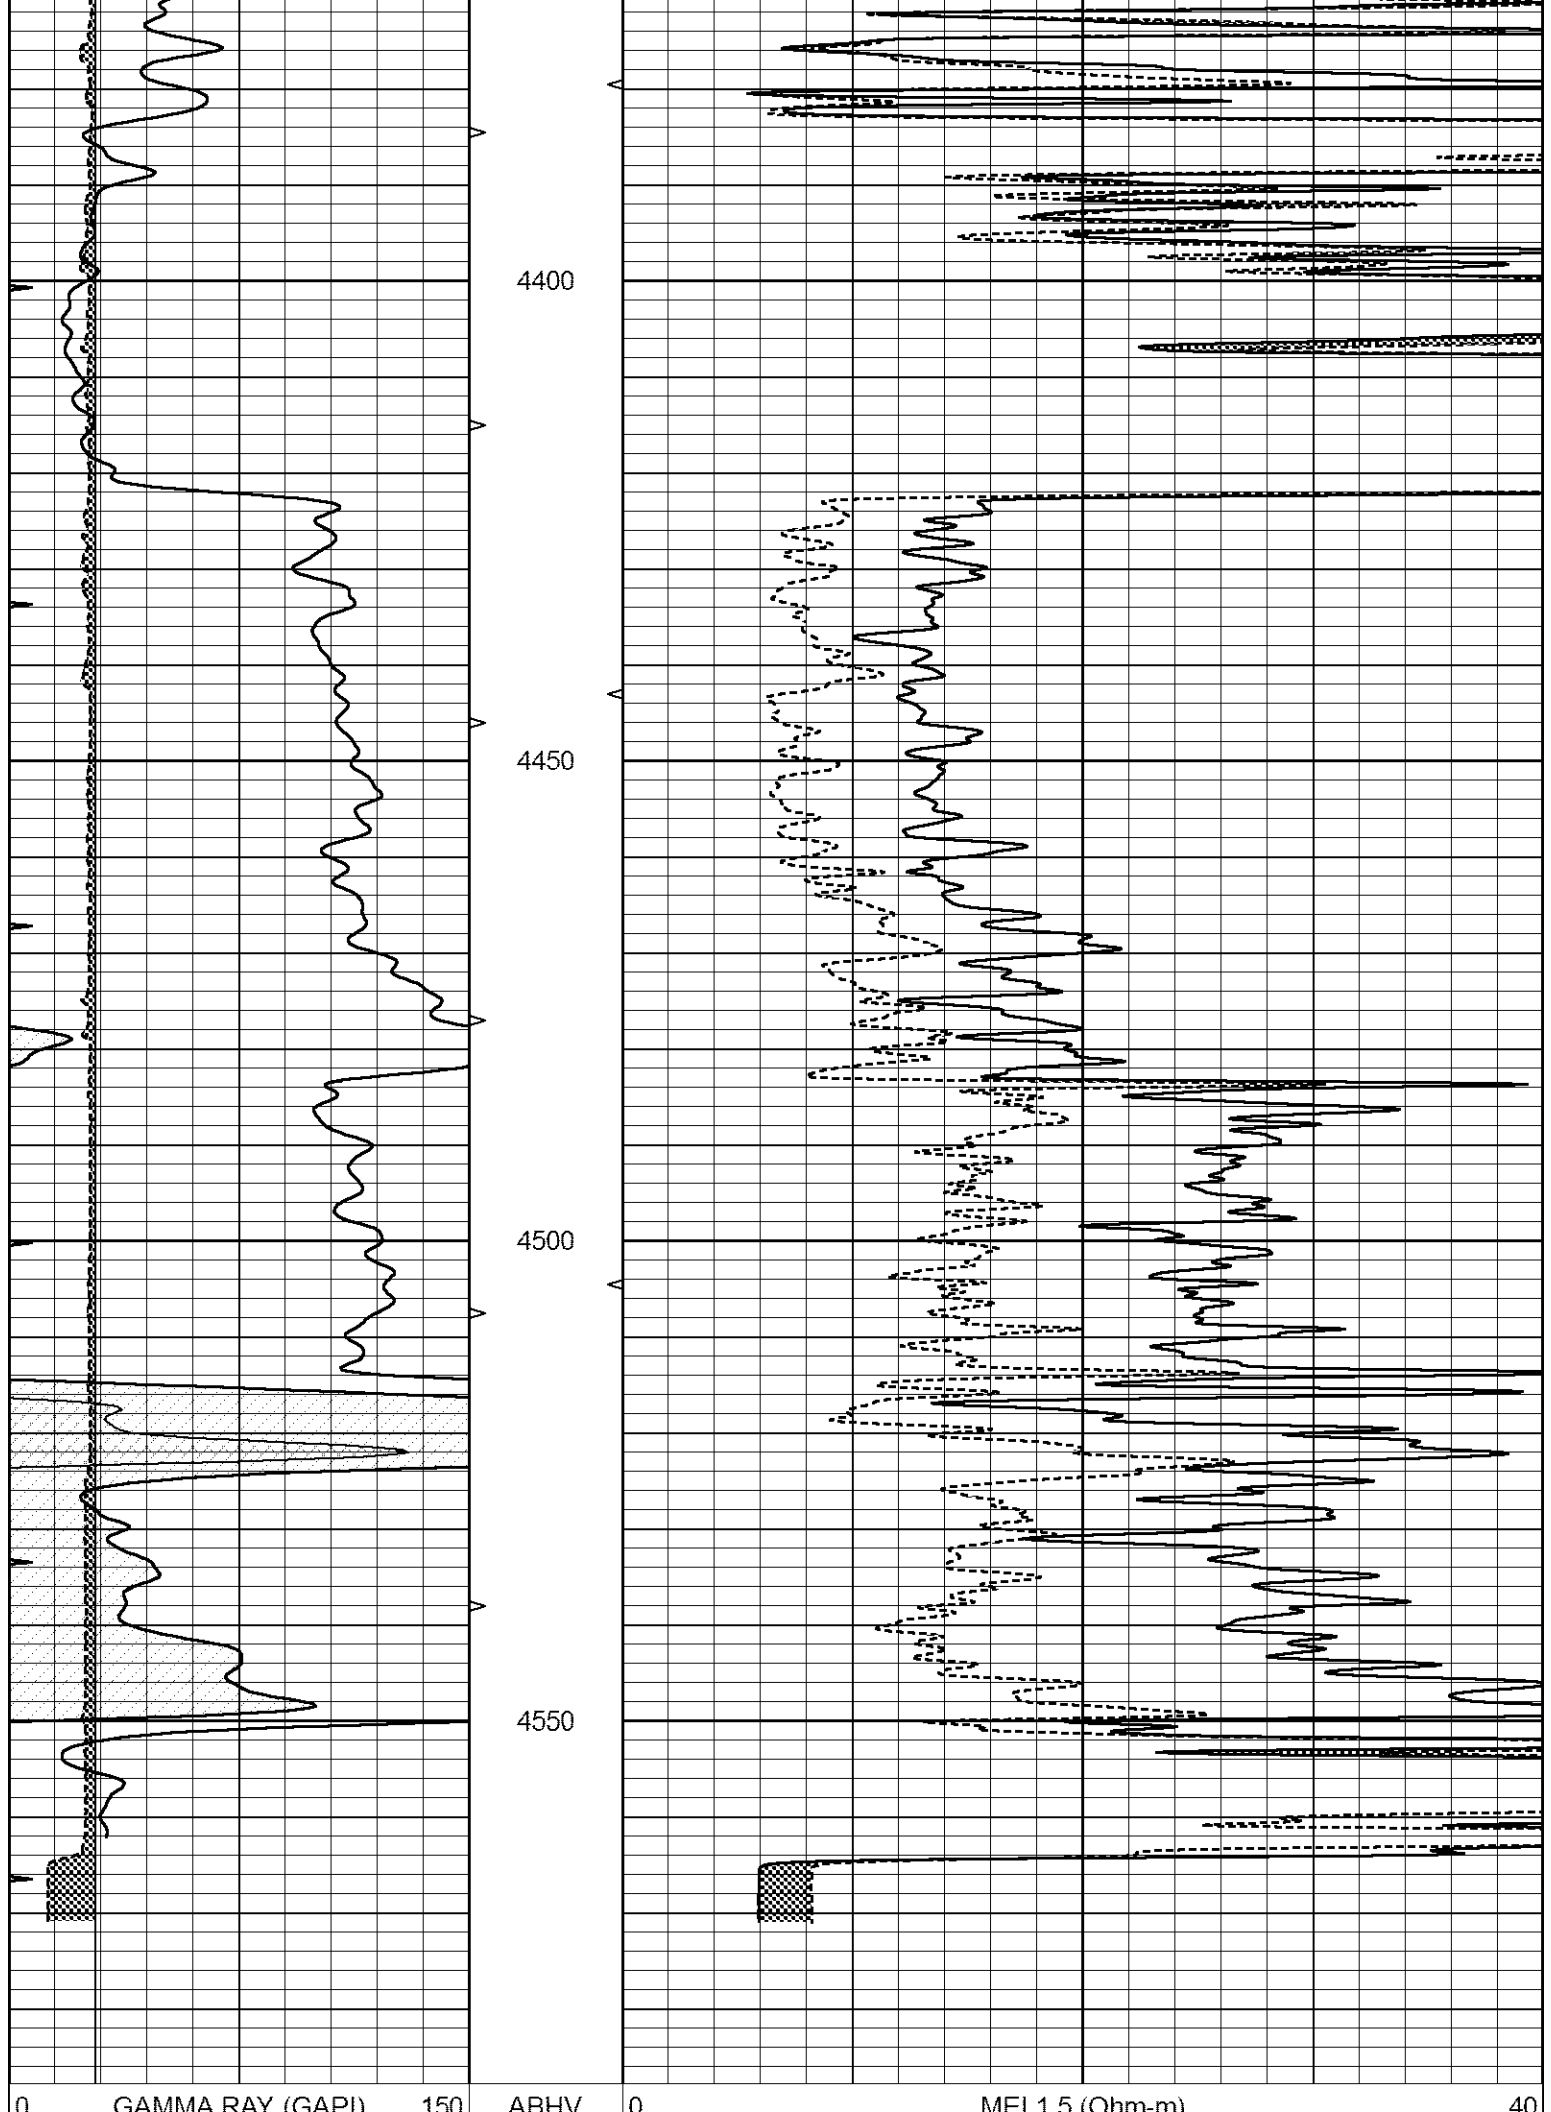

6	CALIPER (in)	16	10 (ft3)	0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV				
			0 (ft3)	10			

Calibration Report								
Database File	7236pe.db							
Dataset Pathname	pass26D							
Dataset Creation	Tue Oct 18 02:40:36 2022							
MICRO_USR Calibration Report								
Serial Number:	070911							
Tool Model:	ProbeL							
Performed:	Sun Oct 16 04:04:35 2022							
Caliper Calibration:	Gain=4.500	Offset=0.350						
References	Low Cal	High Cal						
Readings	8.000	14.000						
	1.451	3.049						
1.5" Calibration:	Gain=65.000	Offset=-0.800						
References	Low Cal	High Cal						
Readings	0.000	20.000						
	0.004	0.843						
2" Calibration:	Gain=62.000	Offset=0.000						
References	Low Cal	High Cal						
Readings	0.000	20.000						
	0.021	0.810						
Microlog Calibration Report								
Serial-Model:	070911-ProbeL							
Performed:	Sat May 14 04:48:25 2022							
	Readings		References		Results			
	Zero	Cal	Zero	Cal	m	b		
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:	070558							
Tool Model:	Probe1							
Performed:	Sat Jul 02 05:55:58 2022							
Calibrator Value:	1.0		GAPI					
Background Reading:	0.0		cps					
Calibrator Reading:	1.0		cps					
Sensitivity:	0.2600		GAPI/cps					