

MICRO LOG

Company	RAYMOND OIL COMPANY, INC.	Company	RAYMOND OIL COMPANY, INC.
Well	FRUSHER-LEWIS TRUS UNIT #1	Well	FRUSHER-LEWIS TRUS UNIT #1
Field	WILDCAT	Field	WILDCAT
County	HODGEMAN	County	HODGEMAN
State	KANSAS	State	KANSAS
Location:	API # : 15-083-21980-0000 1109' FSL & 2526' FWL	Other Services CDL/CNL DIL/SON	
Permanent Datum	SEC 4 TWP 21S RGE 23W	Elevation	
Log Measured From	GROUND LEVEL Elevation 2299	K.B. 2304	
Drilling Measured From	KELLY BUSHING 5' A.G.L. KELLY BUSHING	D.F. 2302	
		G.L. 2299	
Date	05/05/21		
Run Number	TWO		
Depth Driller	4598		
Depth Logger	4598		
Bottom Logged Interval	4578		
Top Log Interval	3500		
Casing Driller	8 5/8" @ 260		
Casing Logger	260		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/46		
pH / Fluid Loss	10.0/6.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.6@ 70F		
Rmf @ Meas. Temp	.45@ 70F		
Rmc @ Meas. Temp	.72 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.35@ 121F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	121F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	KIM SHOEMAKER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: NESS CITY SOUTH TO COUNTY LINE TO X RD.
2 EAST, NORTH INTO.







MAIN PASS

Database File	5433ddn.db
Dataset Pathname	passMIC
Presentation Format	_micro
Dataset Creation	Wed May 05 16:28:15 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

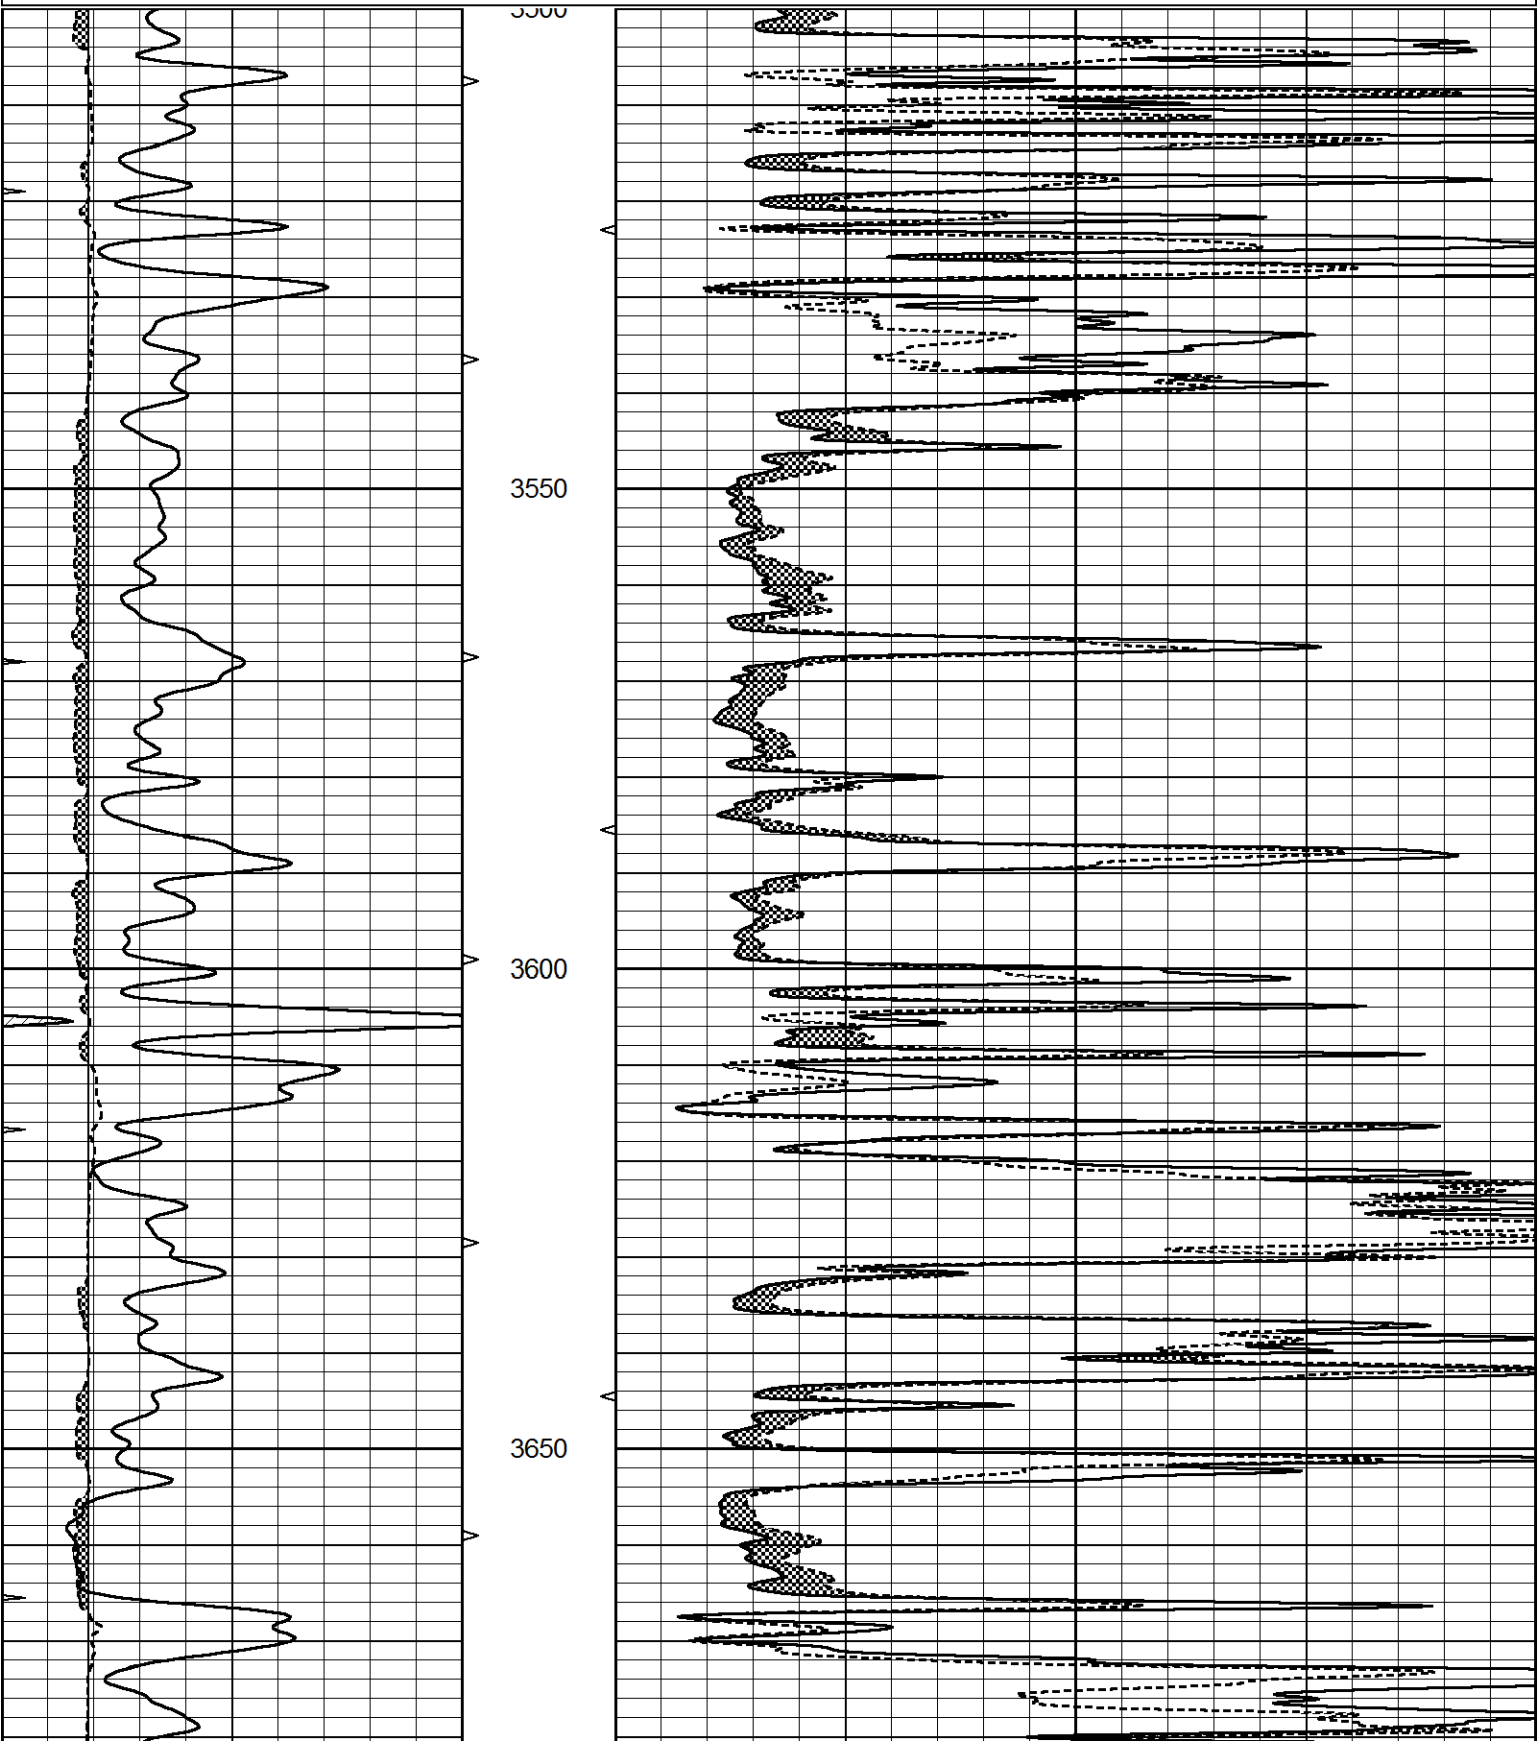

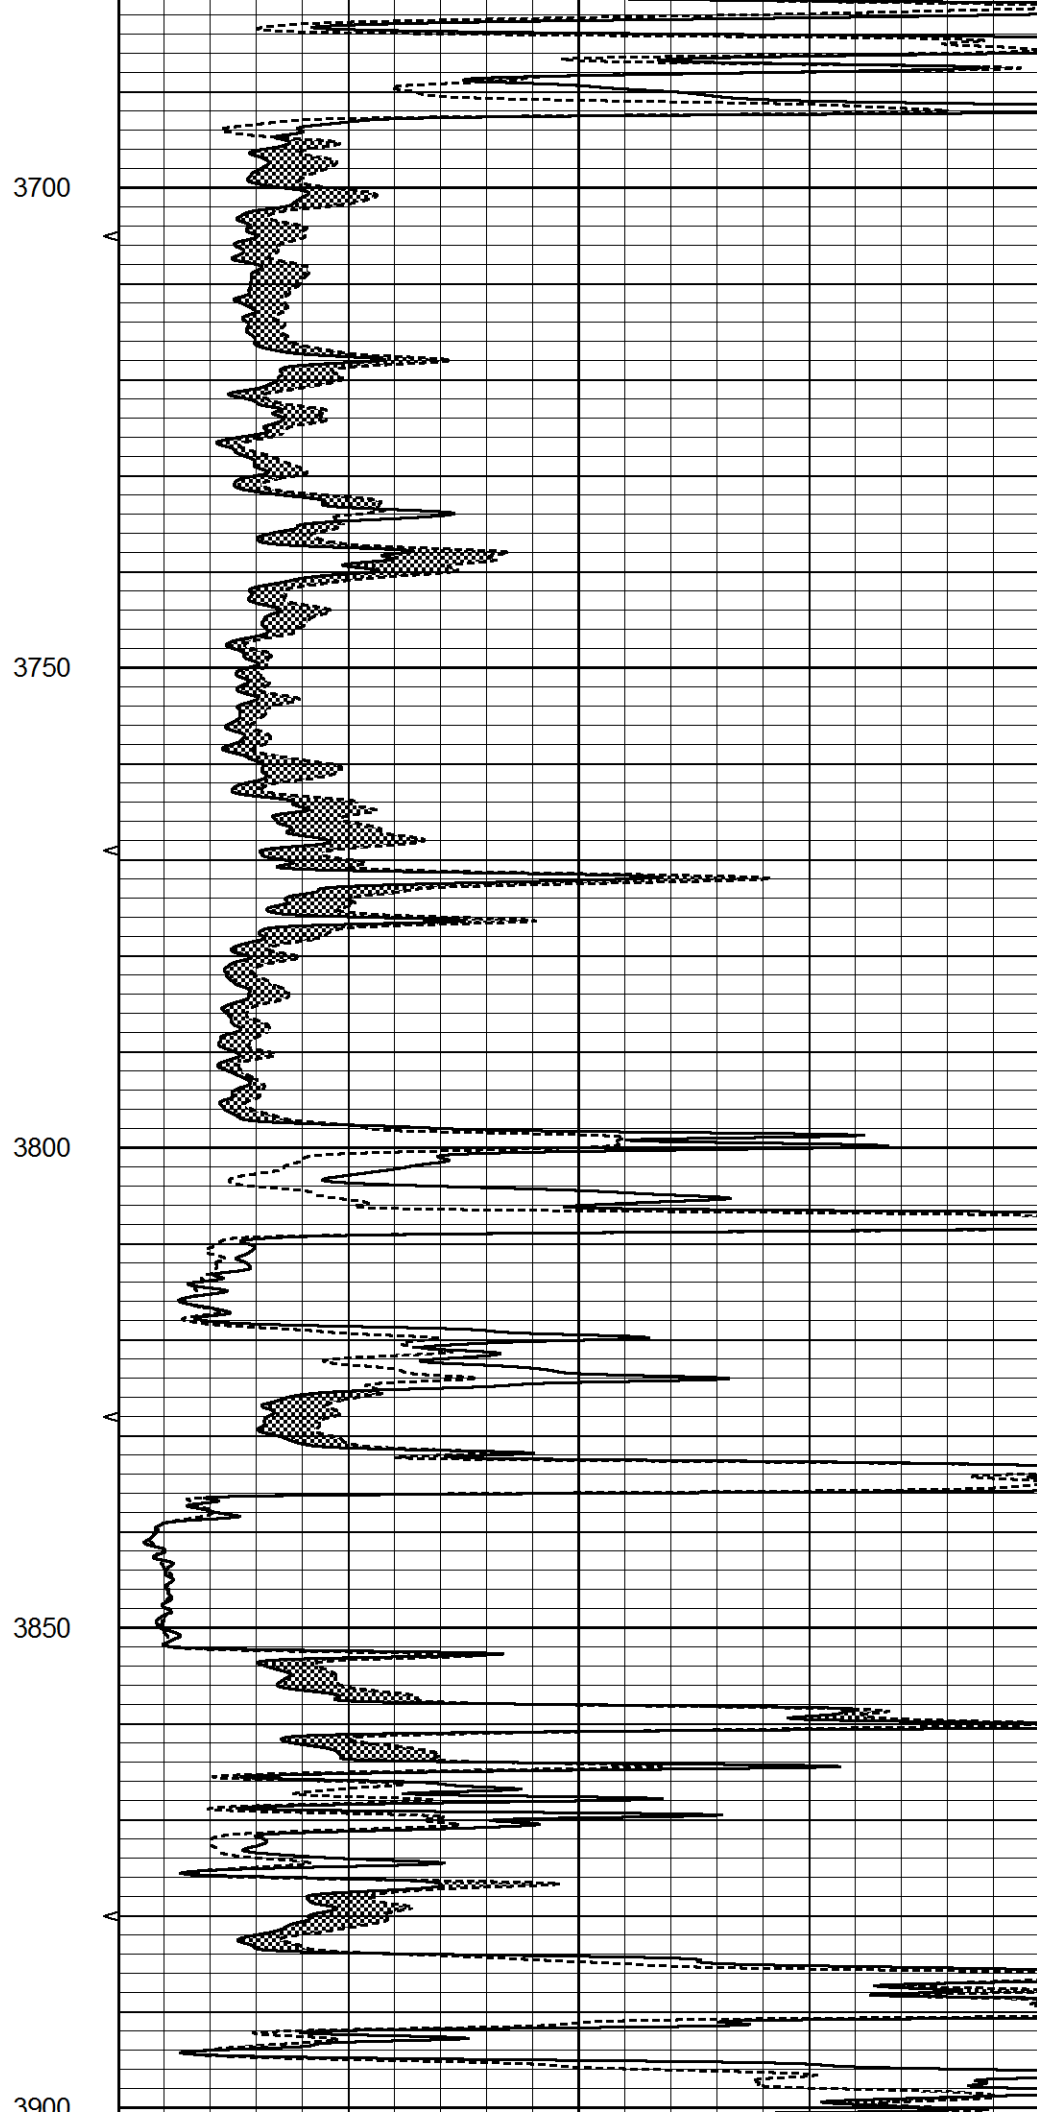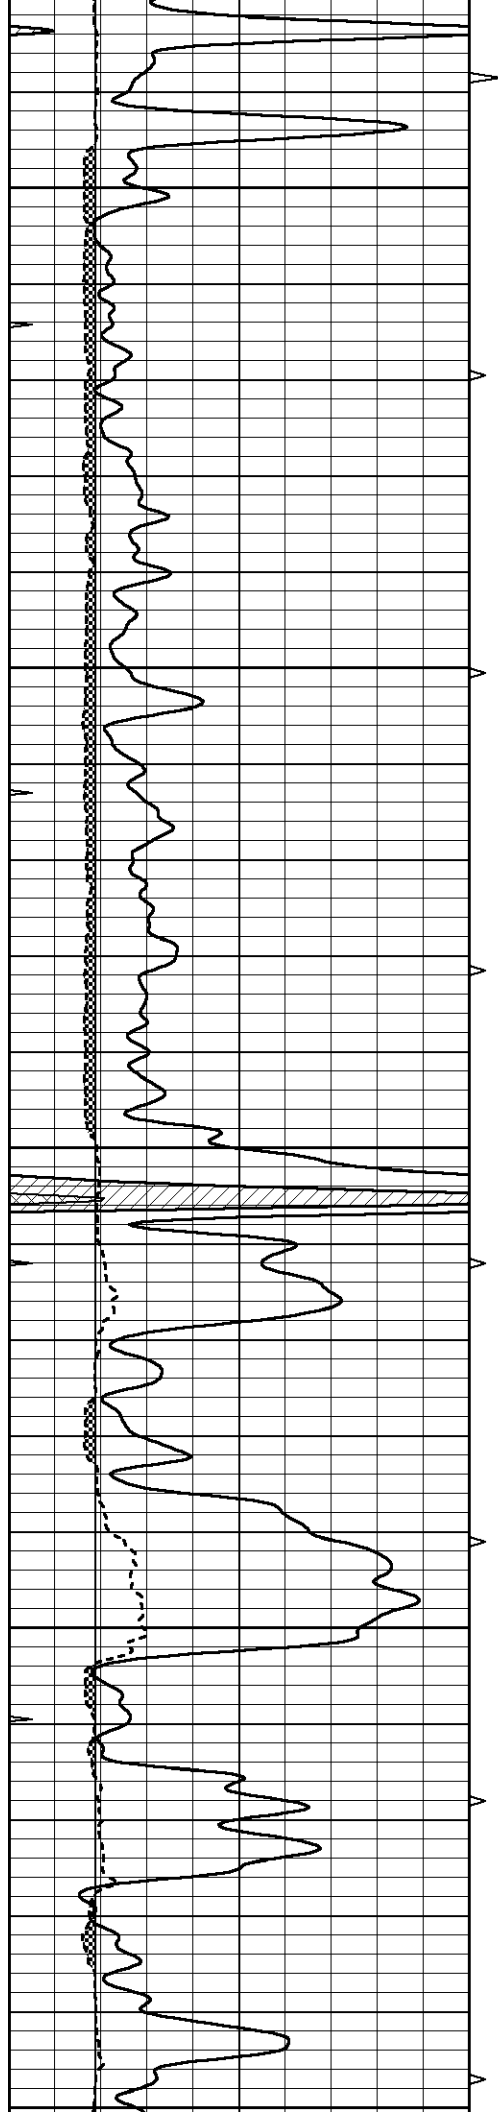

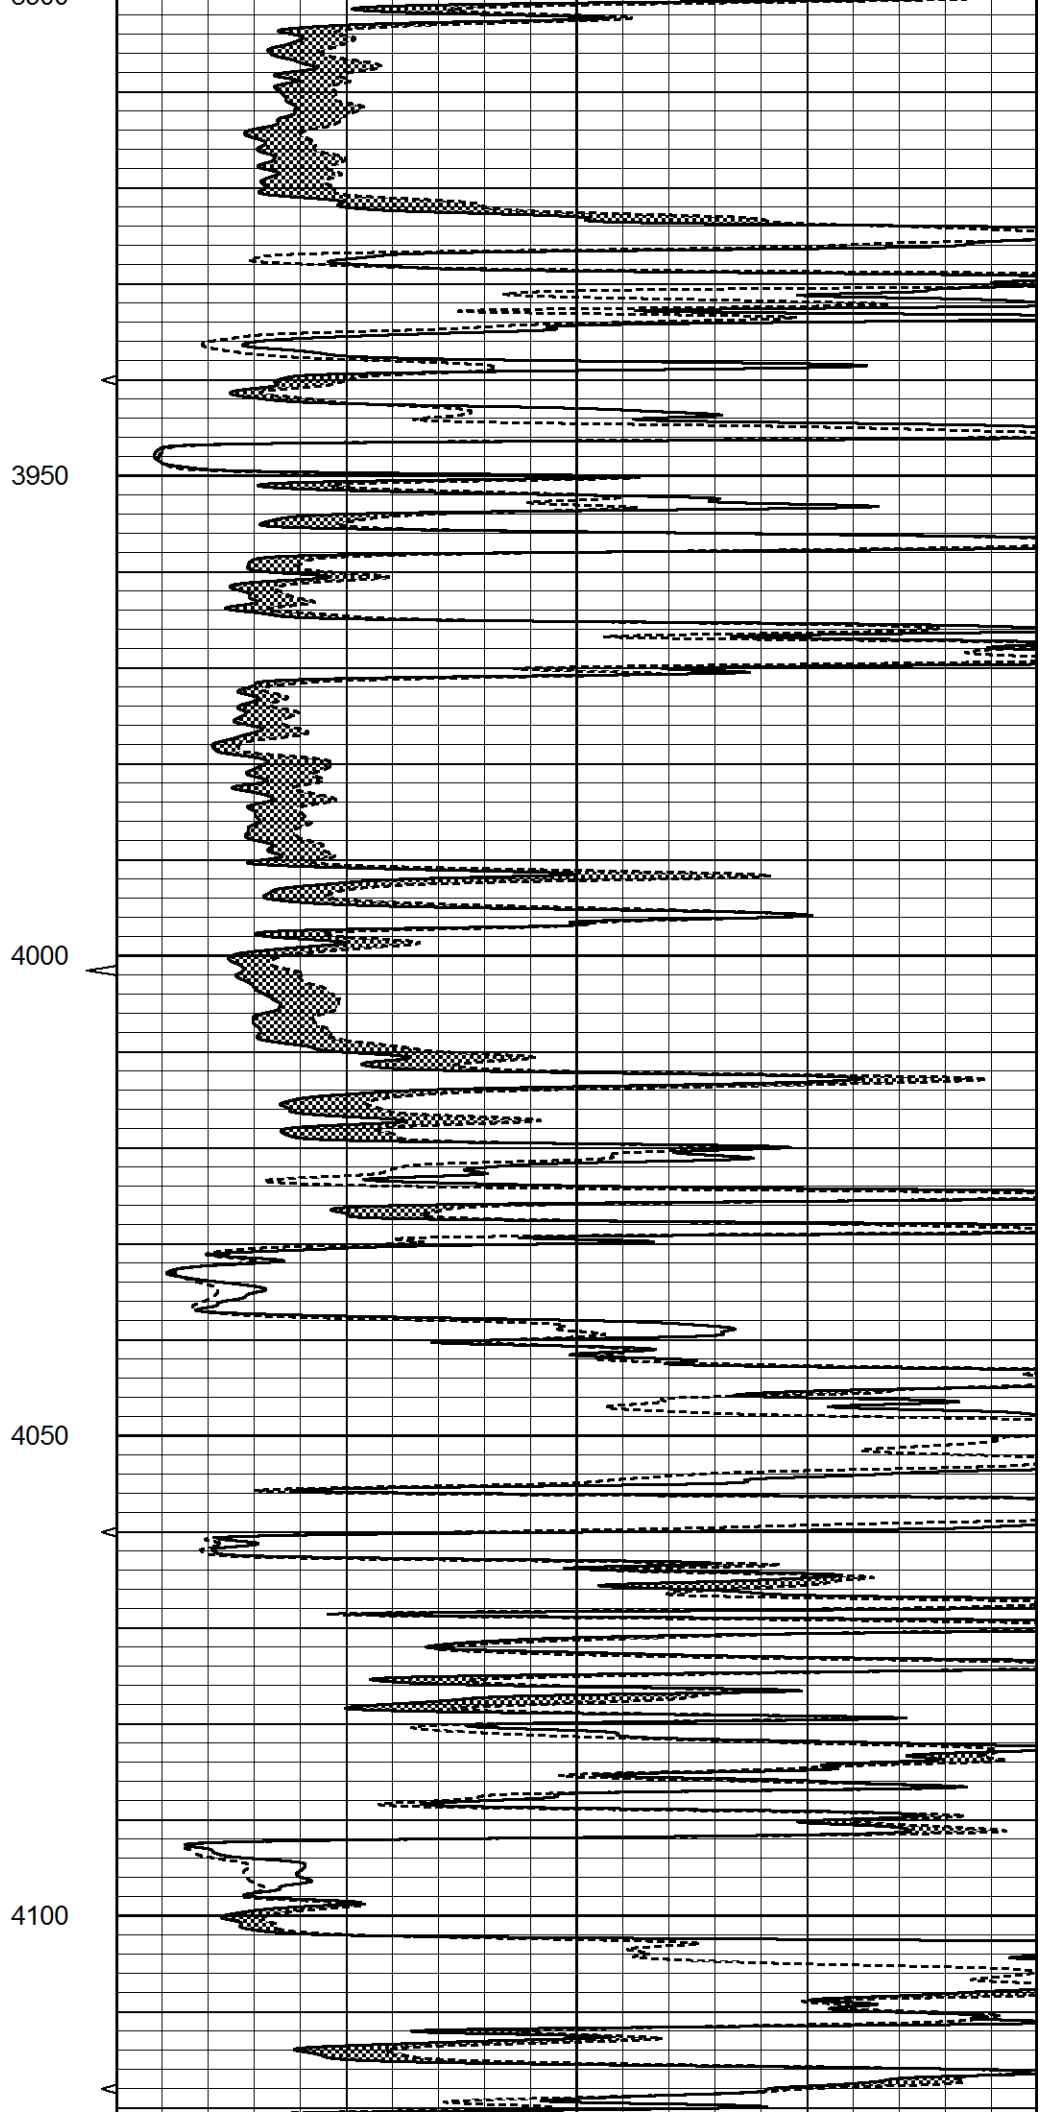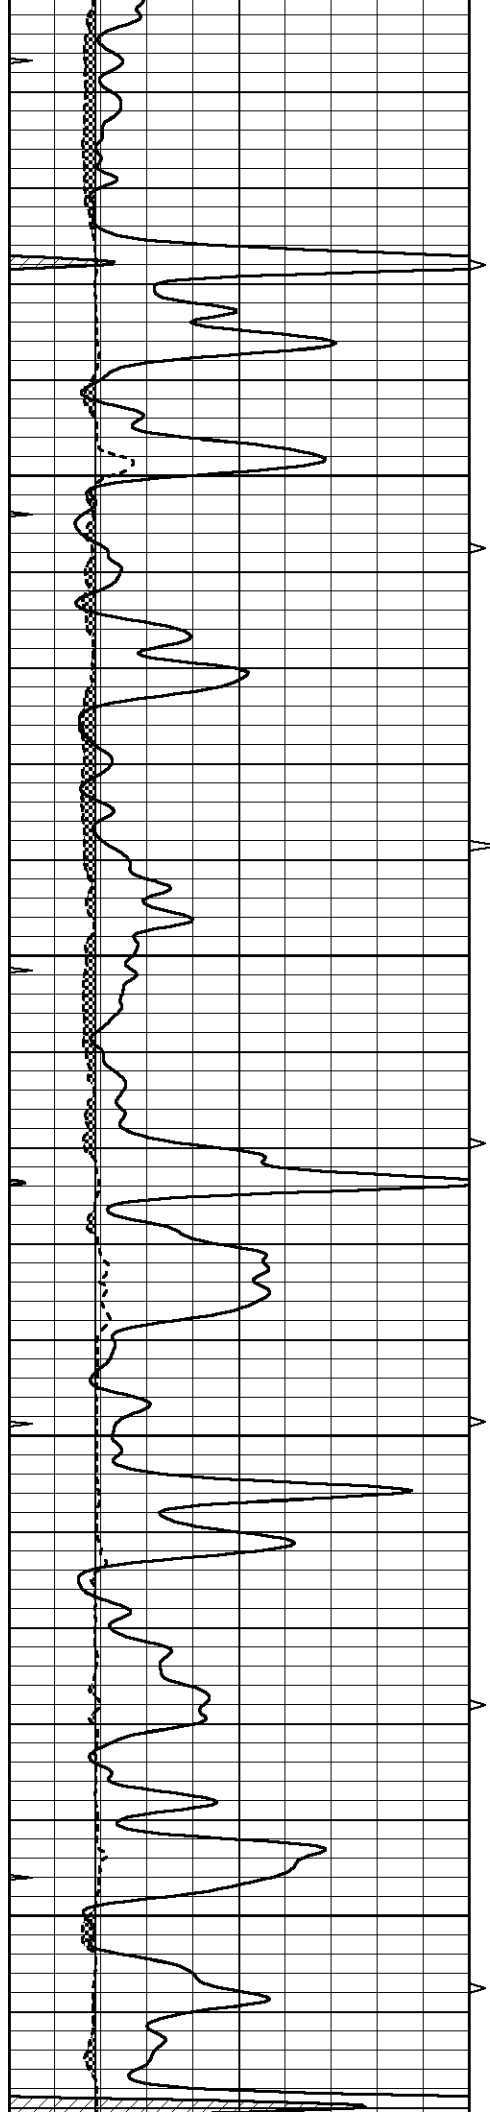





4150

4200

4250

4300

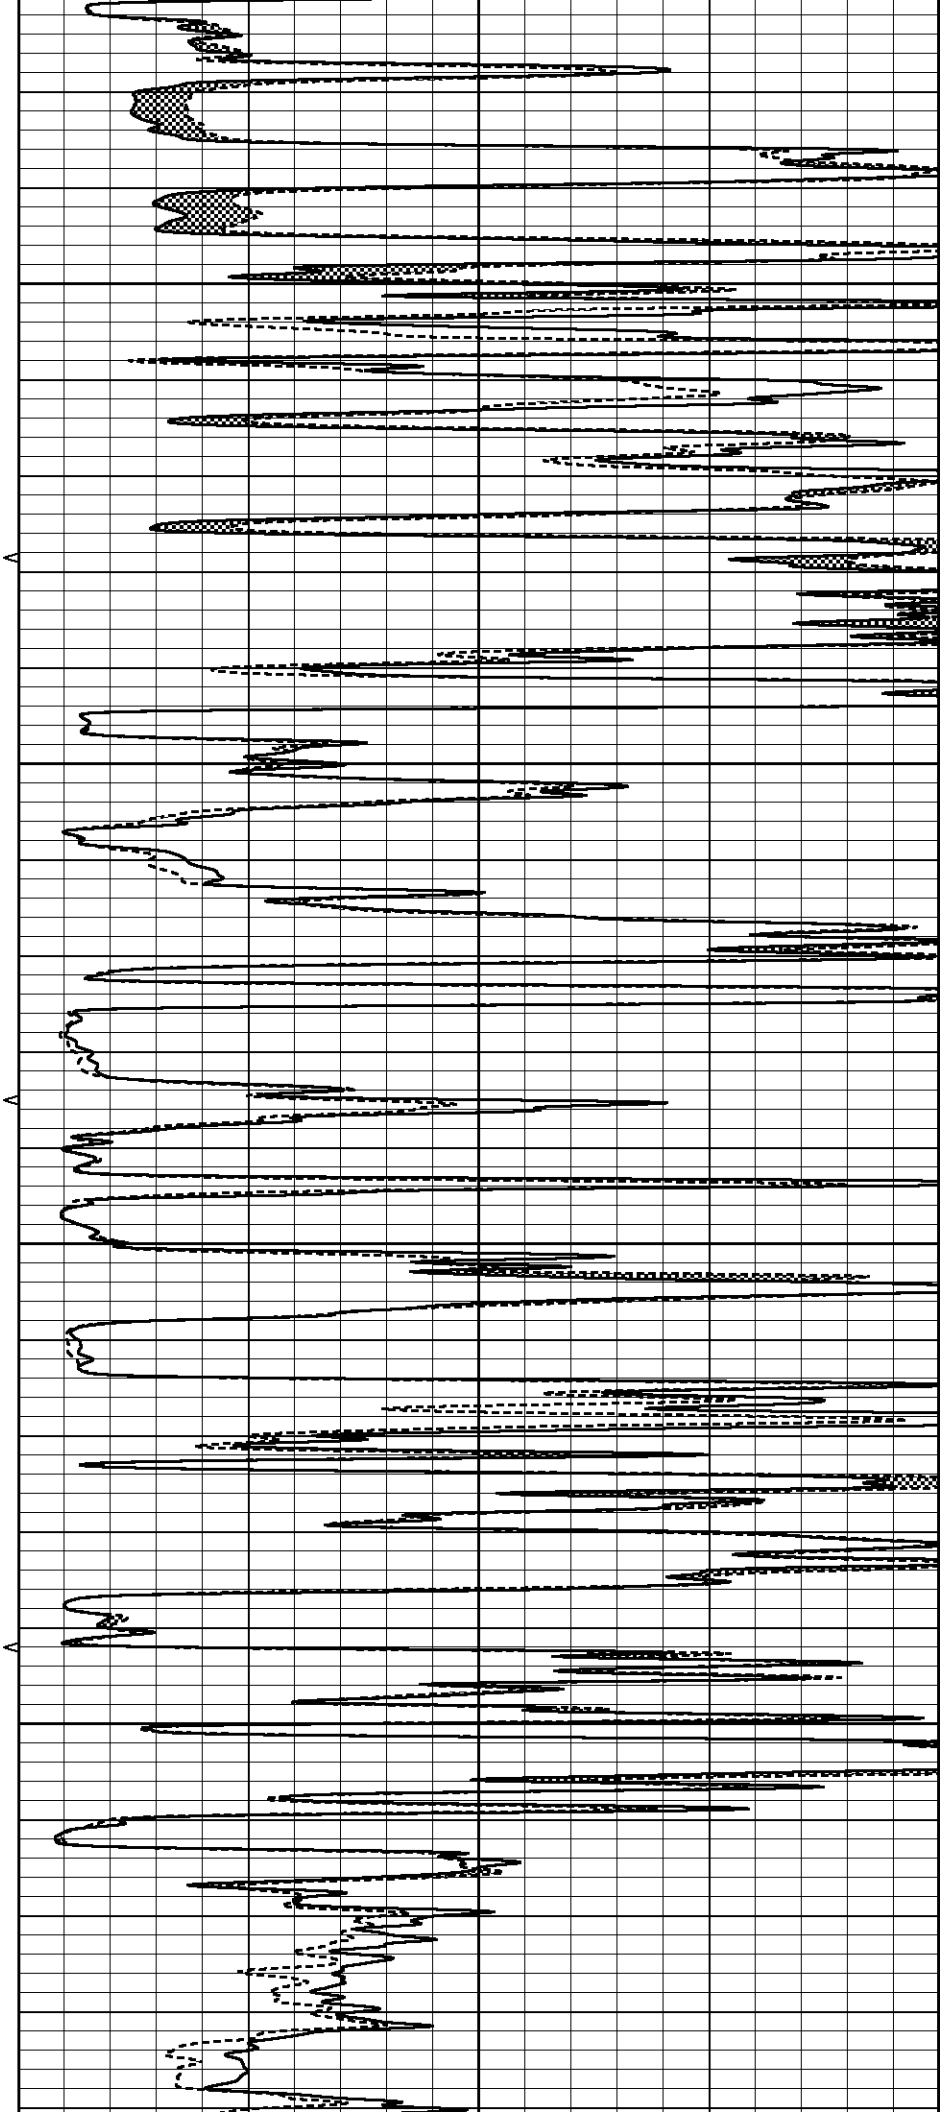

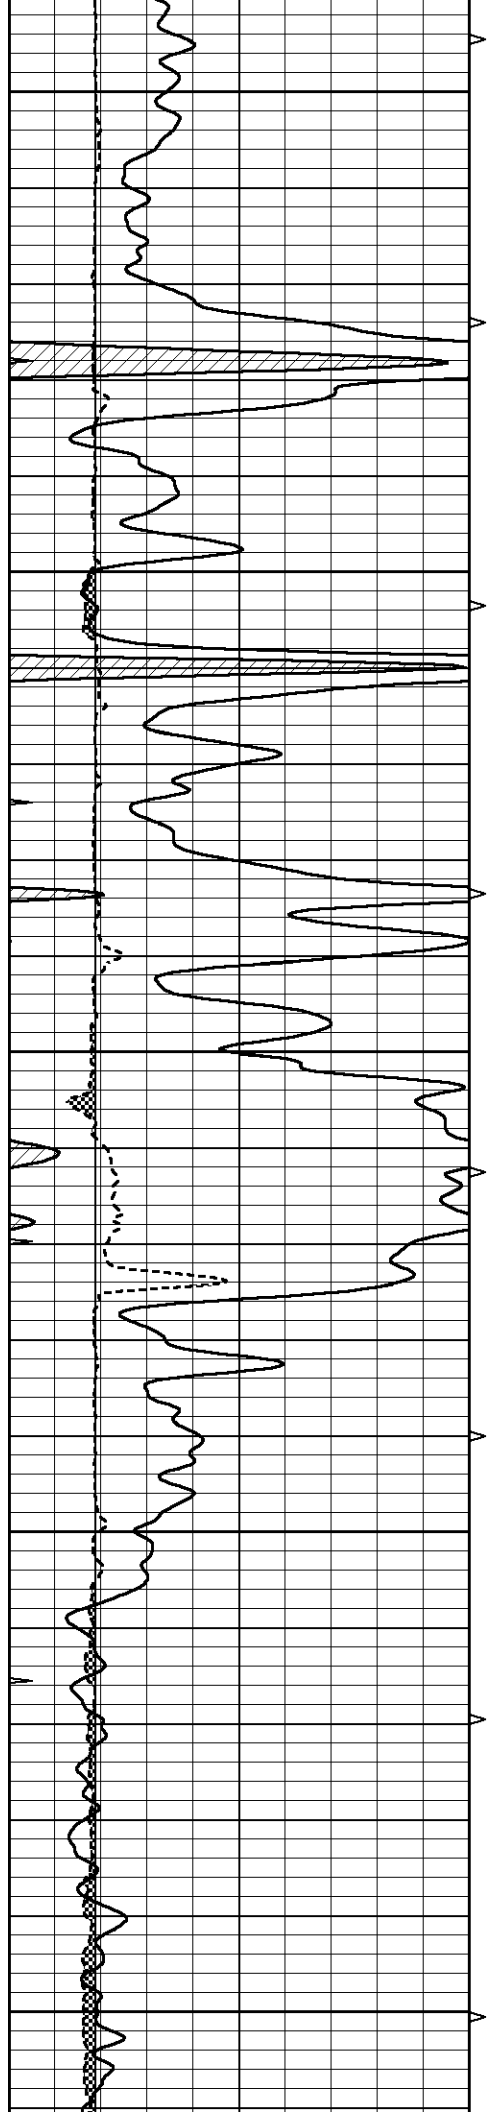


4350


4400

4450

4500



4550

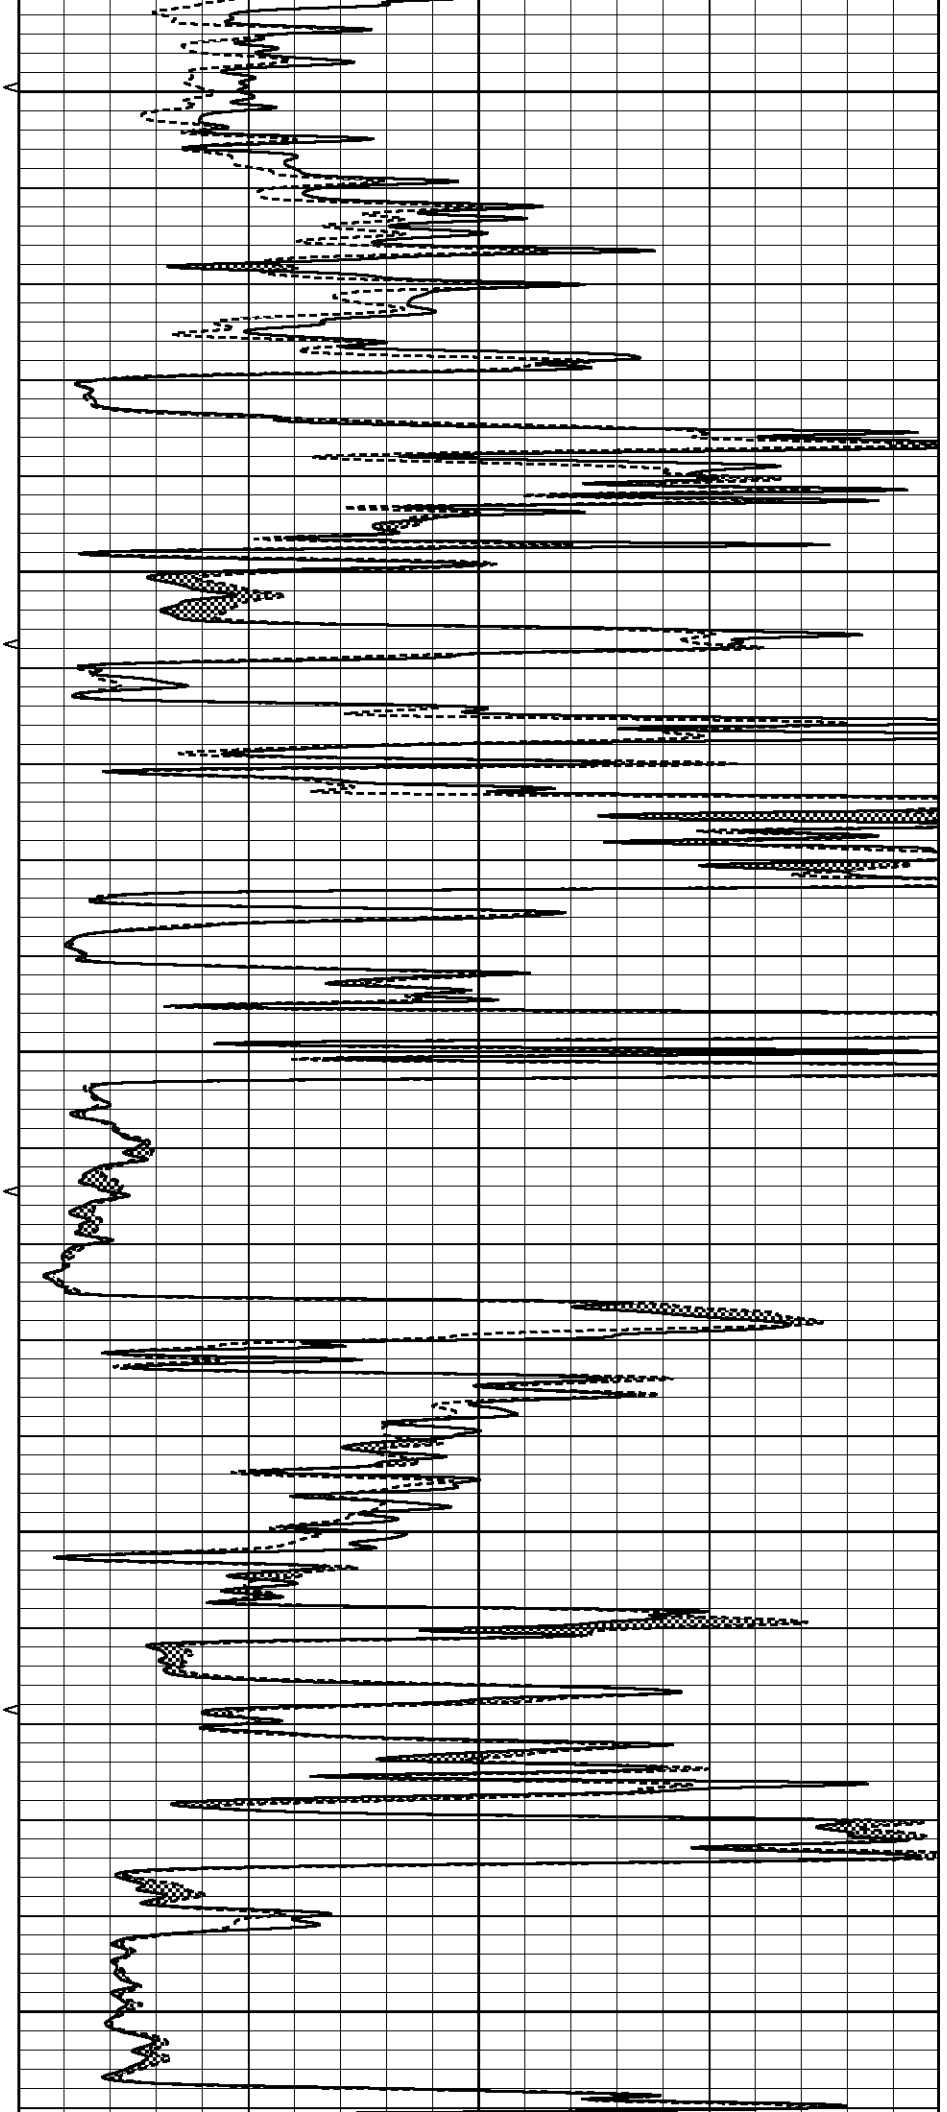


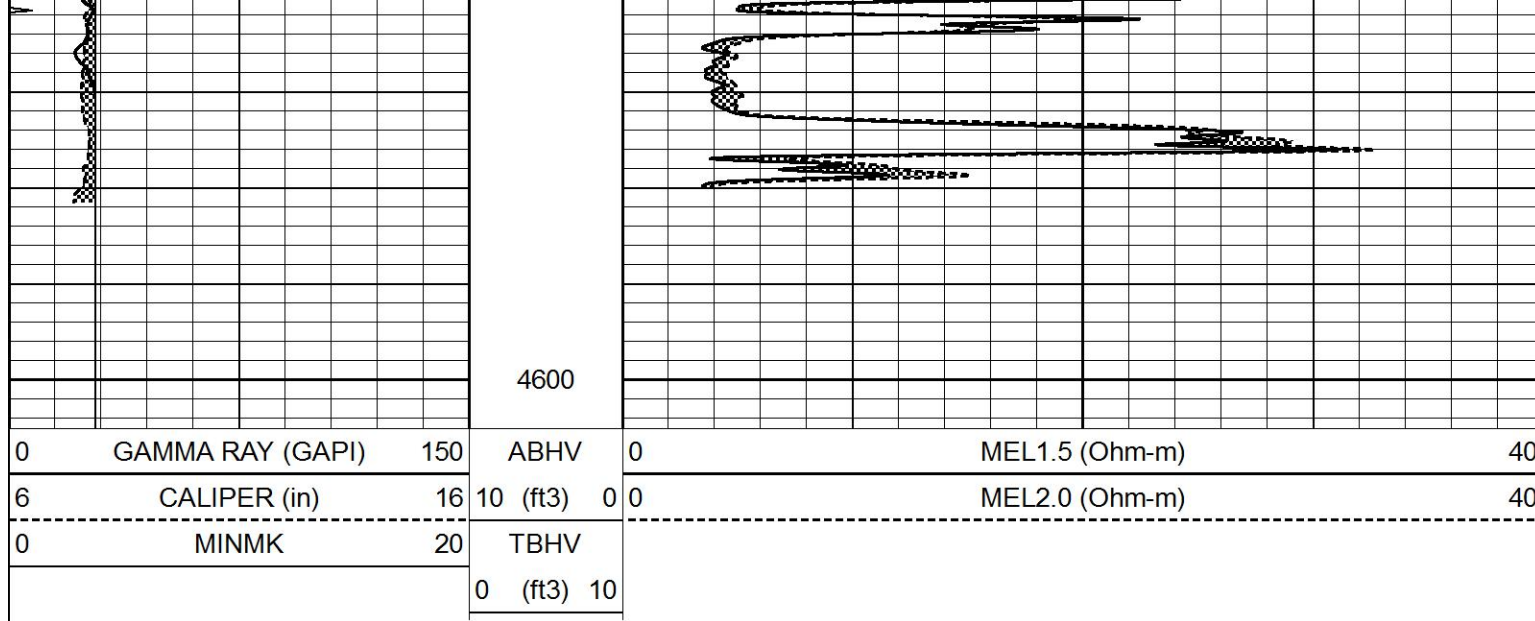

REPEAT SECTION

Database File 5433ddn.db
 Dataset Pathname pass4.1
 Presentation Format _micro
 Dataset Creation Wed May 05 16:16:57 2021
 Charted by Depth in Feet scaled 1:240

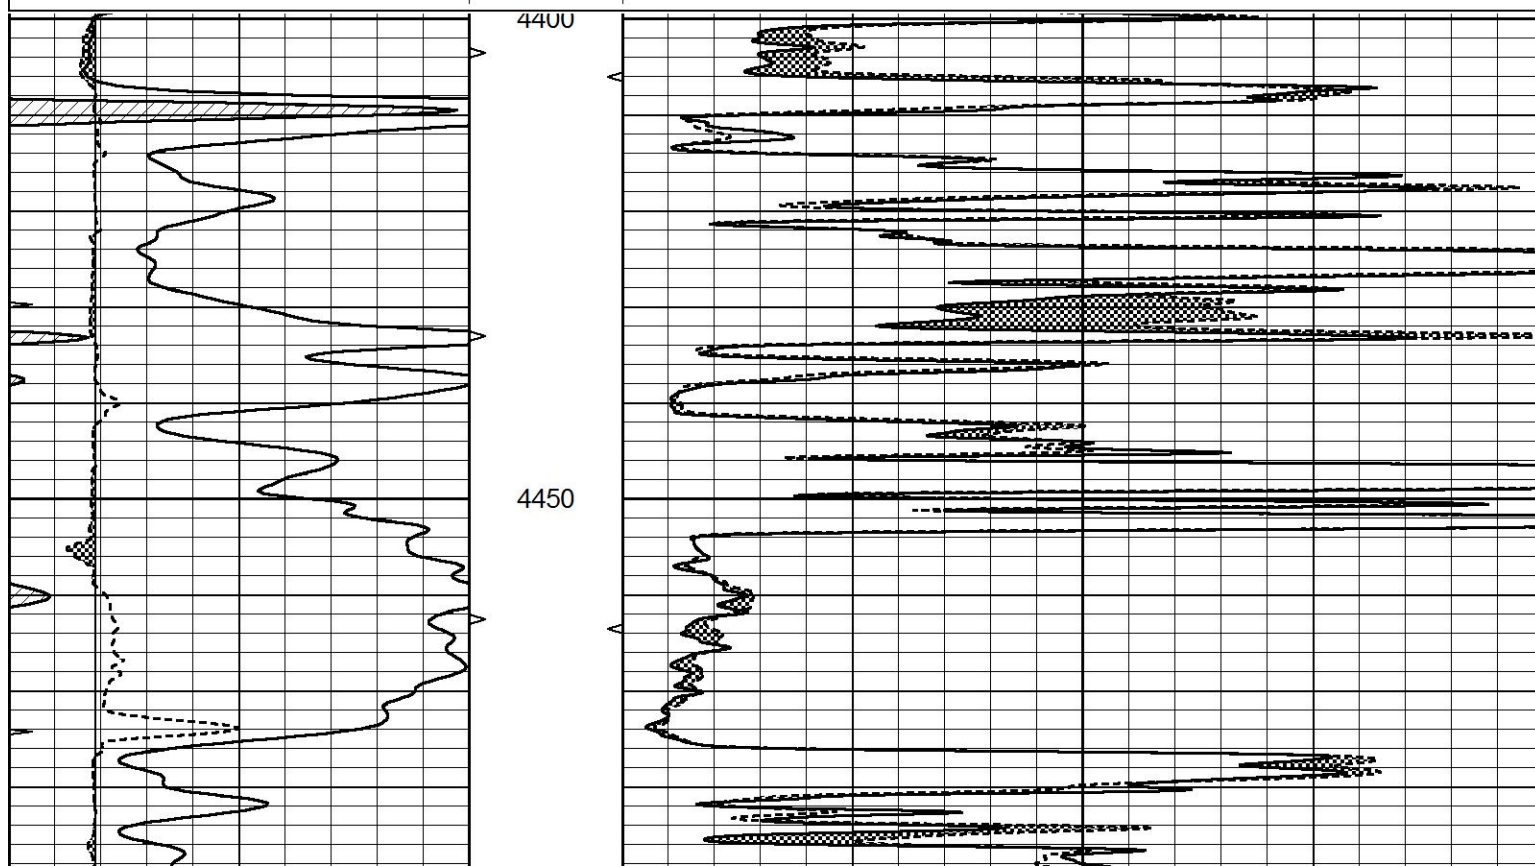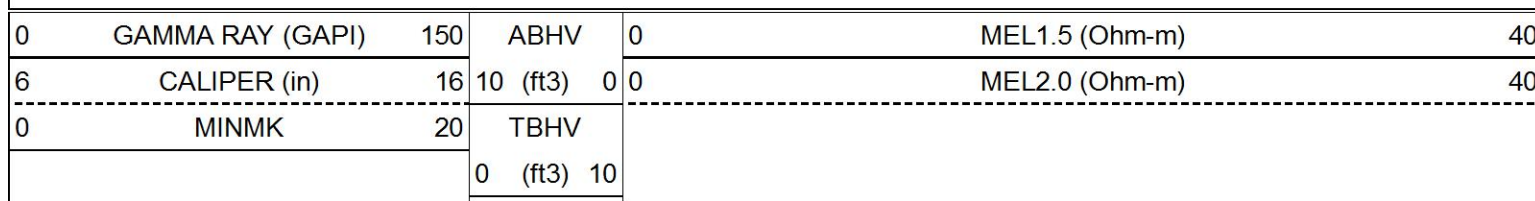

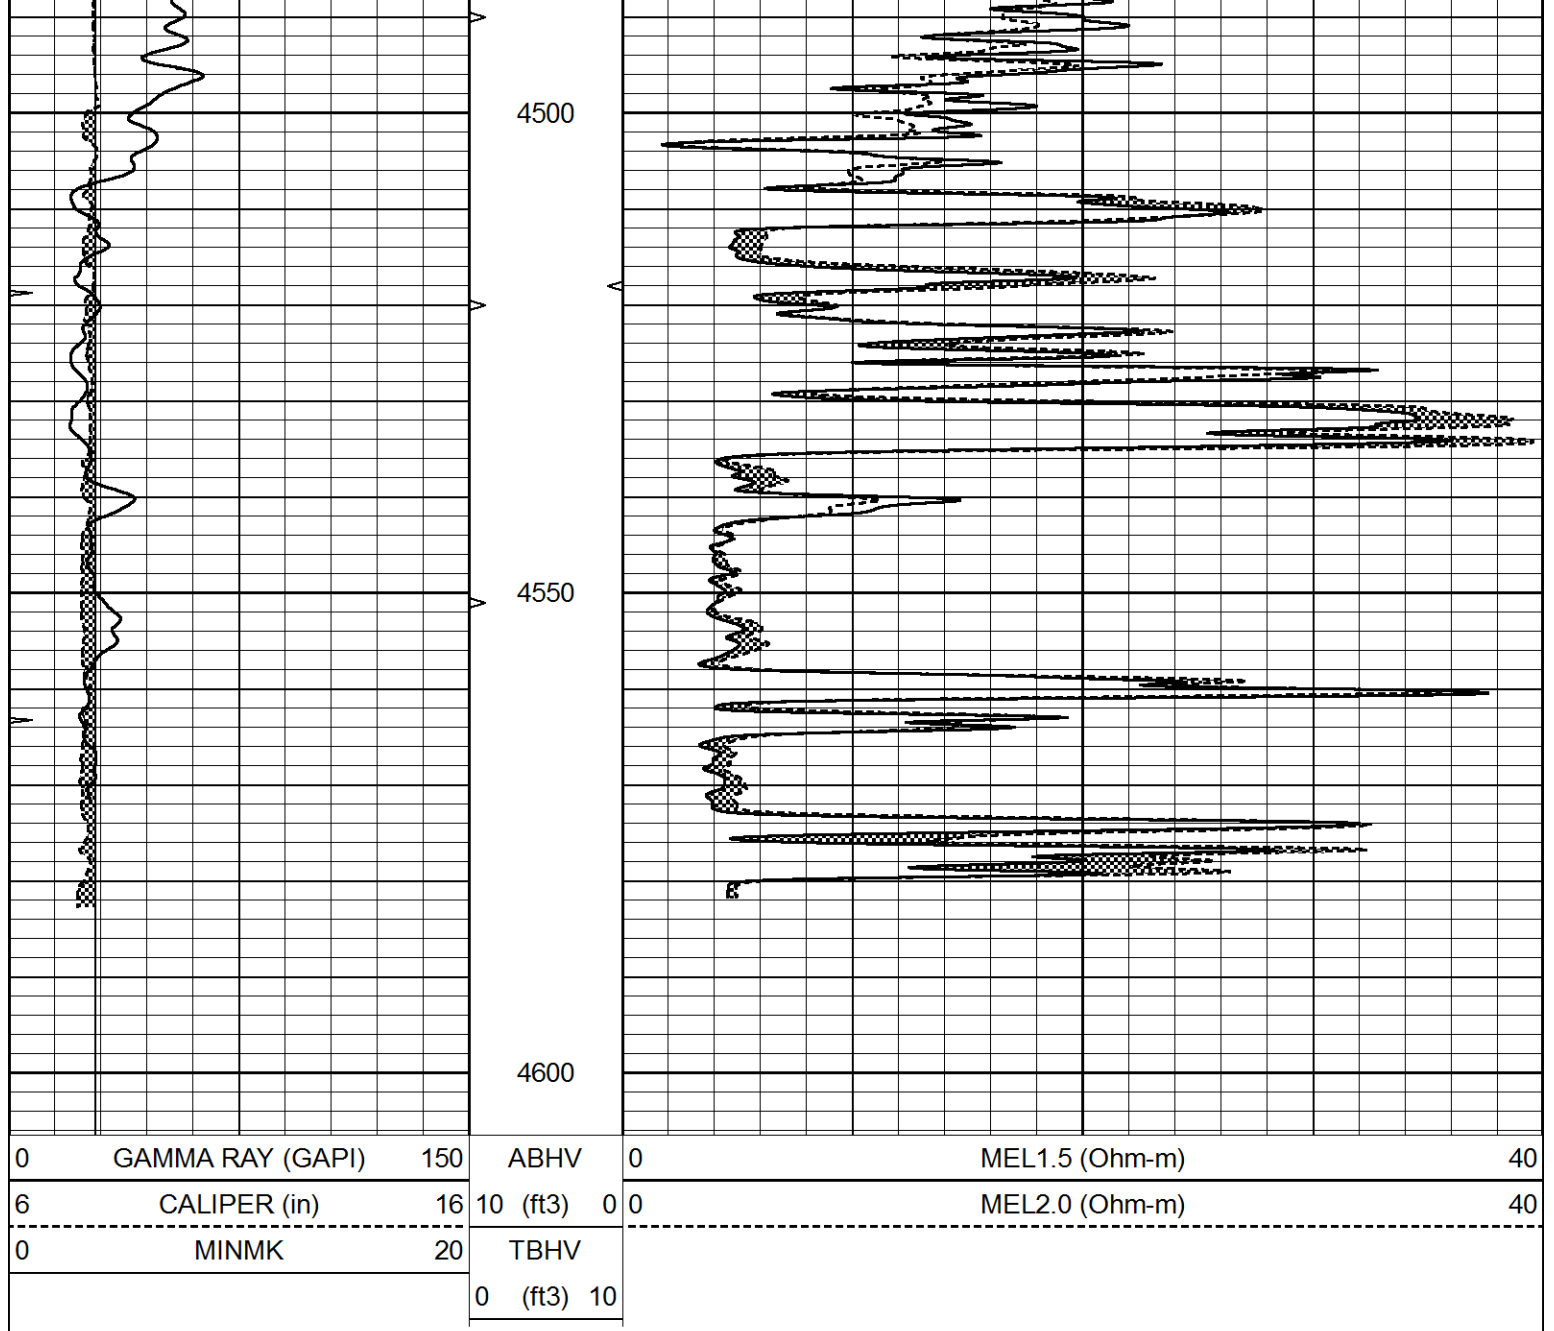

Calibration Report			
Database File	5433ddn.db		
Dataset Pathname	pass4.1		
Dataset Creation	Wed May 05 16:16:57 2021		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Sat Apr 10 18:53:52 2021		
Caliper Calibration:	Gain=2.815	Offset=4.452	
References	Low Cal	High Cal	
Readings	8.500	13.500	
	0.887	2.663	
1.5" Calibration:	Gain=36.134	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.832	

2" Calibration:	Gain=38.000	Offset=0.200
References	Low Cal	High Cal
Readings	0.000	20.000
	0.022	0.793
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Thu Jul 30 23:16:16 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6000	GAPI/cps