



MICRO LOG

Company MCGINNESS ENERGY COMPANY, INC.

Well EUREKA #22-1

Field UNNAMED

County PRATT State KANSAS

Location: API #: 15-151-22554-0000

2185' FNL & 868' FWL

NW - SE - SW - NW

SEC 22 TWP 27S RGE 14W

Other Services
CDL/CNL/PE
DIL

Elevation

K.B. 2003

D.F. 2001

G.L. 1990

Permanent Datum GROUND LEVEL Elevation 1990
Log Measured From KELLY BUSHING 13' A.G.L.
Drilling Measured From KELLY BUSHING

Date 10/1/22

Run Number TWO

Depth Driller 4580

Depth Logger 4584

Bottom Logged Interval 4582

Top Log Interval 2000

Casing Driller 8 5/8"@386'

Casing Logger 386

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.5/53

pH / Fluid Loss 10.5/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.70@60F

Rmf @ Meas. Temp 1.28@60F

Rmc @ Meas. Temp 2.04@60F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .843@121F

Time Circulation Stopped 4.5 HOURS

Time Logger on Bottom 6:00 A.M.

Maximum Recorded Temperature 121F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By KEN LeBLANC

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-151-22554-0000

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395

DIRECTIONS


PRATT, KS., 7W. ON HWY 54 TO (BYERS BLKTOP "SW 70TH RD."), 3 1/4N. TO "NW 30TH RD.", 1 1/2E., S. INTO






MAIN SECTION


Database File	7085pe.db
Dataset Pathname	pass6.1
Presentation Format	micro
Dataset Creation	Sat Oct 01 07:31:09 2022
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

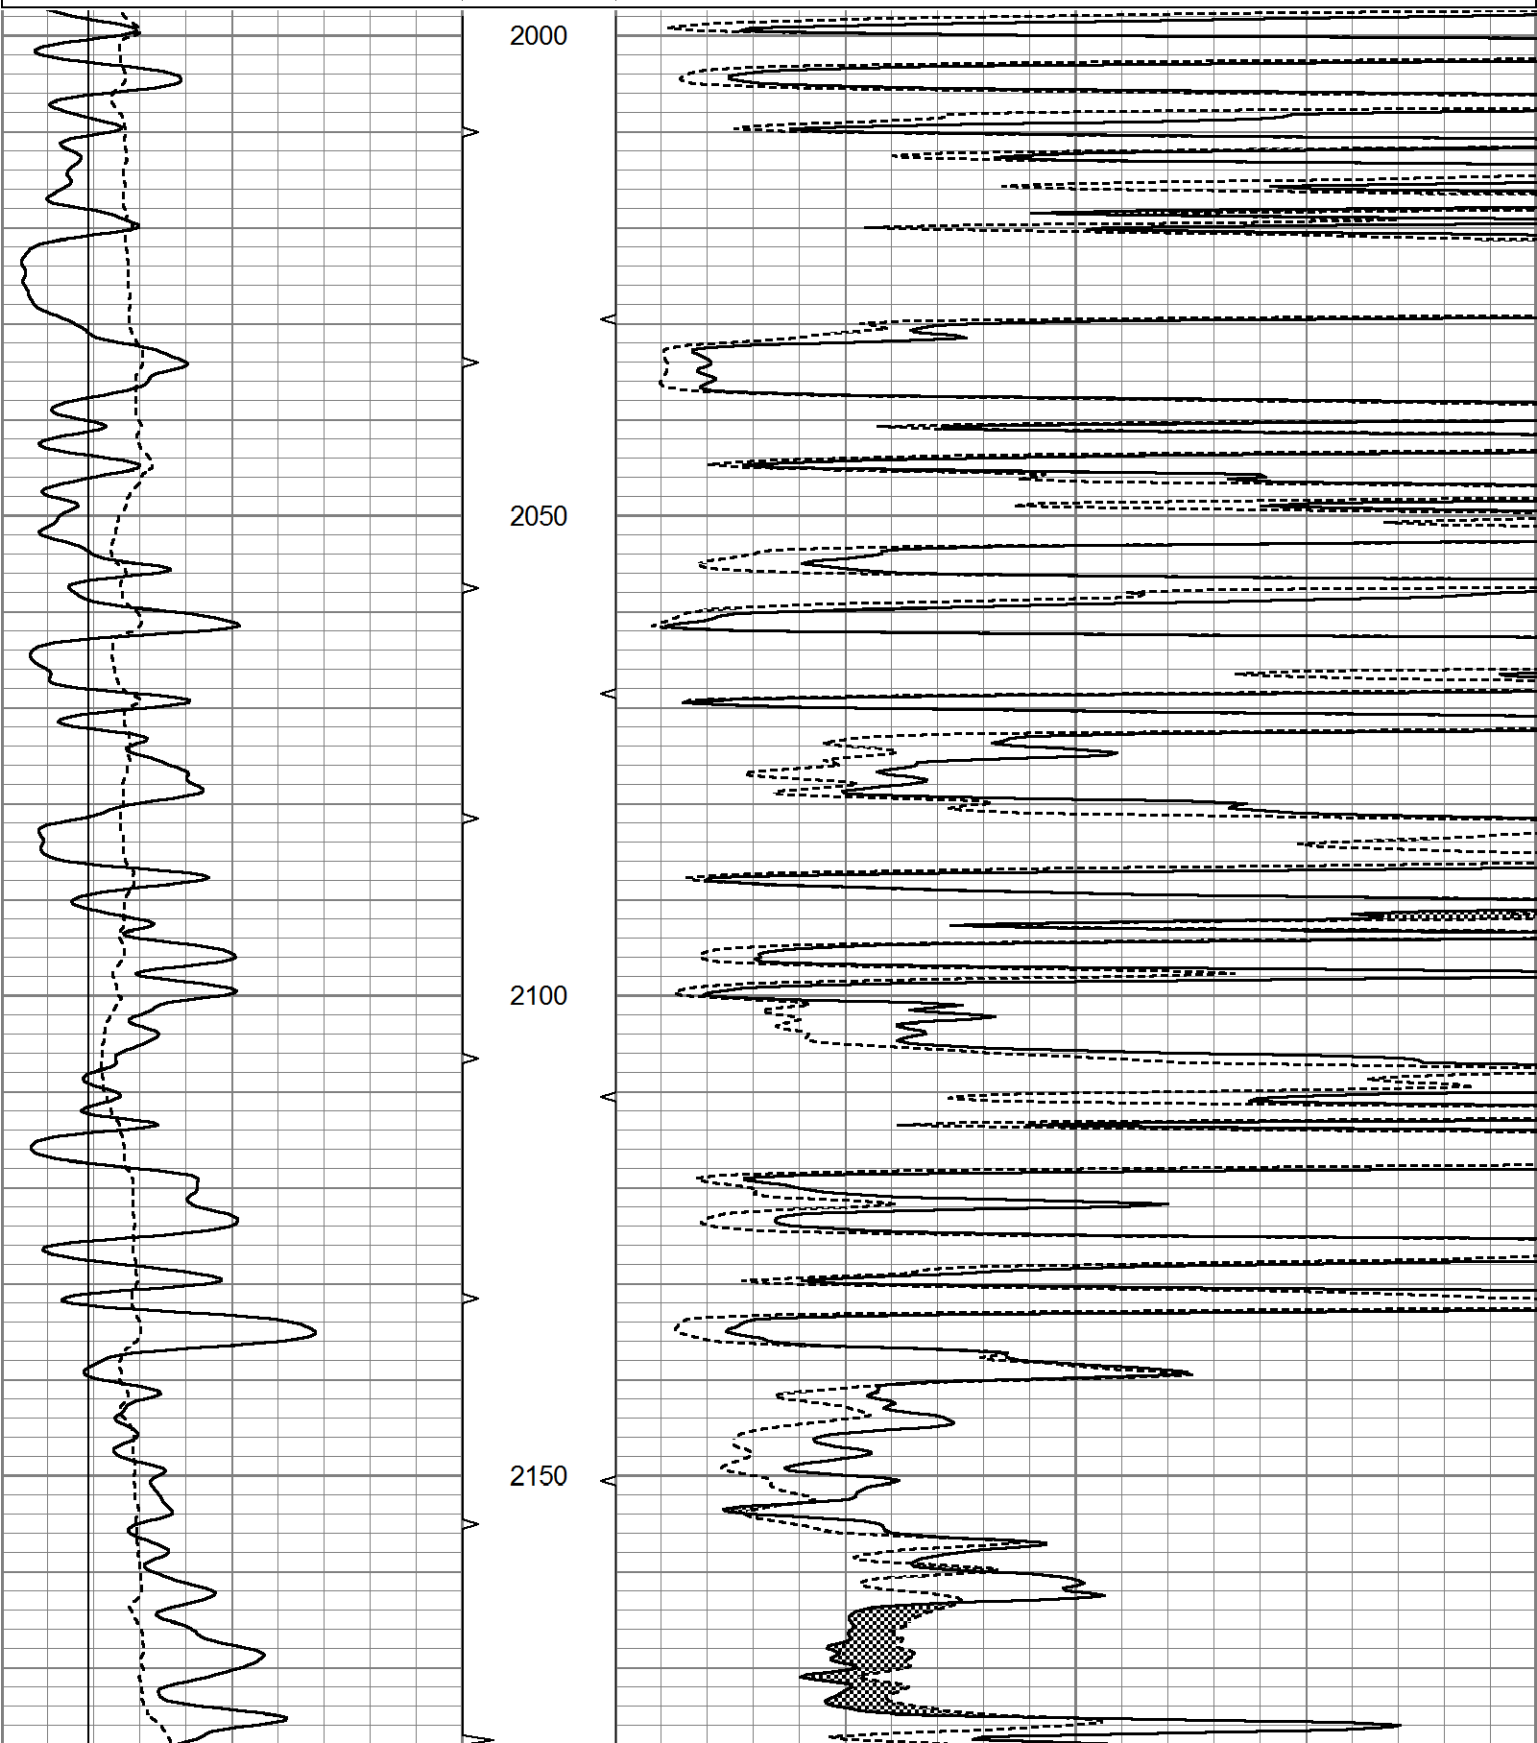


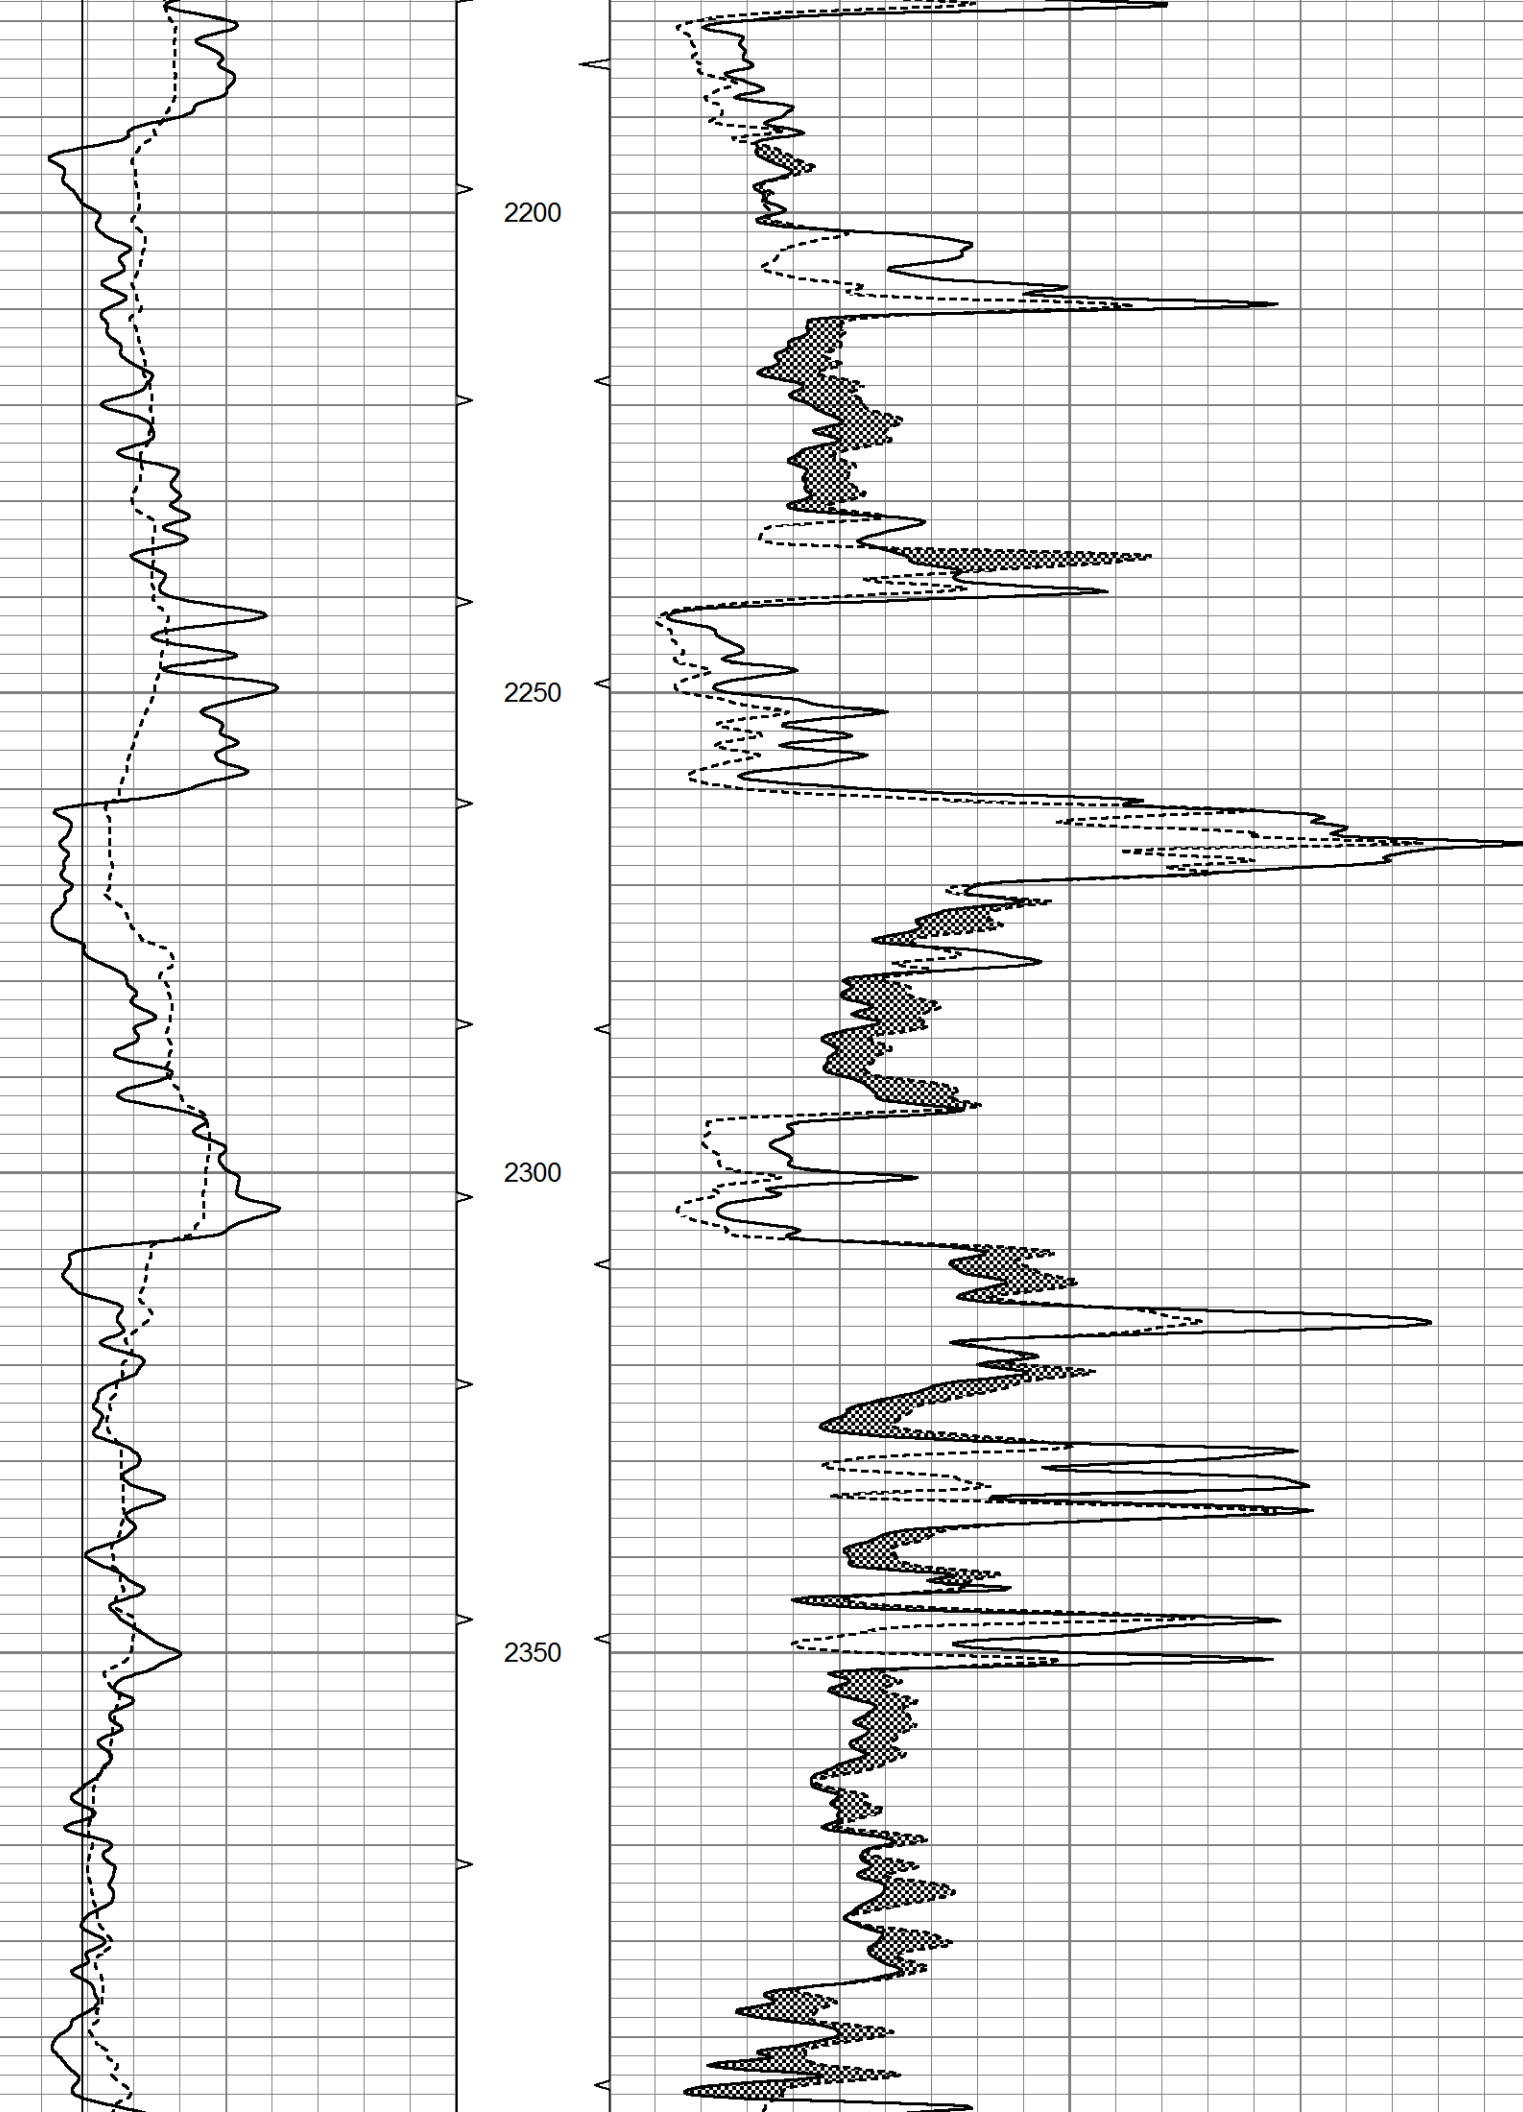


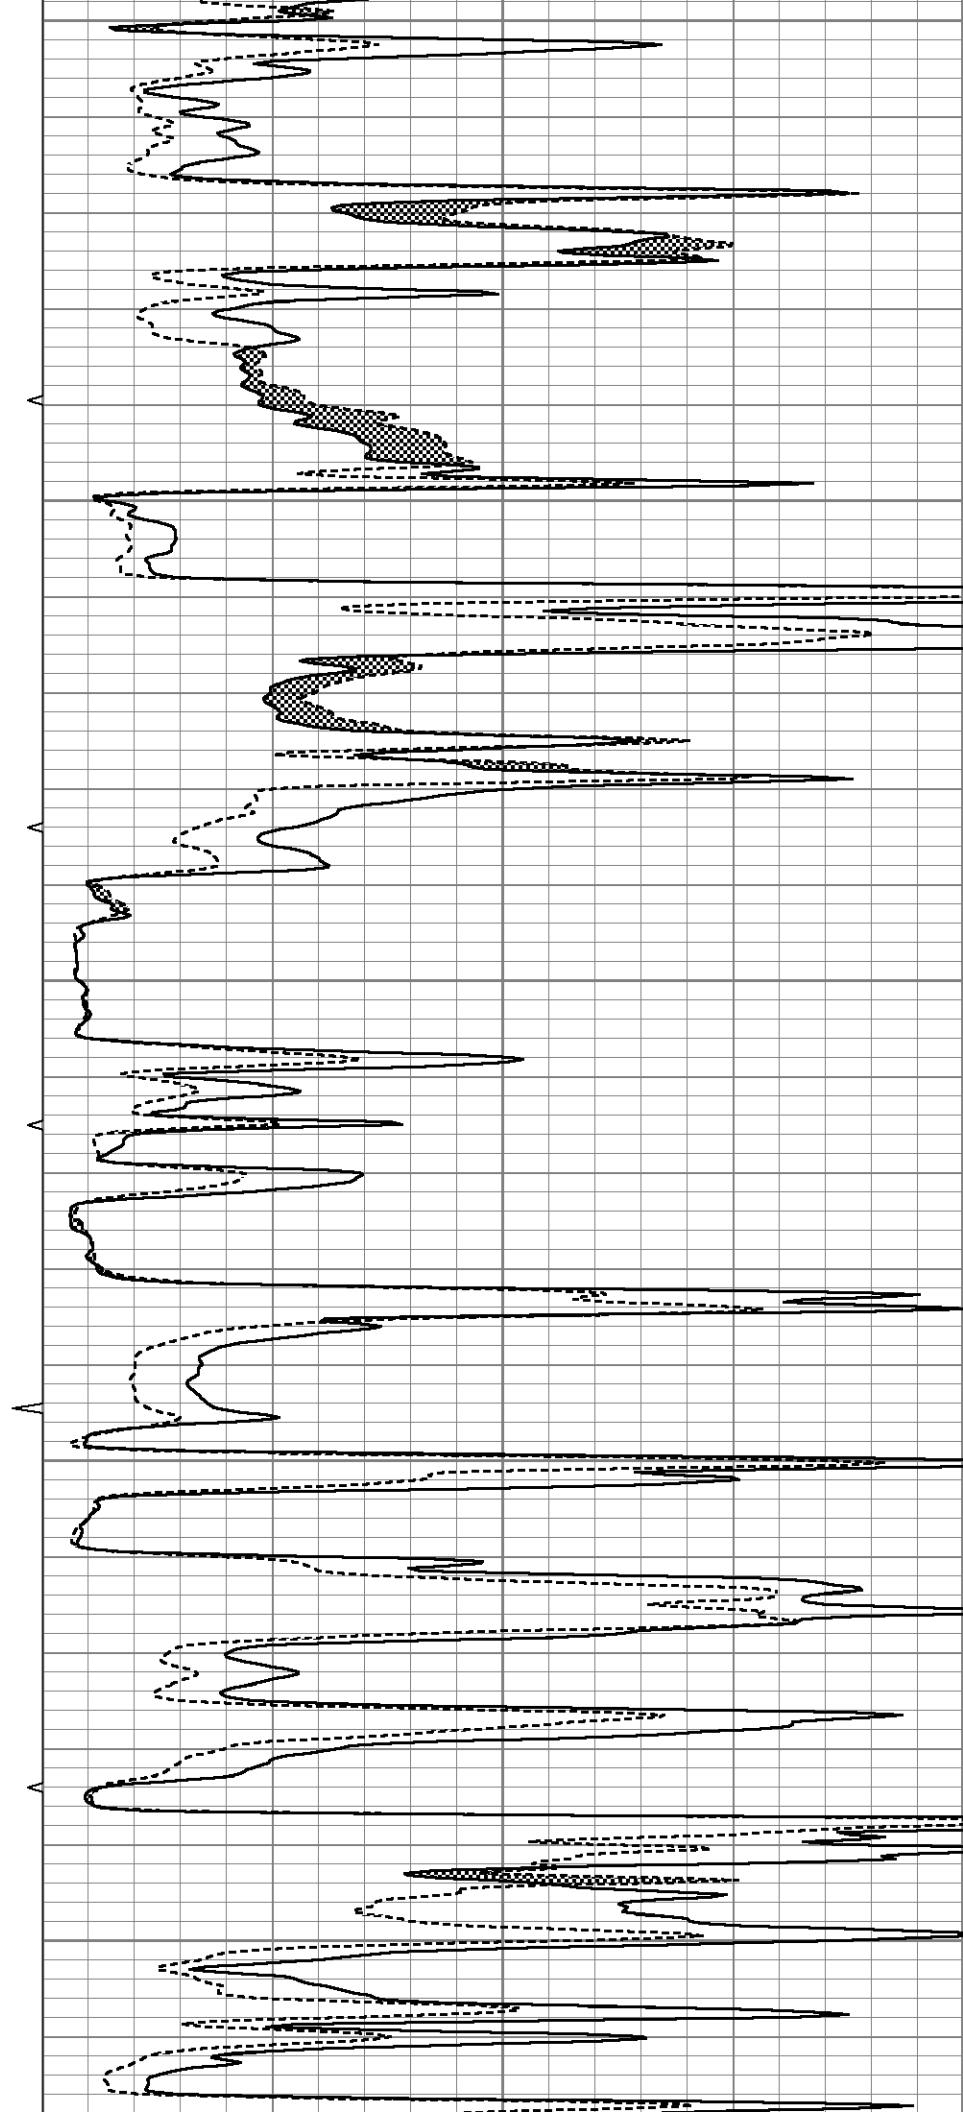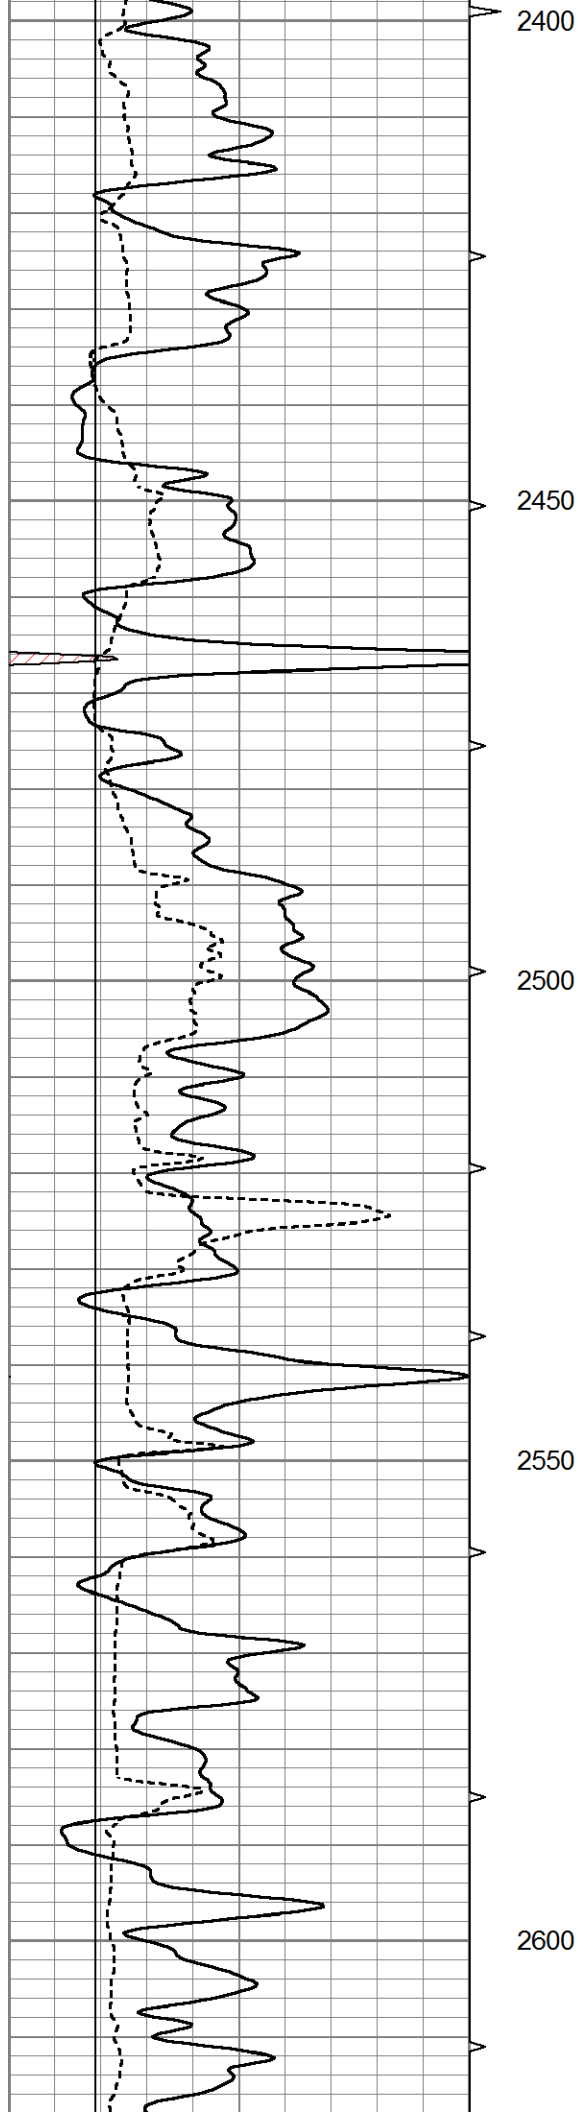


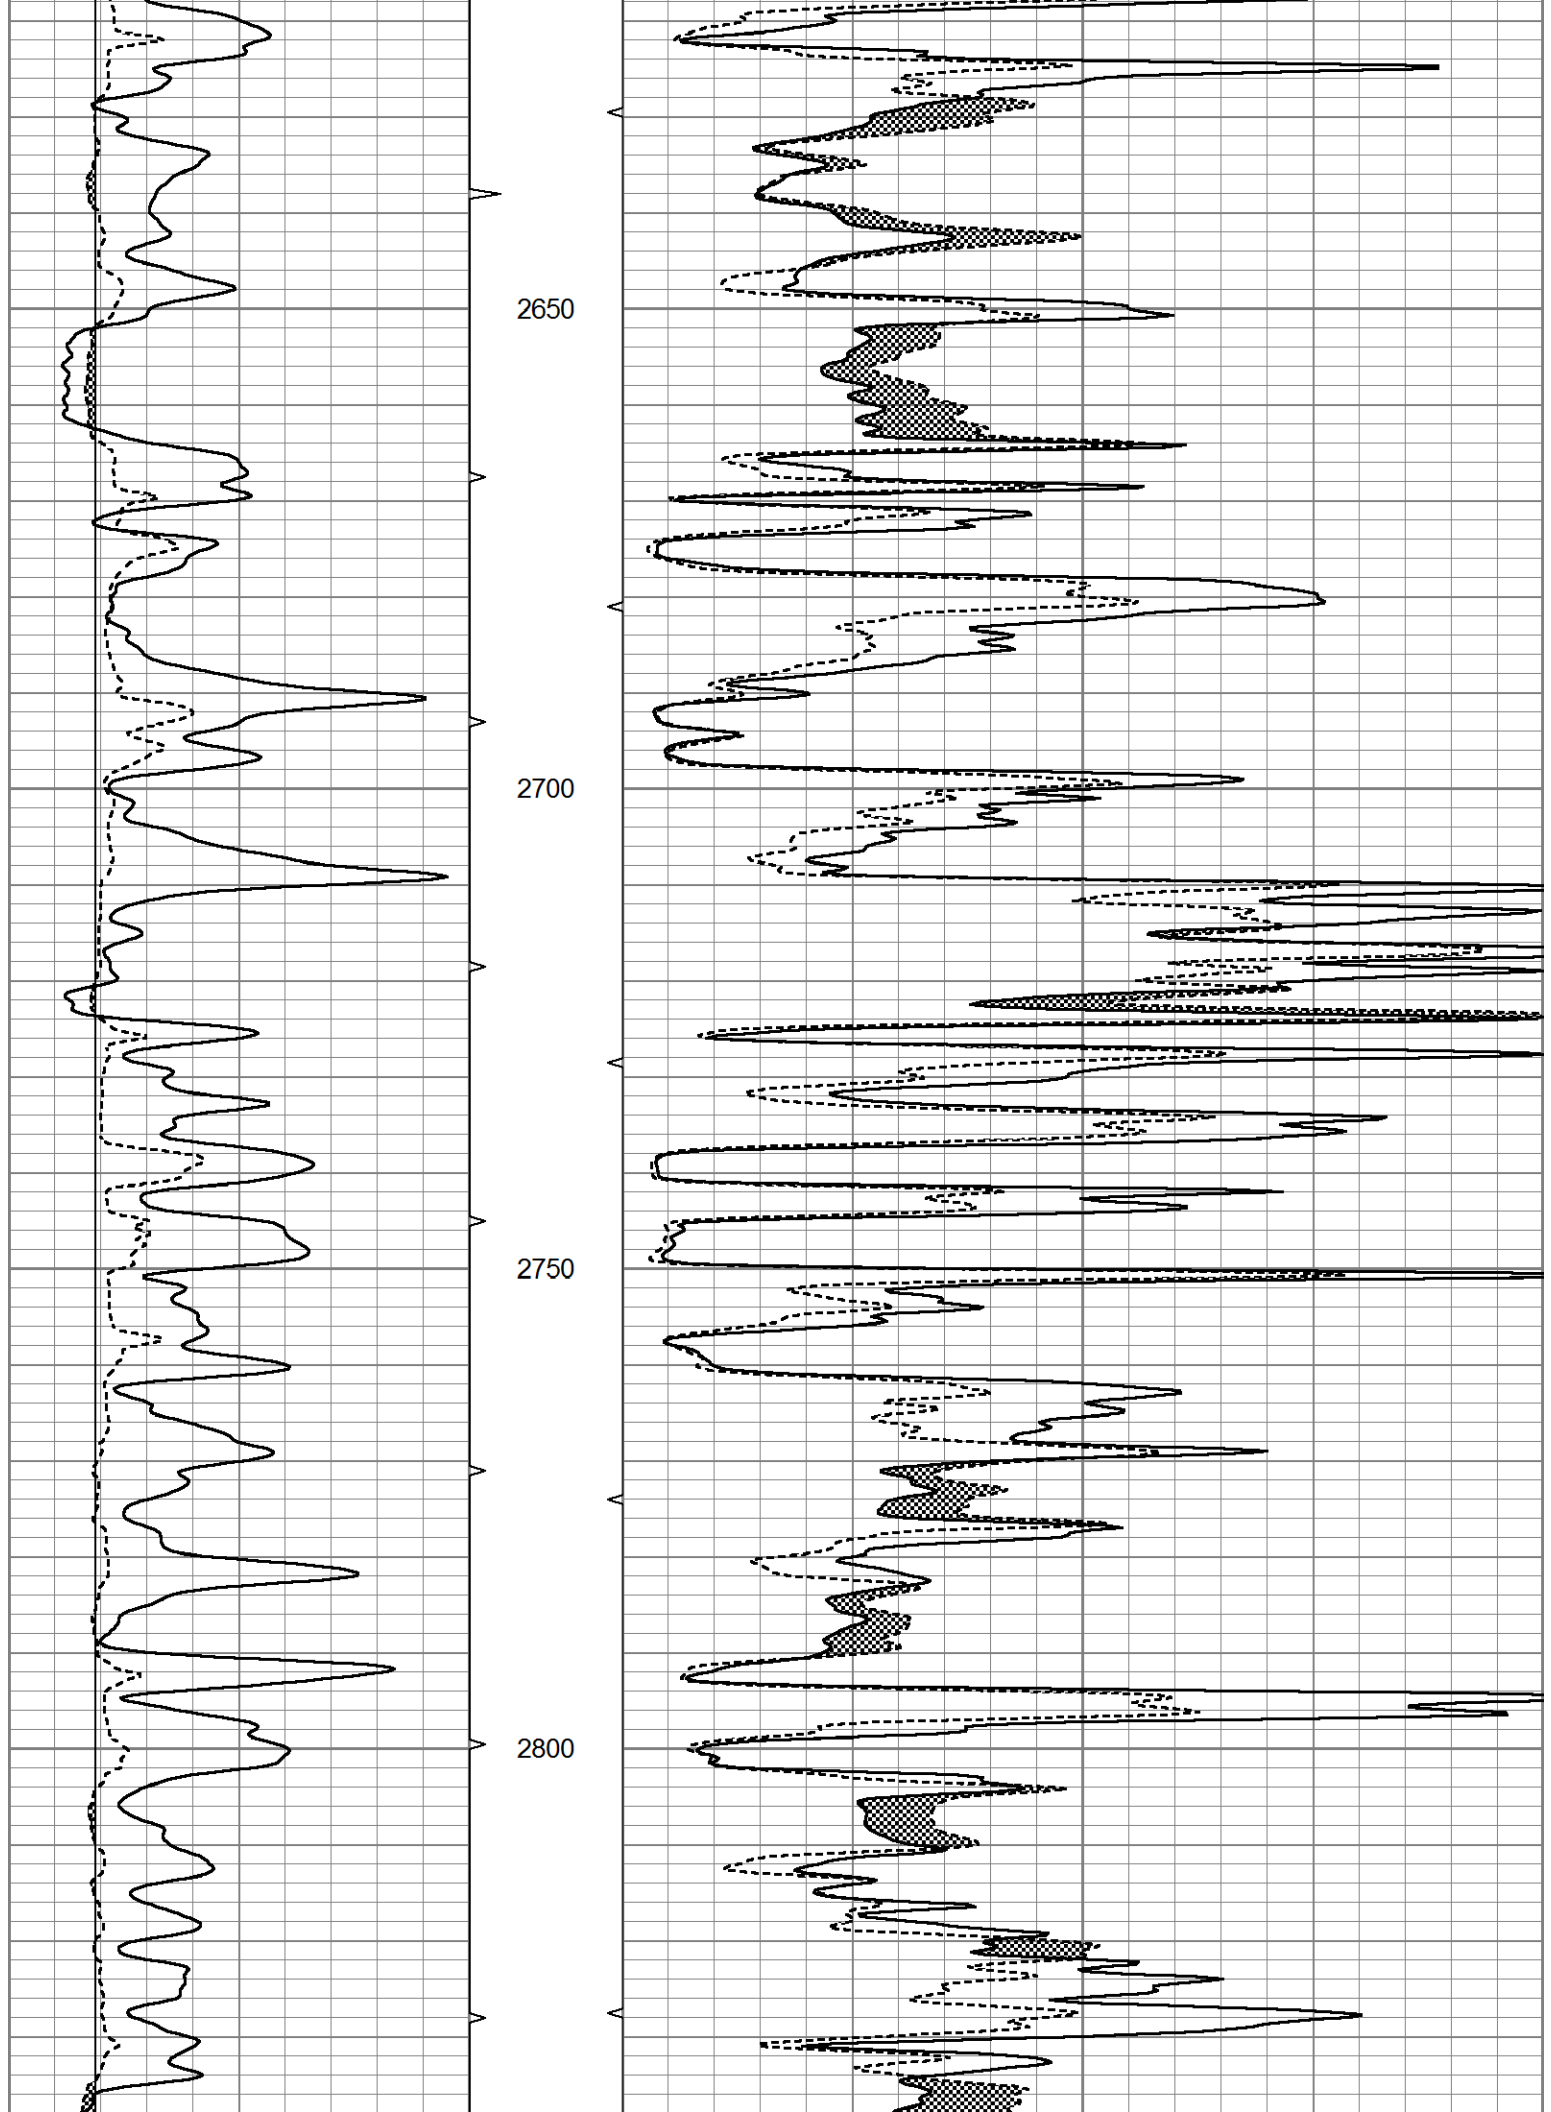


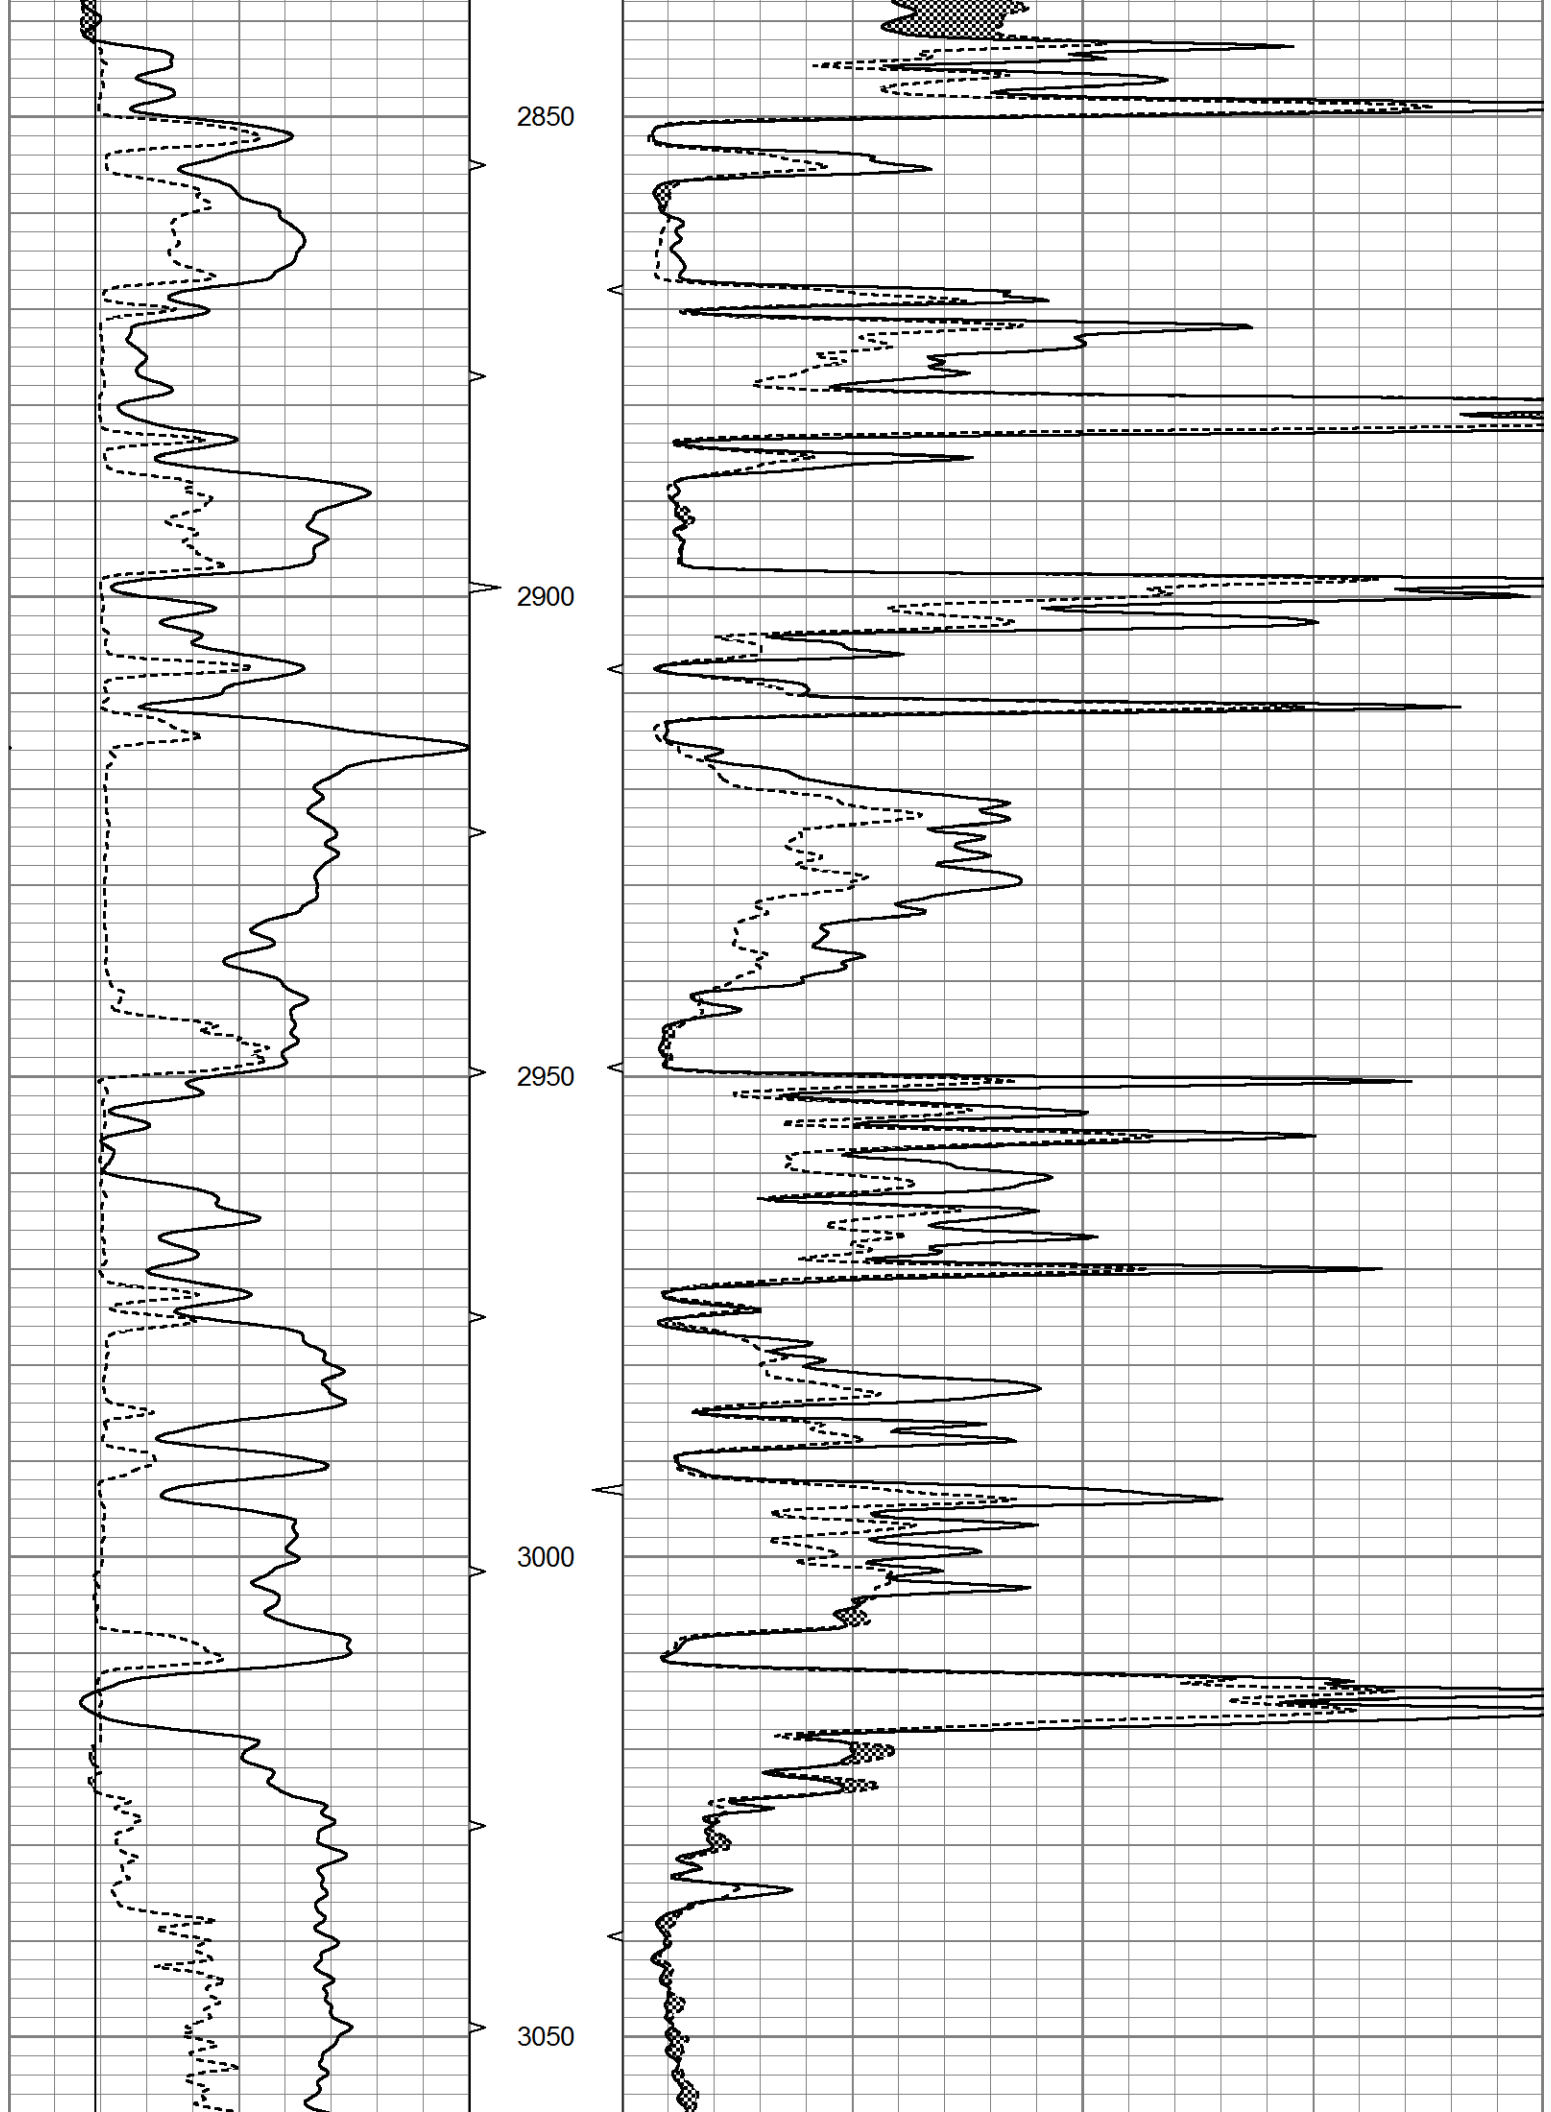

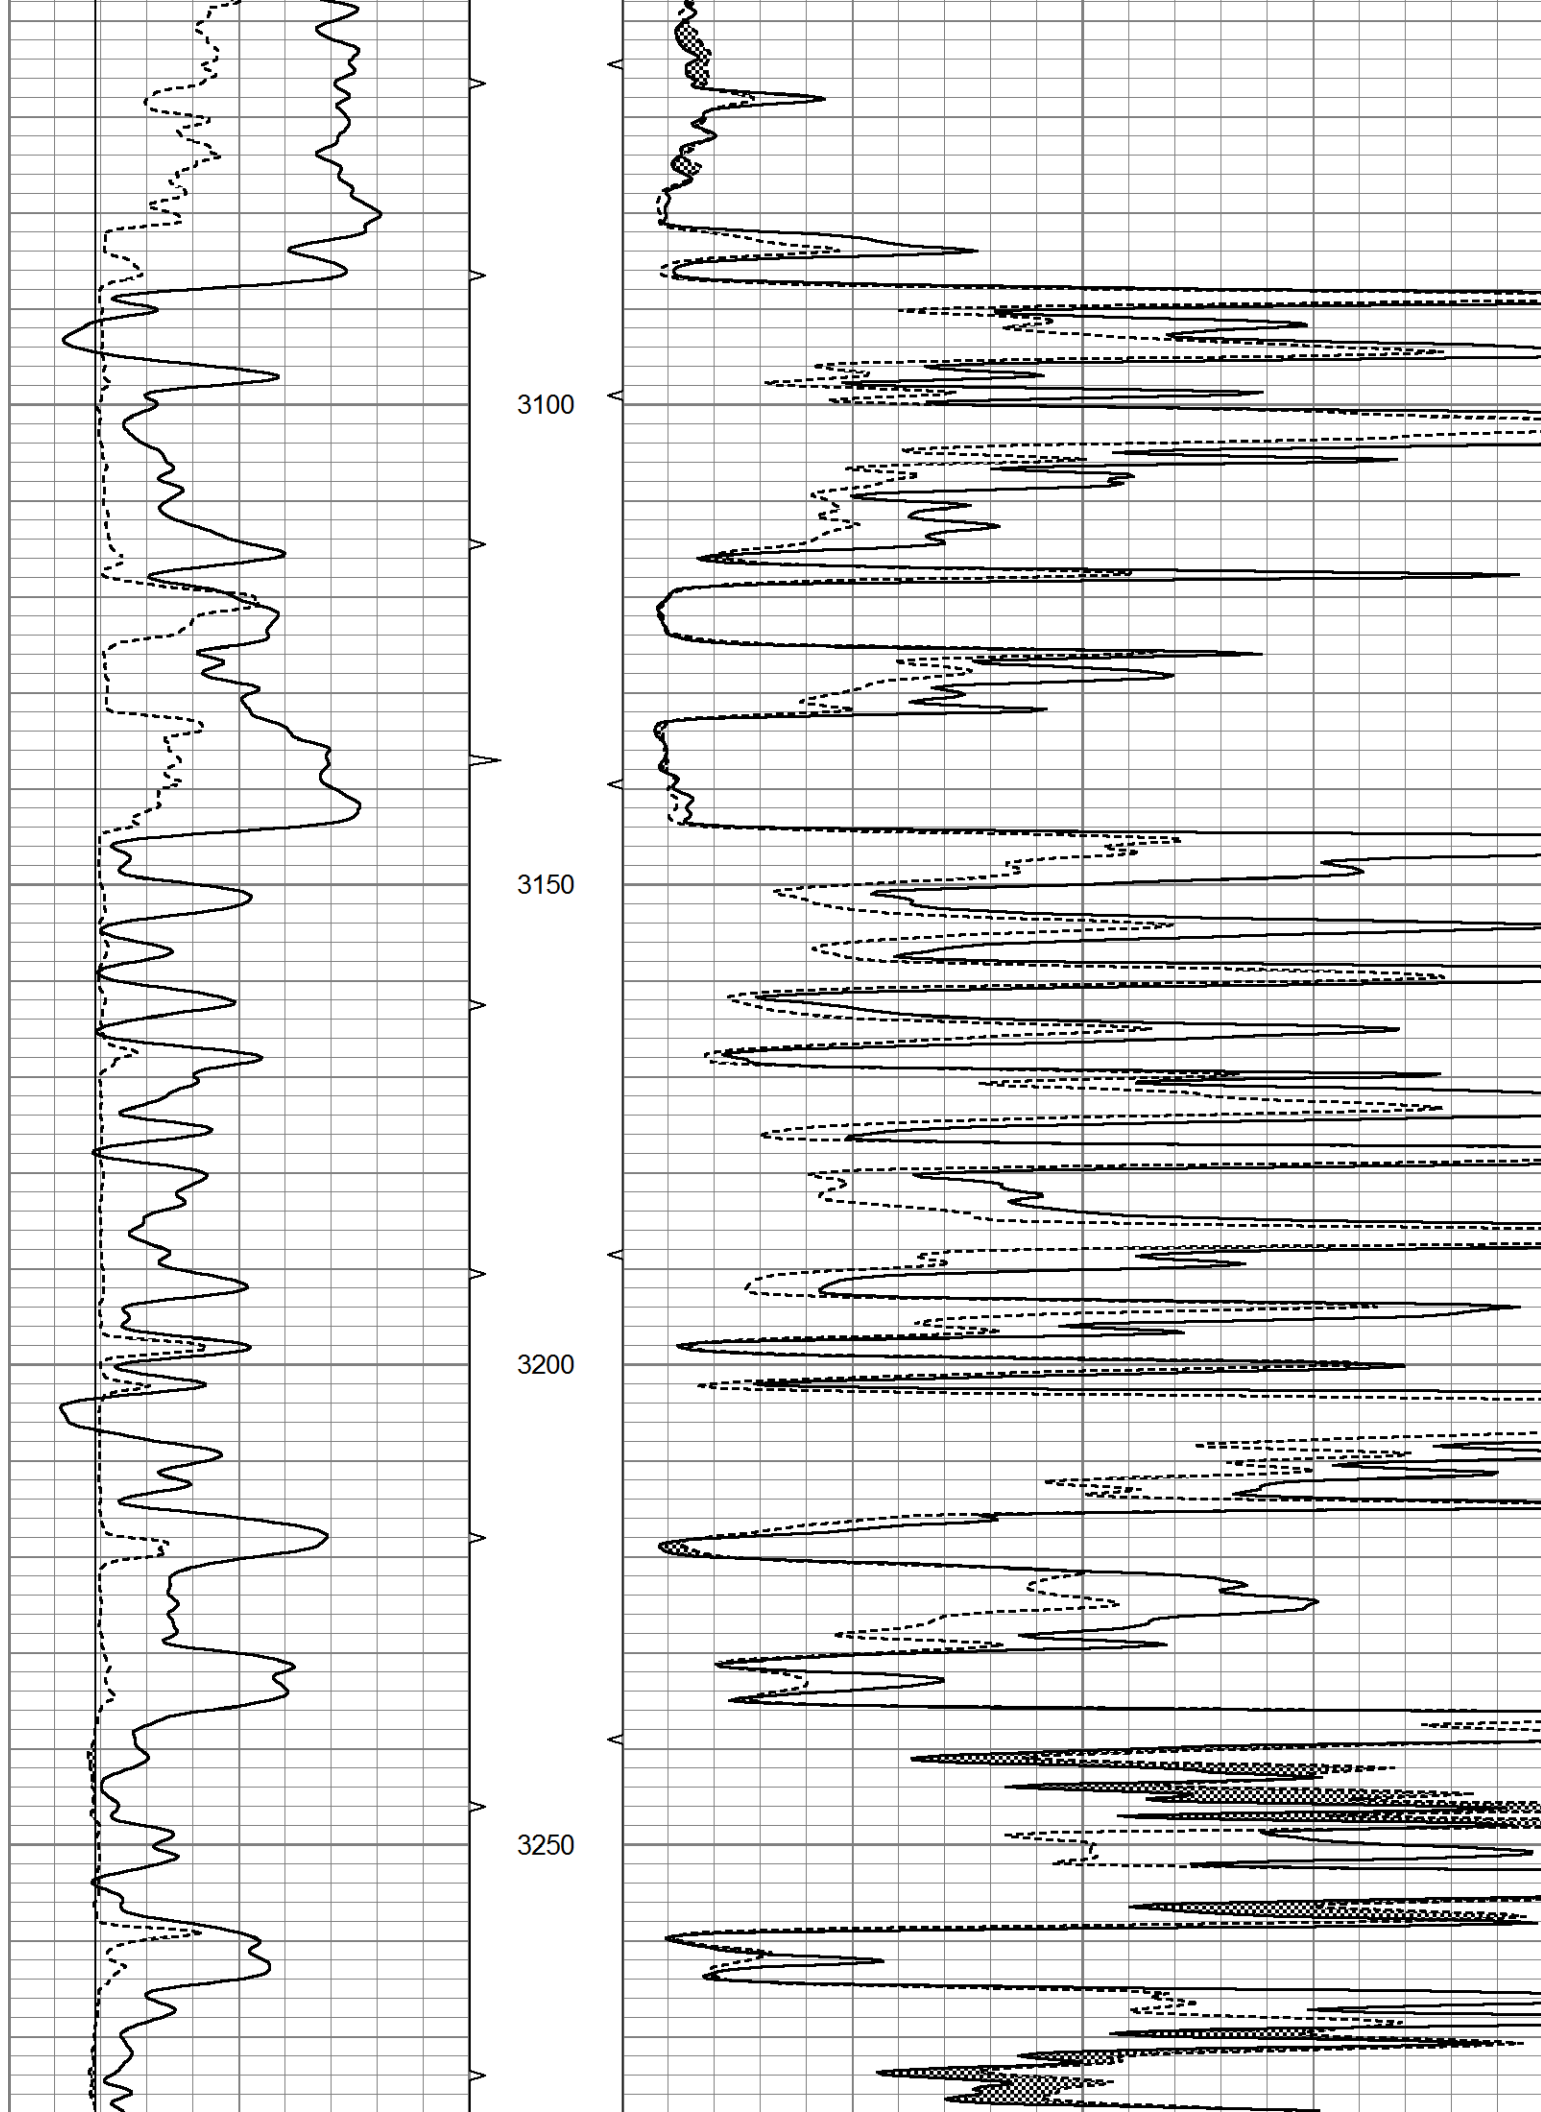

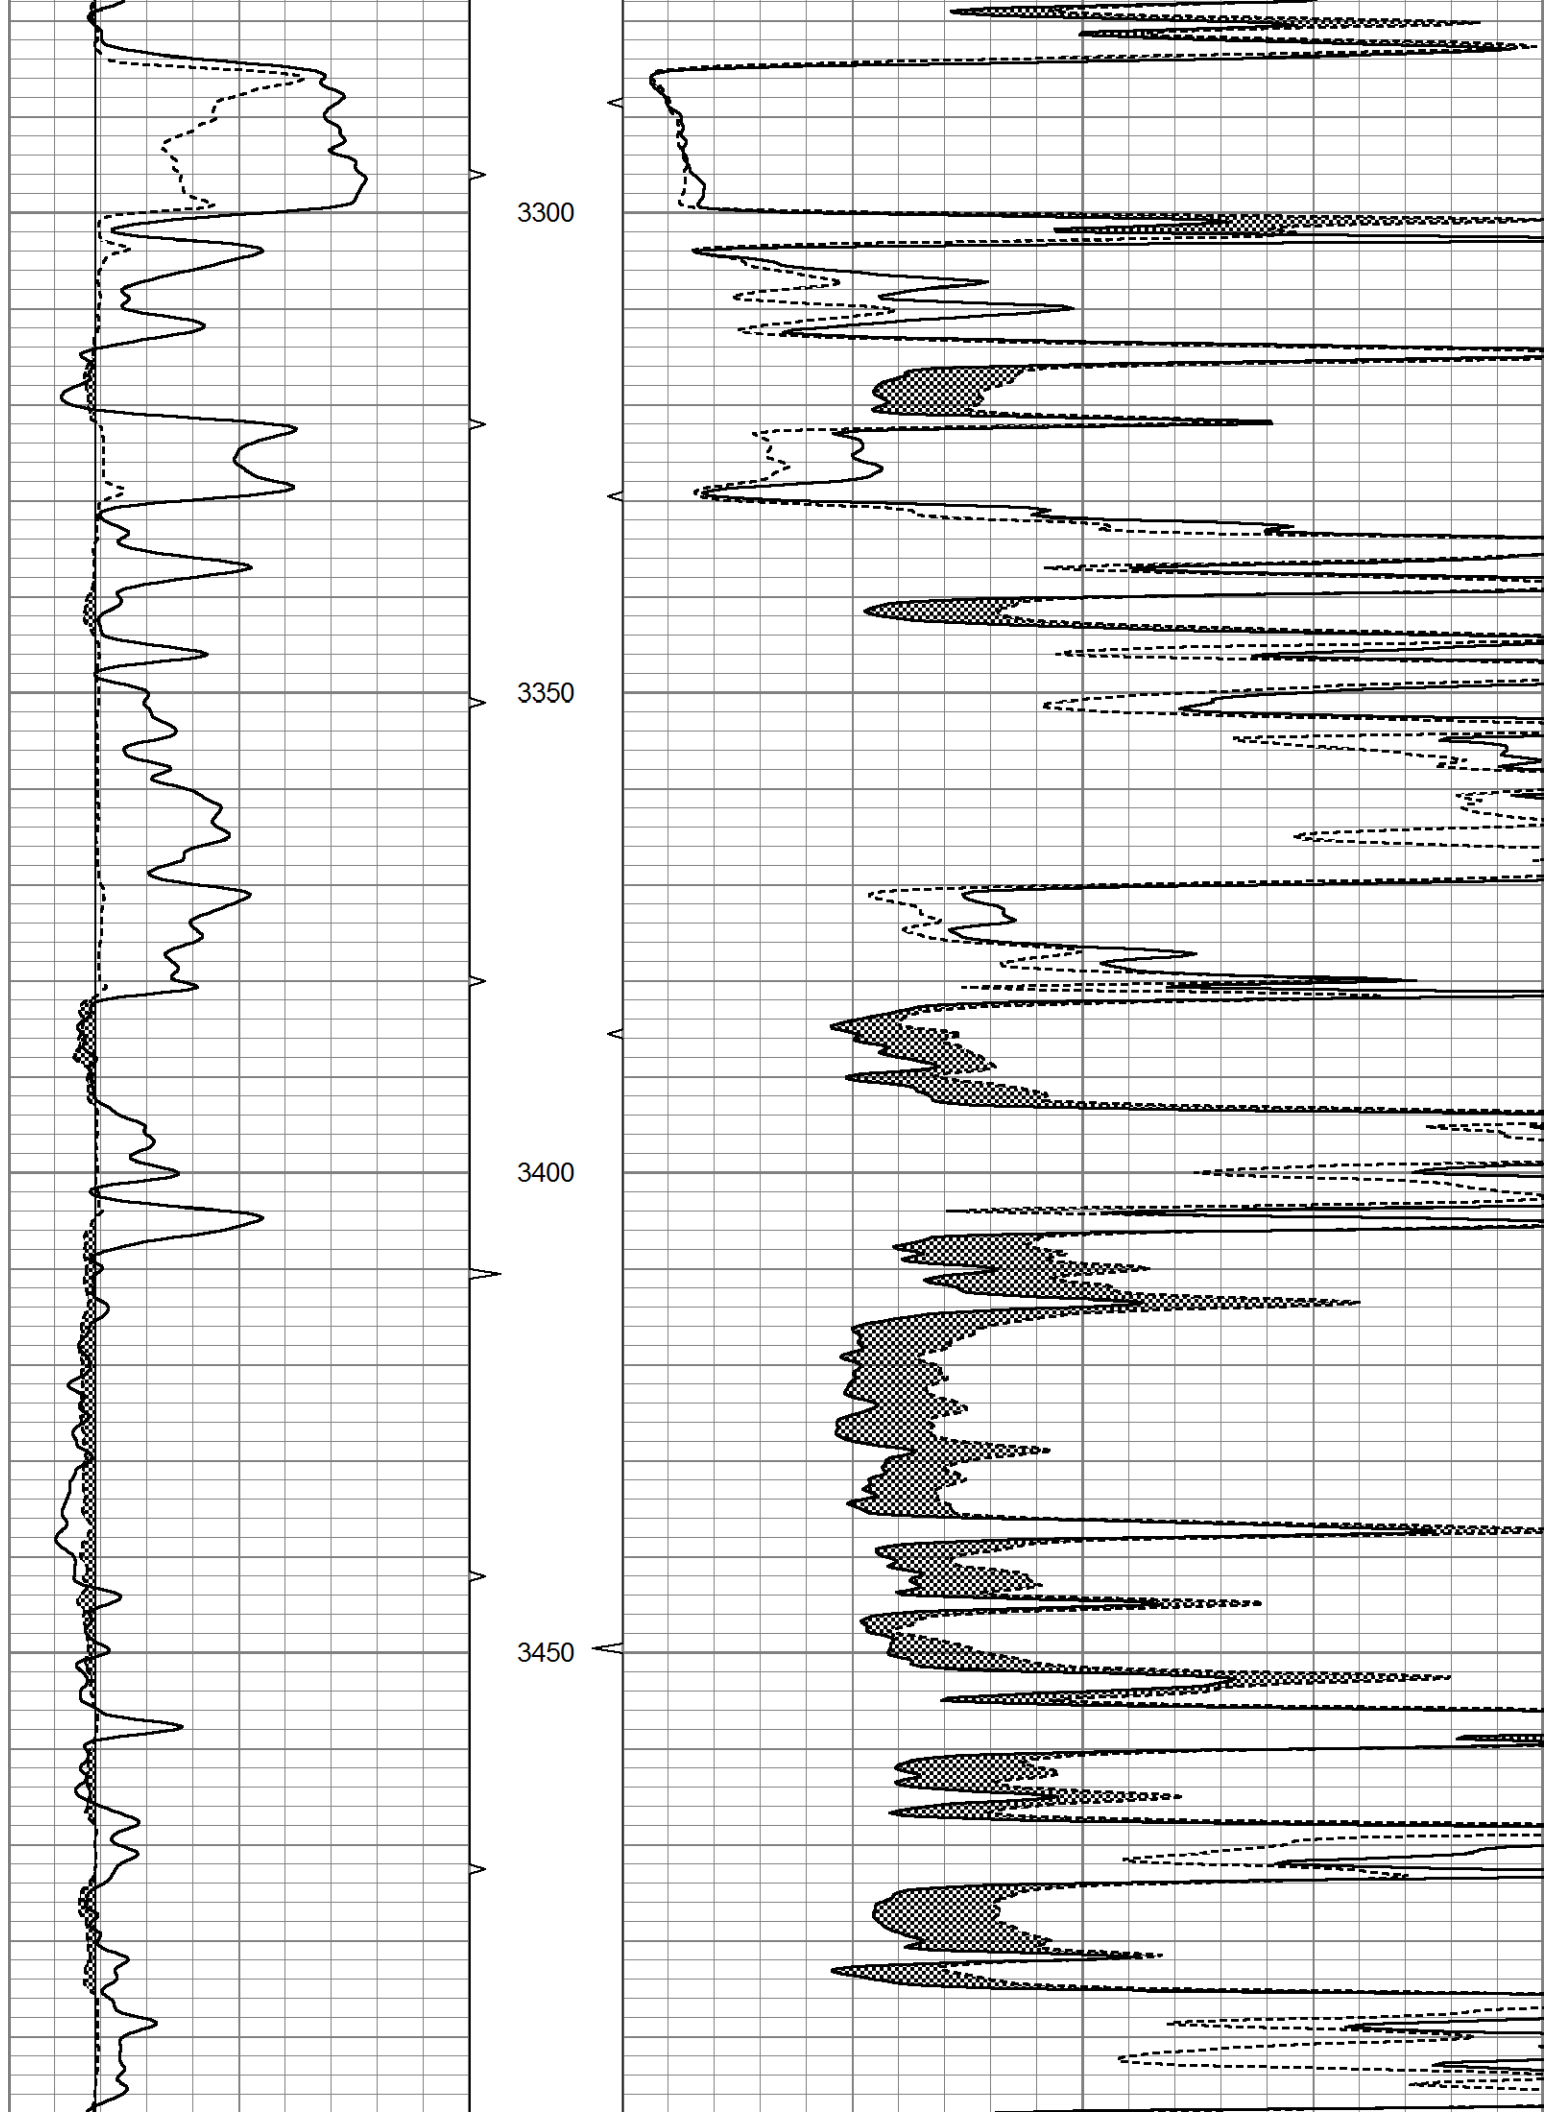

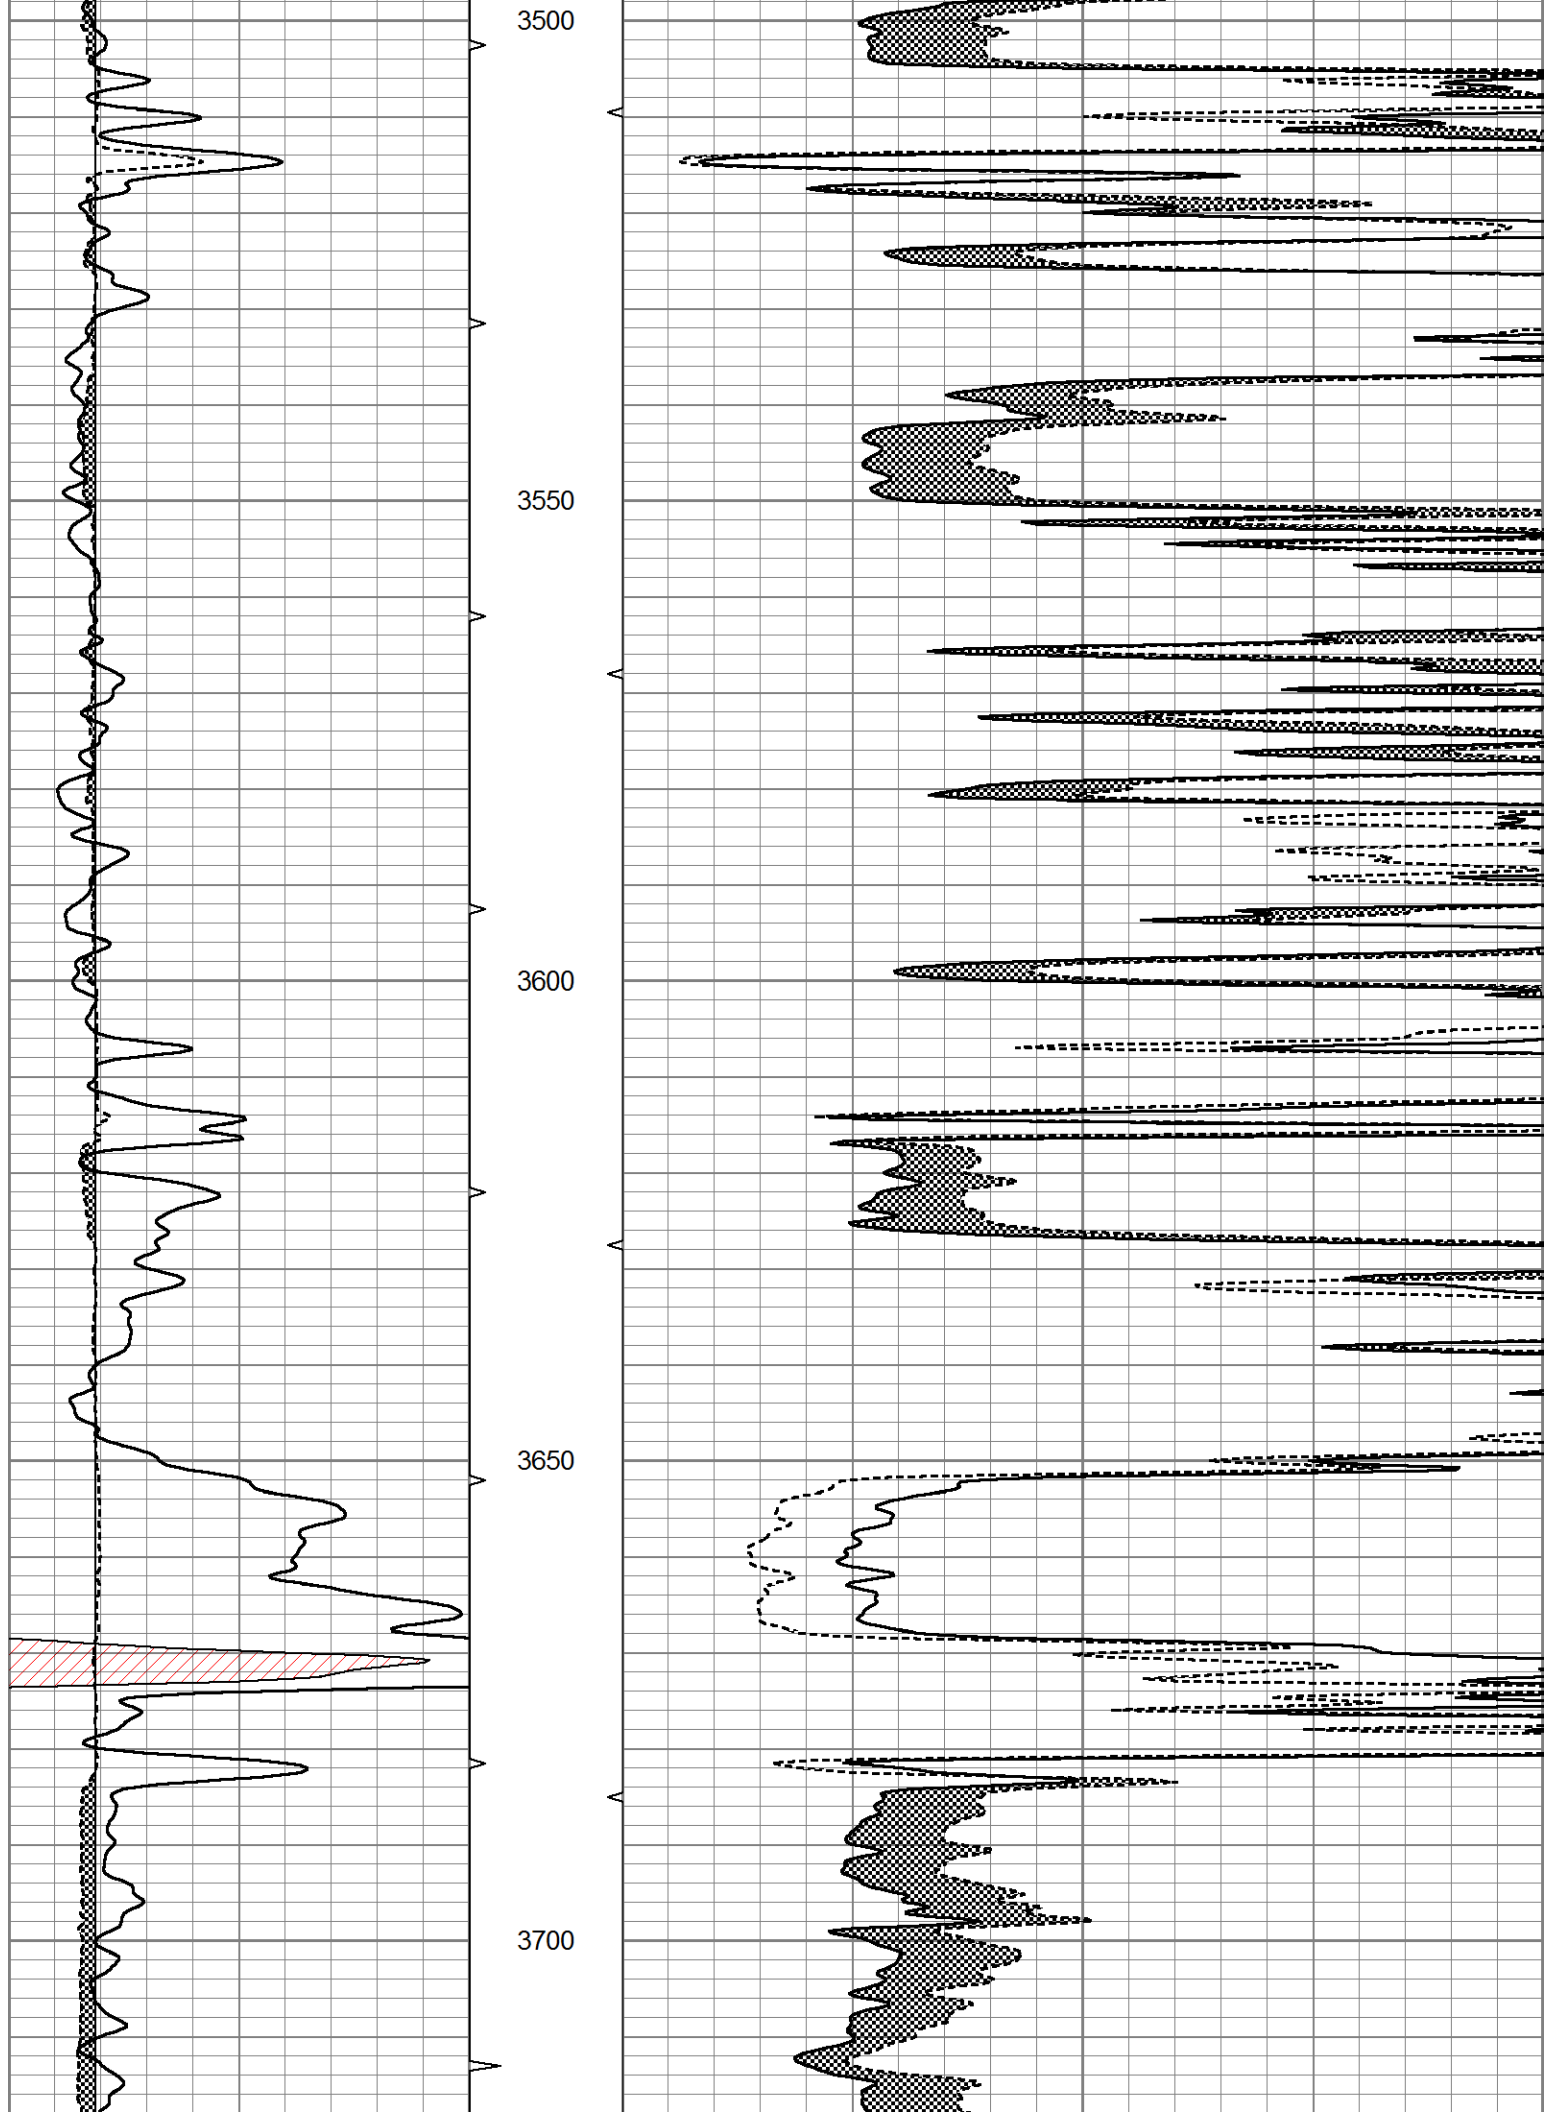

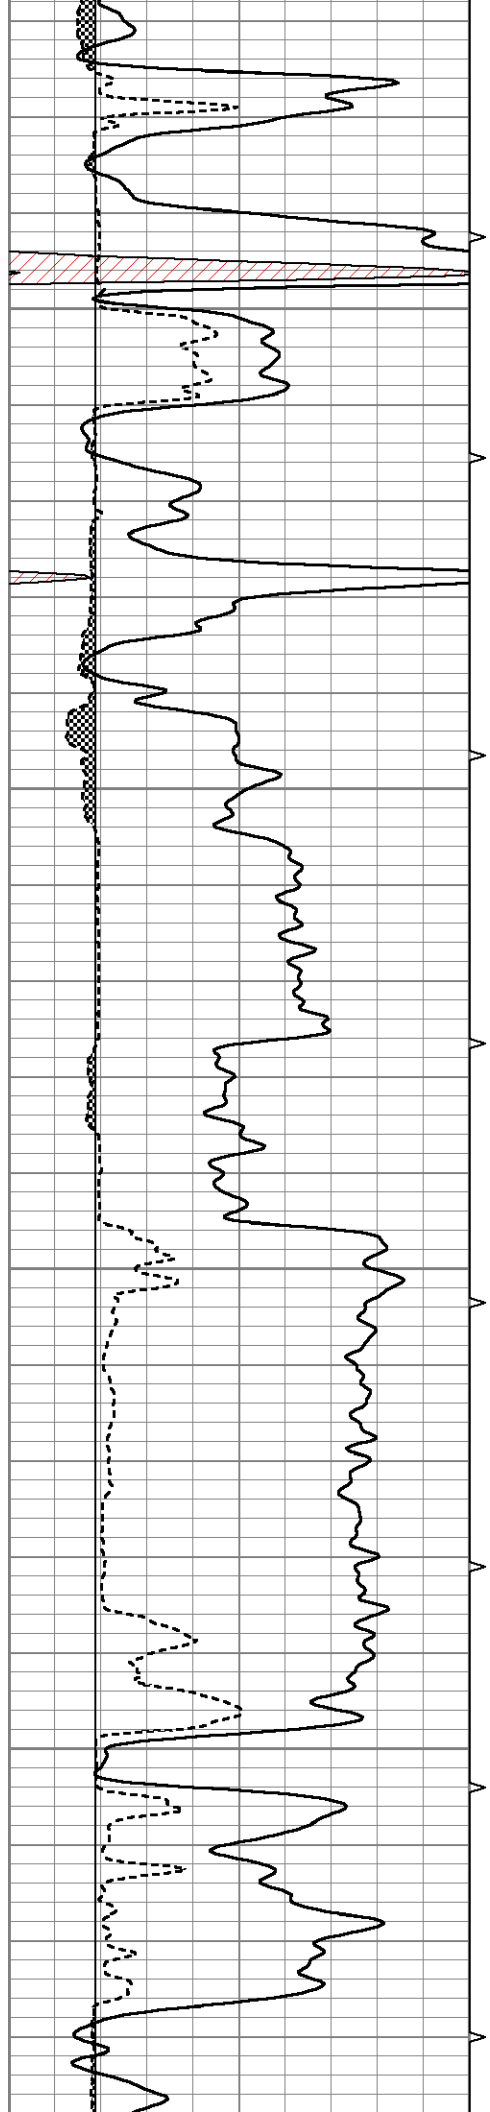



3750


3800


3850

3900

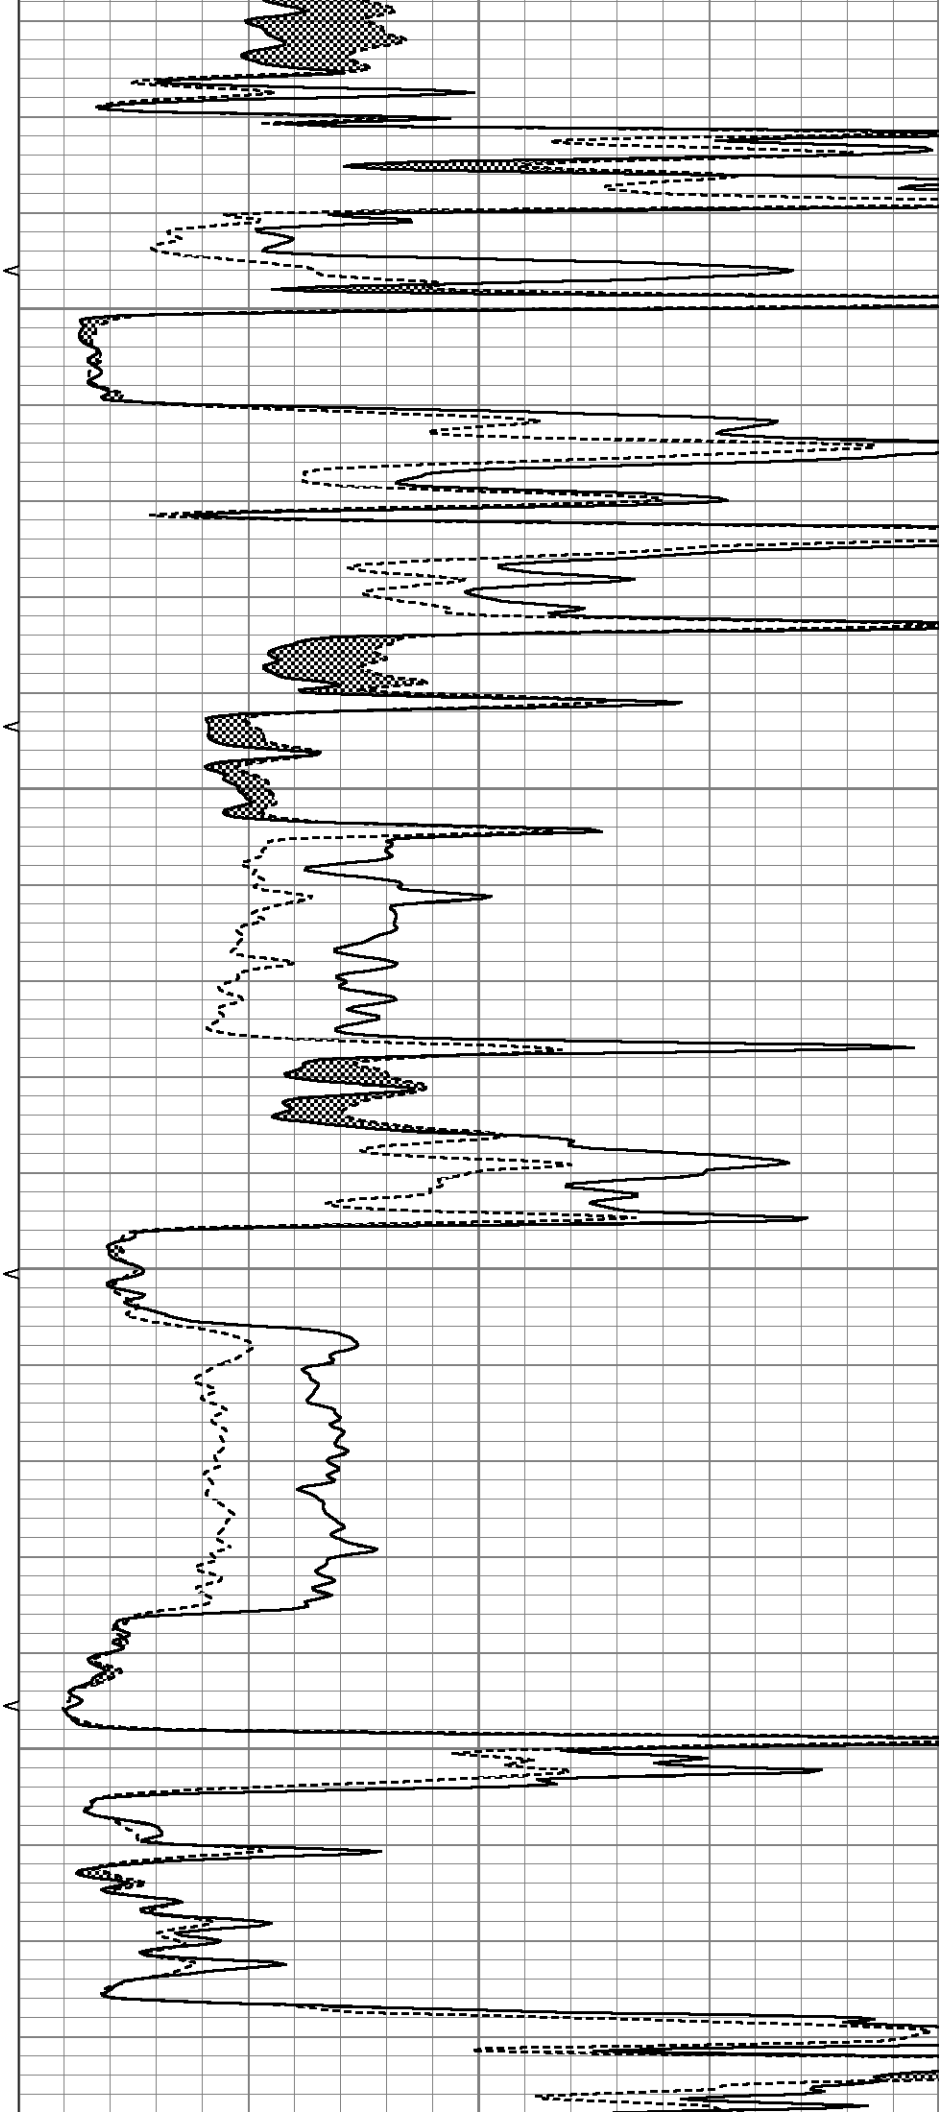

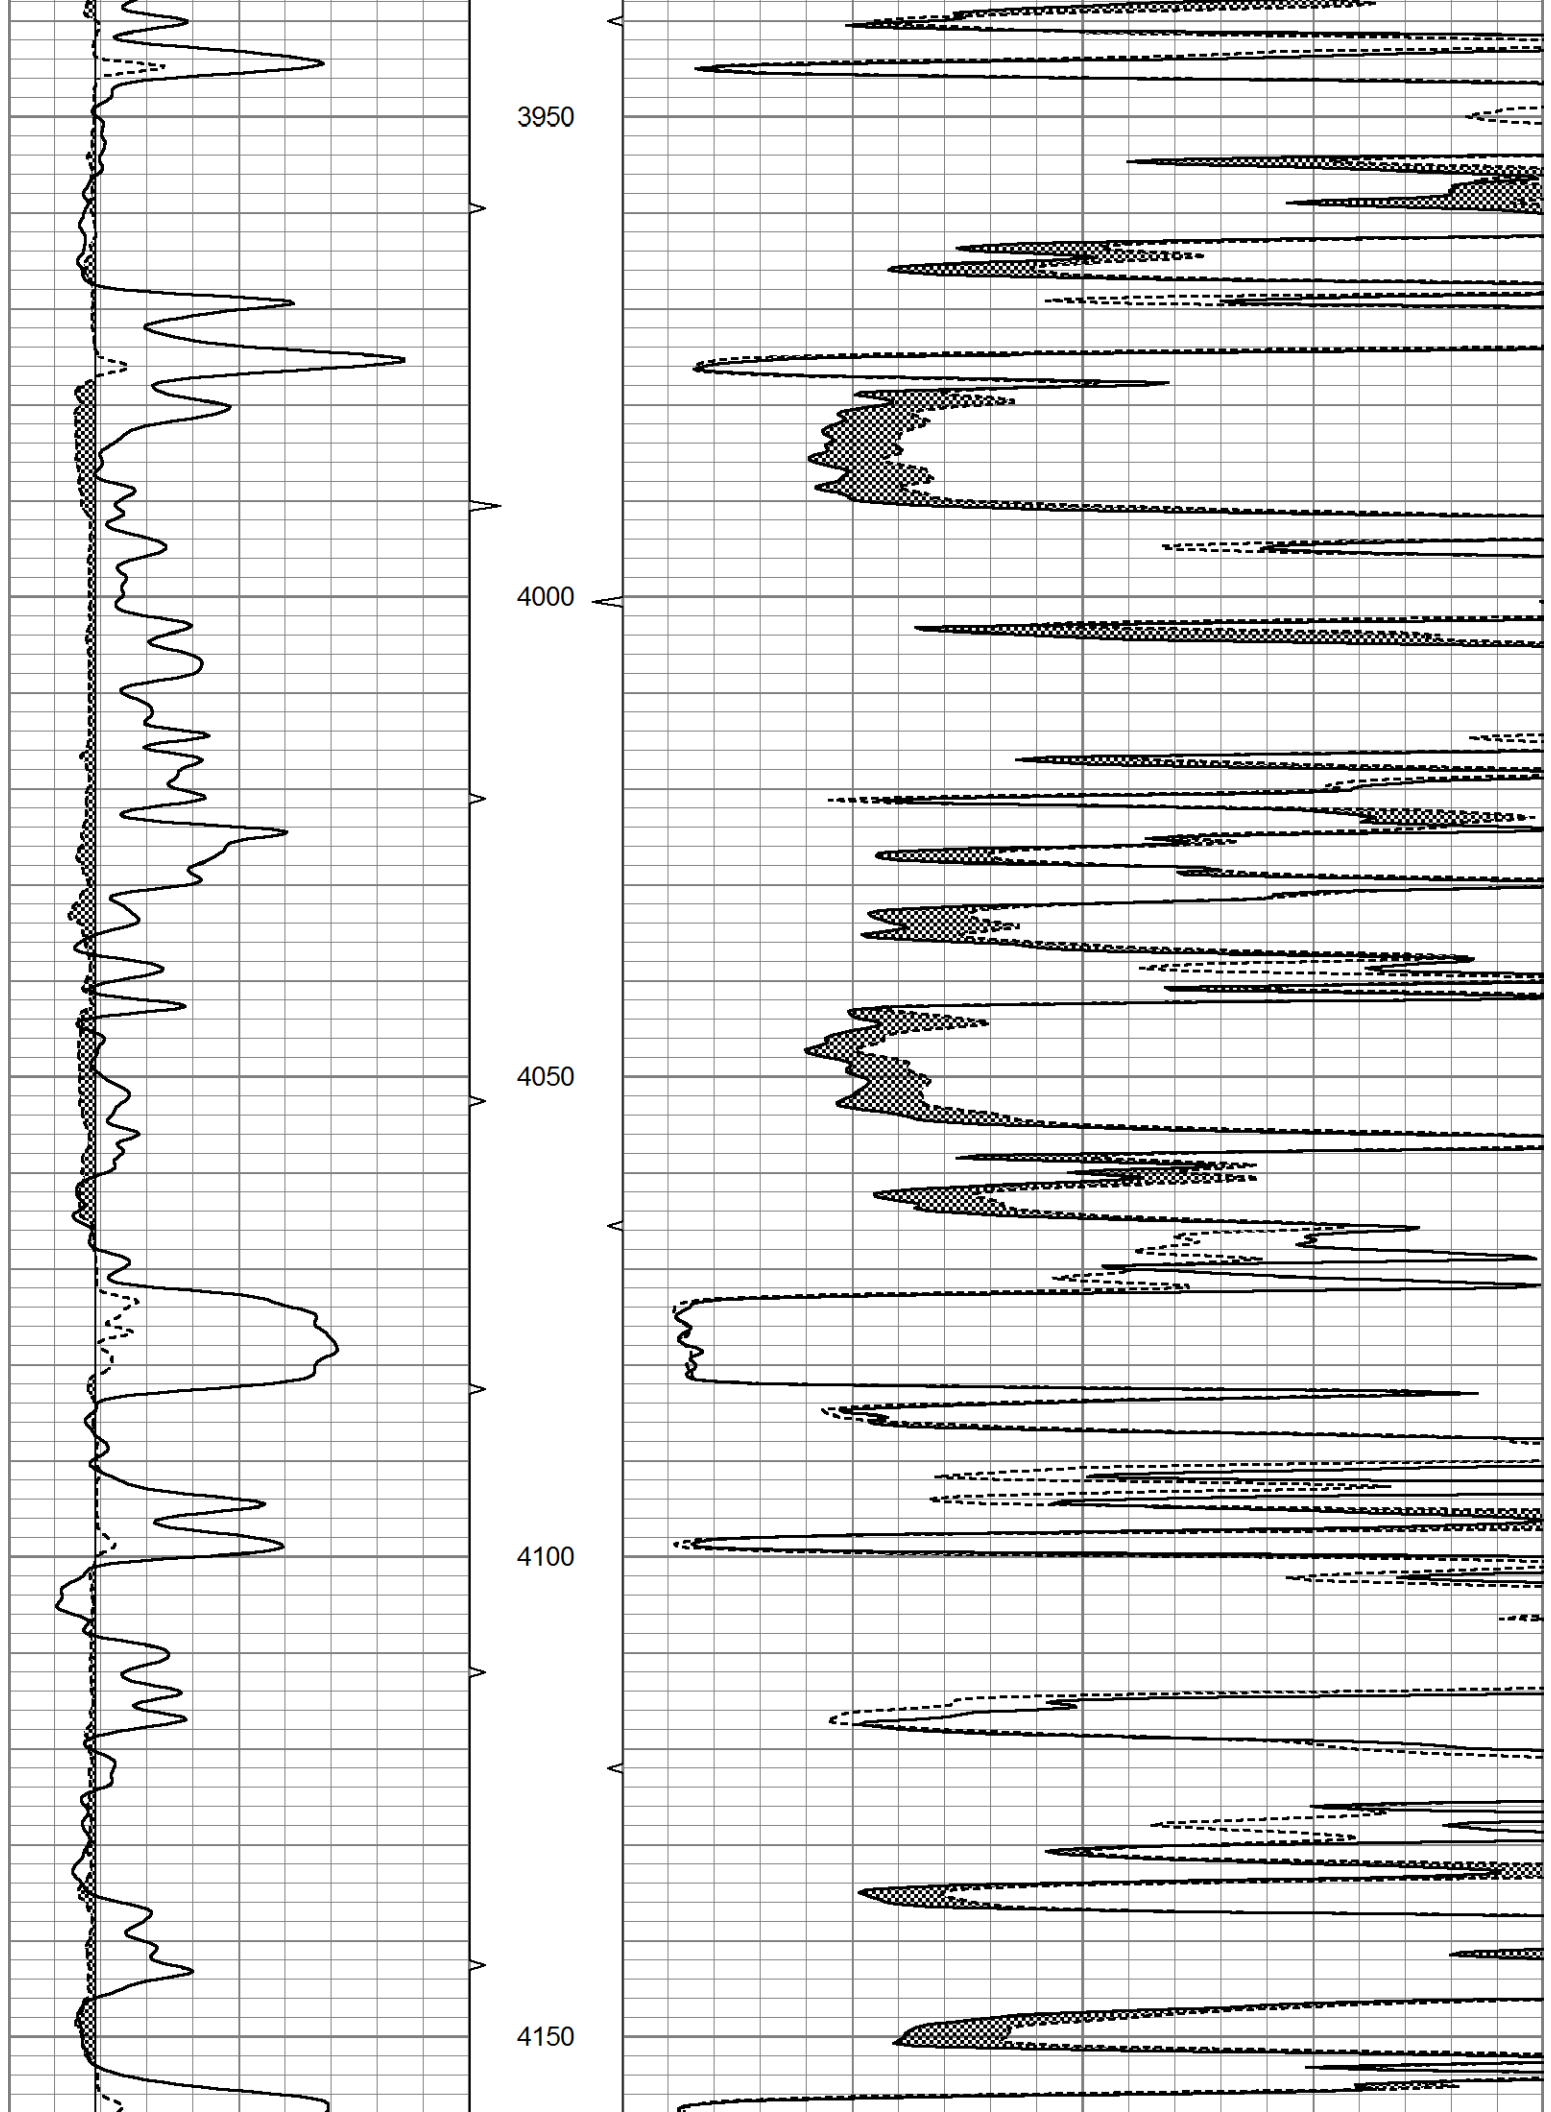

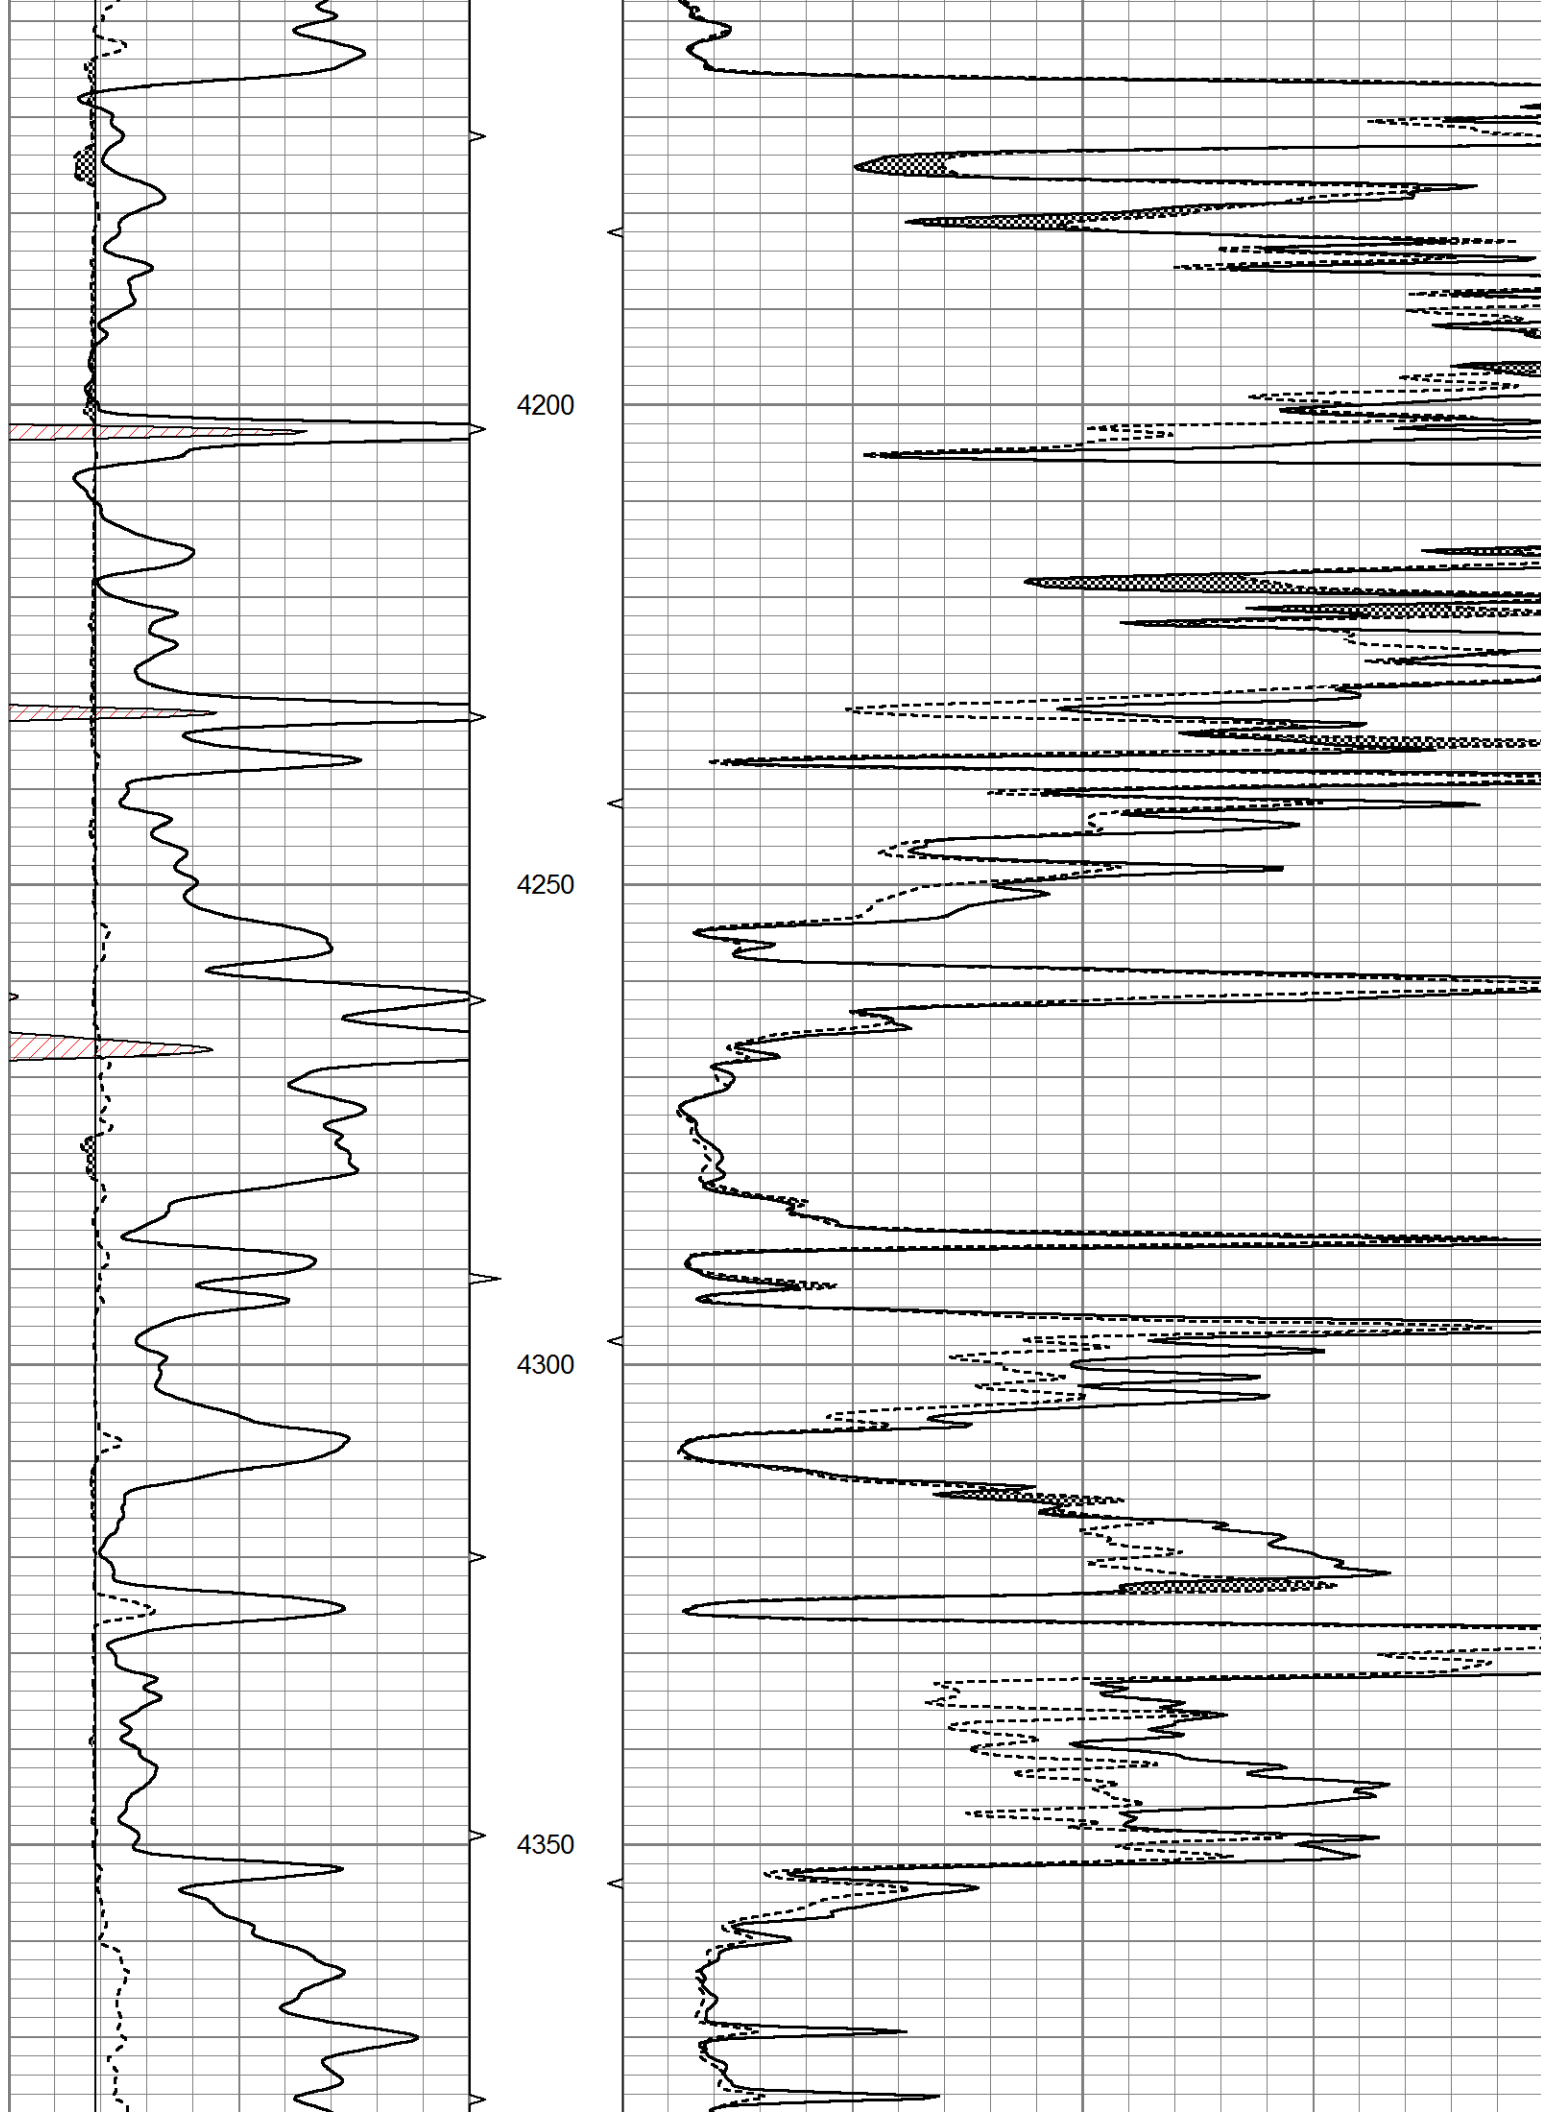

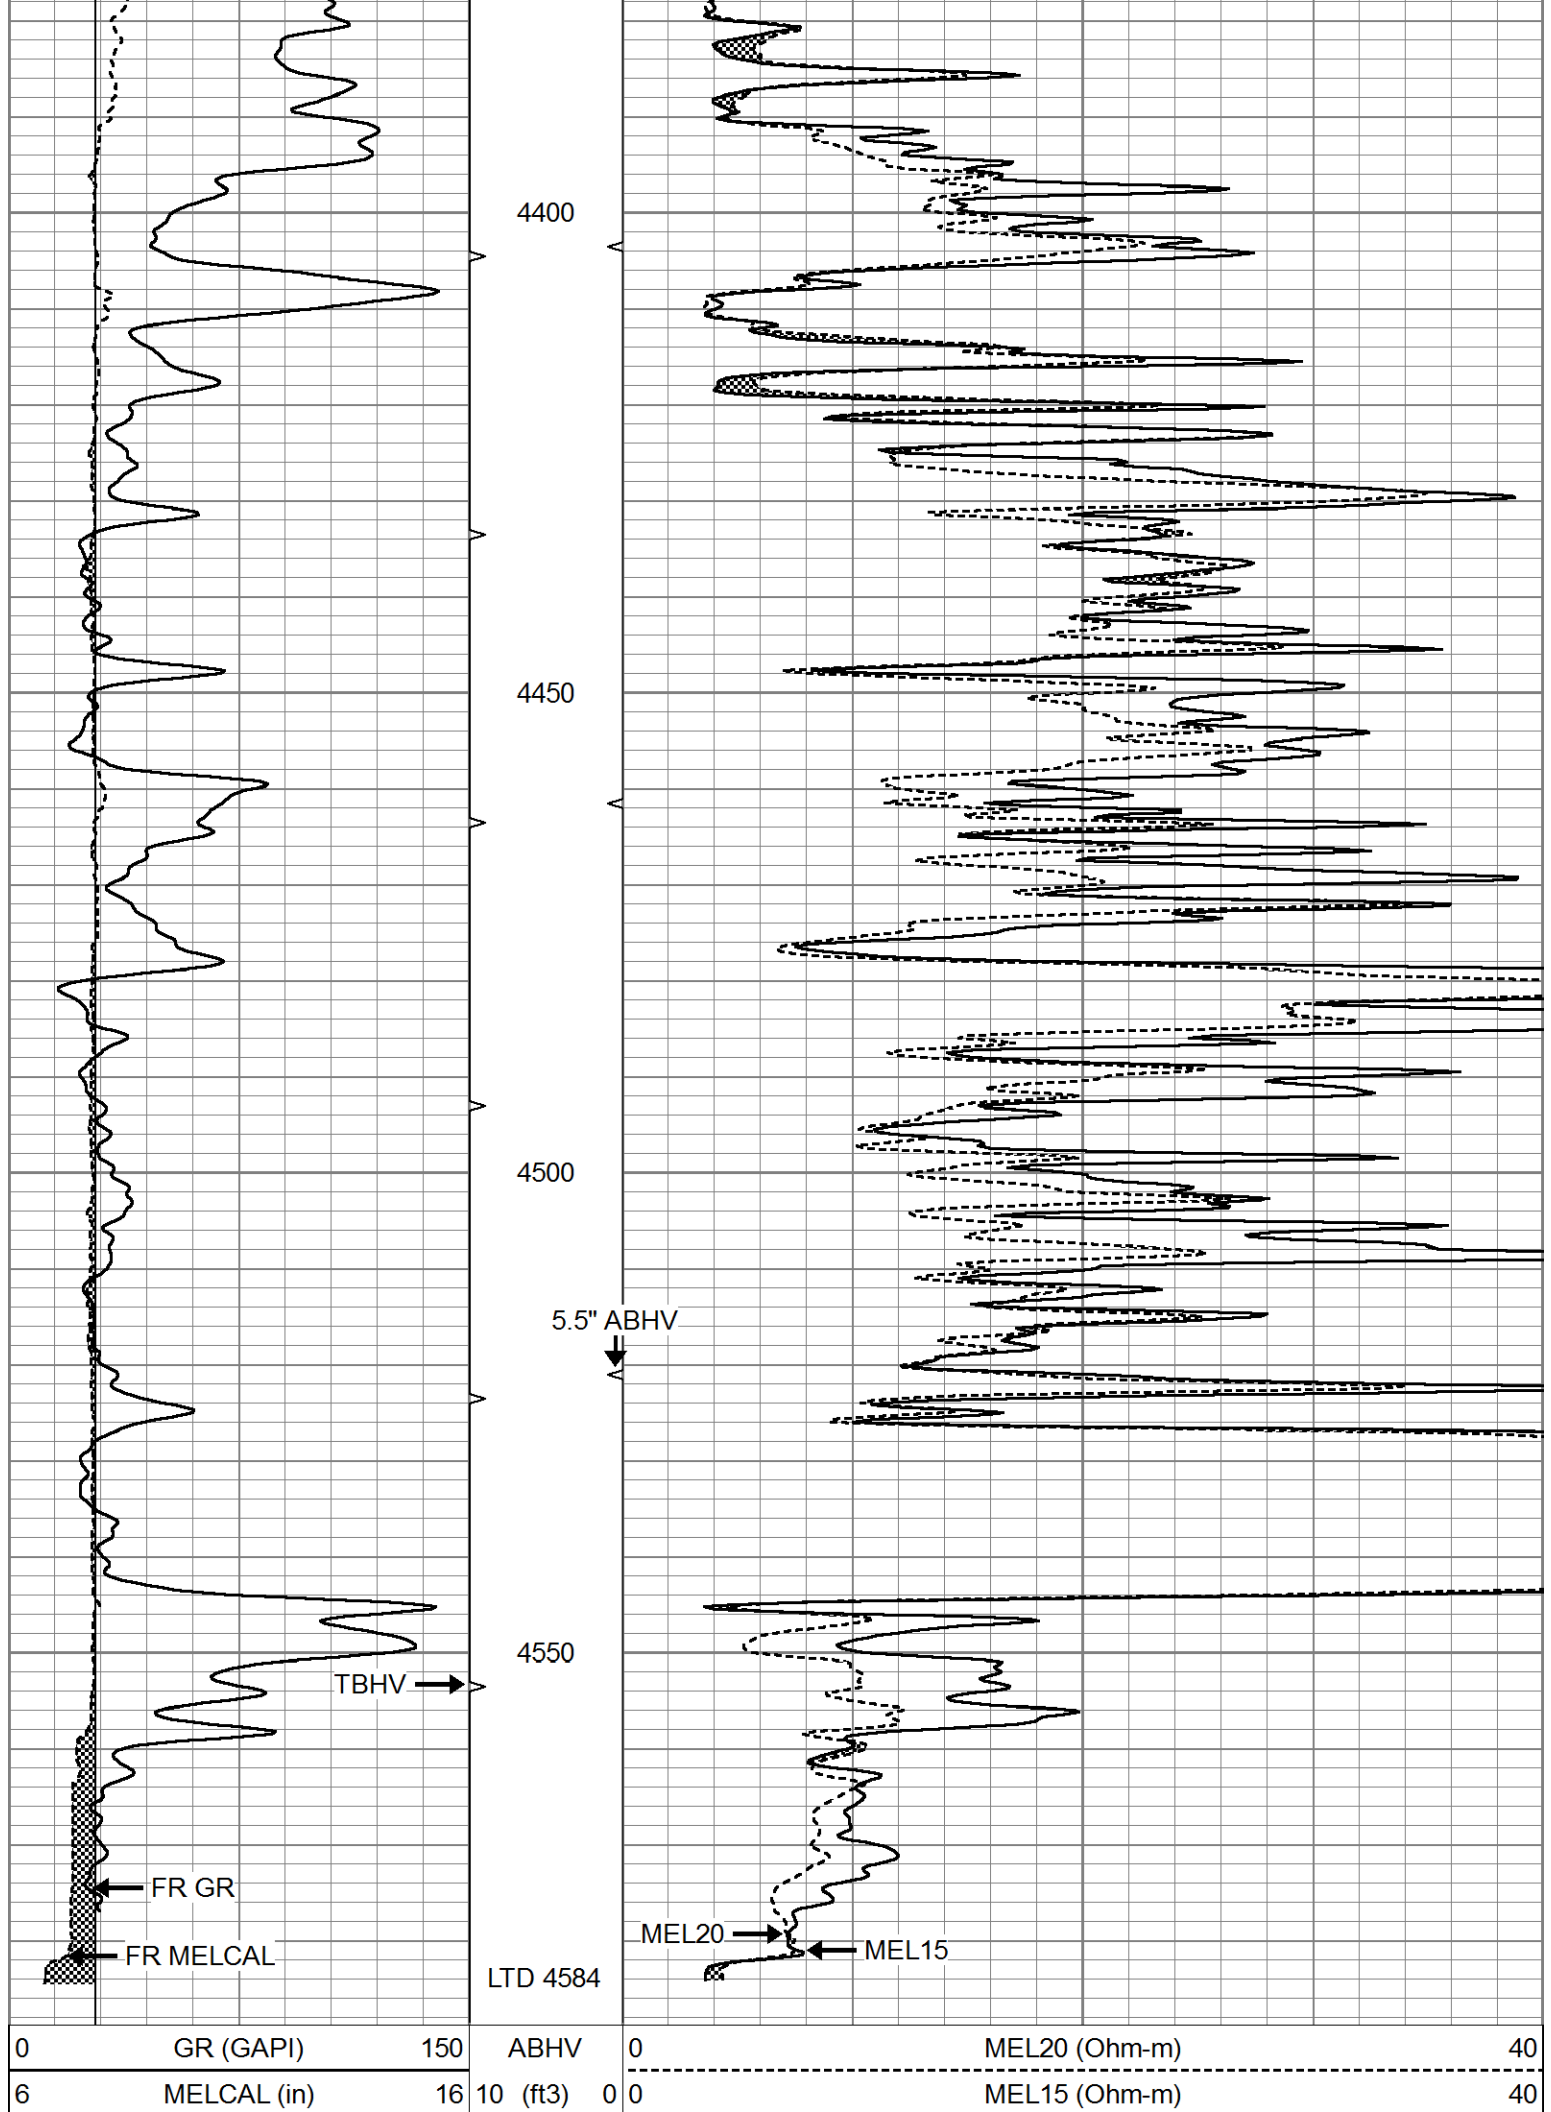


ABHV
0 (ft3) 10




REPEAT SECTION

Database File 7085pe.db
Dataset Pathname pass5.1
Presentation Format micro
Dataset Creation Sat Oct 01 06:44:32 2022
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

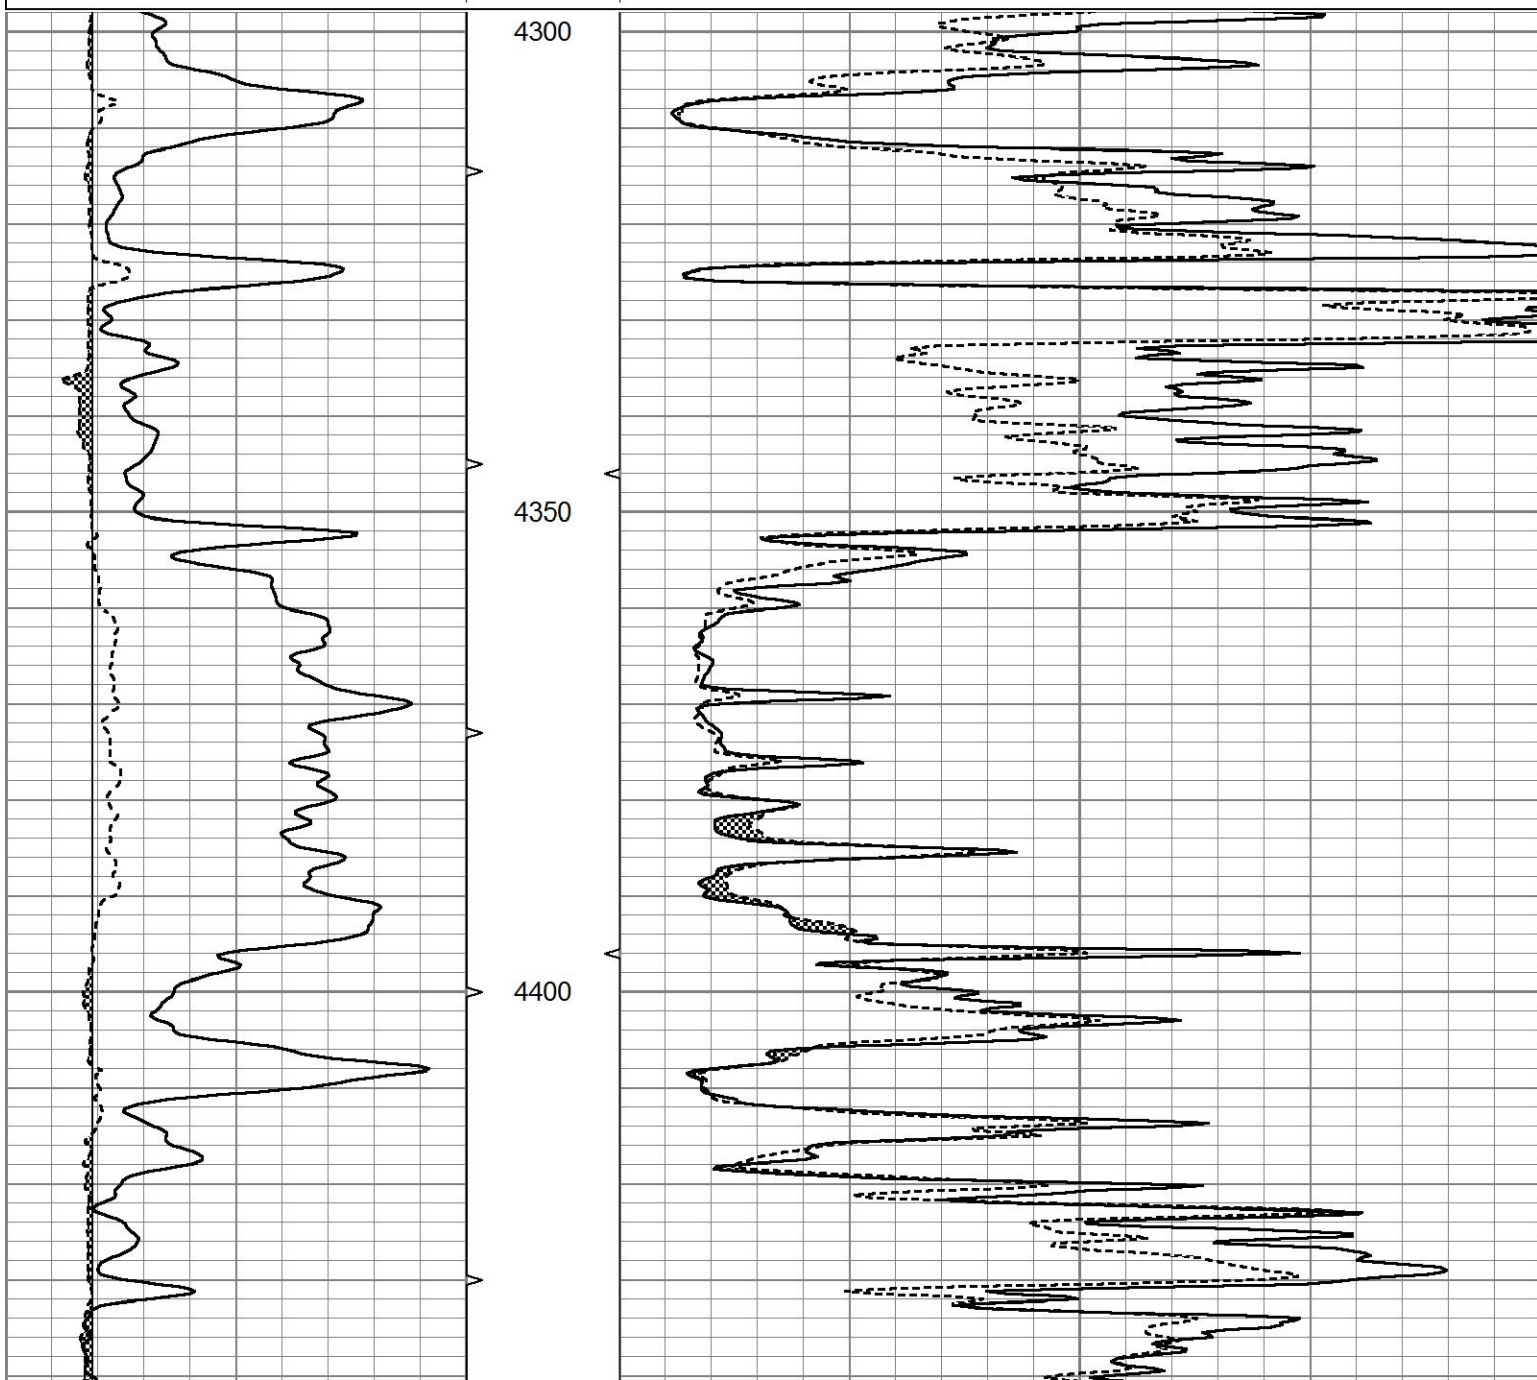

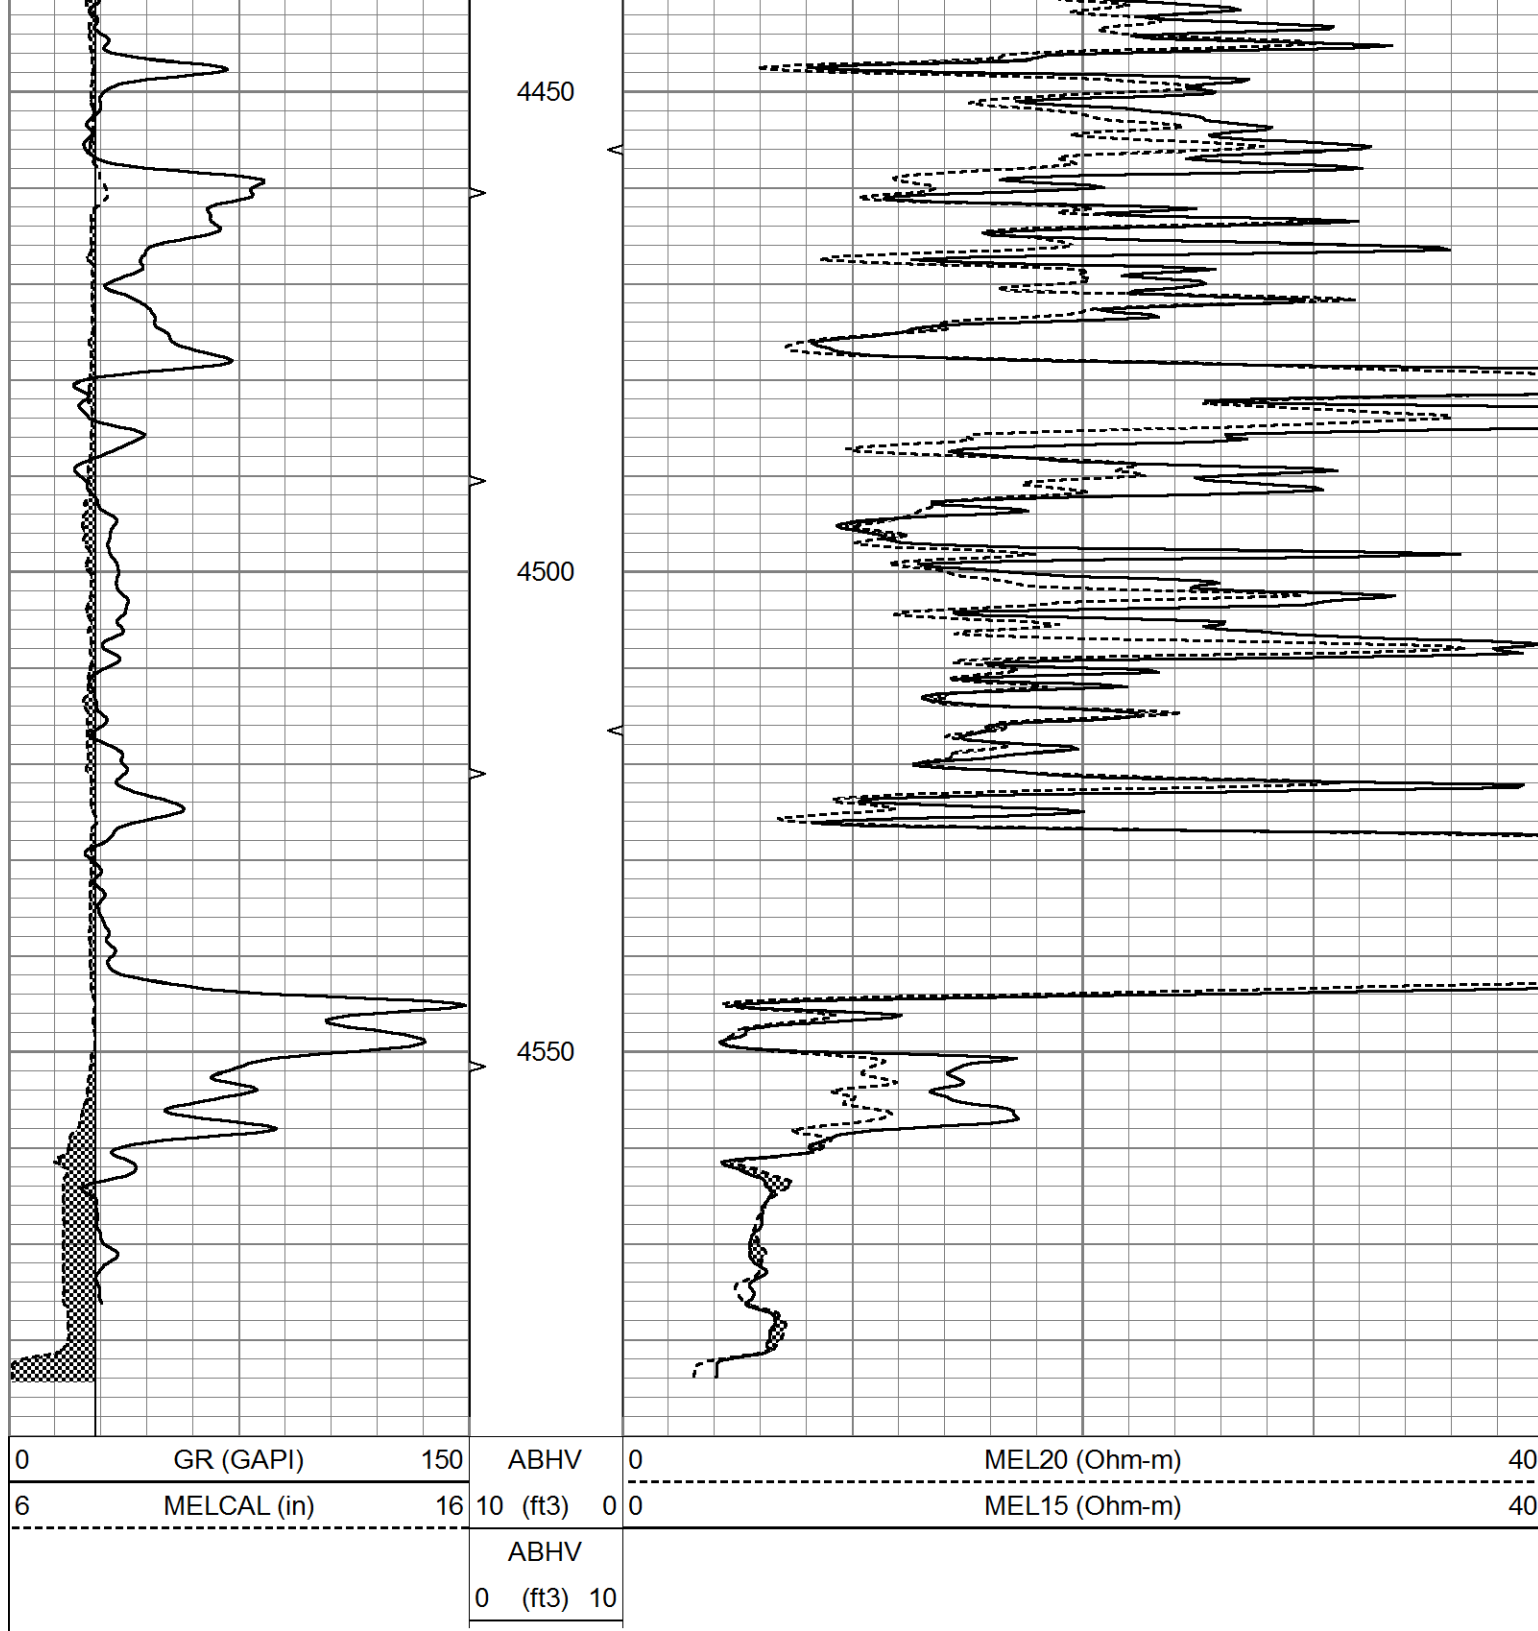

Database File		7085pe.db		Calibration Report	
Dataset Pathname		pass6.1			
Dataset Creation		Sat Oct 01 07:31:09 2022			
MICRO Calibration Report					
Serial Number:		070910			
Tool Model:		ProbeN			
Performed:		Sat Oct 01 07:01:41 2022			
Caliper Calibration:		Gain=4.848		Offset=0.000	

	References	Low Cal 8.000	High Cal 16.000
	Readings	1.650	3.300
1.5" Calibration:		Gain=45.000	Offset=0.000
		Low Cal	High Cal
References		0.000	20.000
Readings		0.000	1.216
2" Calibration:		Gain=60.000	Offset=-0.500
		Low Cal	High Cal
References		0.000	20.000
Readings		0.002	1.053
Gamma Ray Calibration Report			
Serial Number:		070559	
Tool Model:		OPEN_GR	
Performed:		Wed Sep 21 13:36:03 2022	
Calibrator Value:		1.0	GAPI
Background Reading:		0.0	cps
Calibrator Reading:		1.0	cps
Sensitivity:		0.3000	GAPI/cps