

MICRO LOG

Company	PALOMINO PETROLEUM, INC.	
Well	THE SHAWSHANK REDEMPTION #1	
Field	BUERKLE NORTHWEST	
County	SCOTT	State
State	KANSAS	
Location:	API # : 15-171-21297-0000	Other Services CDL/CNL DIL
Permanent Datum	SEC 30 TWP 20S RGE 33W	Elevation
Log Measured From	GROUND LEVEL	K.B. 2981
Drilling Measured From	KELLY BUSHING 11' A.G.L.	D.F. 2979
	KELLY BUSHING	G.L. 2970
Date	9/21/22	
Run Number	TWO	
Depth Driller	4860	
Depth Logger	4861	
Bottom Logged Interval	4859	
Top Log Interval	2100	
Casing Driller	8 5/8" @ 227	
Casing Logger	227	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 4.200 PPM
Density / Viscosity	9.3/55	
pH / Fluid Loss	10.5/7.2	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	1.20 @ 75F	
Rmt @ Meas. Temp	.900 @ 75F	
Rmc @ Meas. Temp	1.44 @ 75F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.726 @ 124F	
Time Circulation Stopped	4.5 HOURS	
Time Logger on Bottom	12:30 P.M.	
Maximum Recorded Temperature	124F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	COLE ROBBEN	
Witnessed By	RYAN SEIB	

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM SCOTT CITY, KANSAS, SOUTH TO ROAD 70, WEST 6 MILES TO FALCON ROAD, SOUTH 5 MILES, EAST INTO

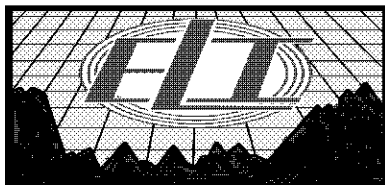


MAIN SECTION

Database File	7020ddn.db
Dataset Pathname	pass6D
Presentation Format	_micro
Dataset Creation	Wed Sep 21 14:11:43 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

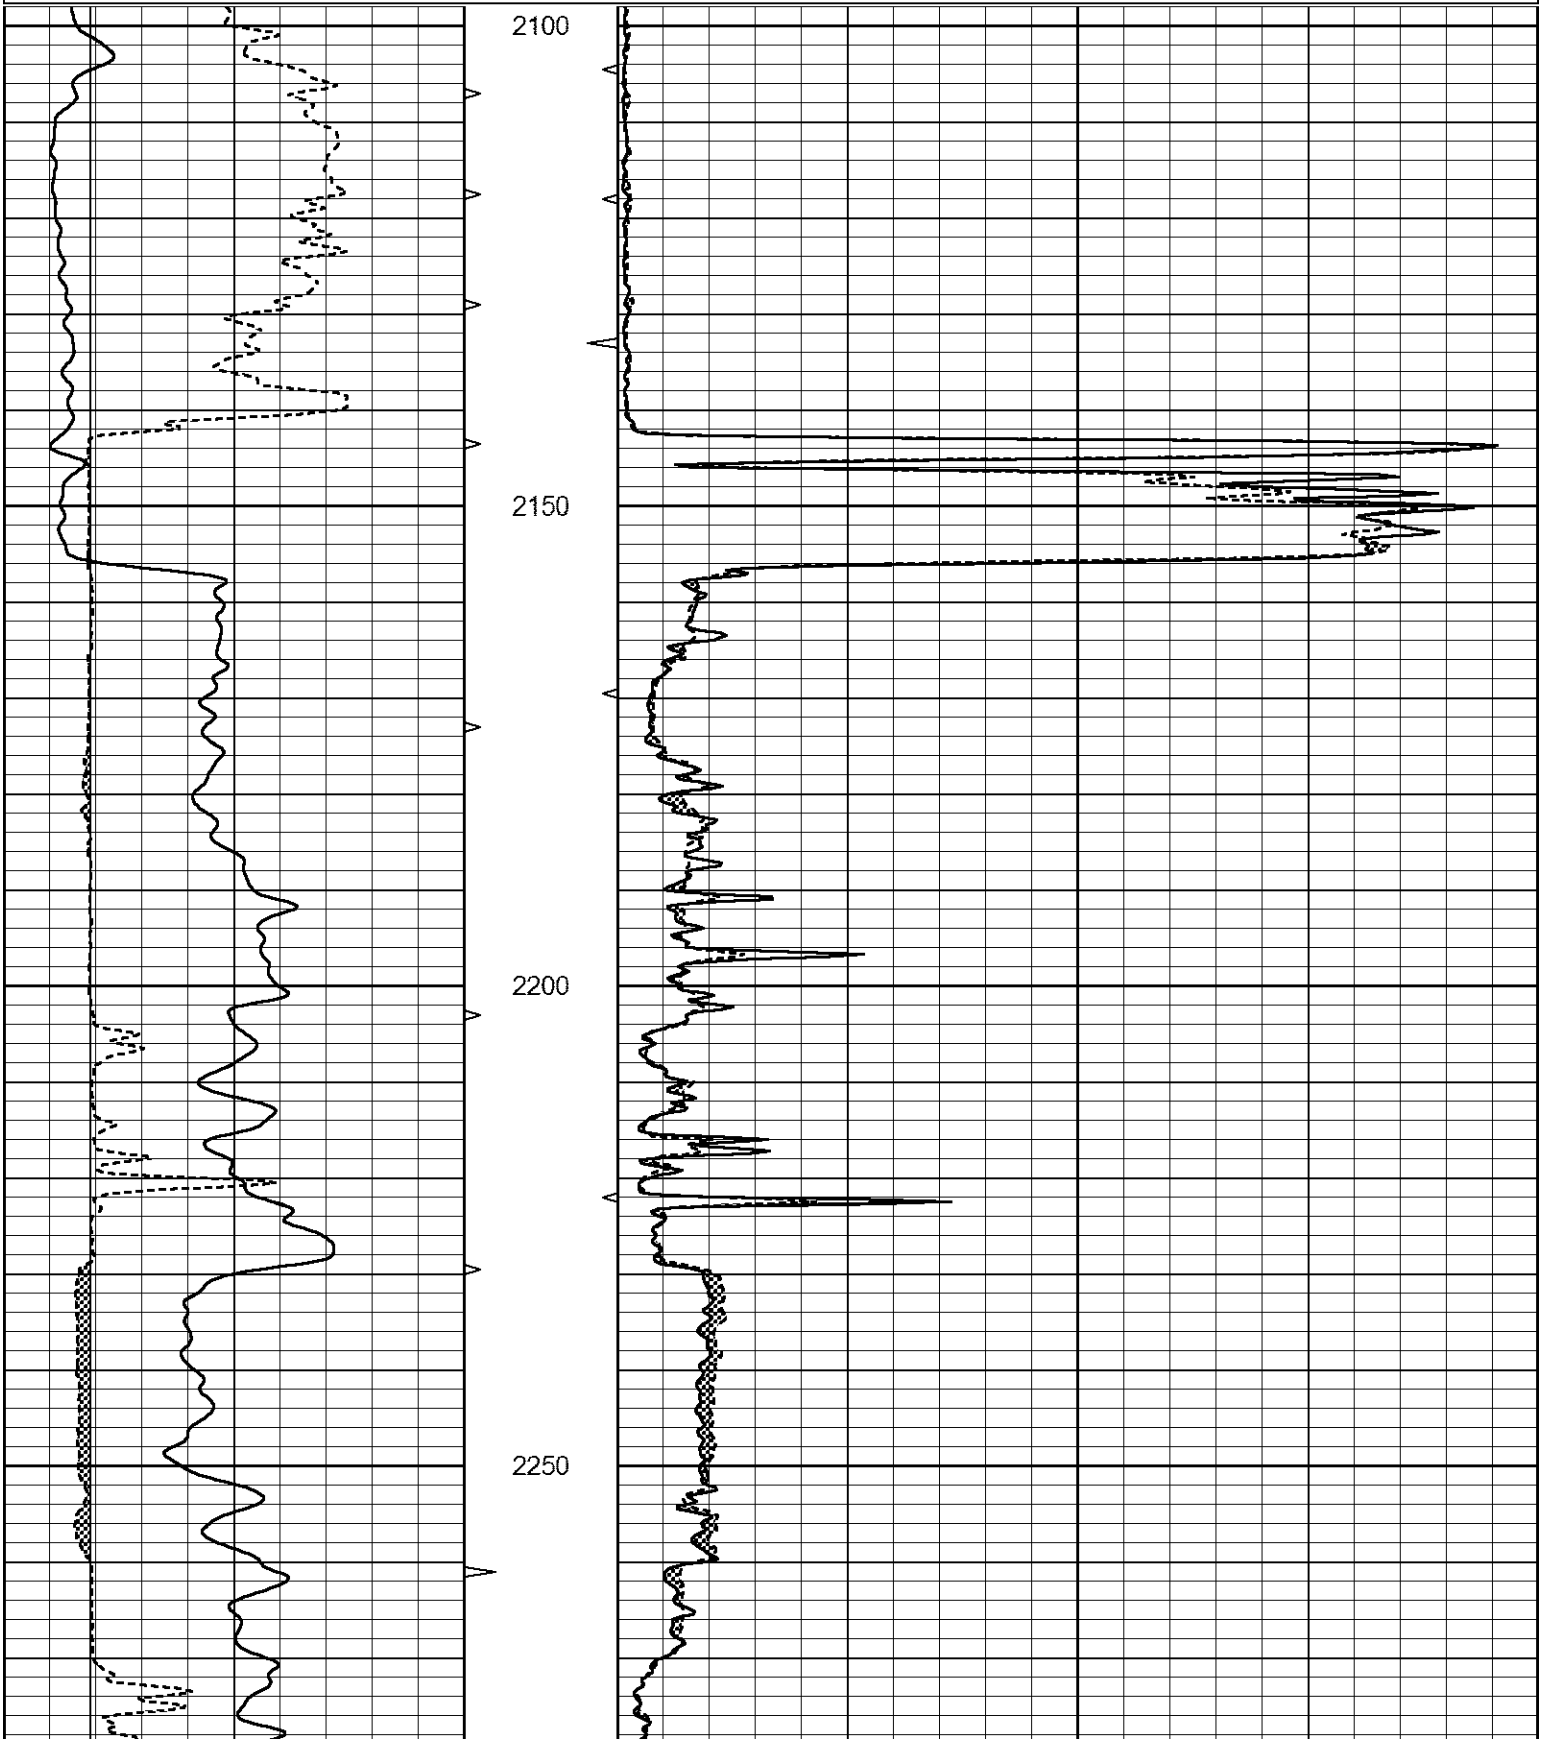

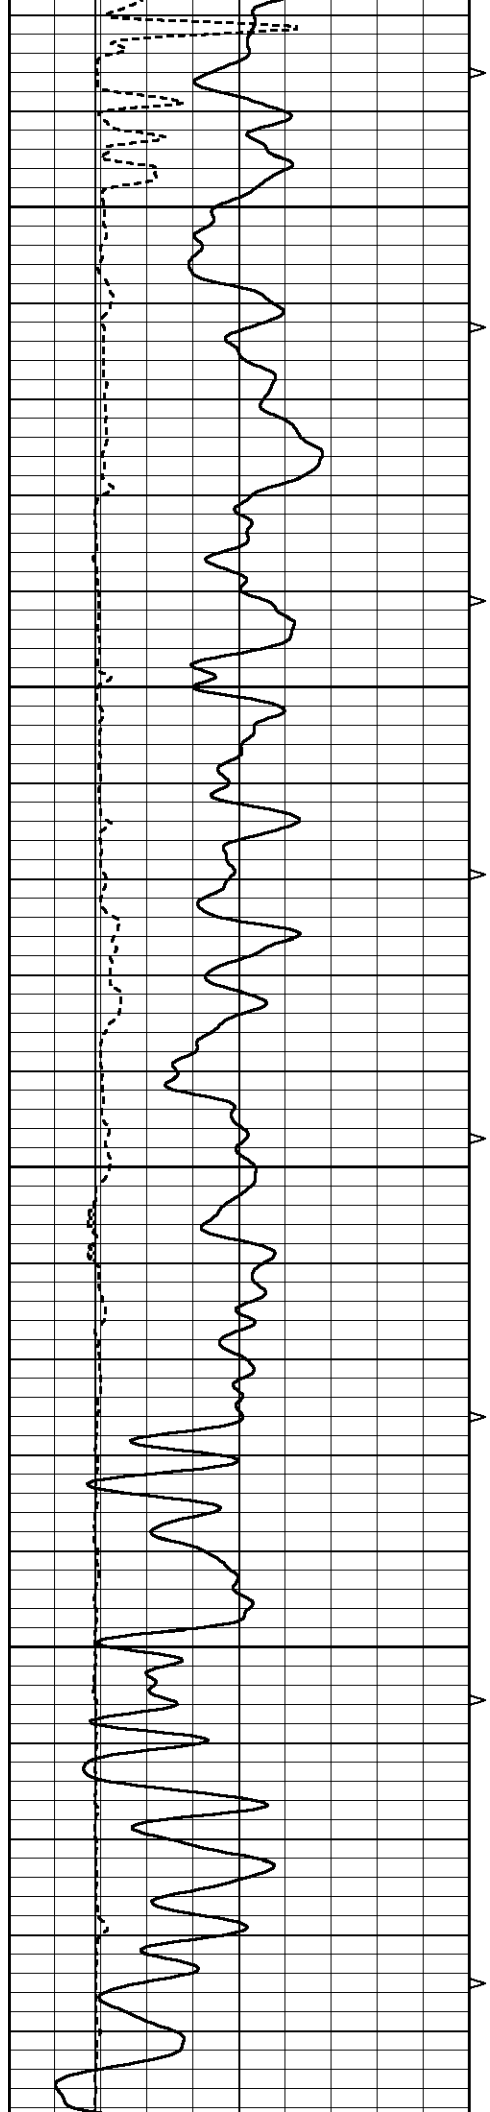




2300



2350


2400

2450

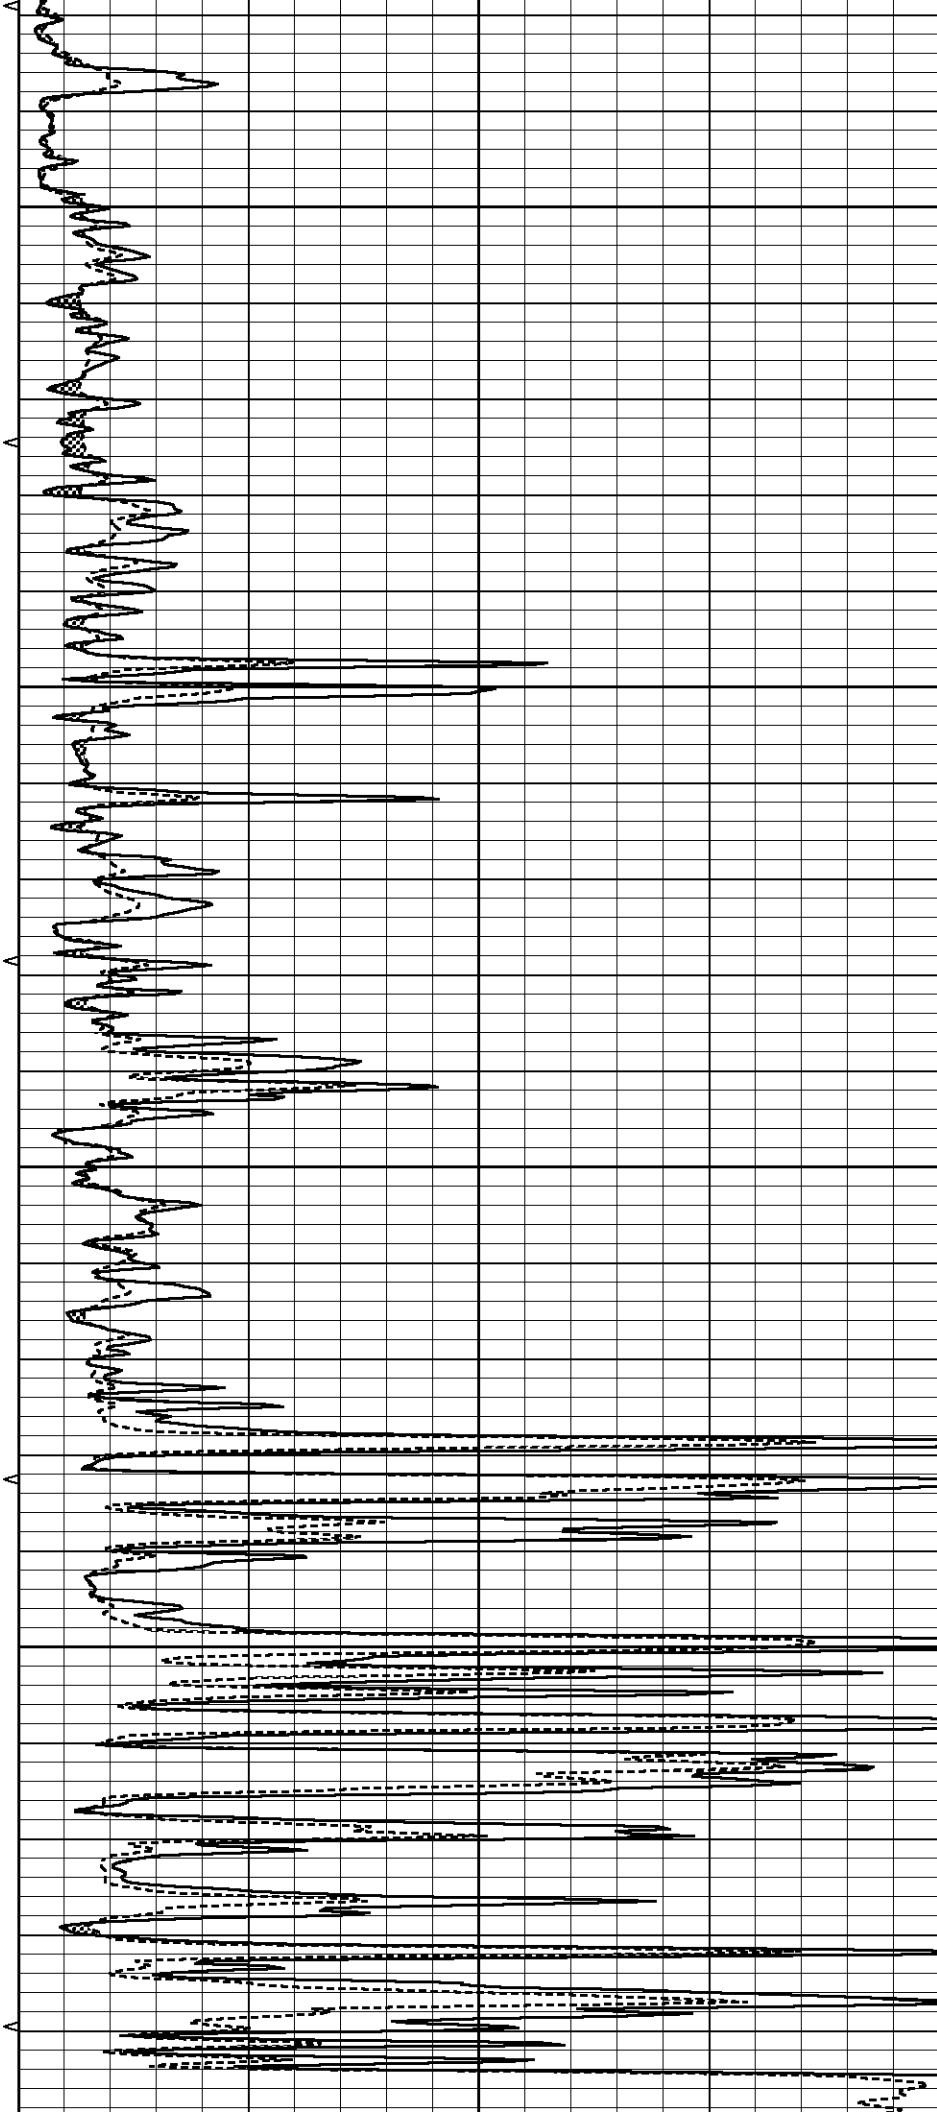

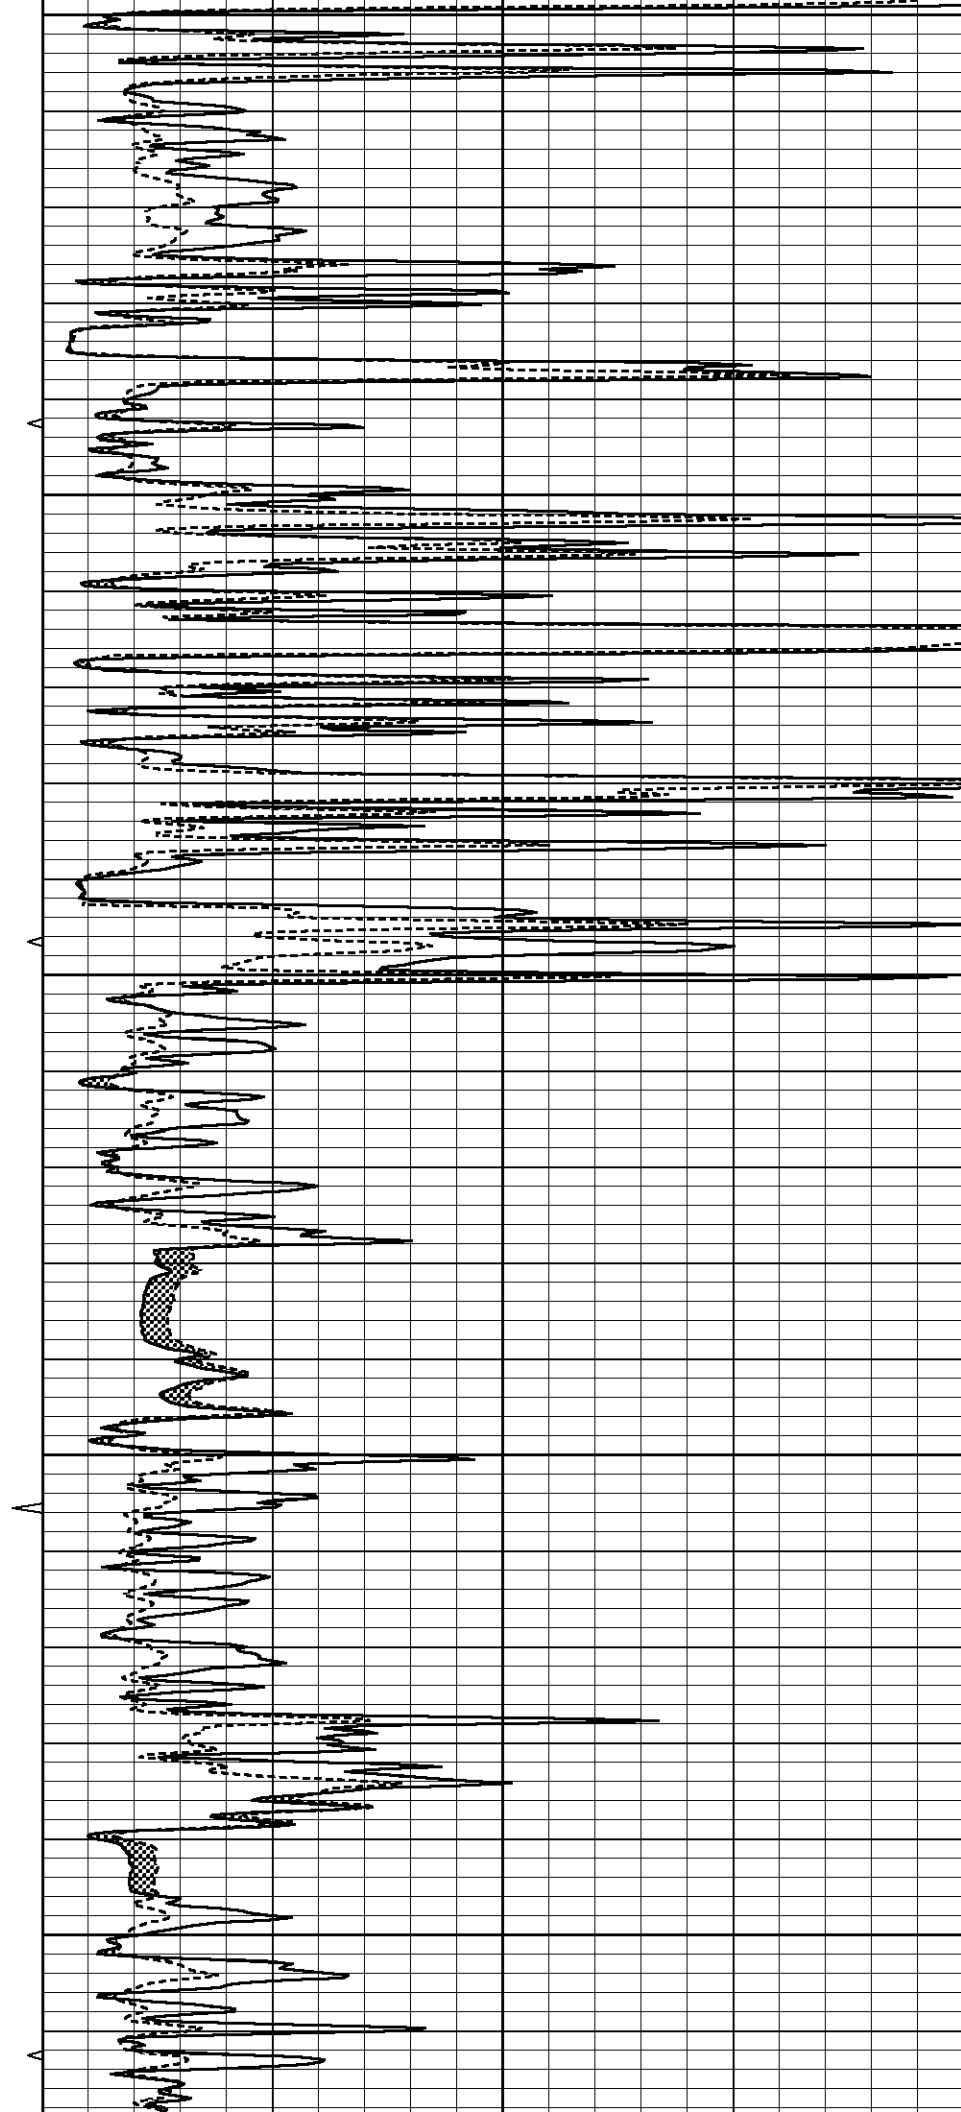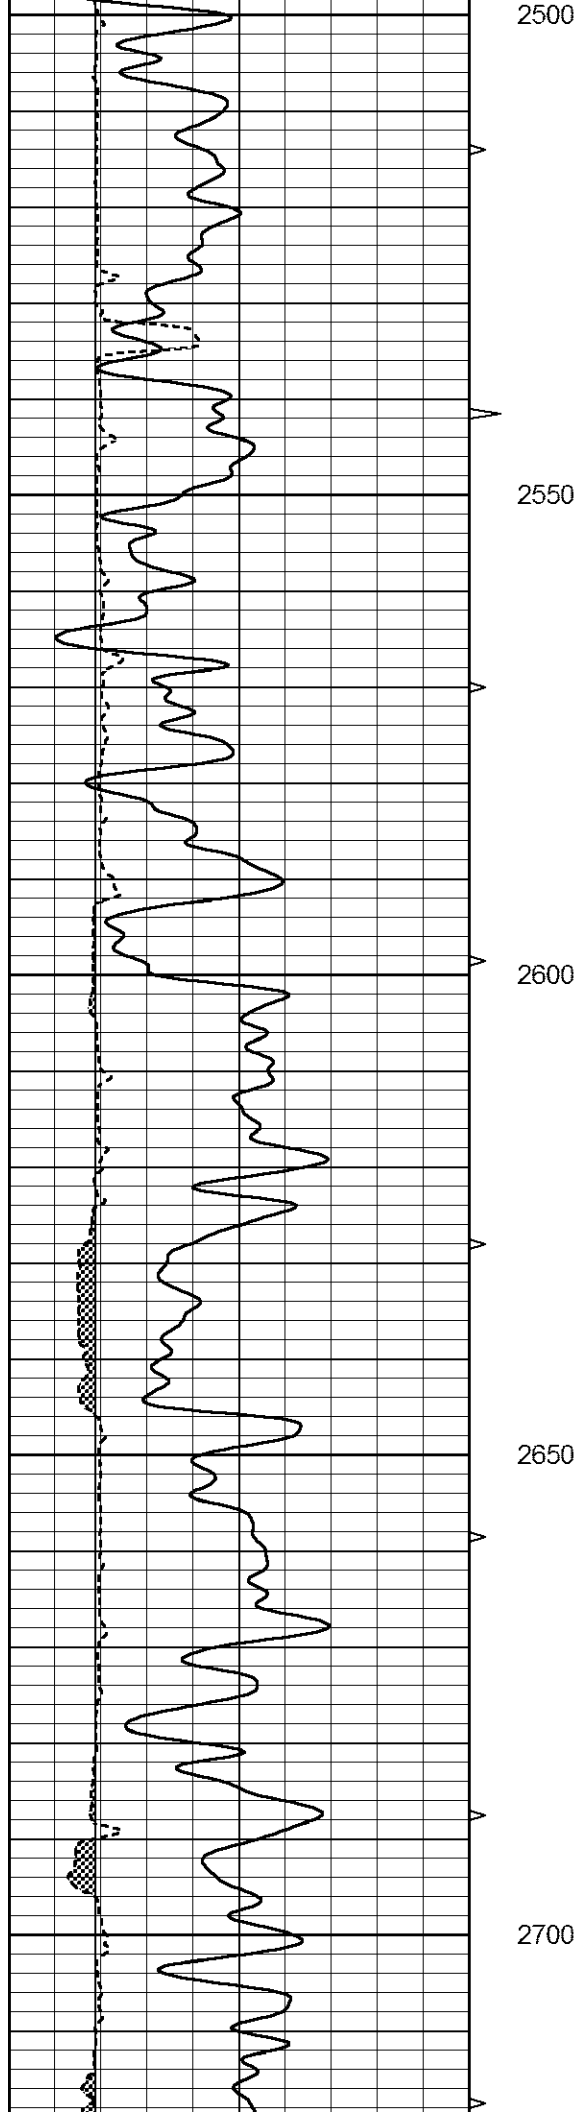

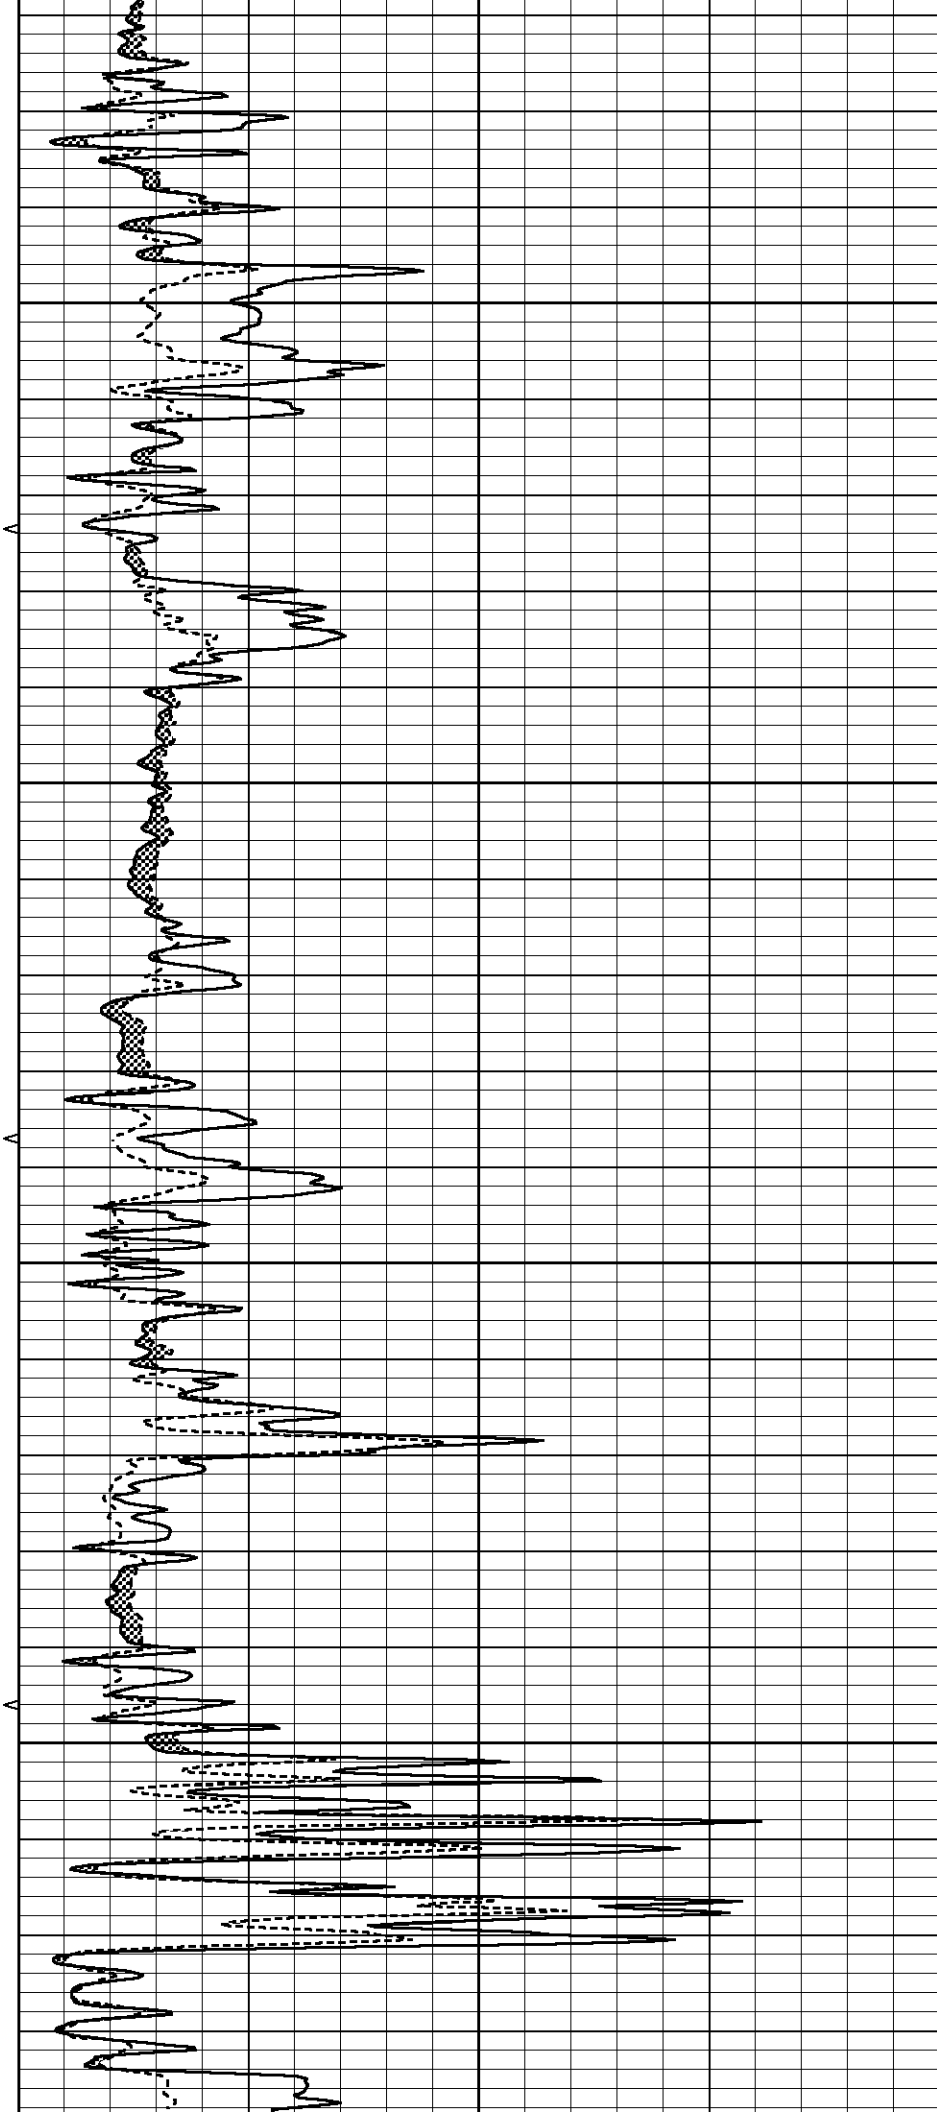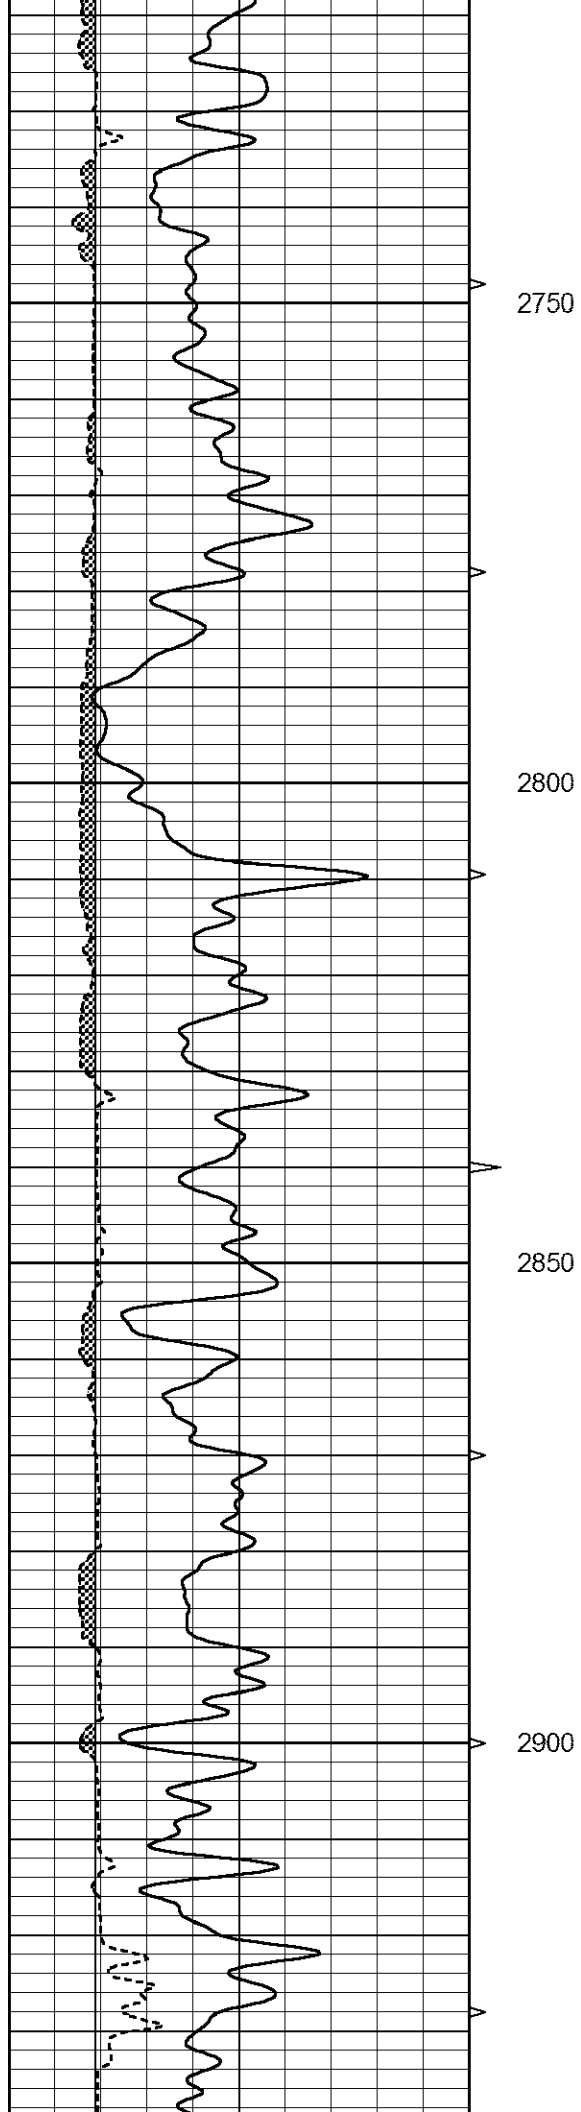

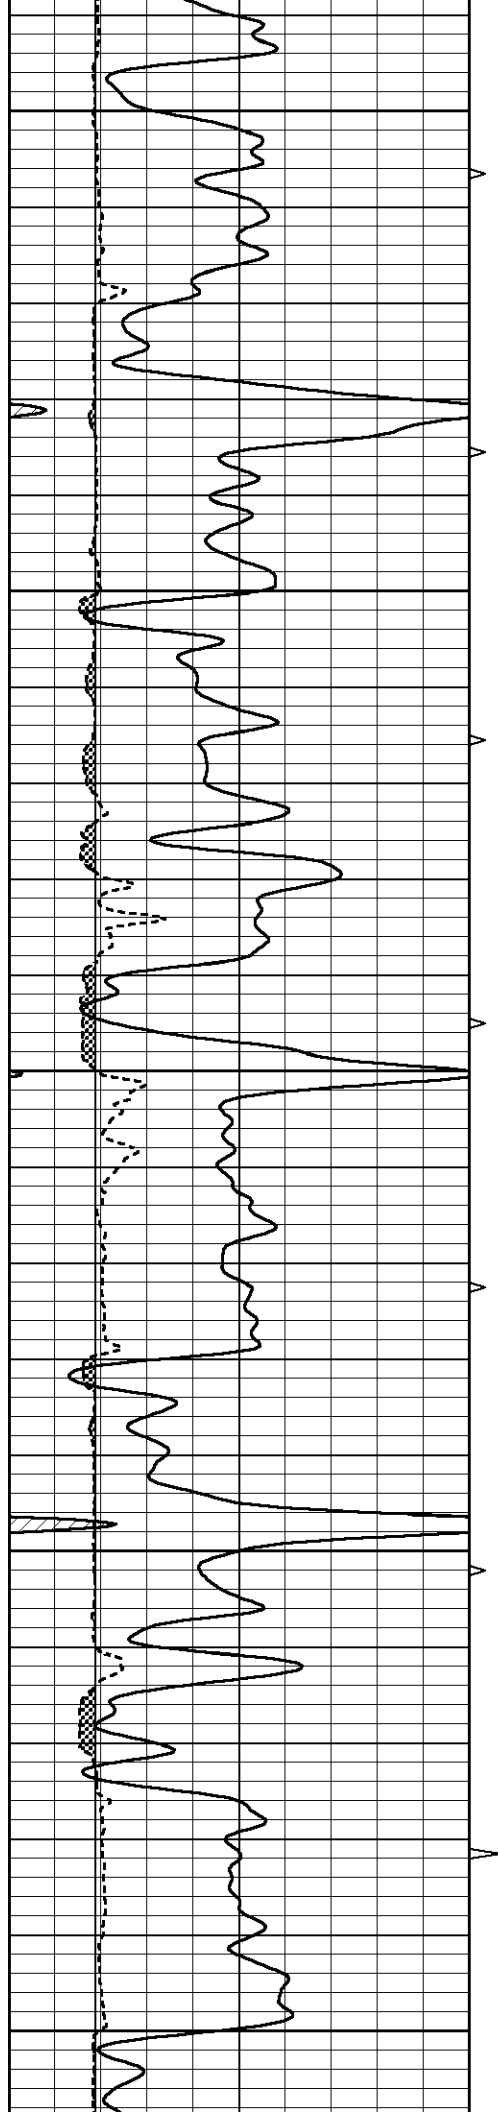


2950


3000

3050

3100

3150

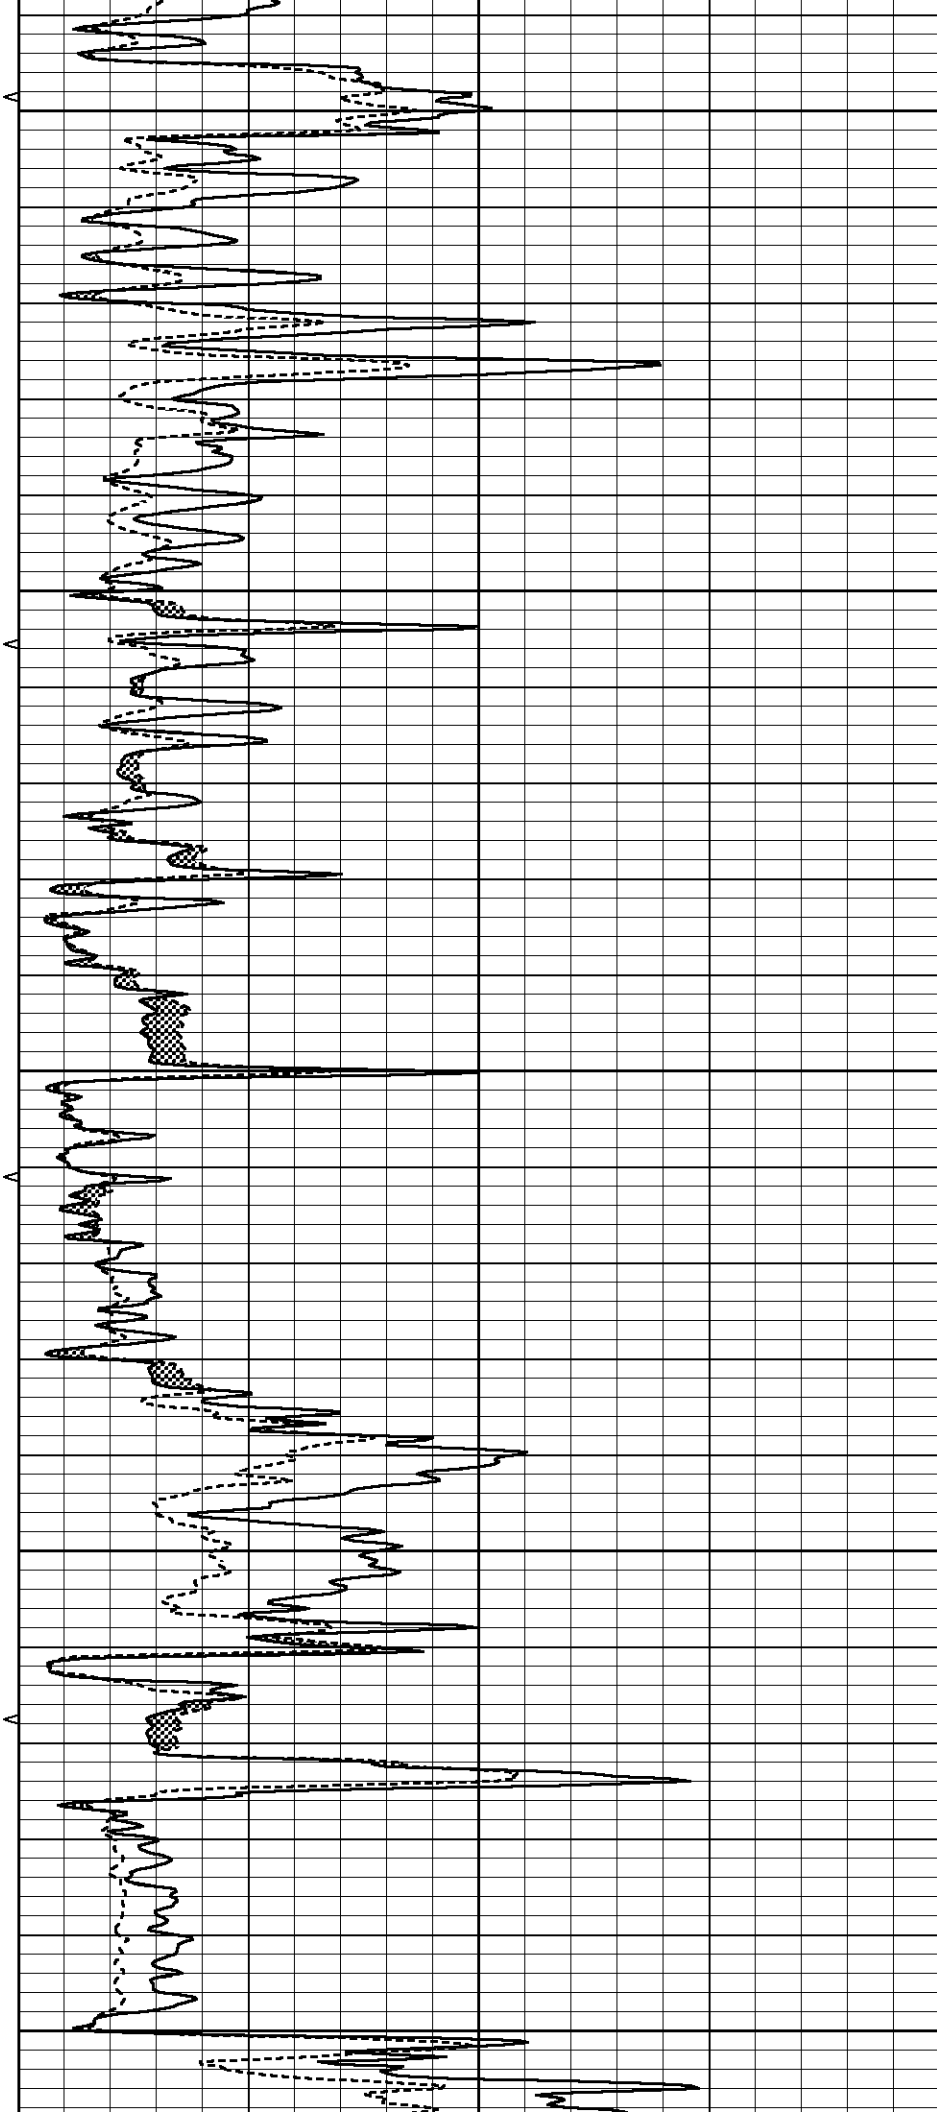

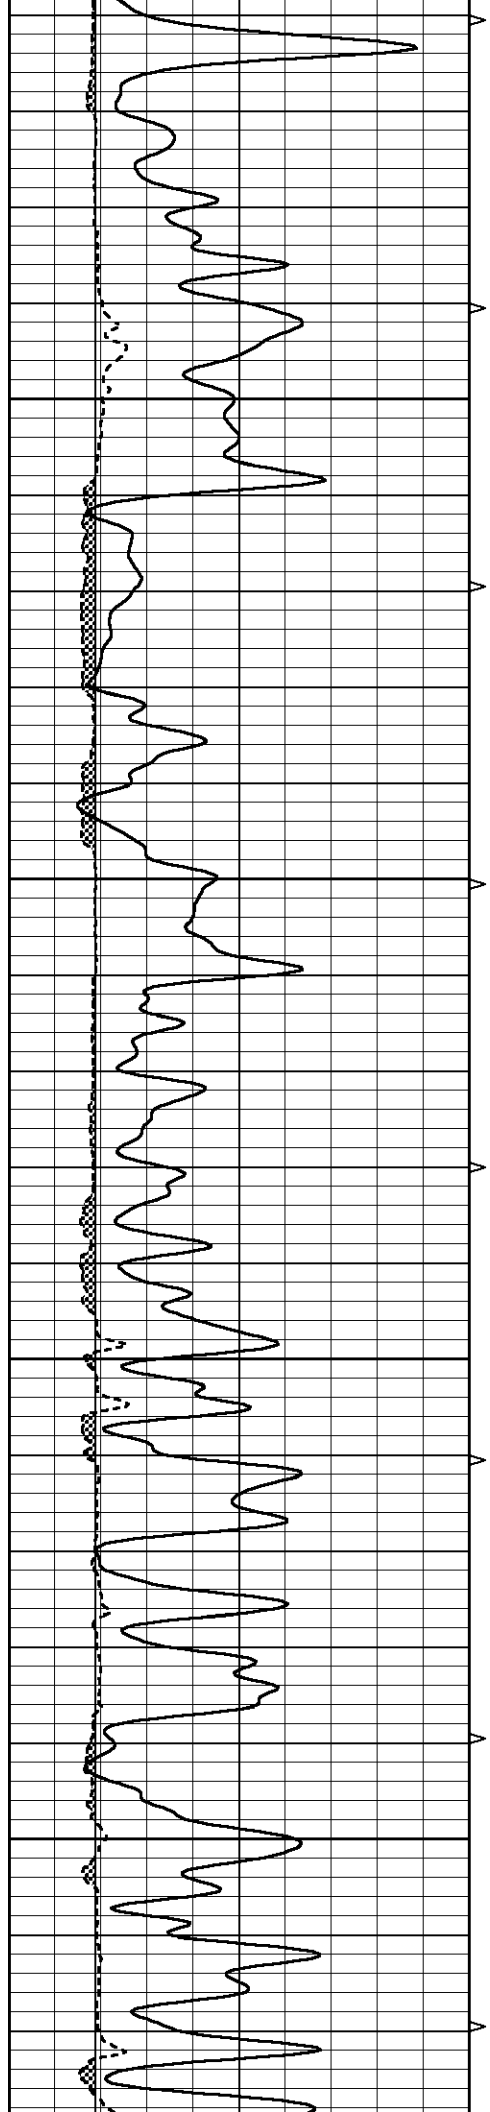



3200

3250

3300

3350

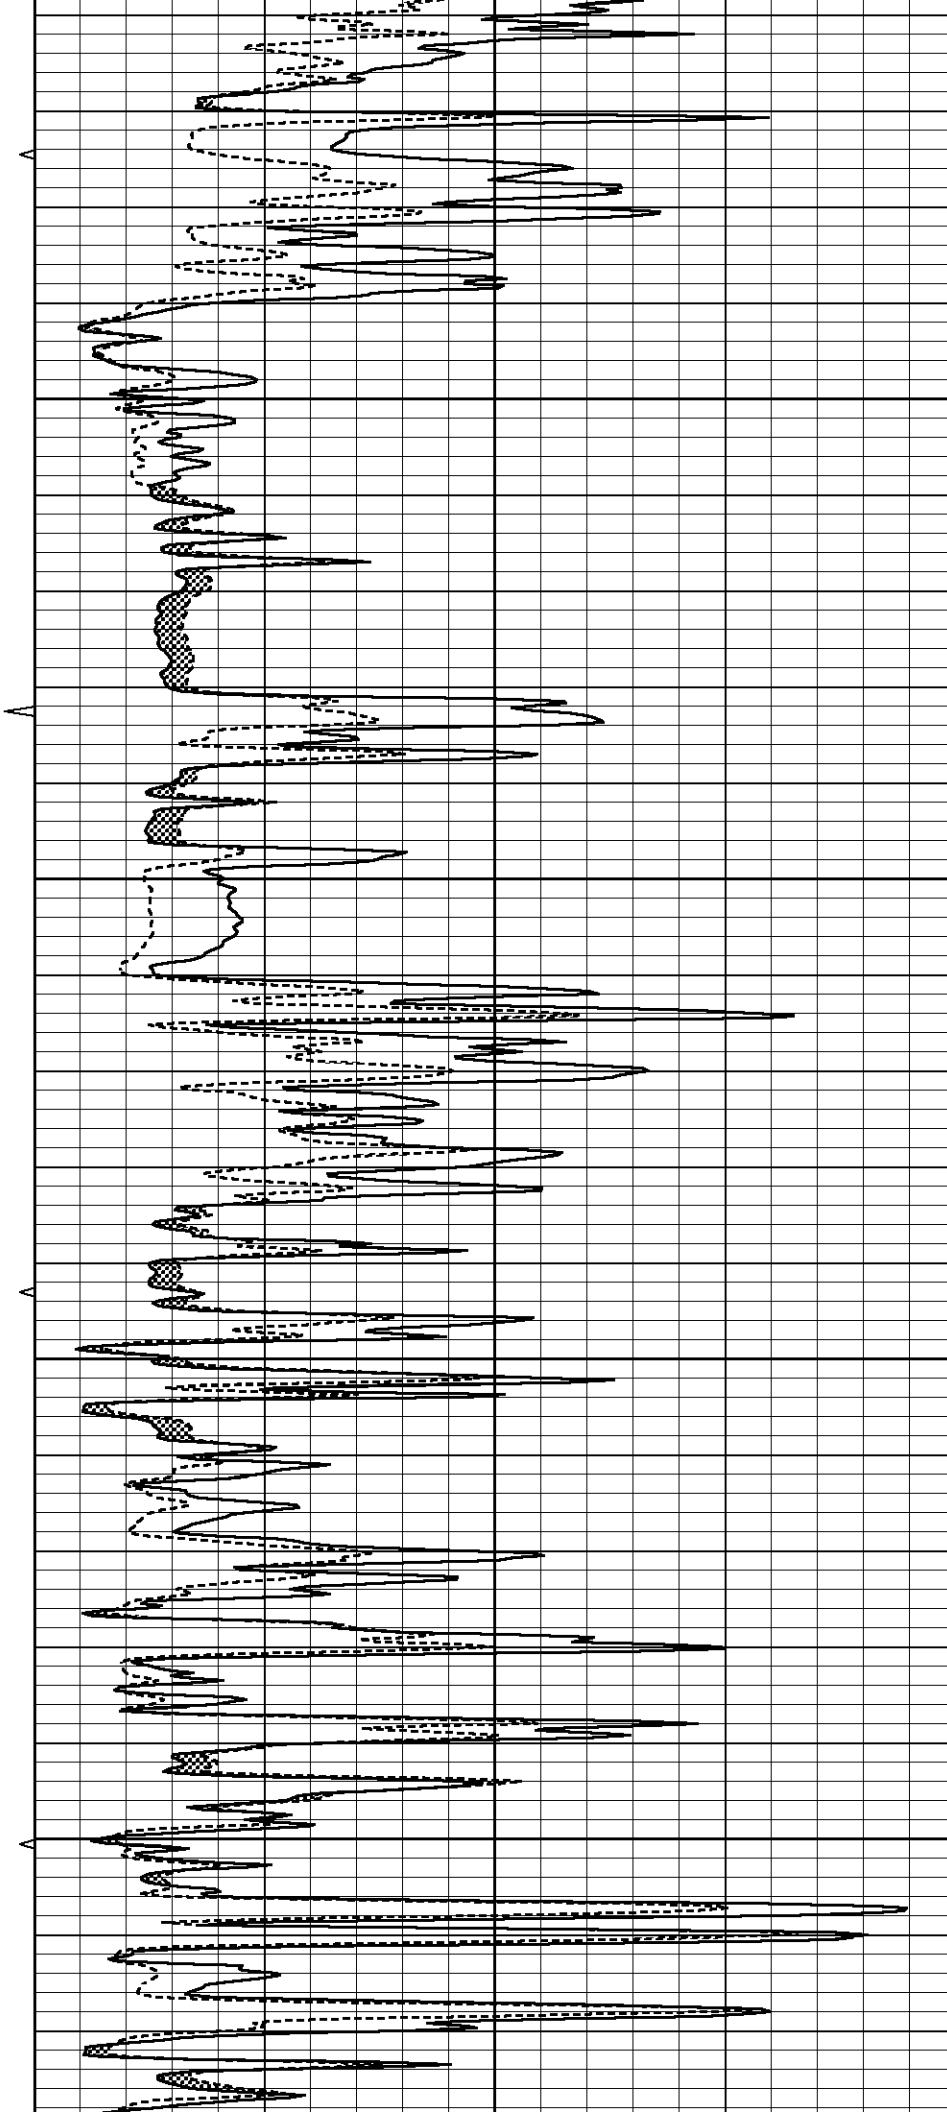

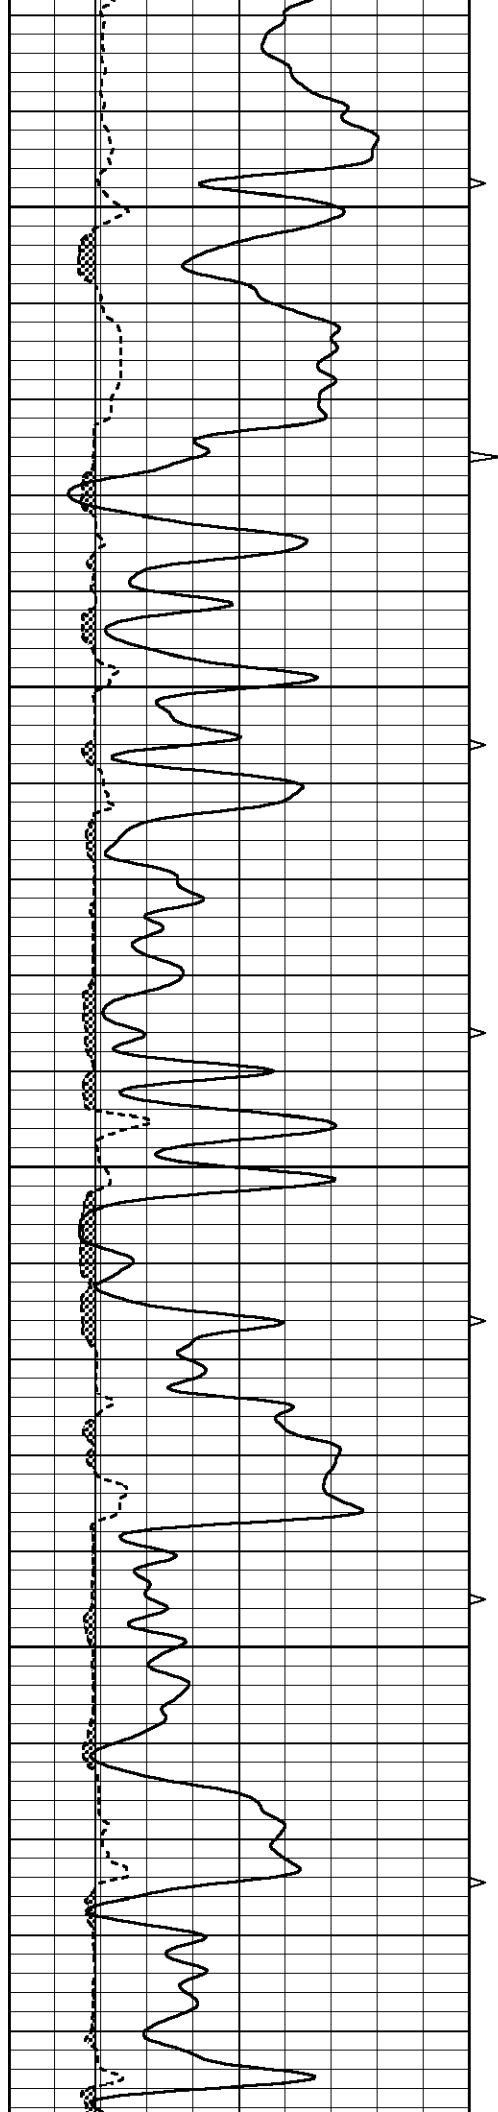




3400


3450


3500

3550

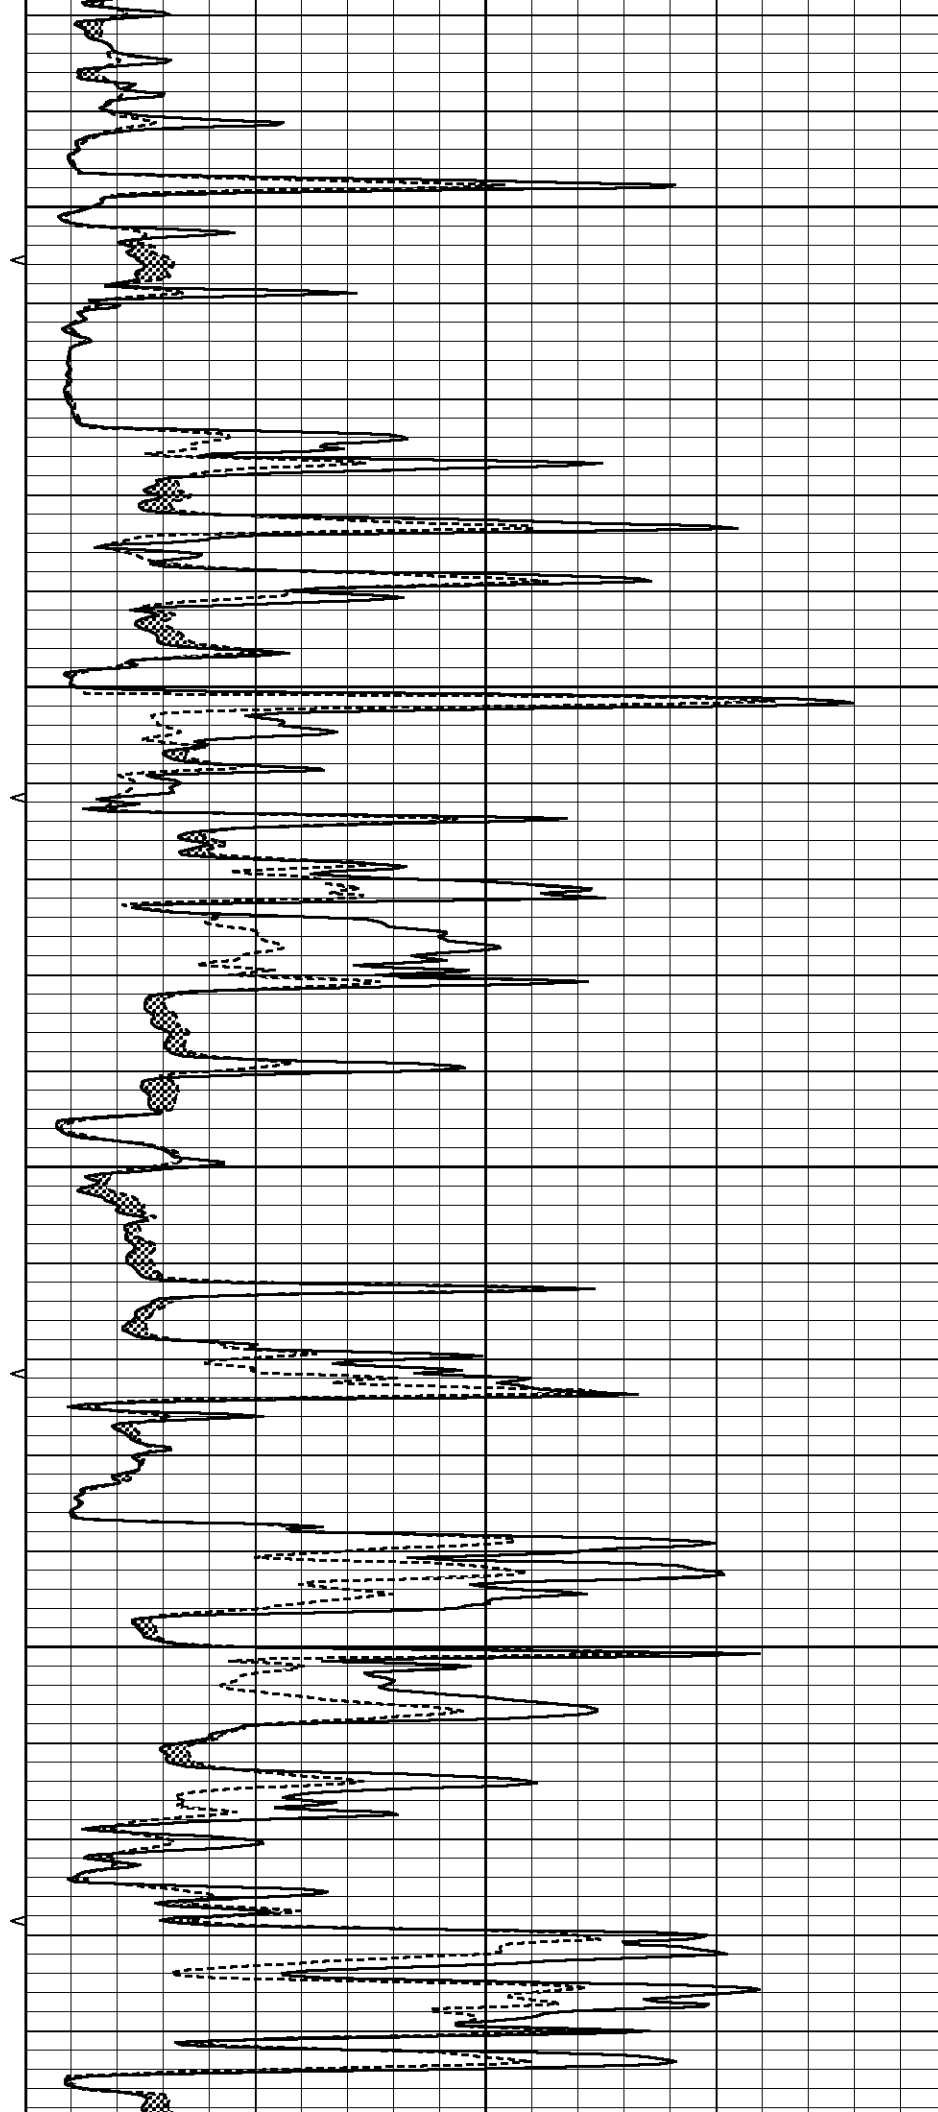

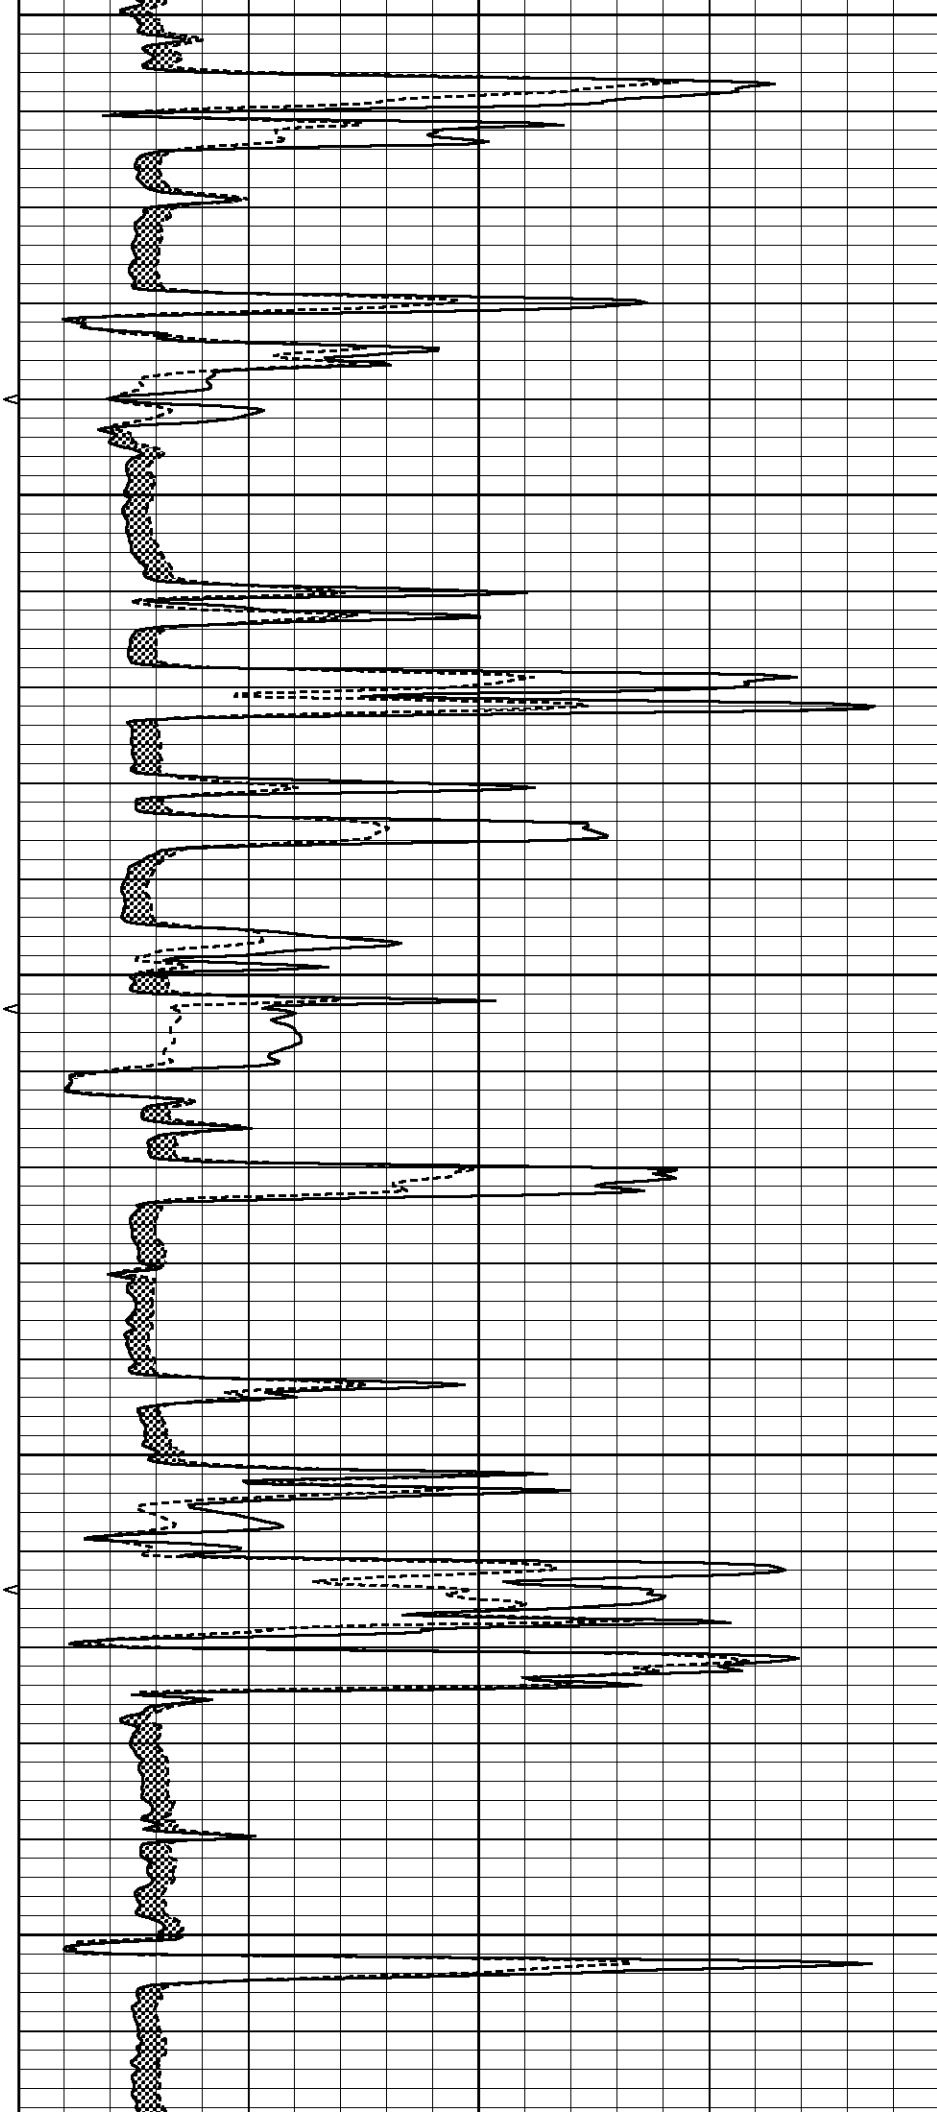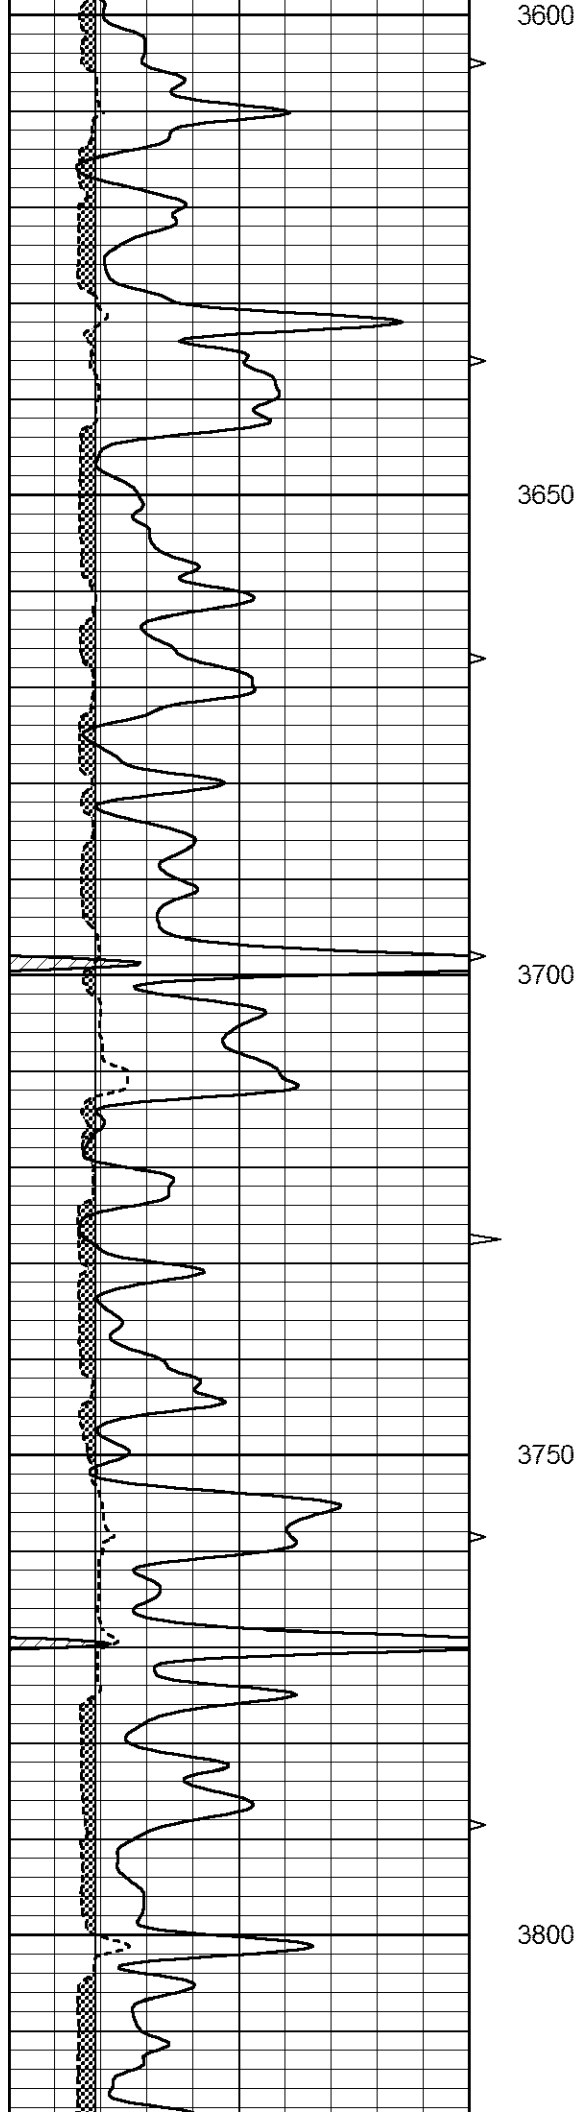

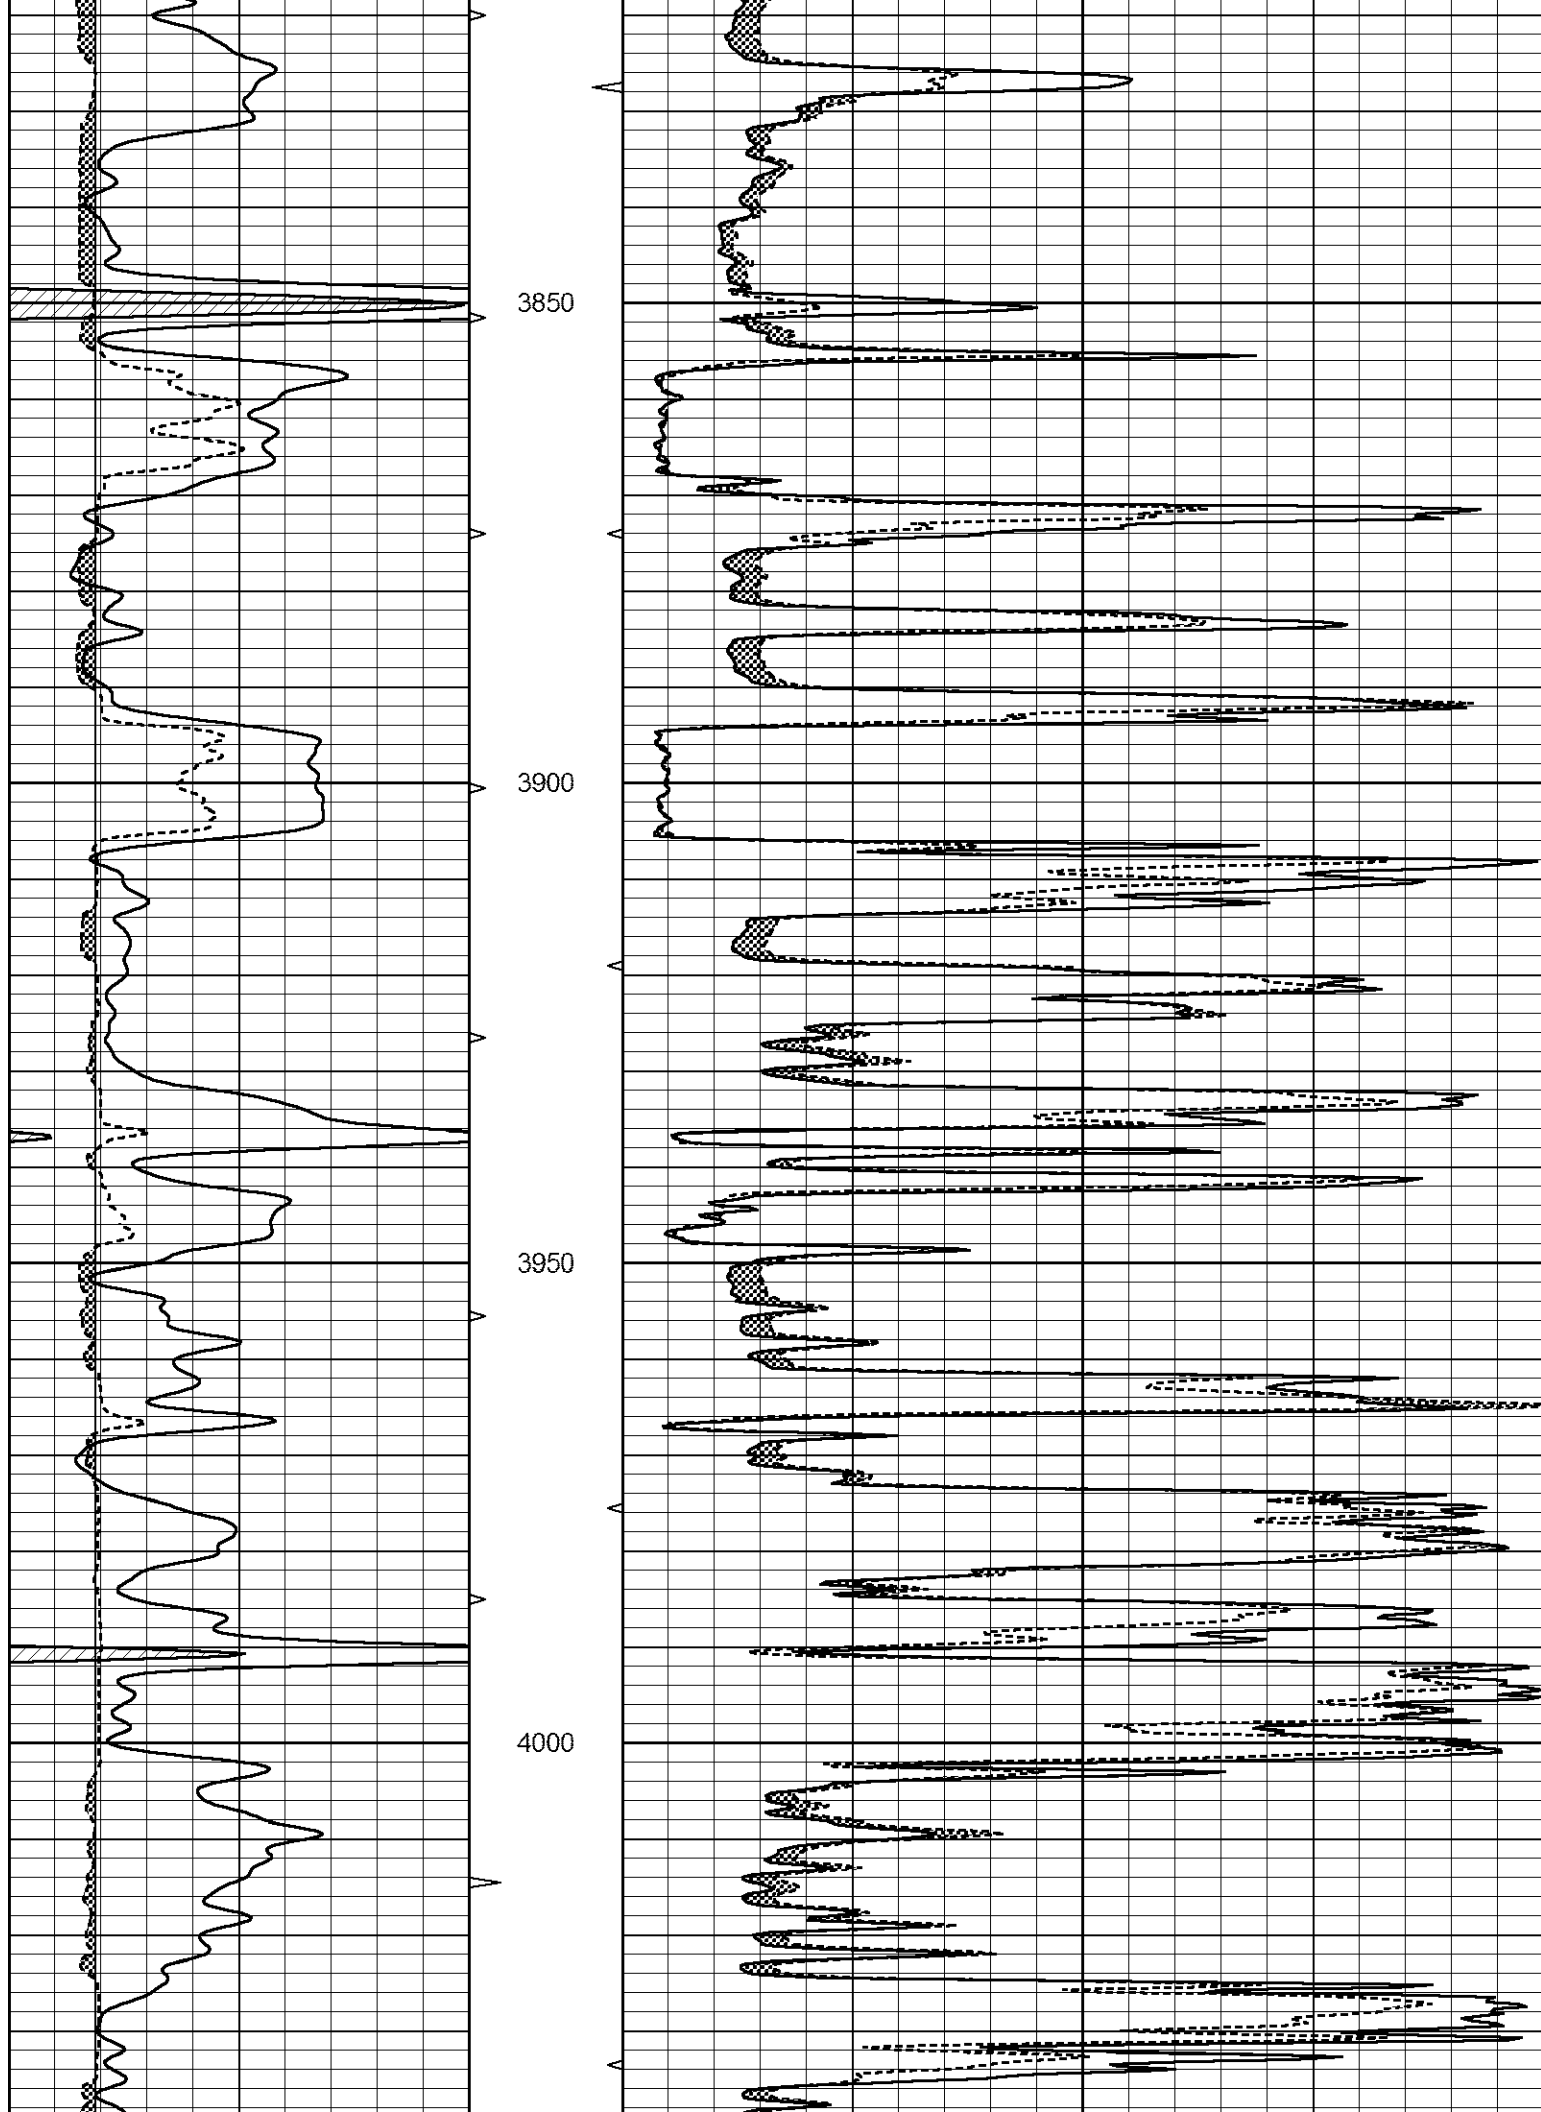

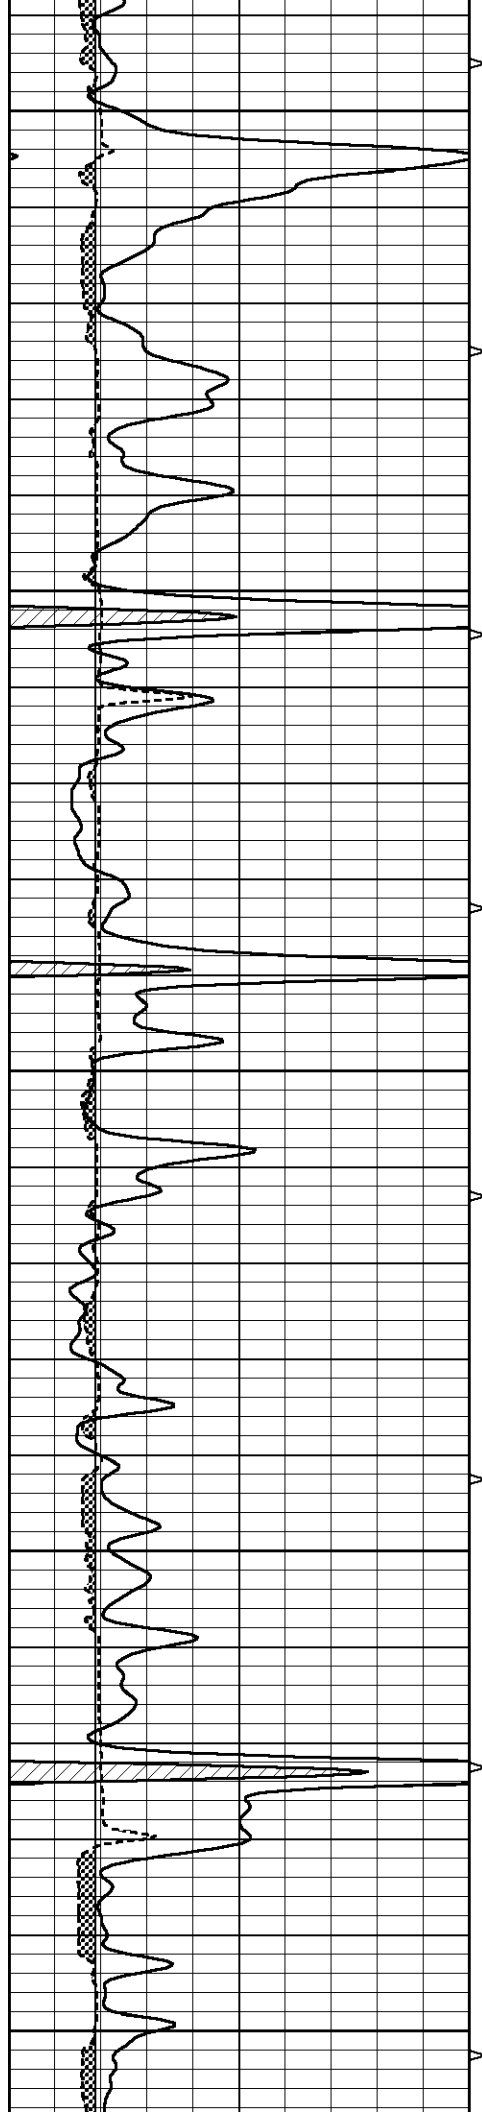


4050


4100

4150

4200

4250

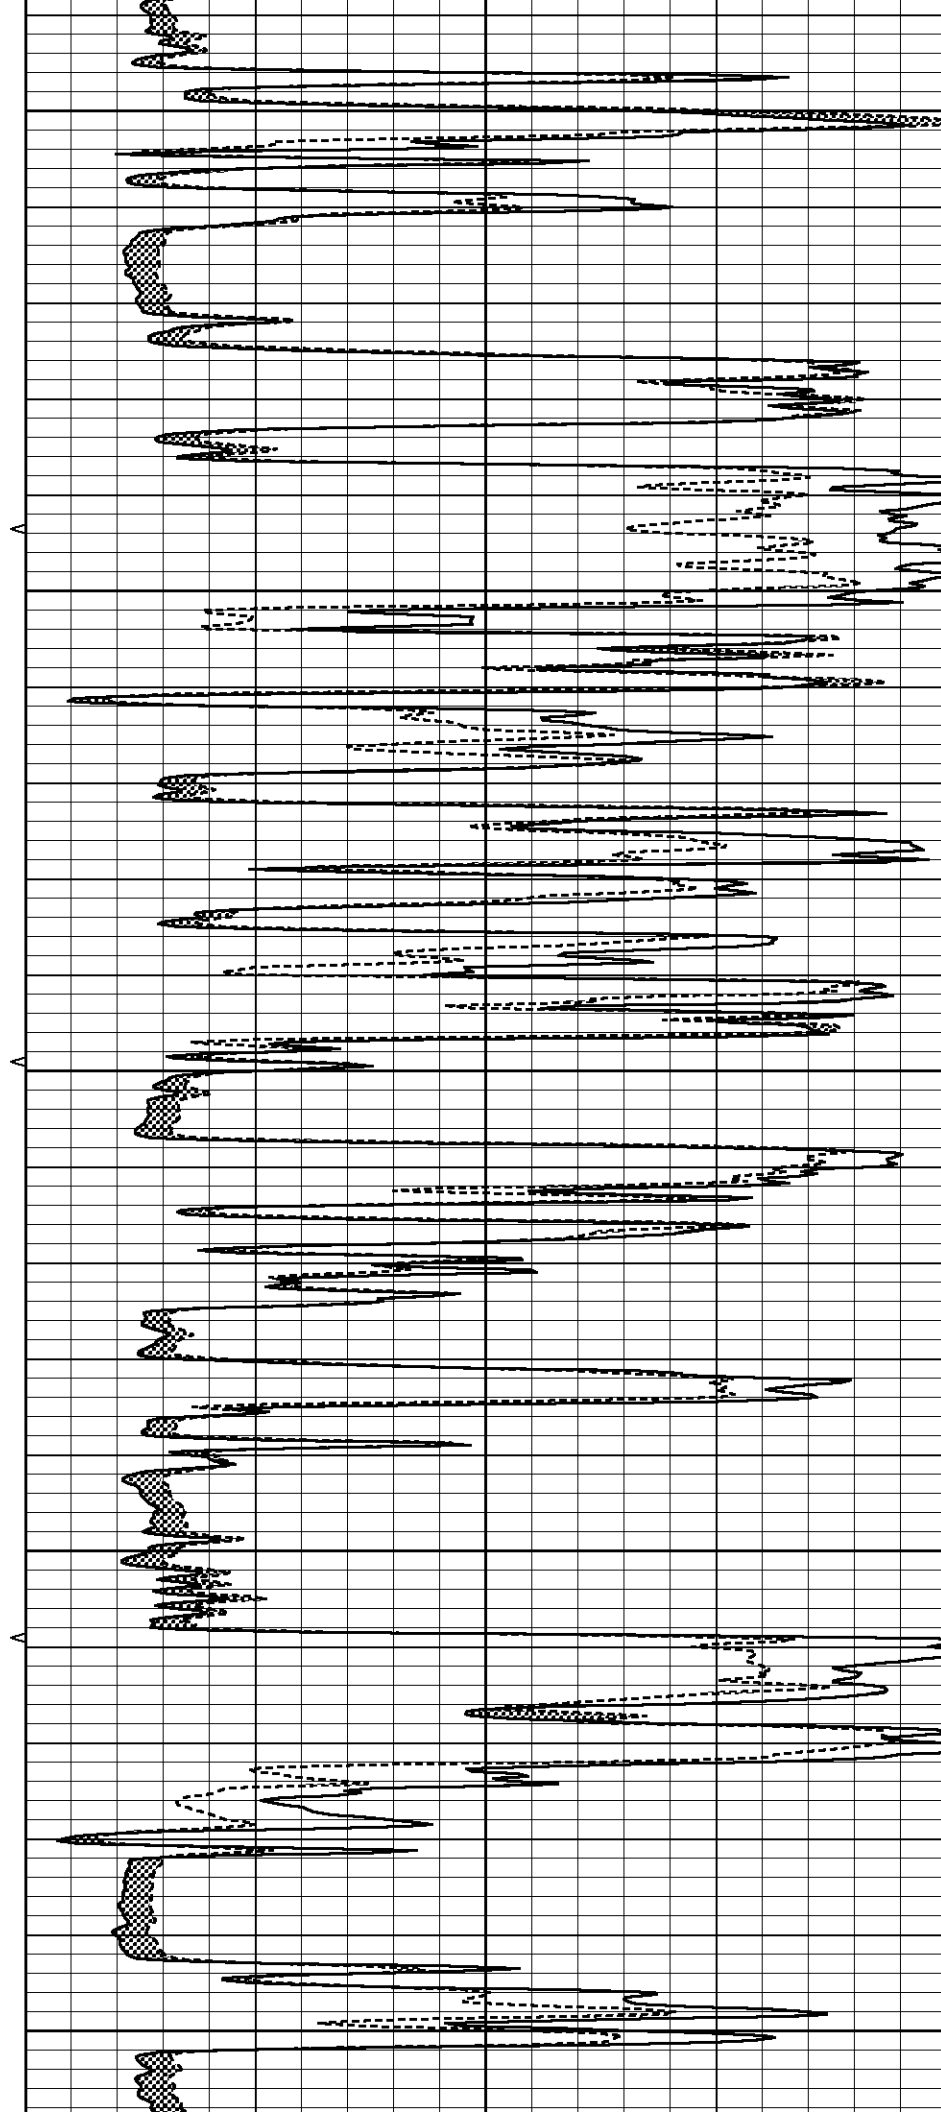

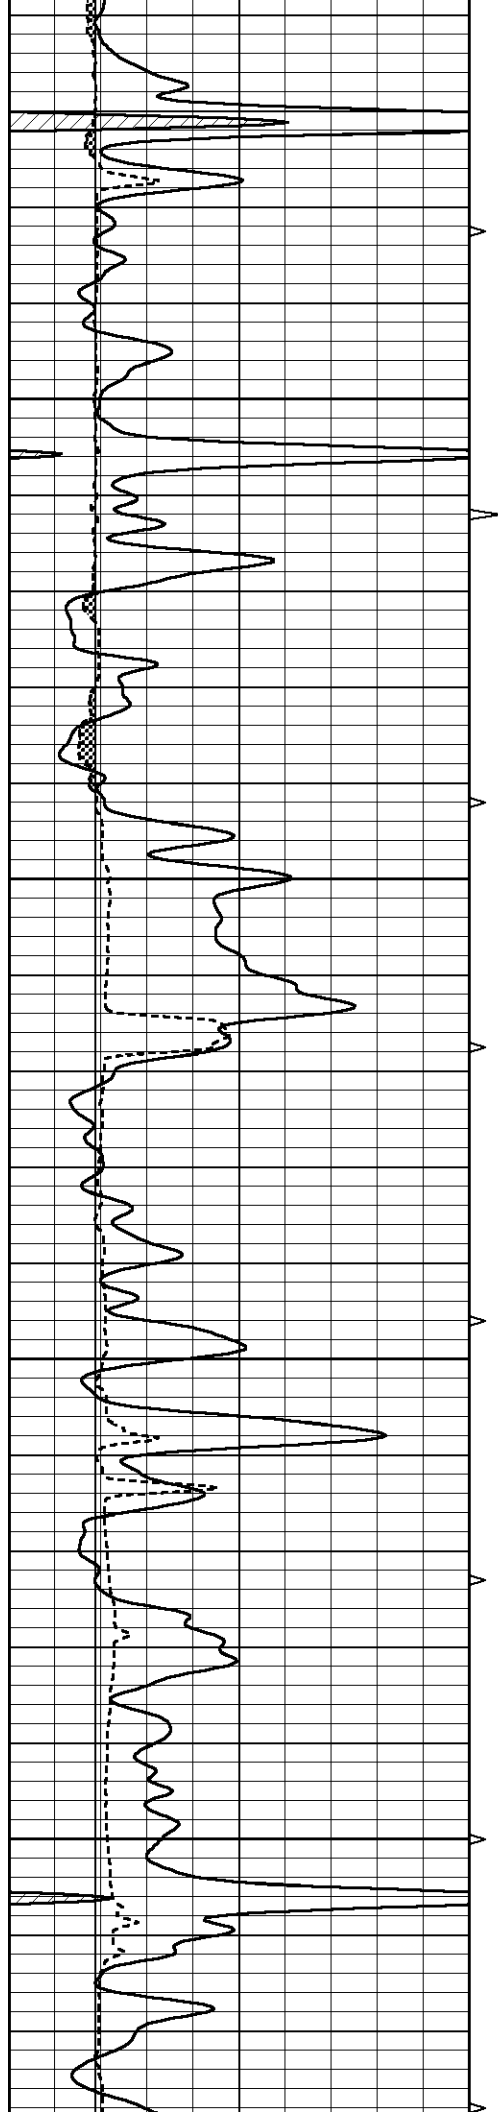



4300

4350

4400

4450

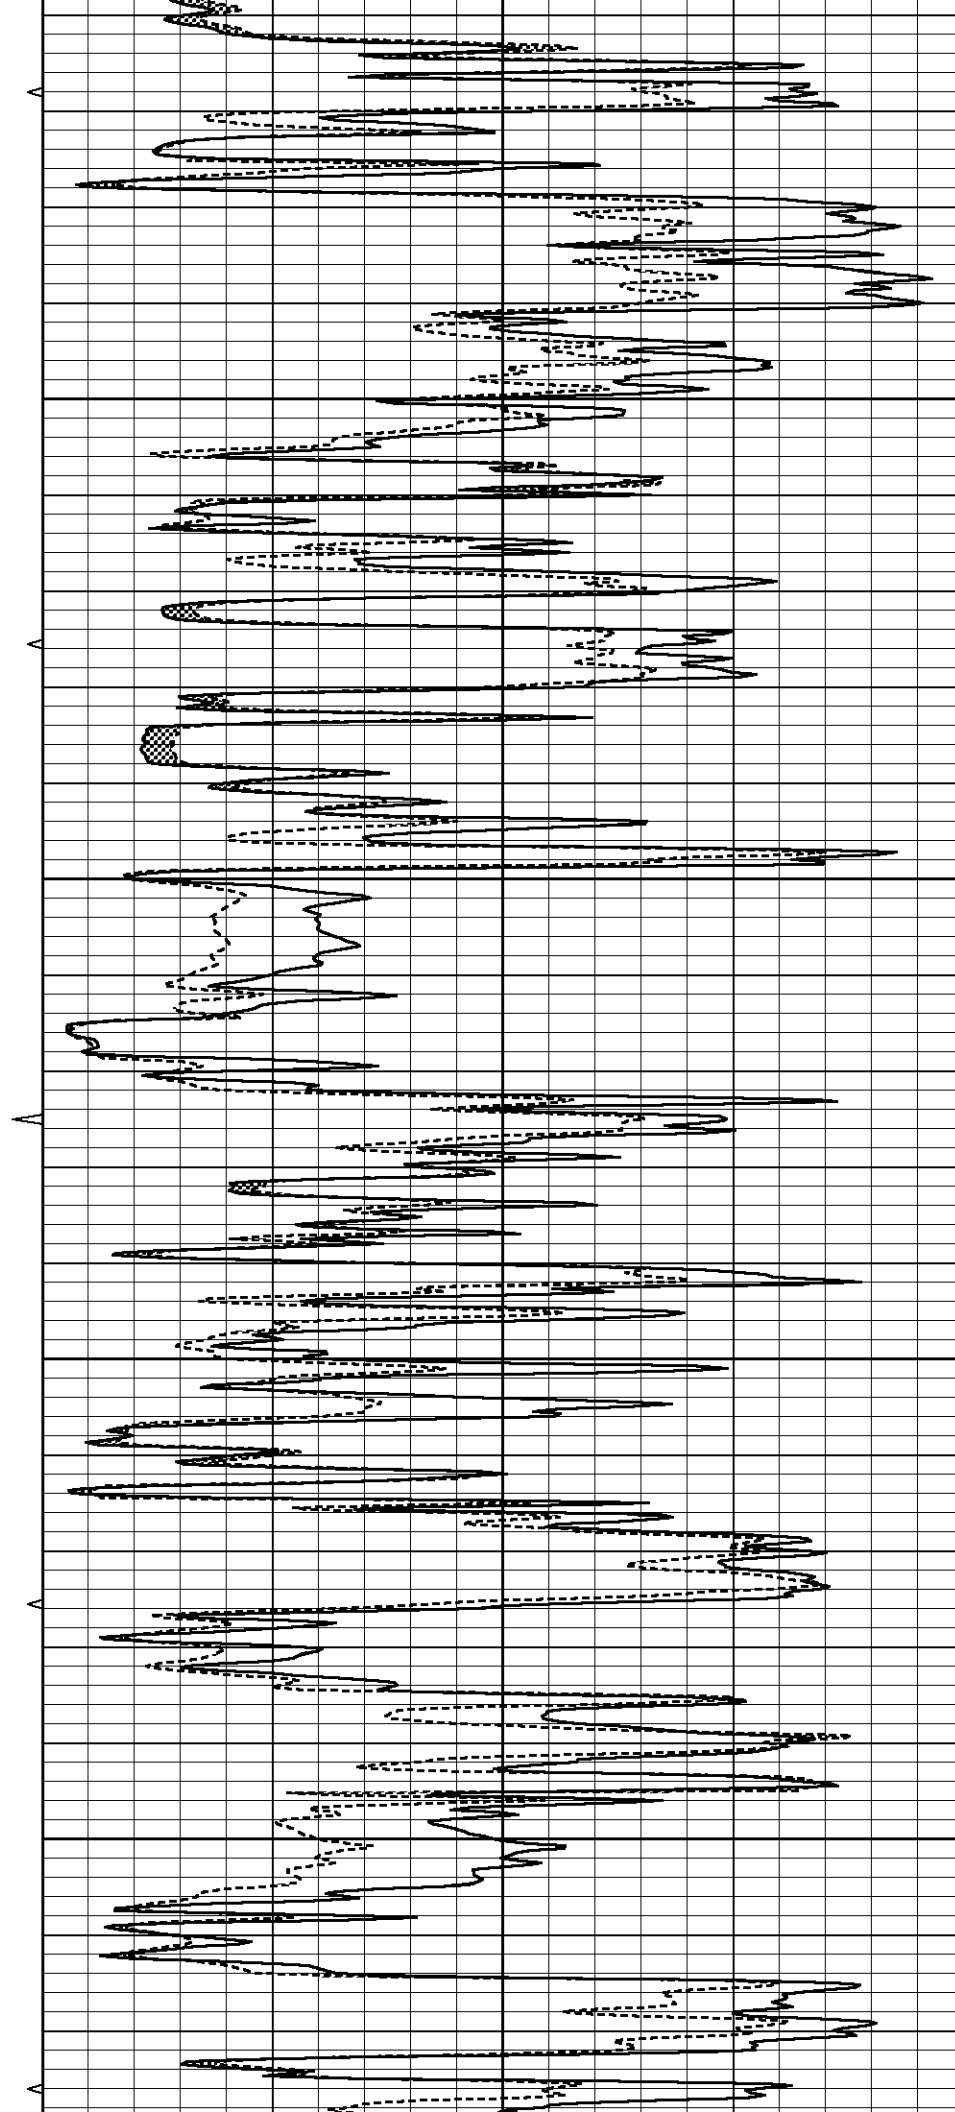

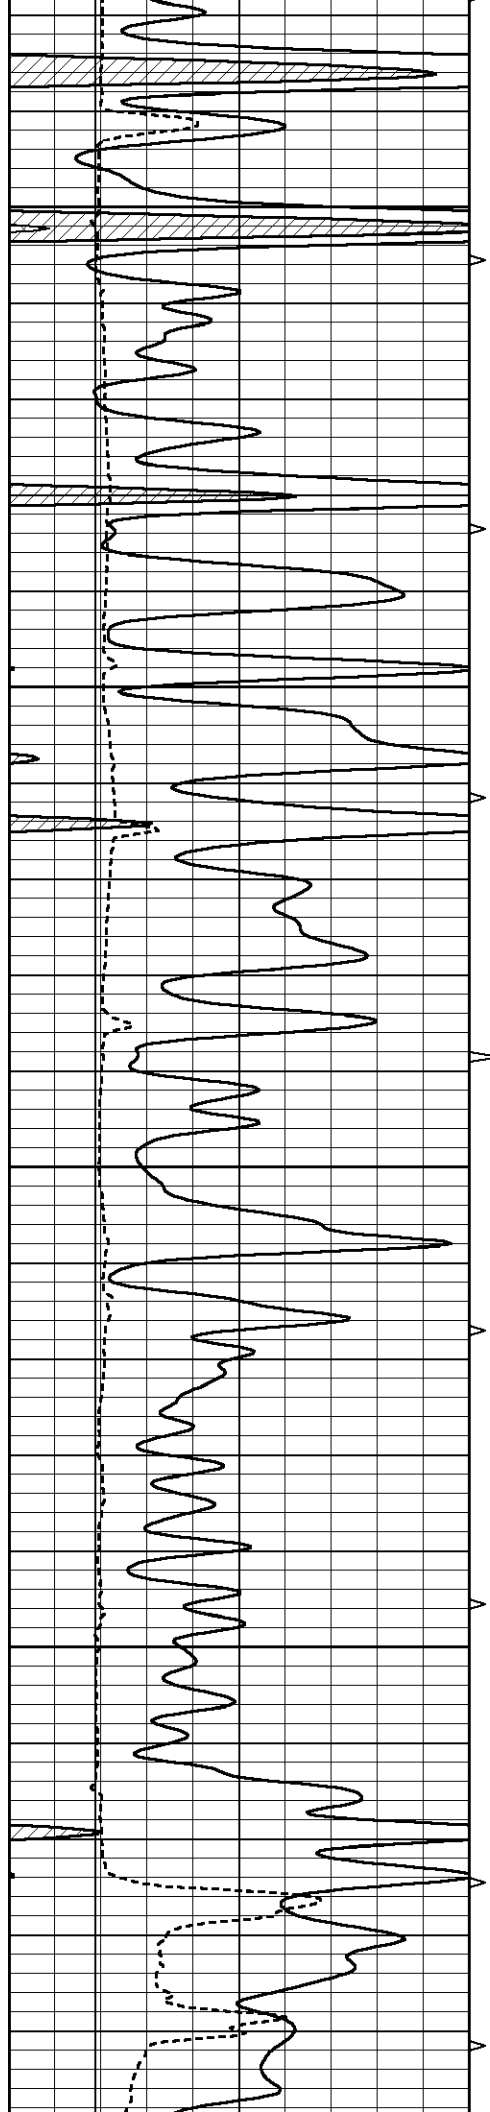




4500

4550

4600


4650

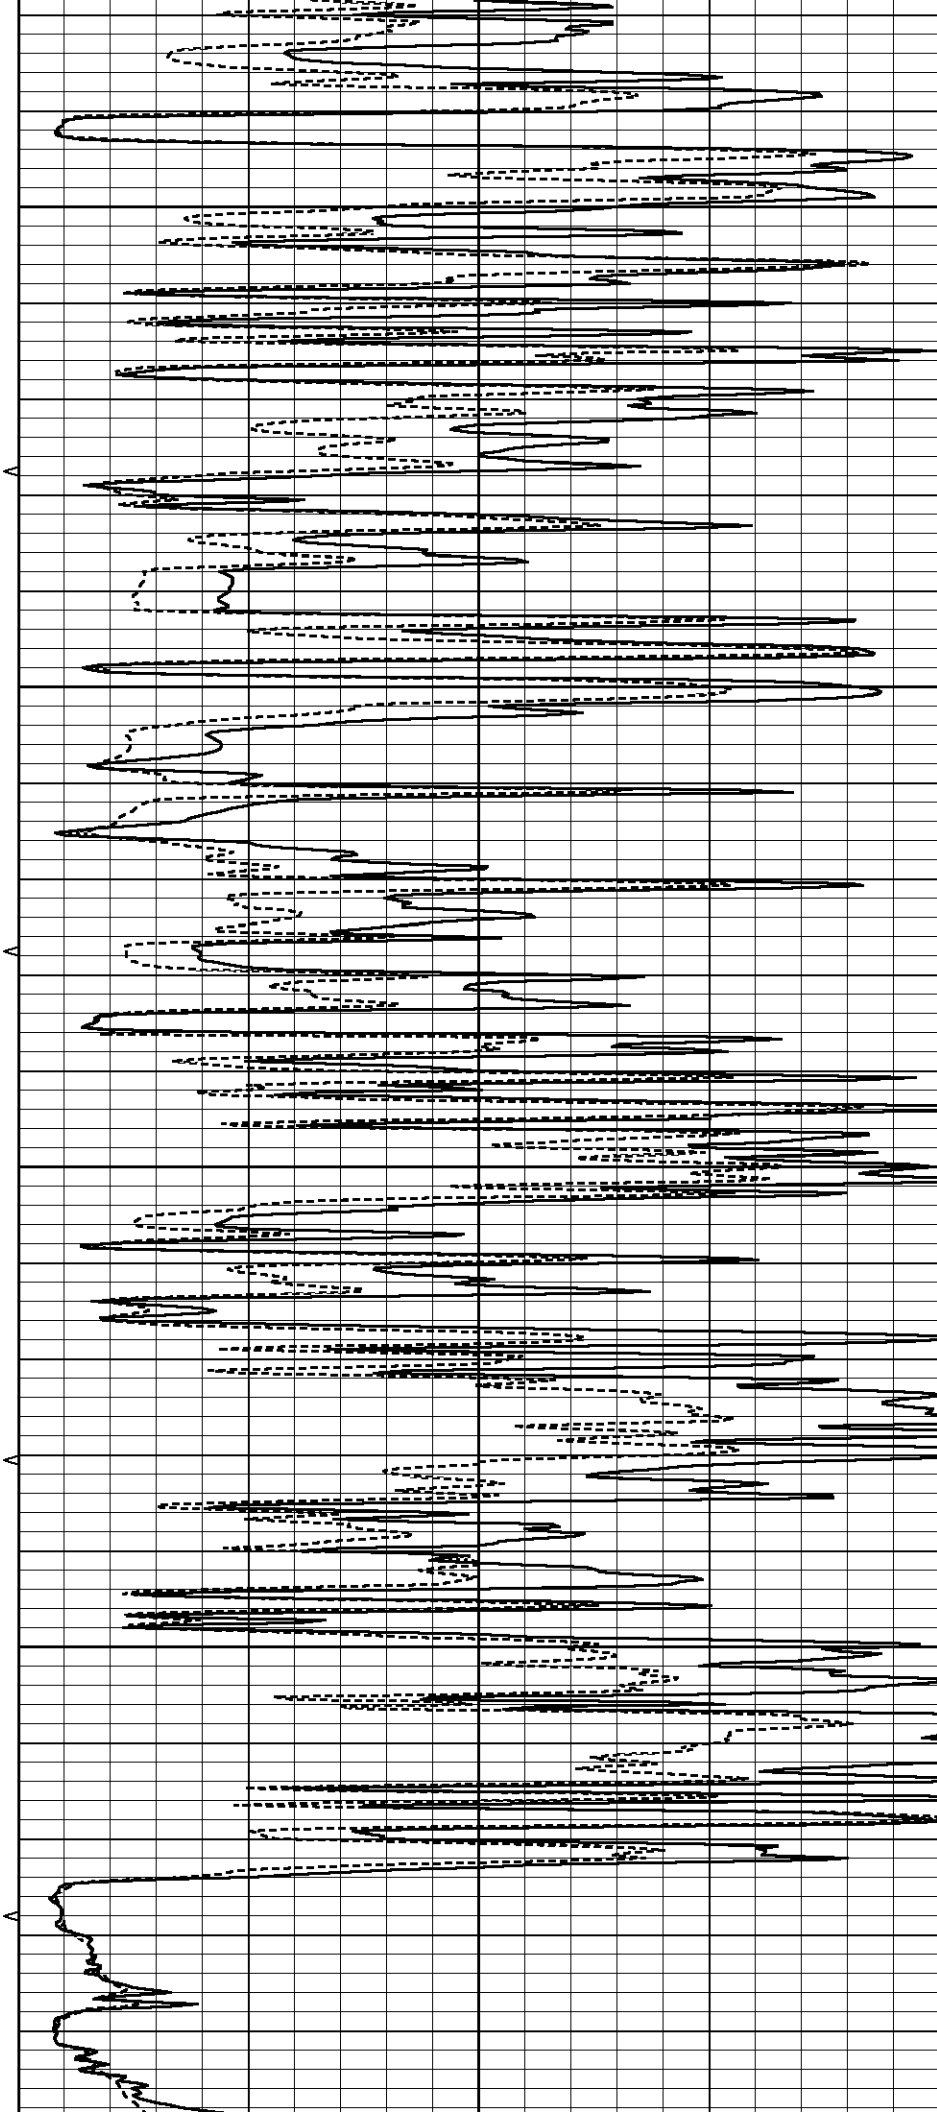


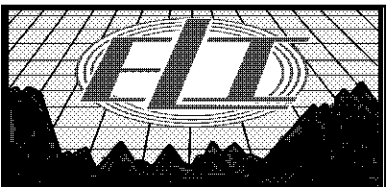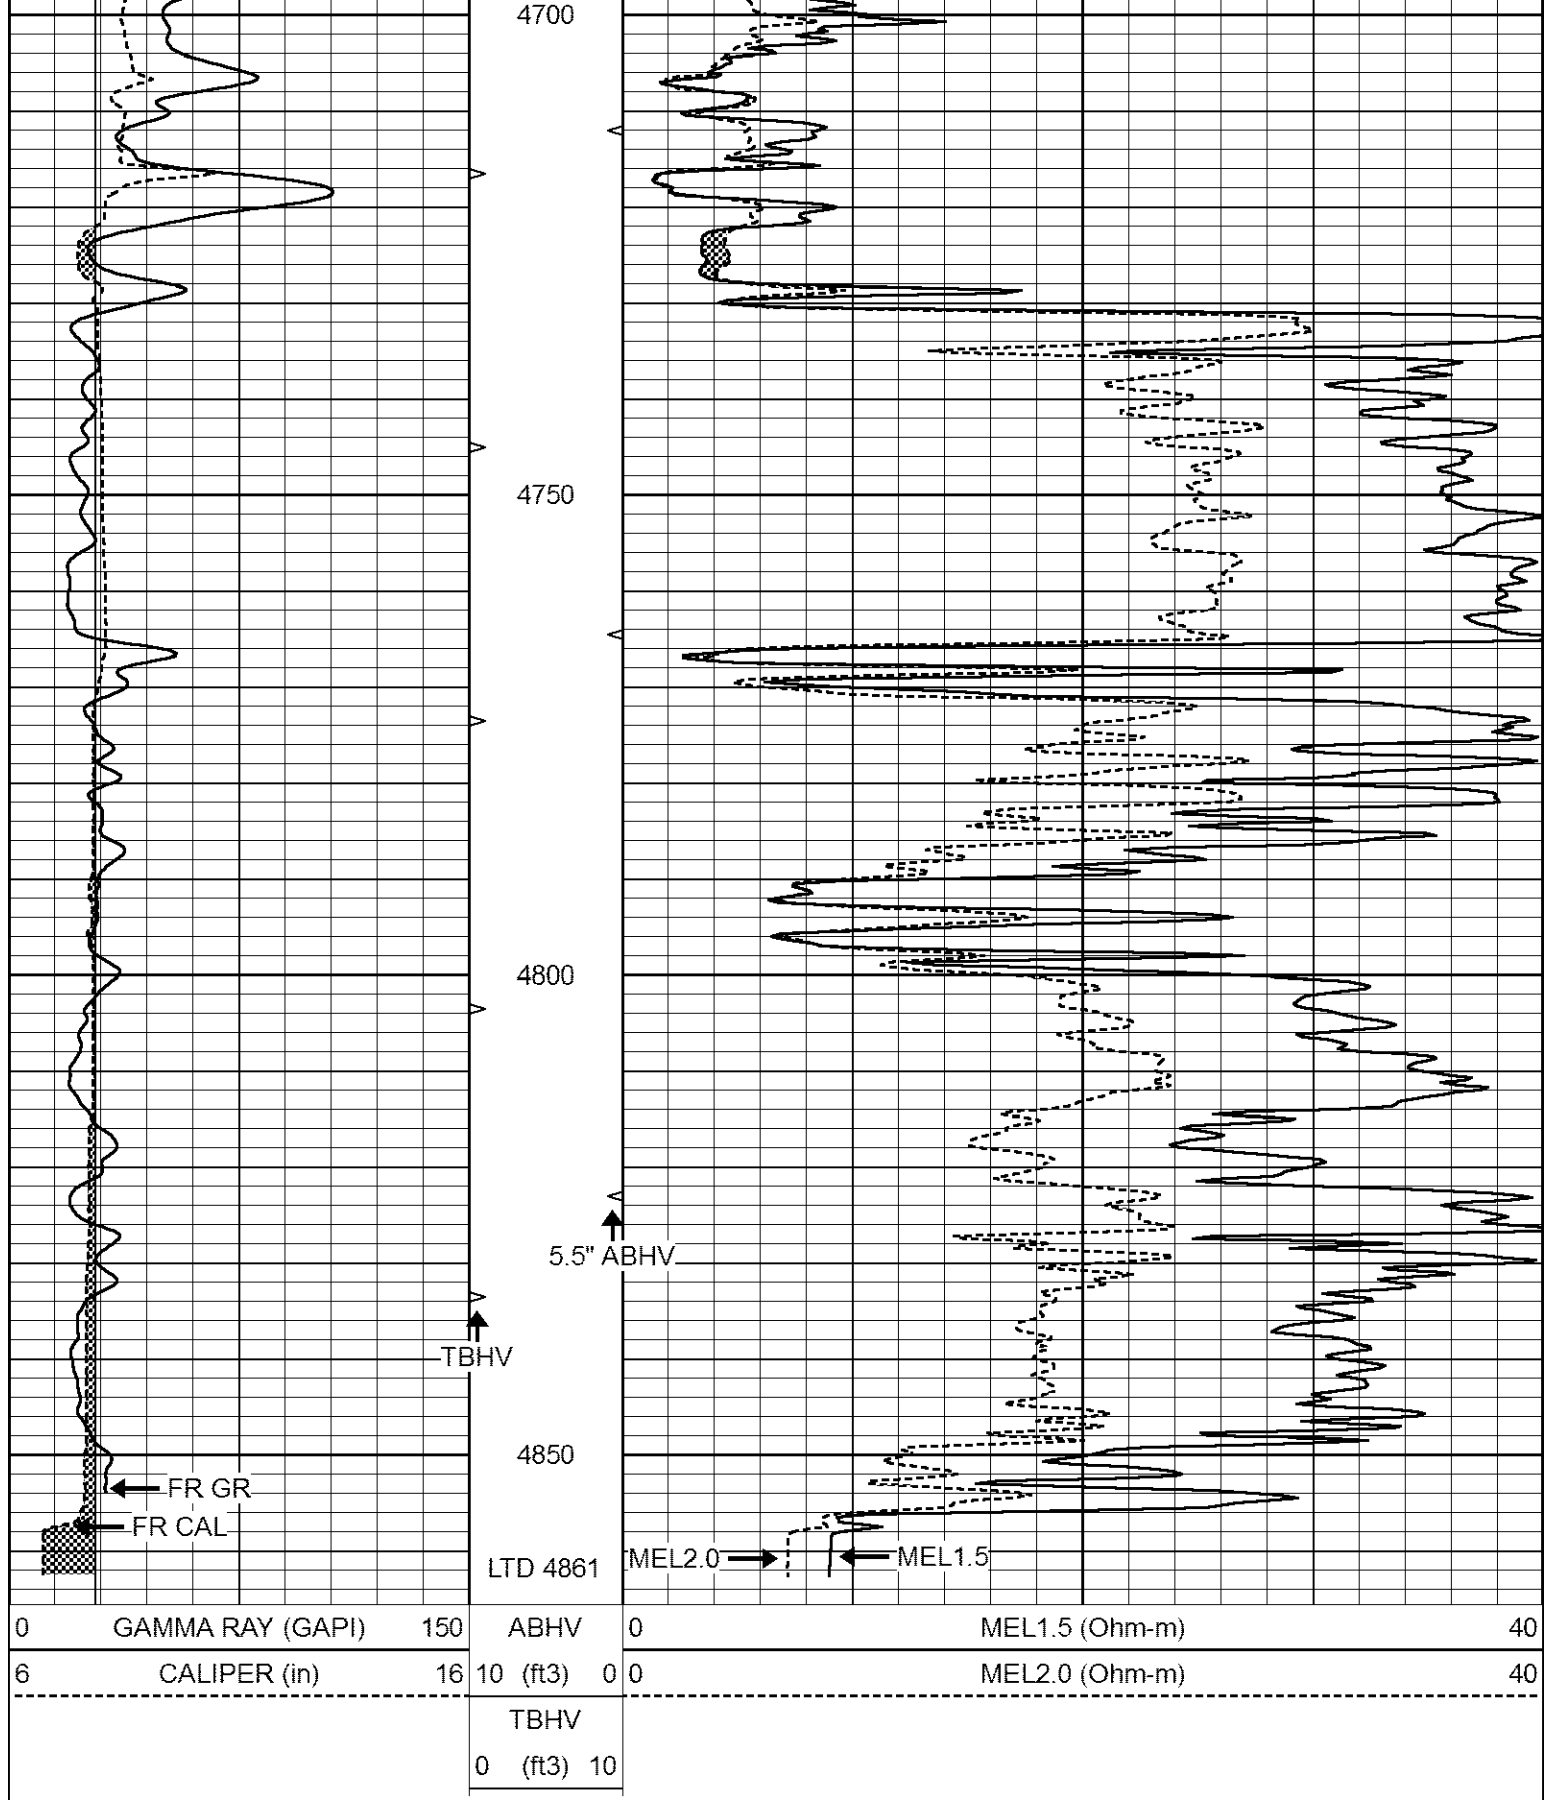

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

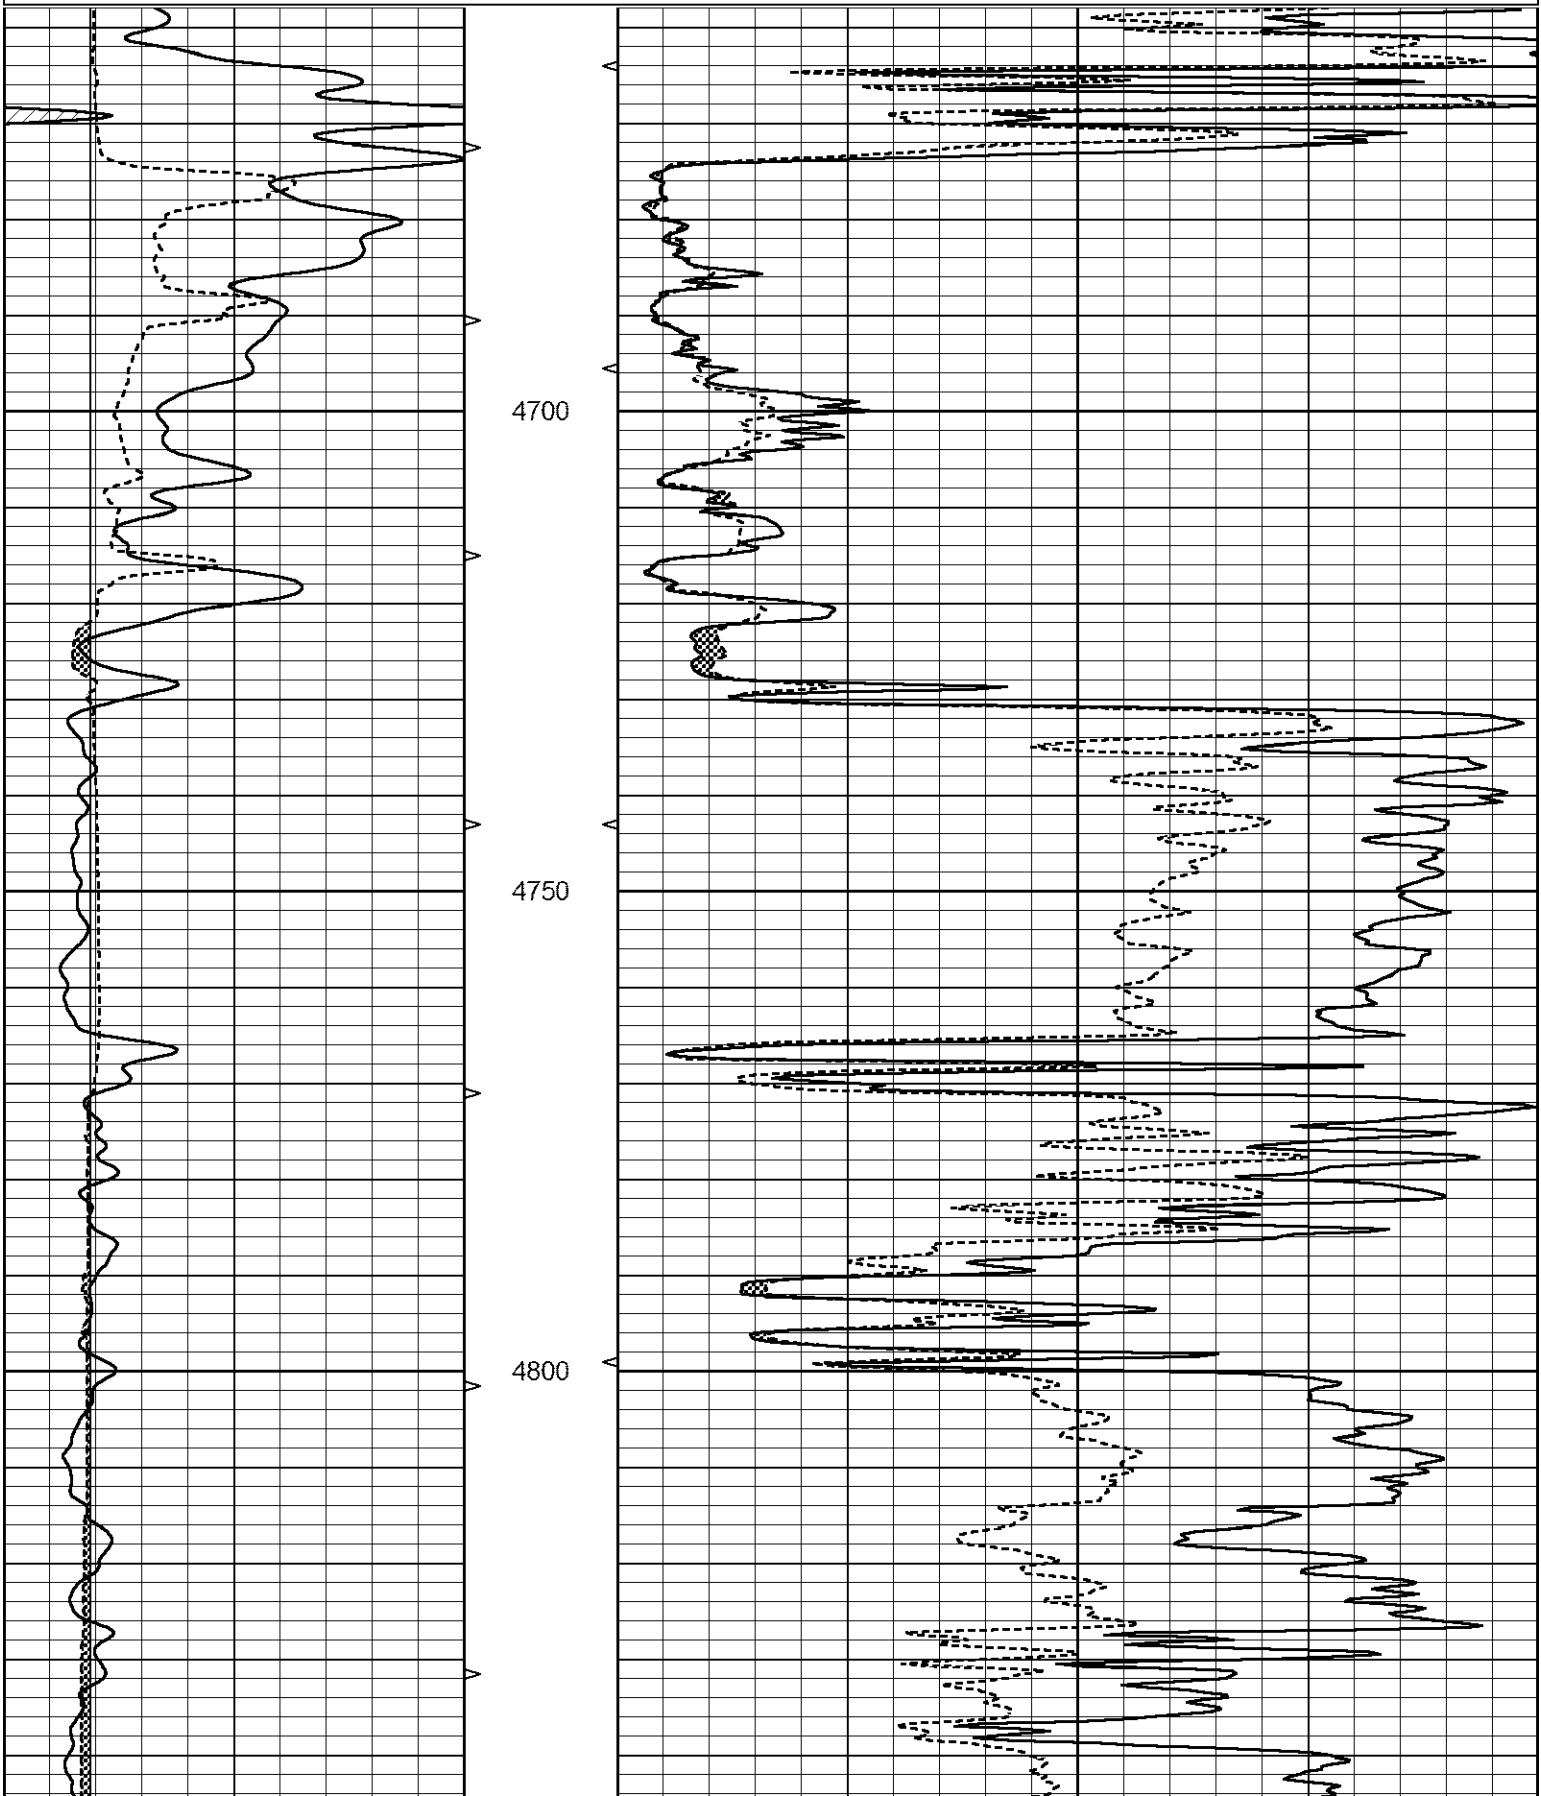

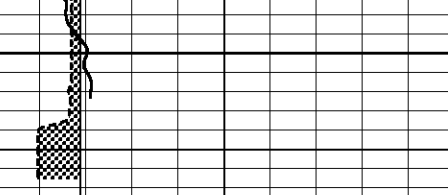			4850												
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)										40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)										40
			TBHV												
			0 (ft3) 10												

Calibration Report								
Database File	7020ddn.db							
Dataset Pathname	pass6D							
Dataset Creation	Wed Sep 21 14:11:43 2022							
MICRO_USR Calibration Report								
Serial Number:			070910					
Tool Model:			ProbeL					
Performed:			Wed Sep 21 00:40:51 2022					
Caliper Calibration:			Gain=7.212		Offset=1.950			
References			Low Cal		High Cal			
Readings			8.000		14.000			
			0.725		1.557			
1.5" Calibration:			Gain=20.000		Offset=0.000			
References			Low Cal		High Cal			
Readings			0.000		20.000			
			0.004		1.335			
2" Calibration:			Gain=15.000		Offset=2.000			
References			Low Cal		High Cal			
Readings			0.000		20.000			
			0.004		1.029			
Microlog Calibration Report								
Serial-Model:			070910-ProbeL					
Performed:			(Not Performed)					
Readings			References				Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report									
Serial Number:		070558							
Tool Model:		Probe1							
Performed:		Sat Jul 02 05:55:58 2022							
Calibrator Value:		1.0		GAPI					
Background Reading:		0.0		cps					
Calibrator Reading:		1.0		cps					

Sensitivity:

0.2600

GAPI/cps