



MICRO LOG

Company	AGV CORPORATION	Company	AGV CORPORATION
Well	BARBARA #1	Well	BARBARA #1
Field	BENFER	Field	BENFER
County	BUTLER	County	BUTLER
State	KANSAS	State	KANSAS
Location:	API # : 15-015-24153-0000 2310' FSL & 2110' FEL E/2 - NW - NW - SE	Other Services CDL/CNL DIL/SON	
Permanent Datum	GROUND LEVEL	Elevation	1342
Log Measured From	KELLY BUSHING		
Drilling Measured From	KELLY BUSHING		
Date	9/21/21		
Run Number	TWO		
Depth Driller	3340		
Depth Logger	3338		
Bottom Logged Interval	3312		
Top Log Interval	1700		
Casing Driller	8 5/8"@218"		
Casing Logger	220		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES	N/A
Density / Viscosity	9.5/42		
pH / Fluid Loss	N/A		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.50@85F		
Rmf @ Meas. Temp	1.13@85F		
Rmc @ Meas. Temp	1.80@85F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.16@110F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	11:45 A.M.		
Maximum Recorded Temperature	110F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KENT ROBERTS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-015-24153-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
BENTON, KS., & HWY 254 EXIT, N. 100 YARDS TO FRONTAGE RD THAT GOES WEST 1/2 MILE,
THEN NORTH 1/8, W. INTO





MAIN SECTION


Database File	5660ddn.db
Dataset Pathname	pass6.1M
Presentation Format	micro
Dataset Creation	Tue Sep 21 13:27:41 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

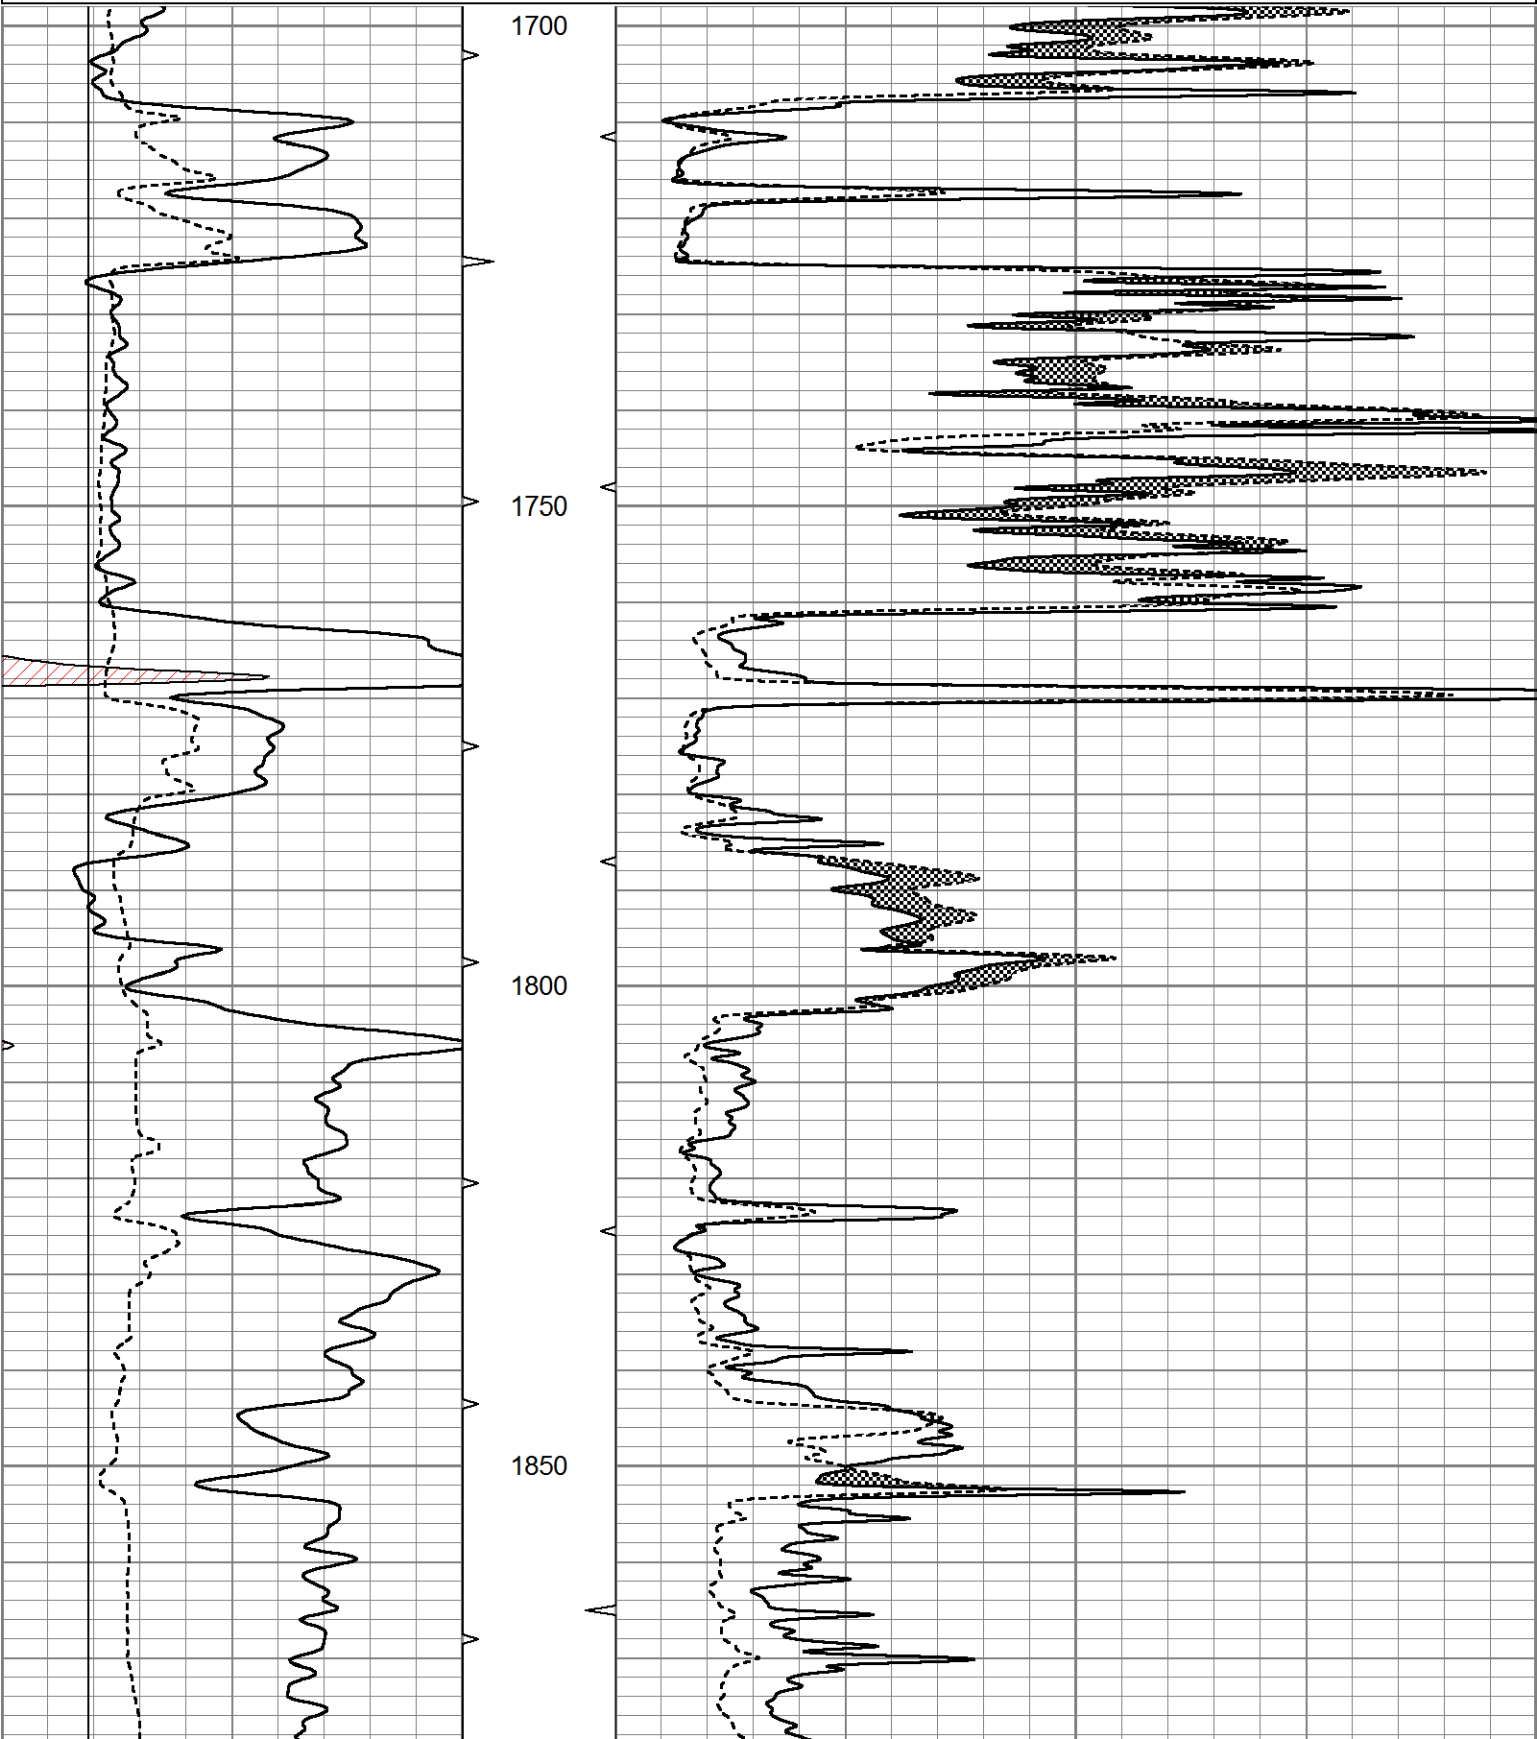

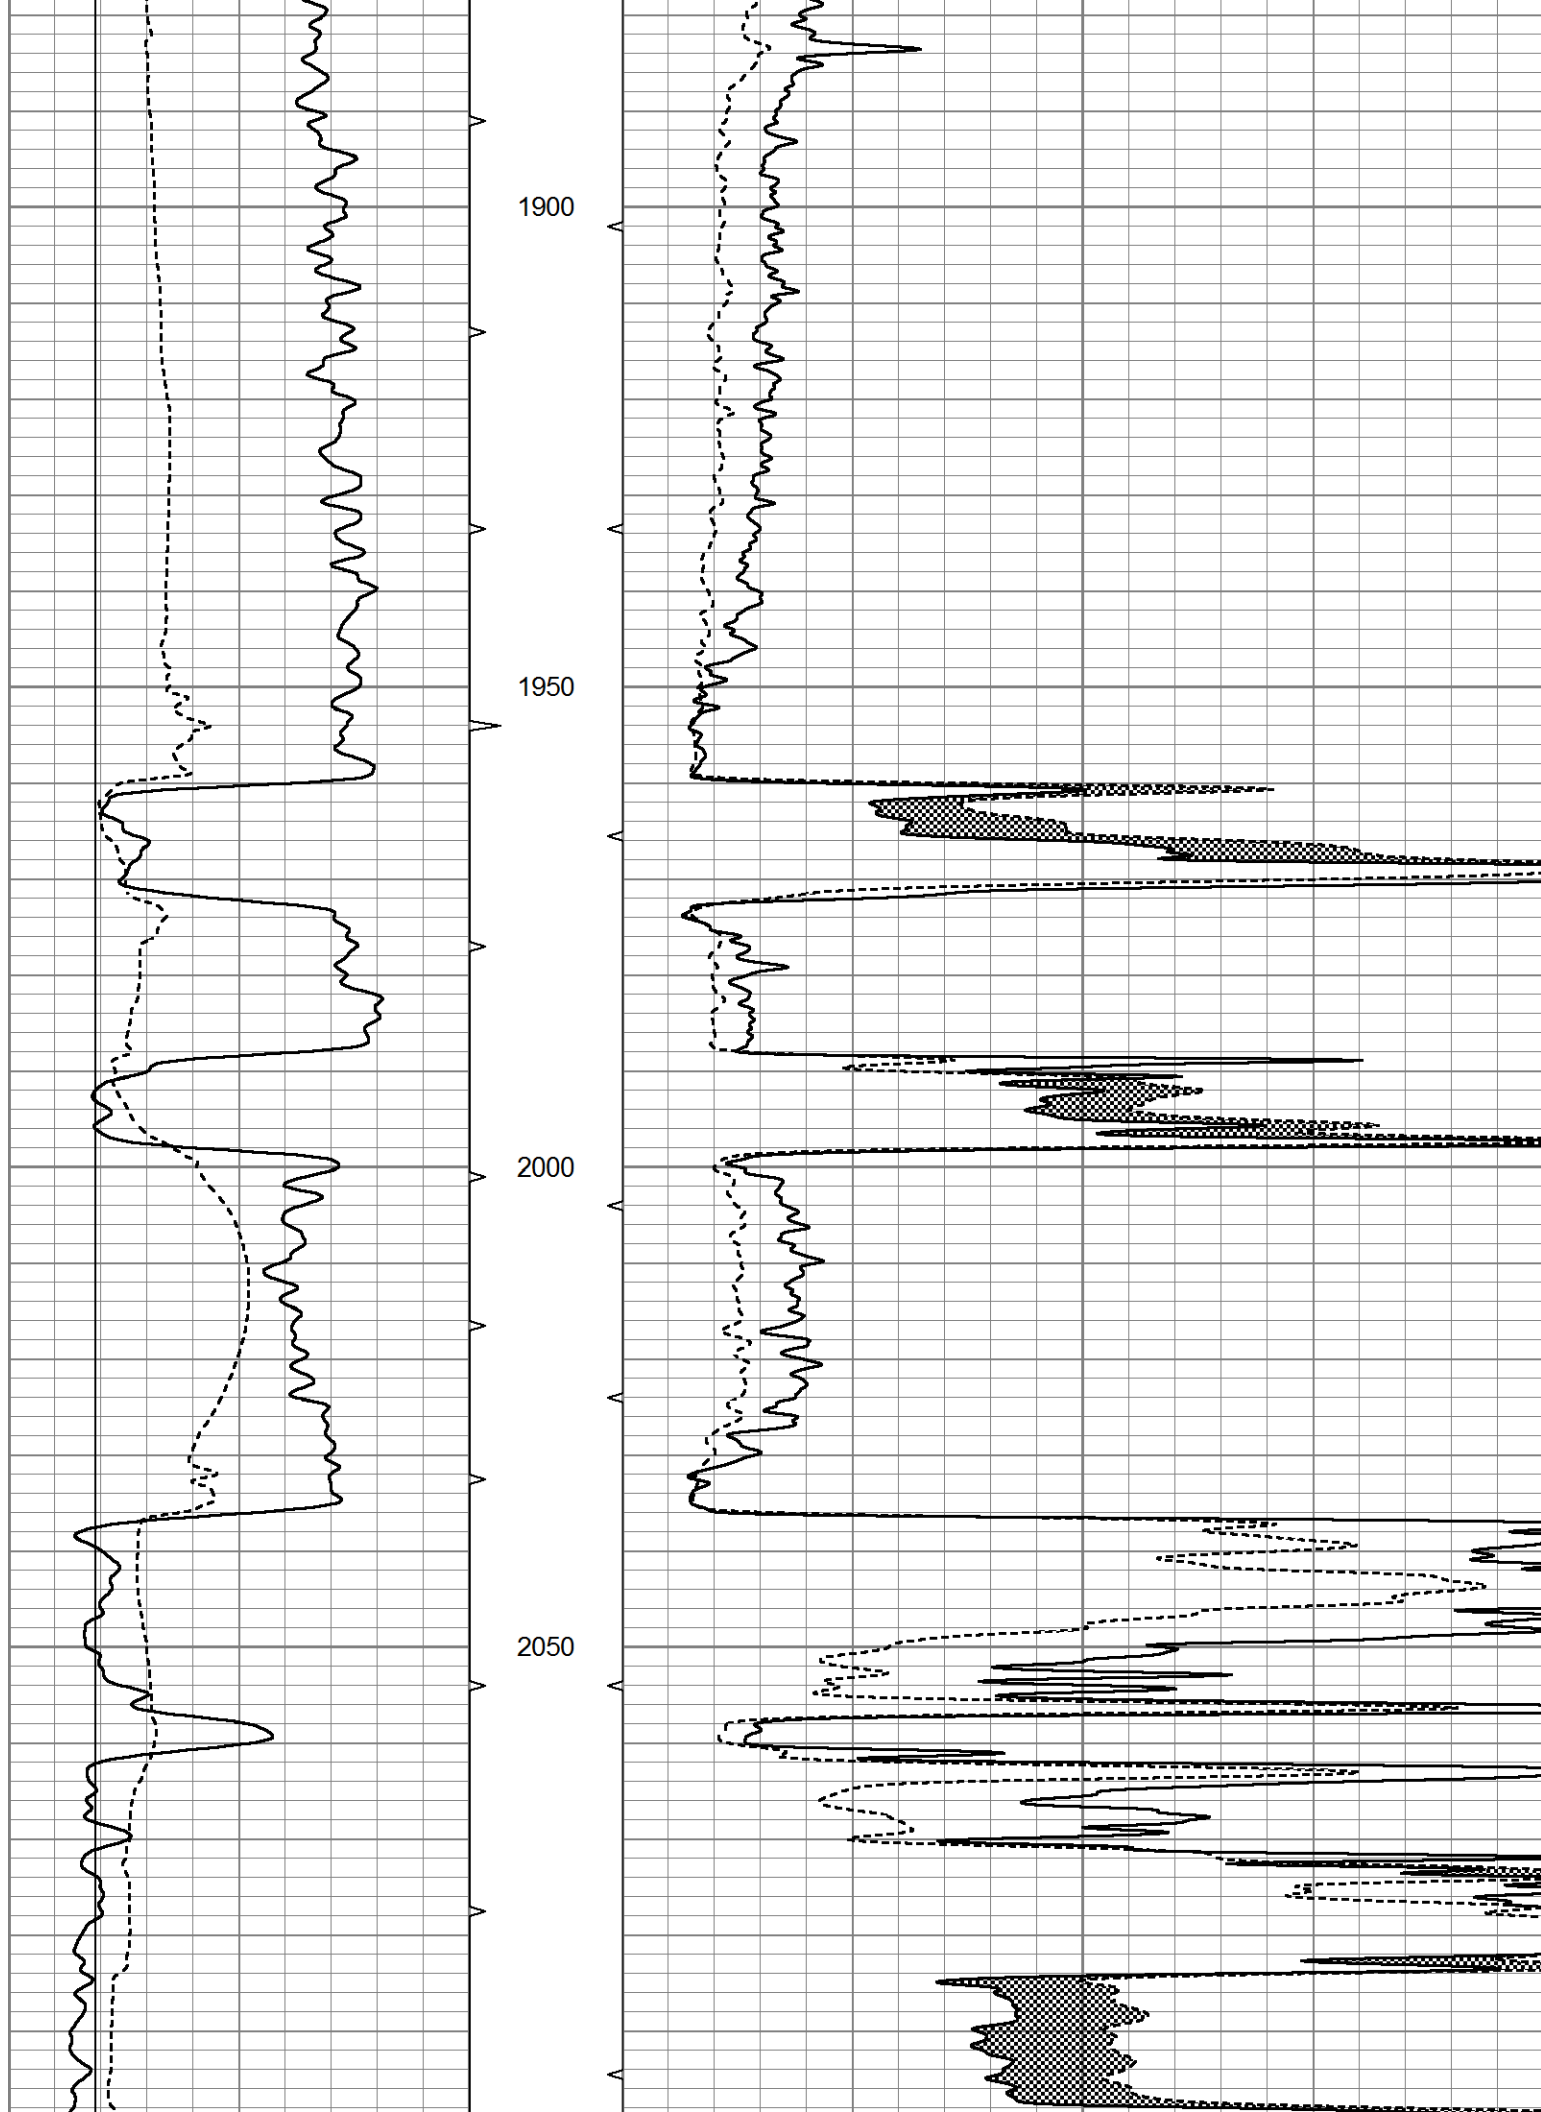

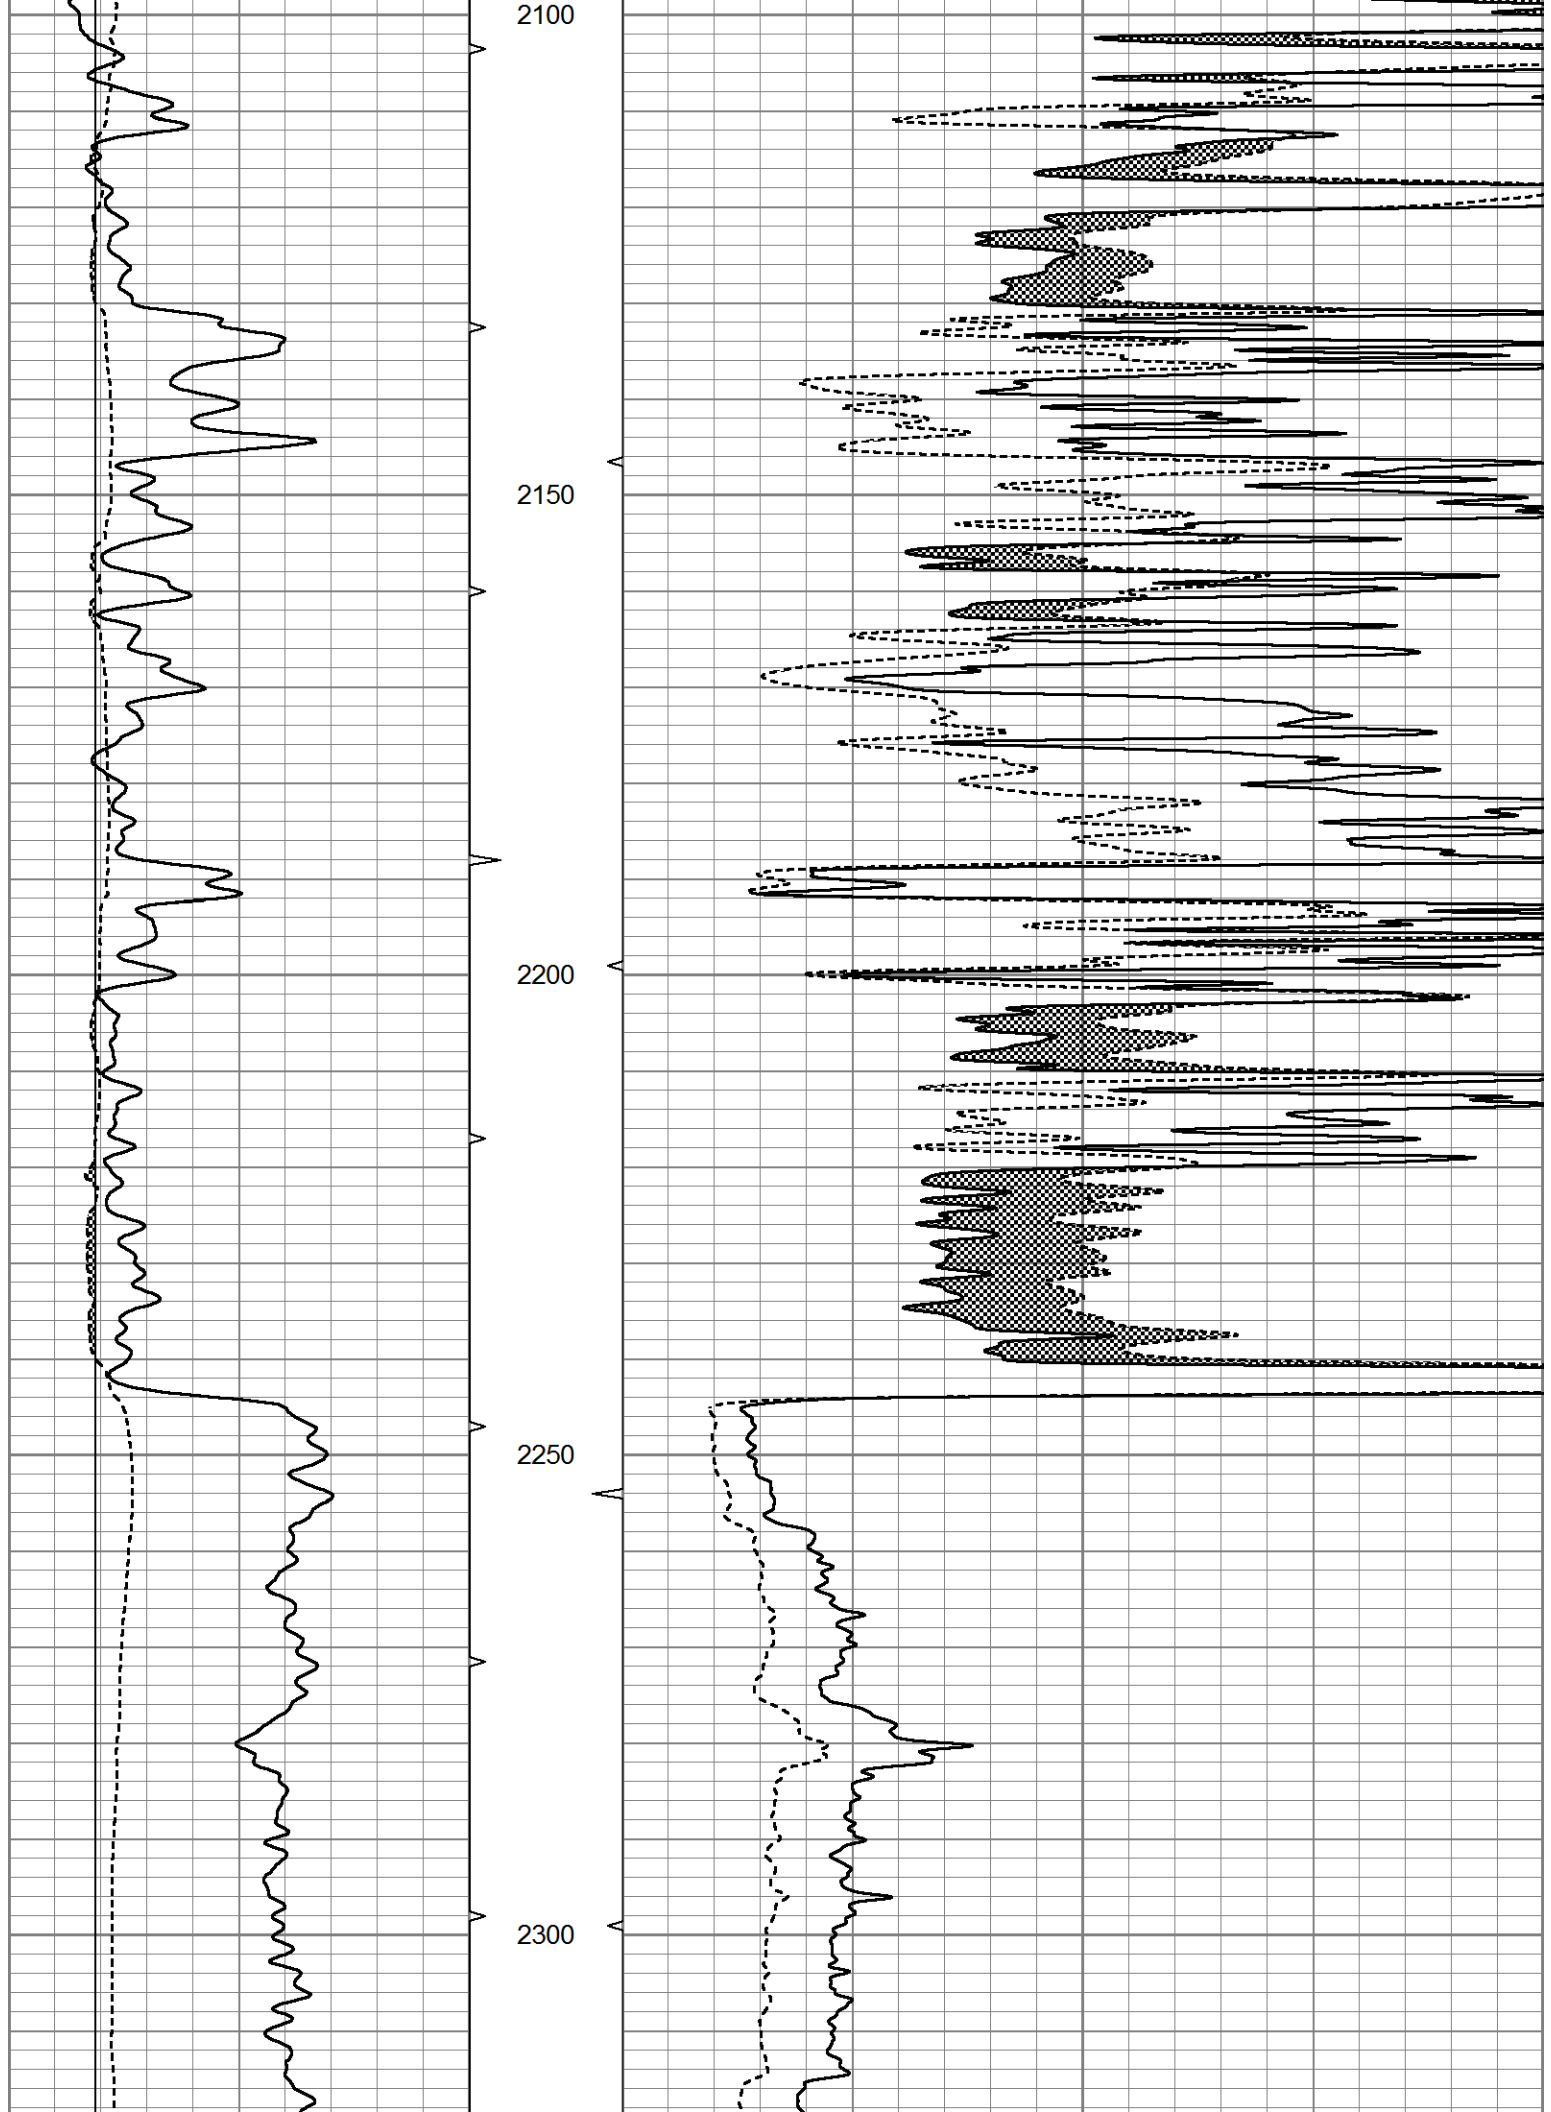

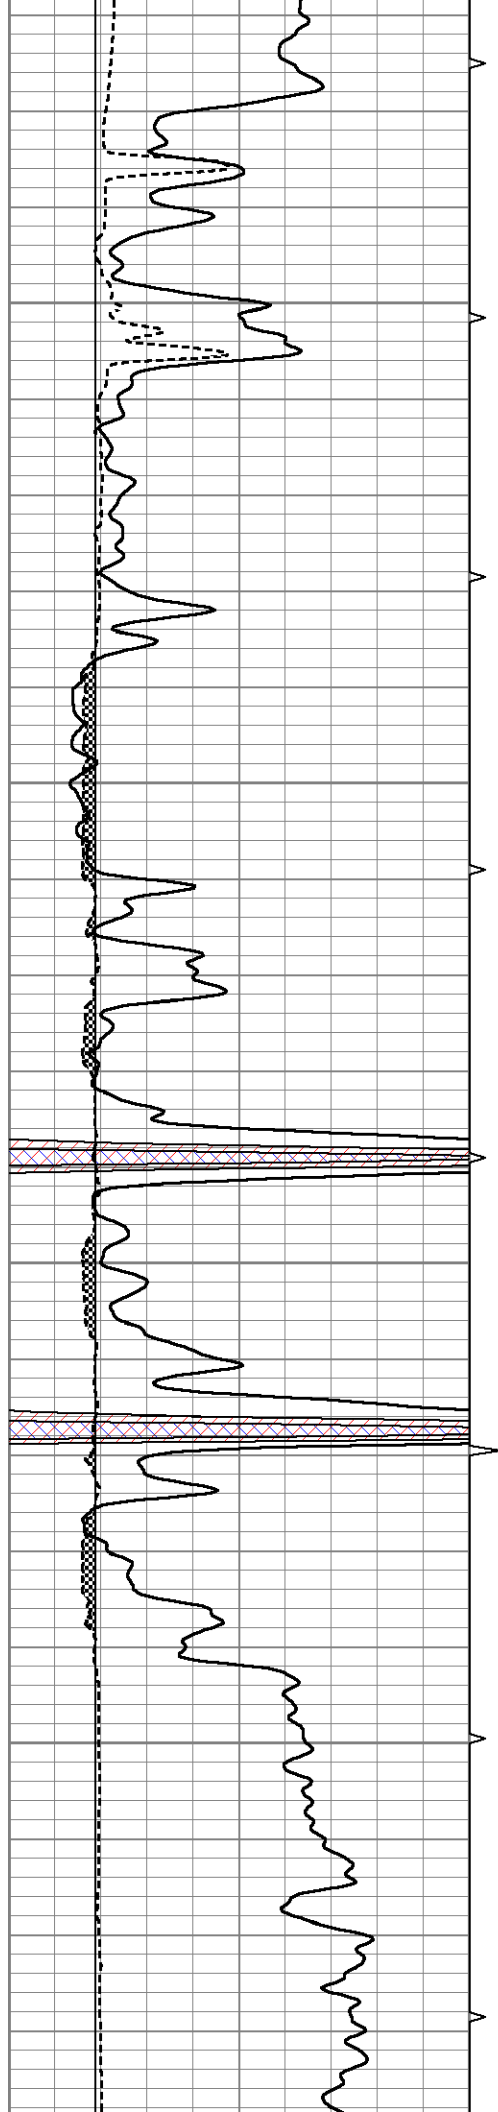



2350


2400


2450


2500

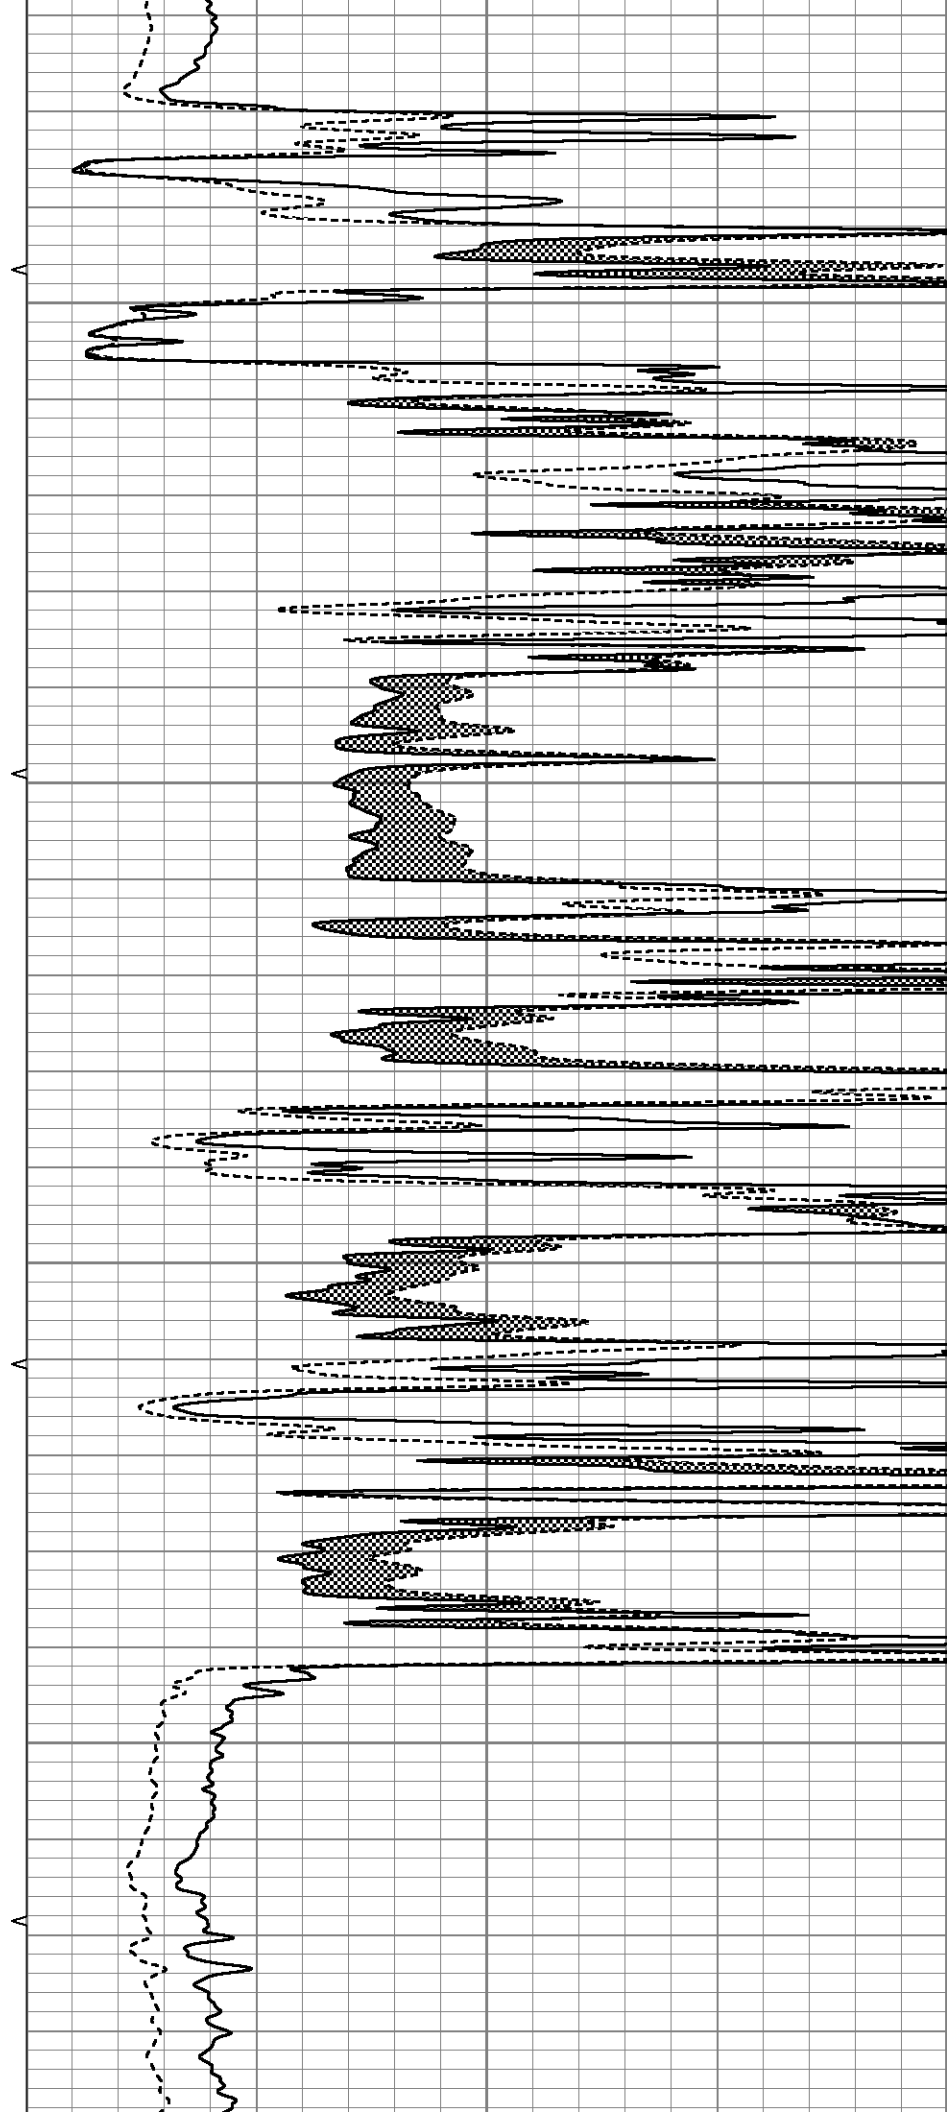

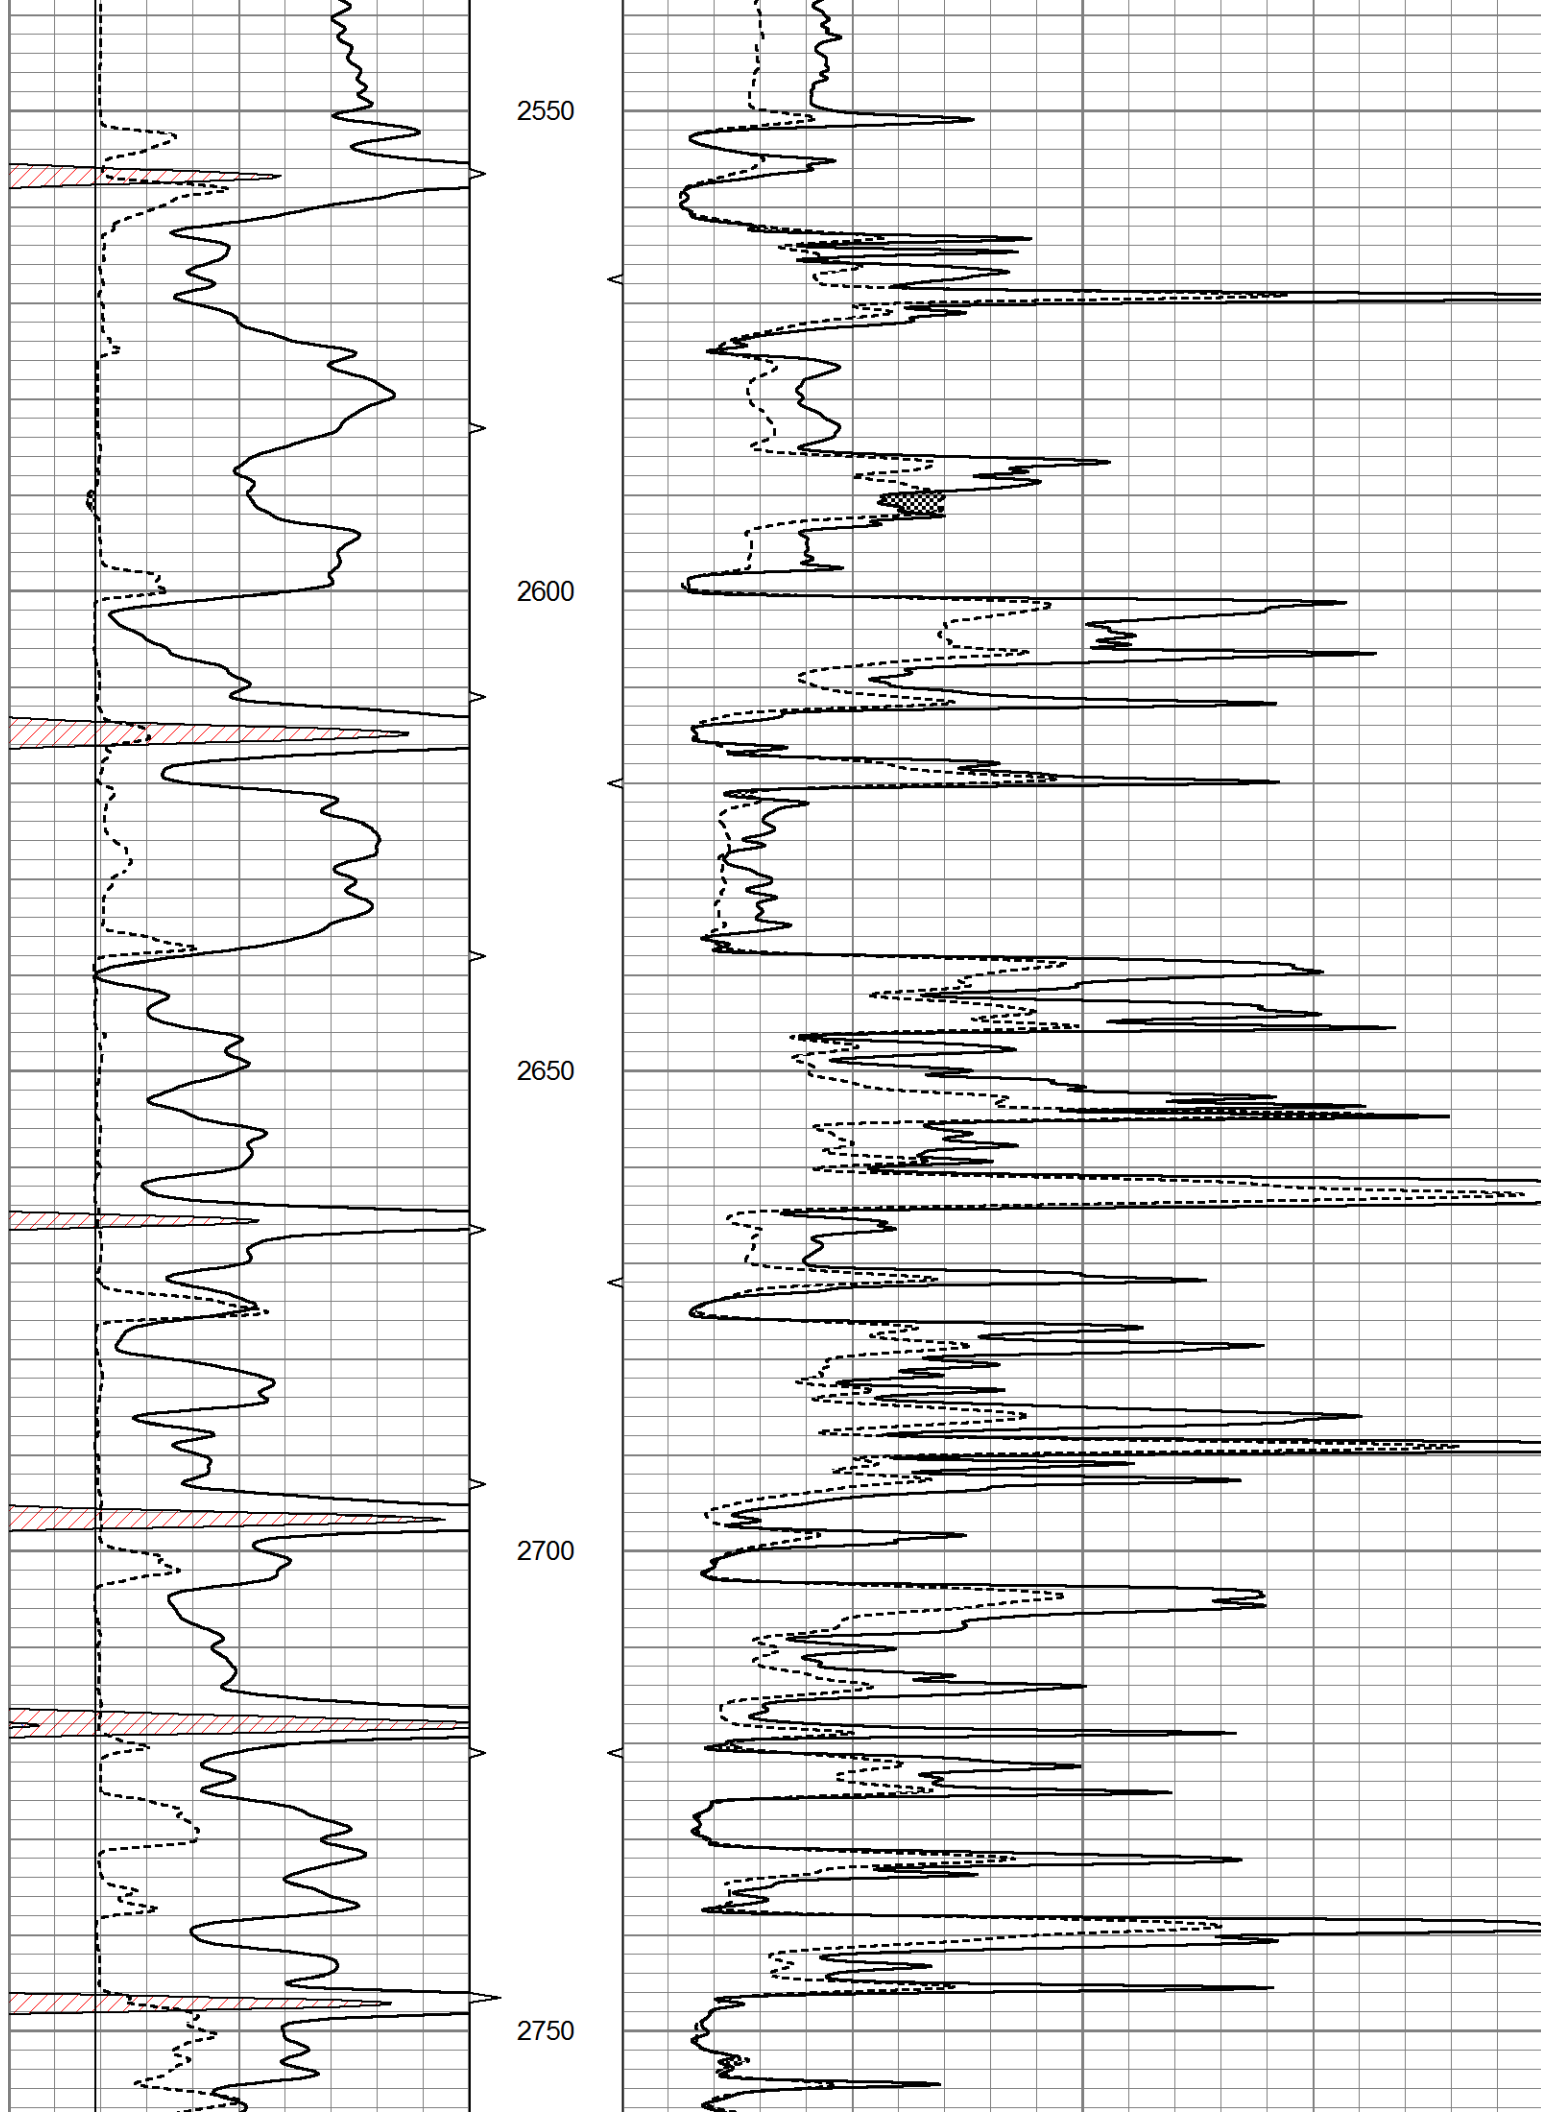

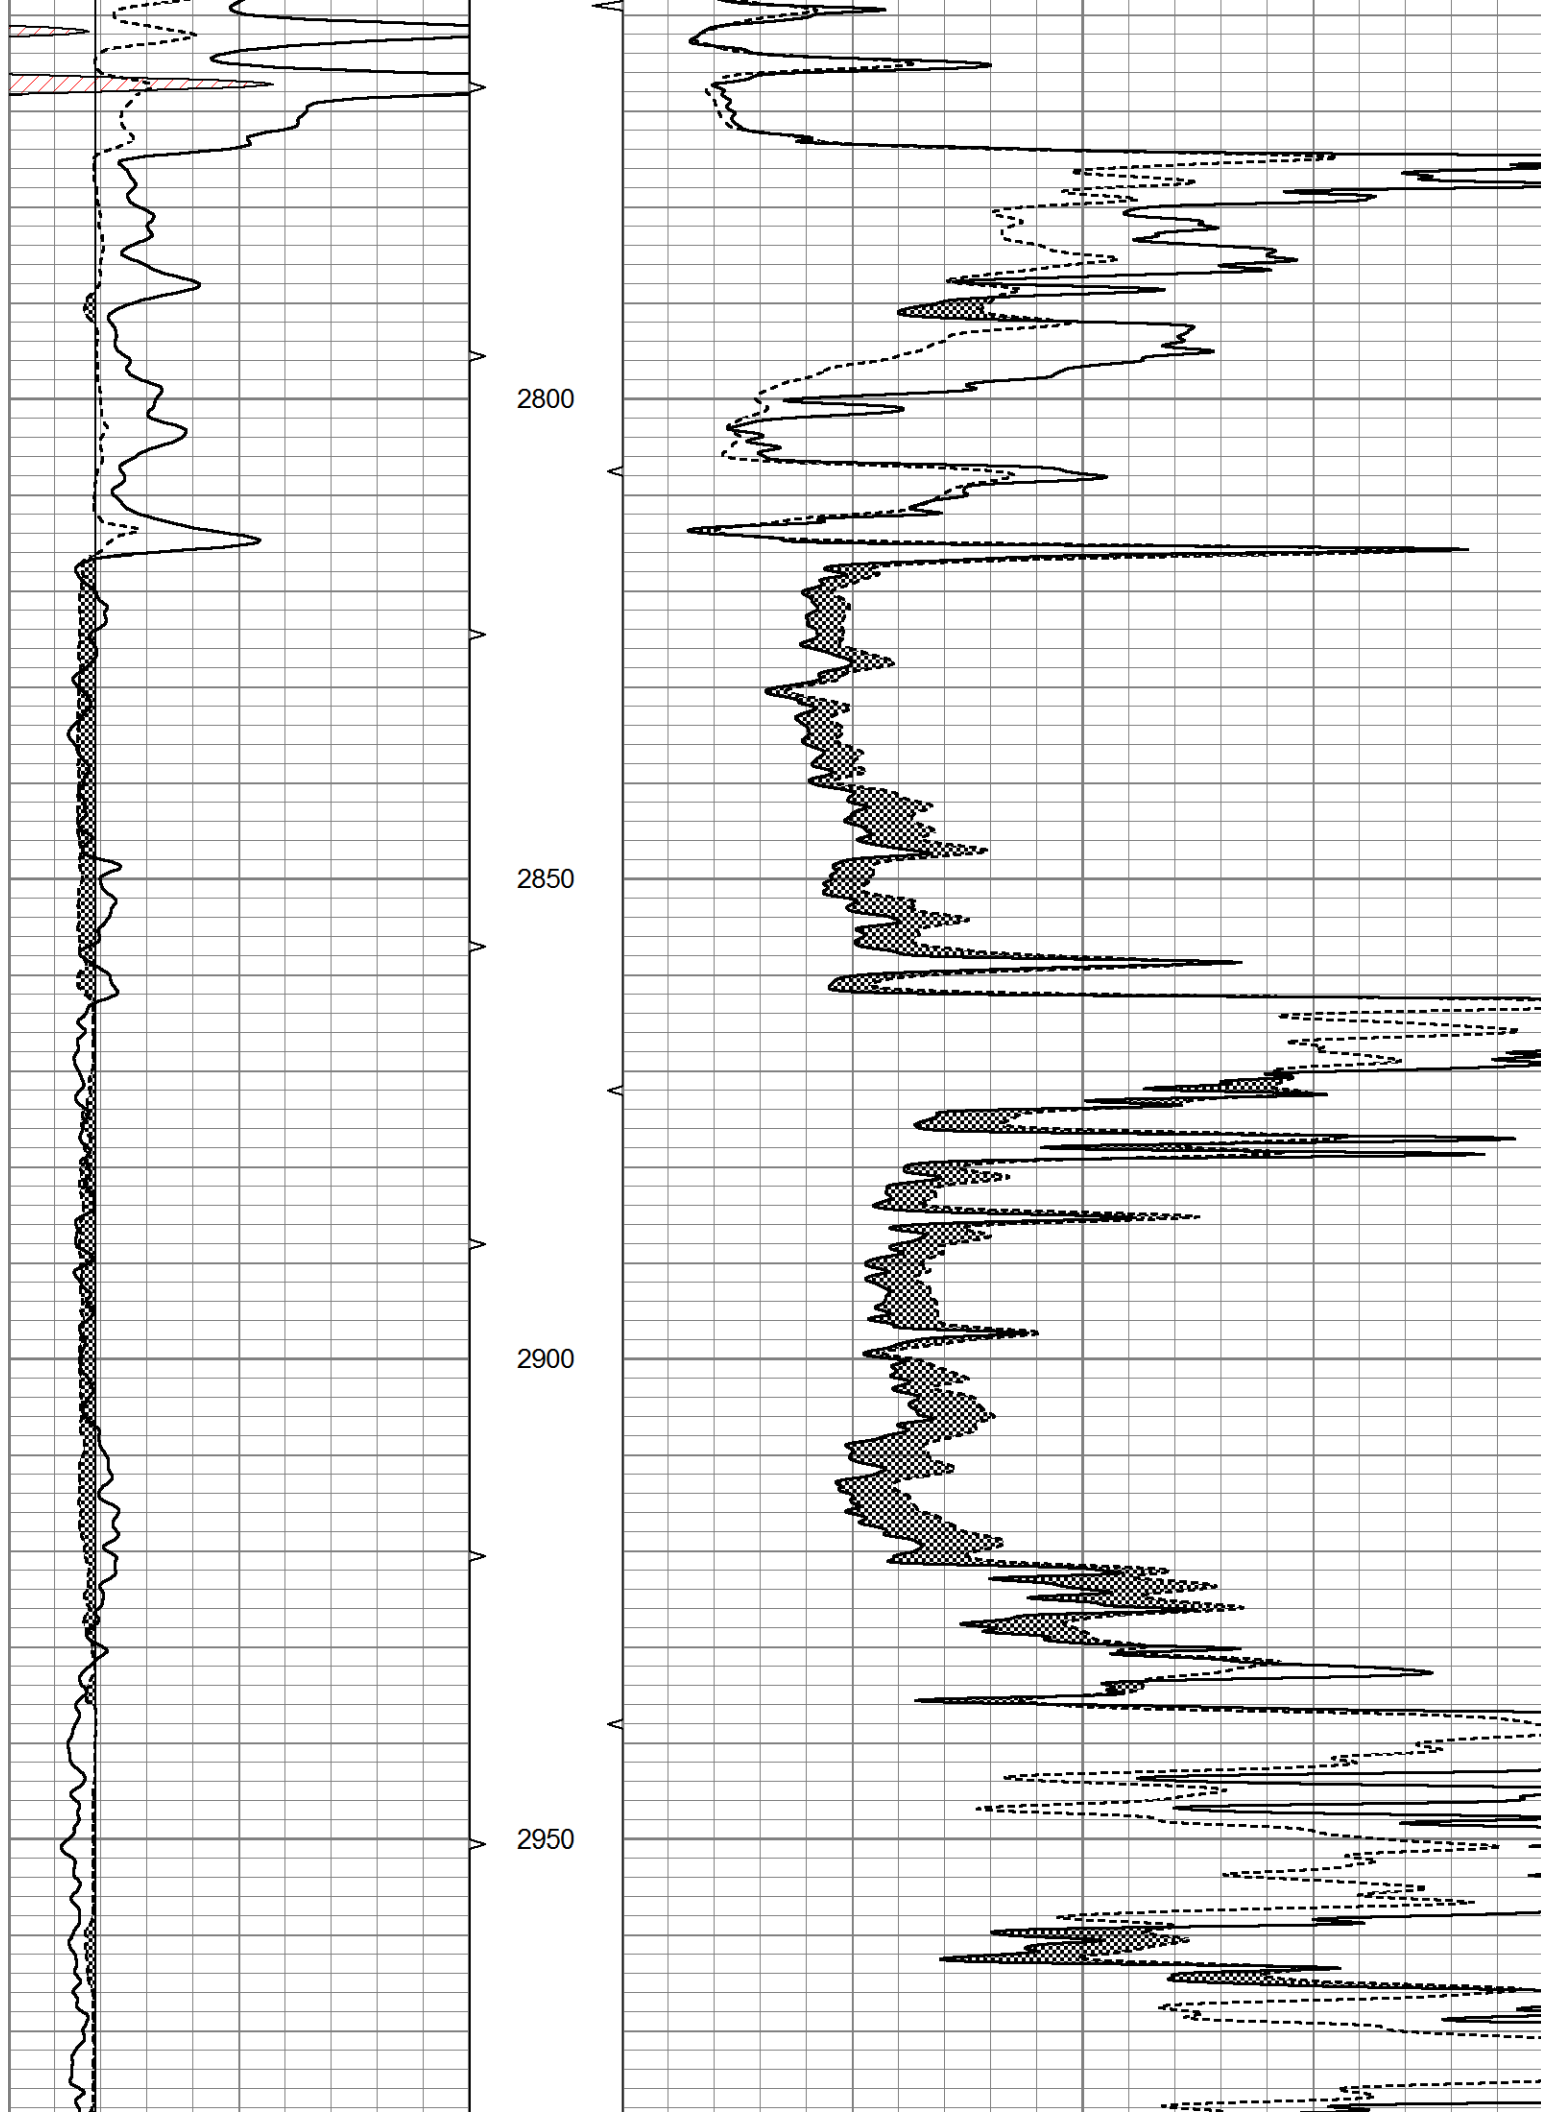

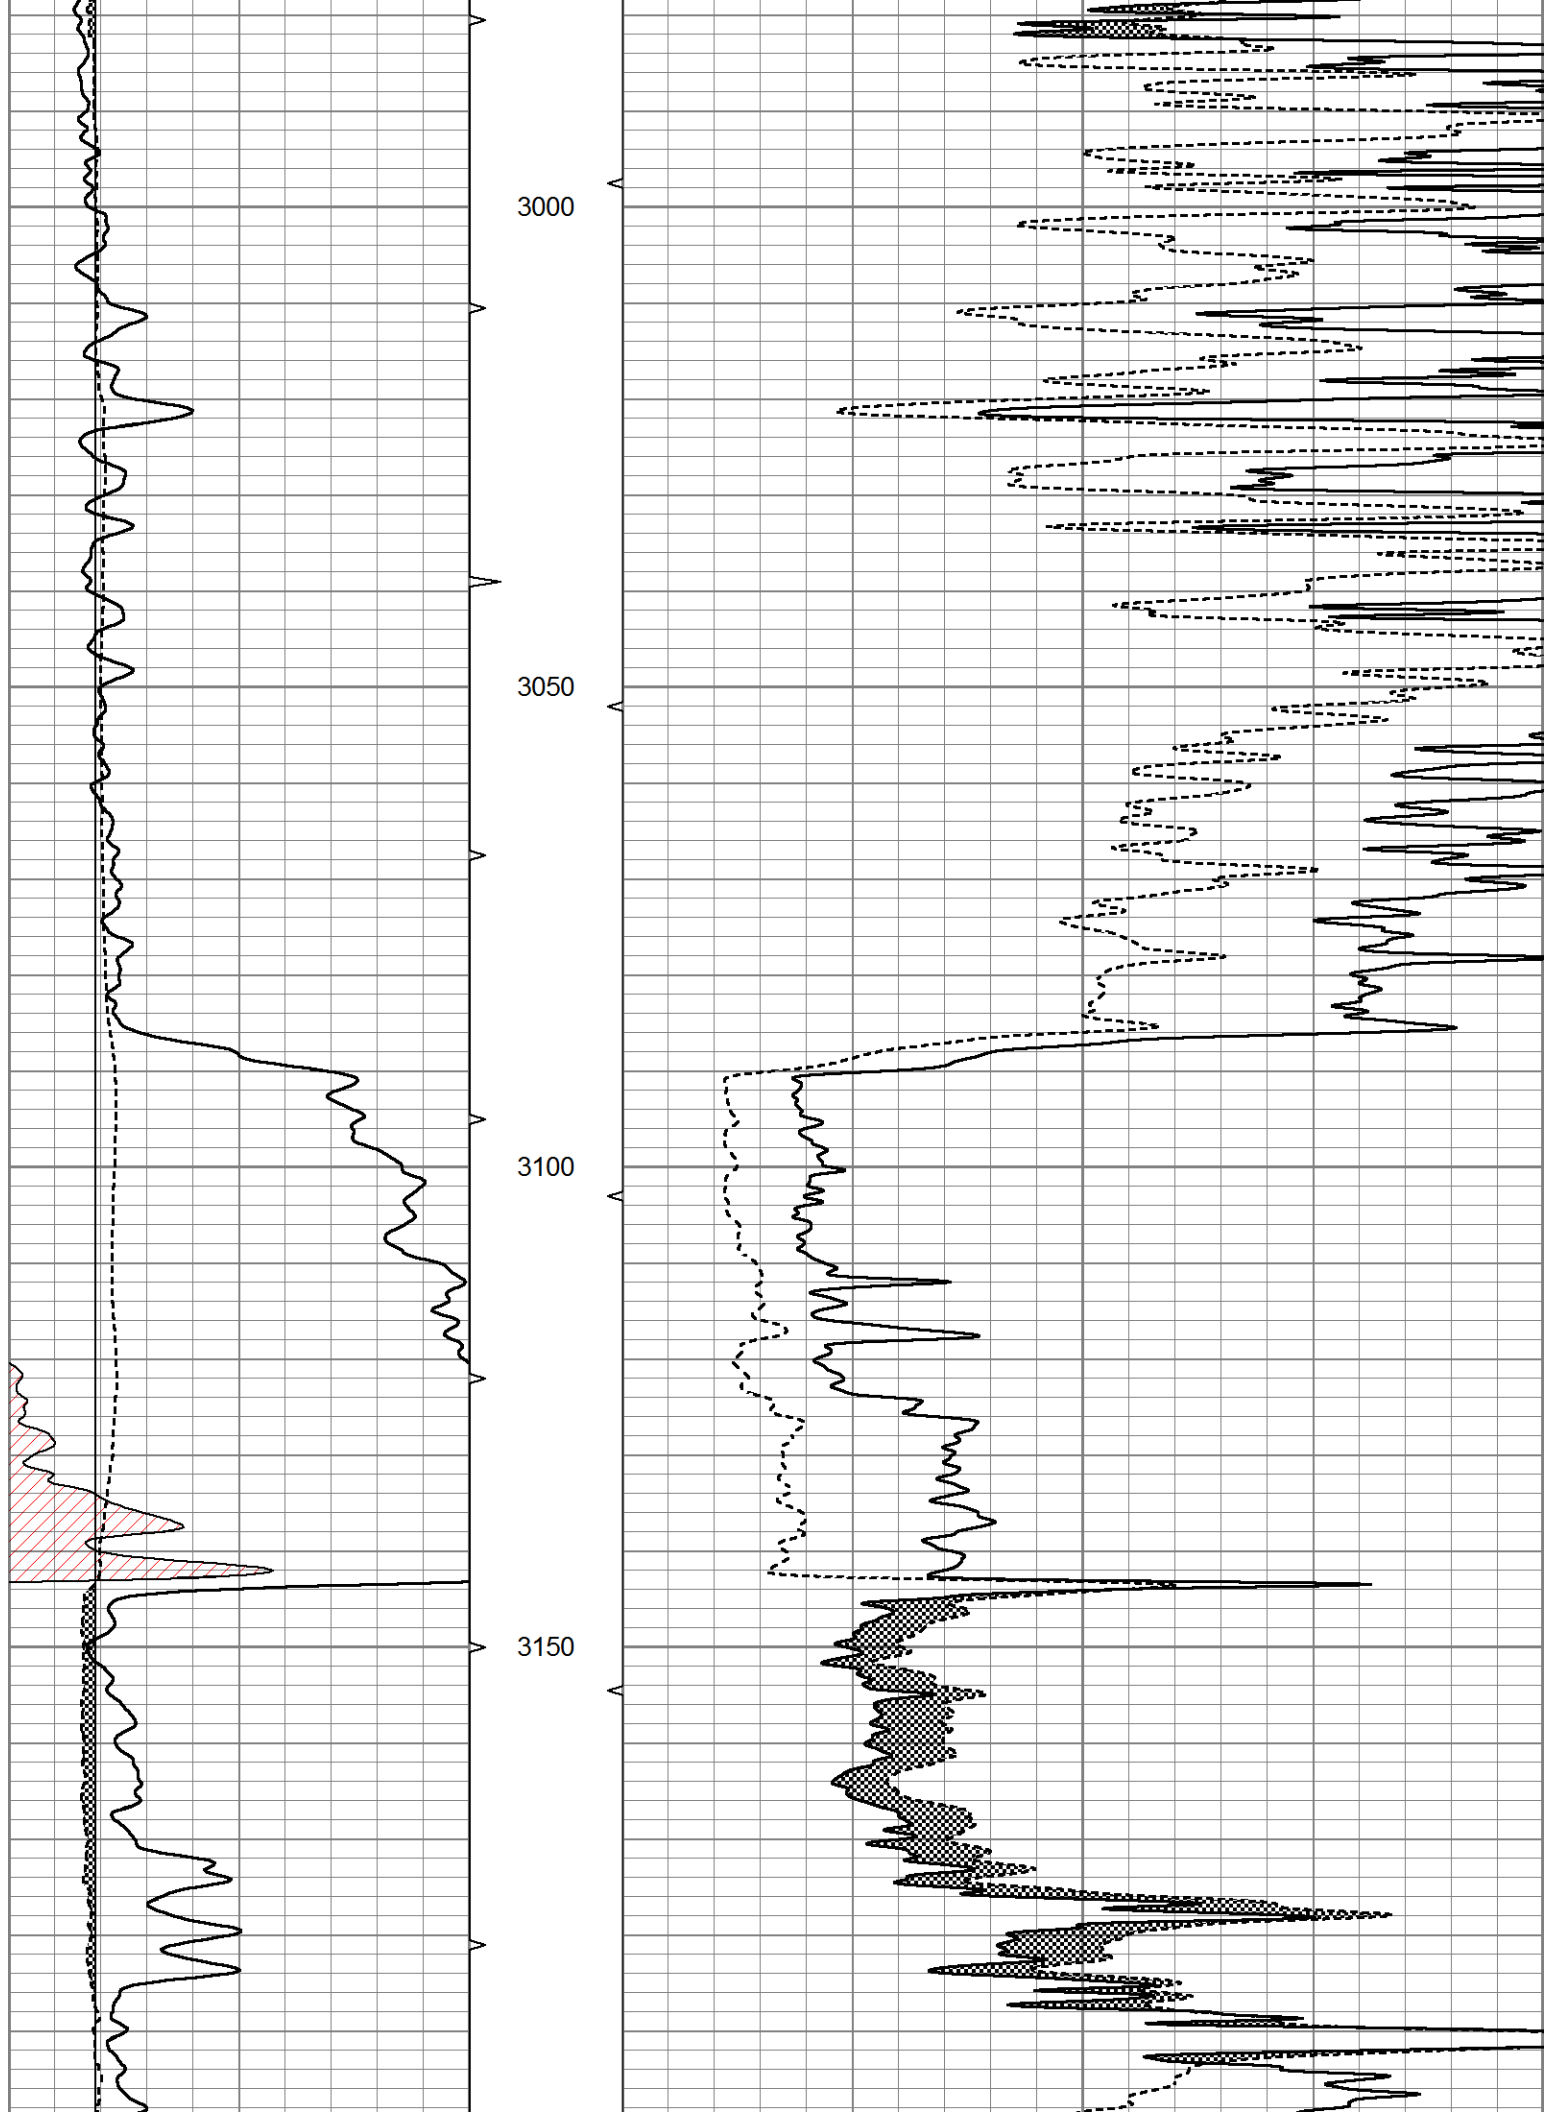

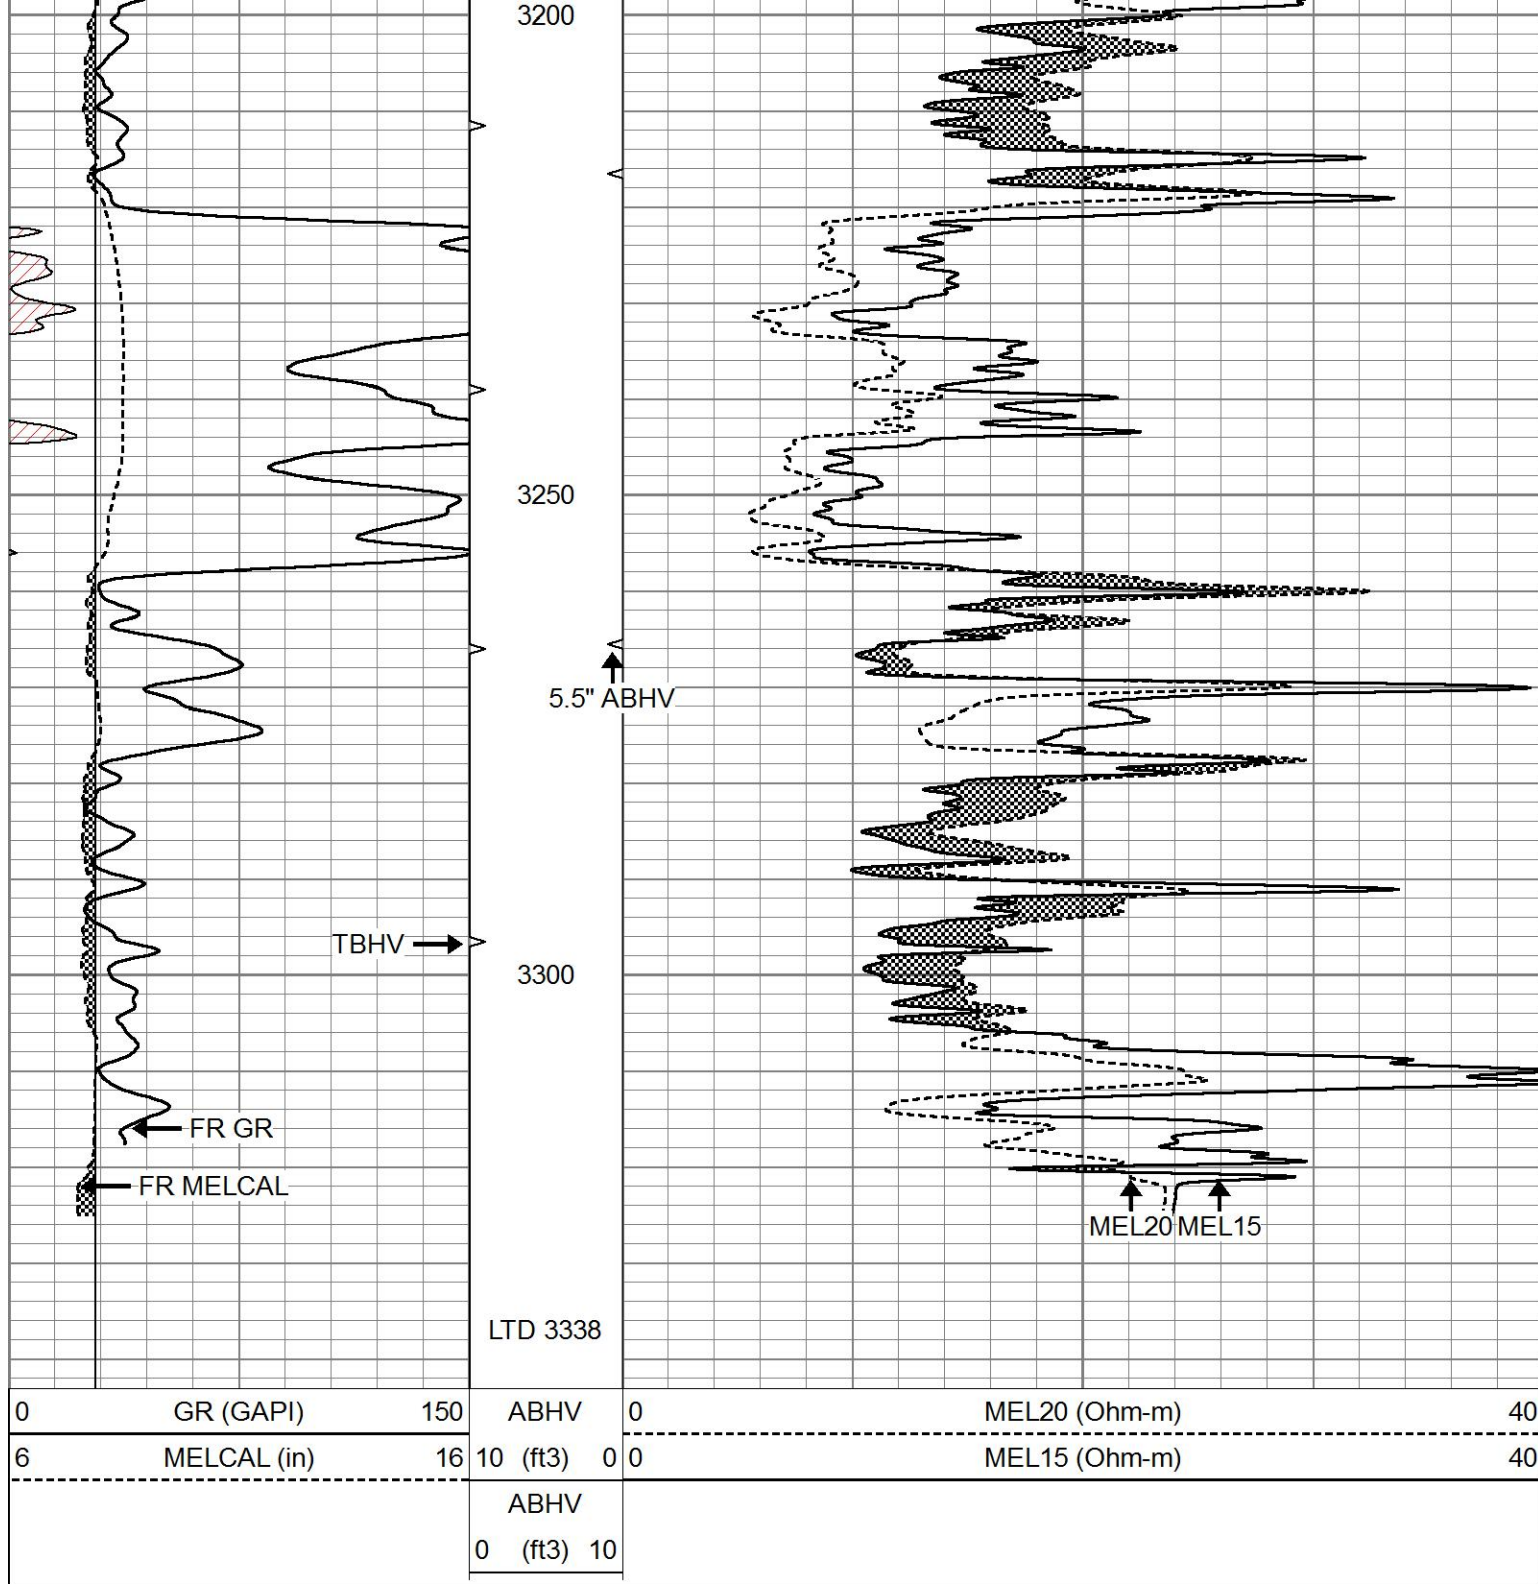


REPEAT SECTION

Database File 5660ddn.db
 Dataset Pathname pass5.2R
 Presentation Format micro
 Dataset Creation Tue Sep 21 12:47:17 2021
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40

ABHV
0 (ft3) 10

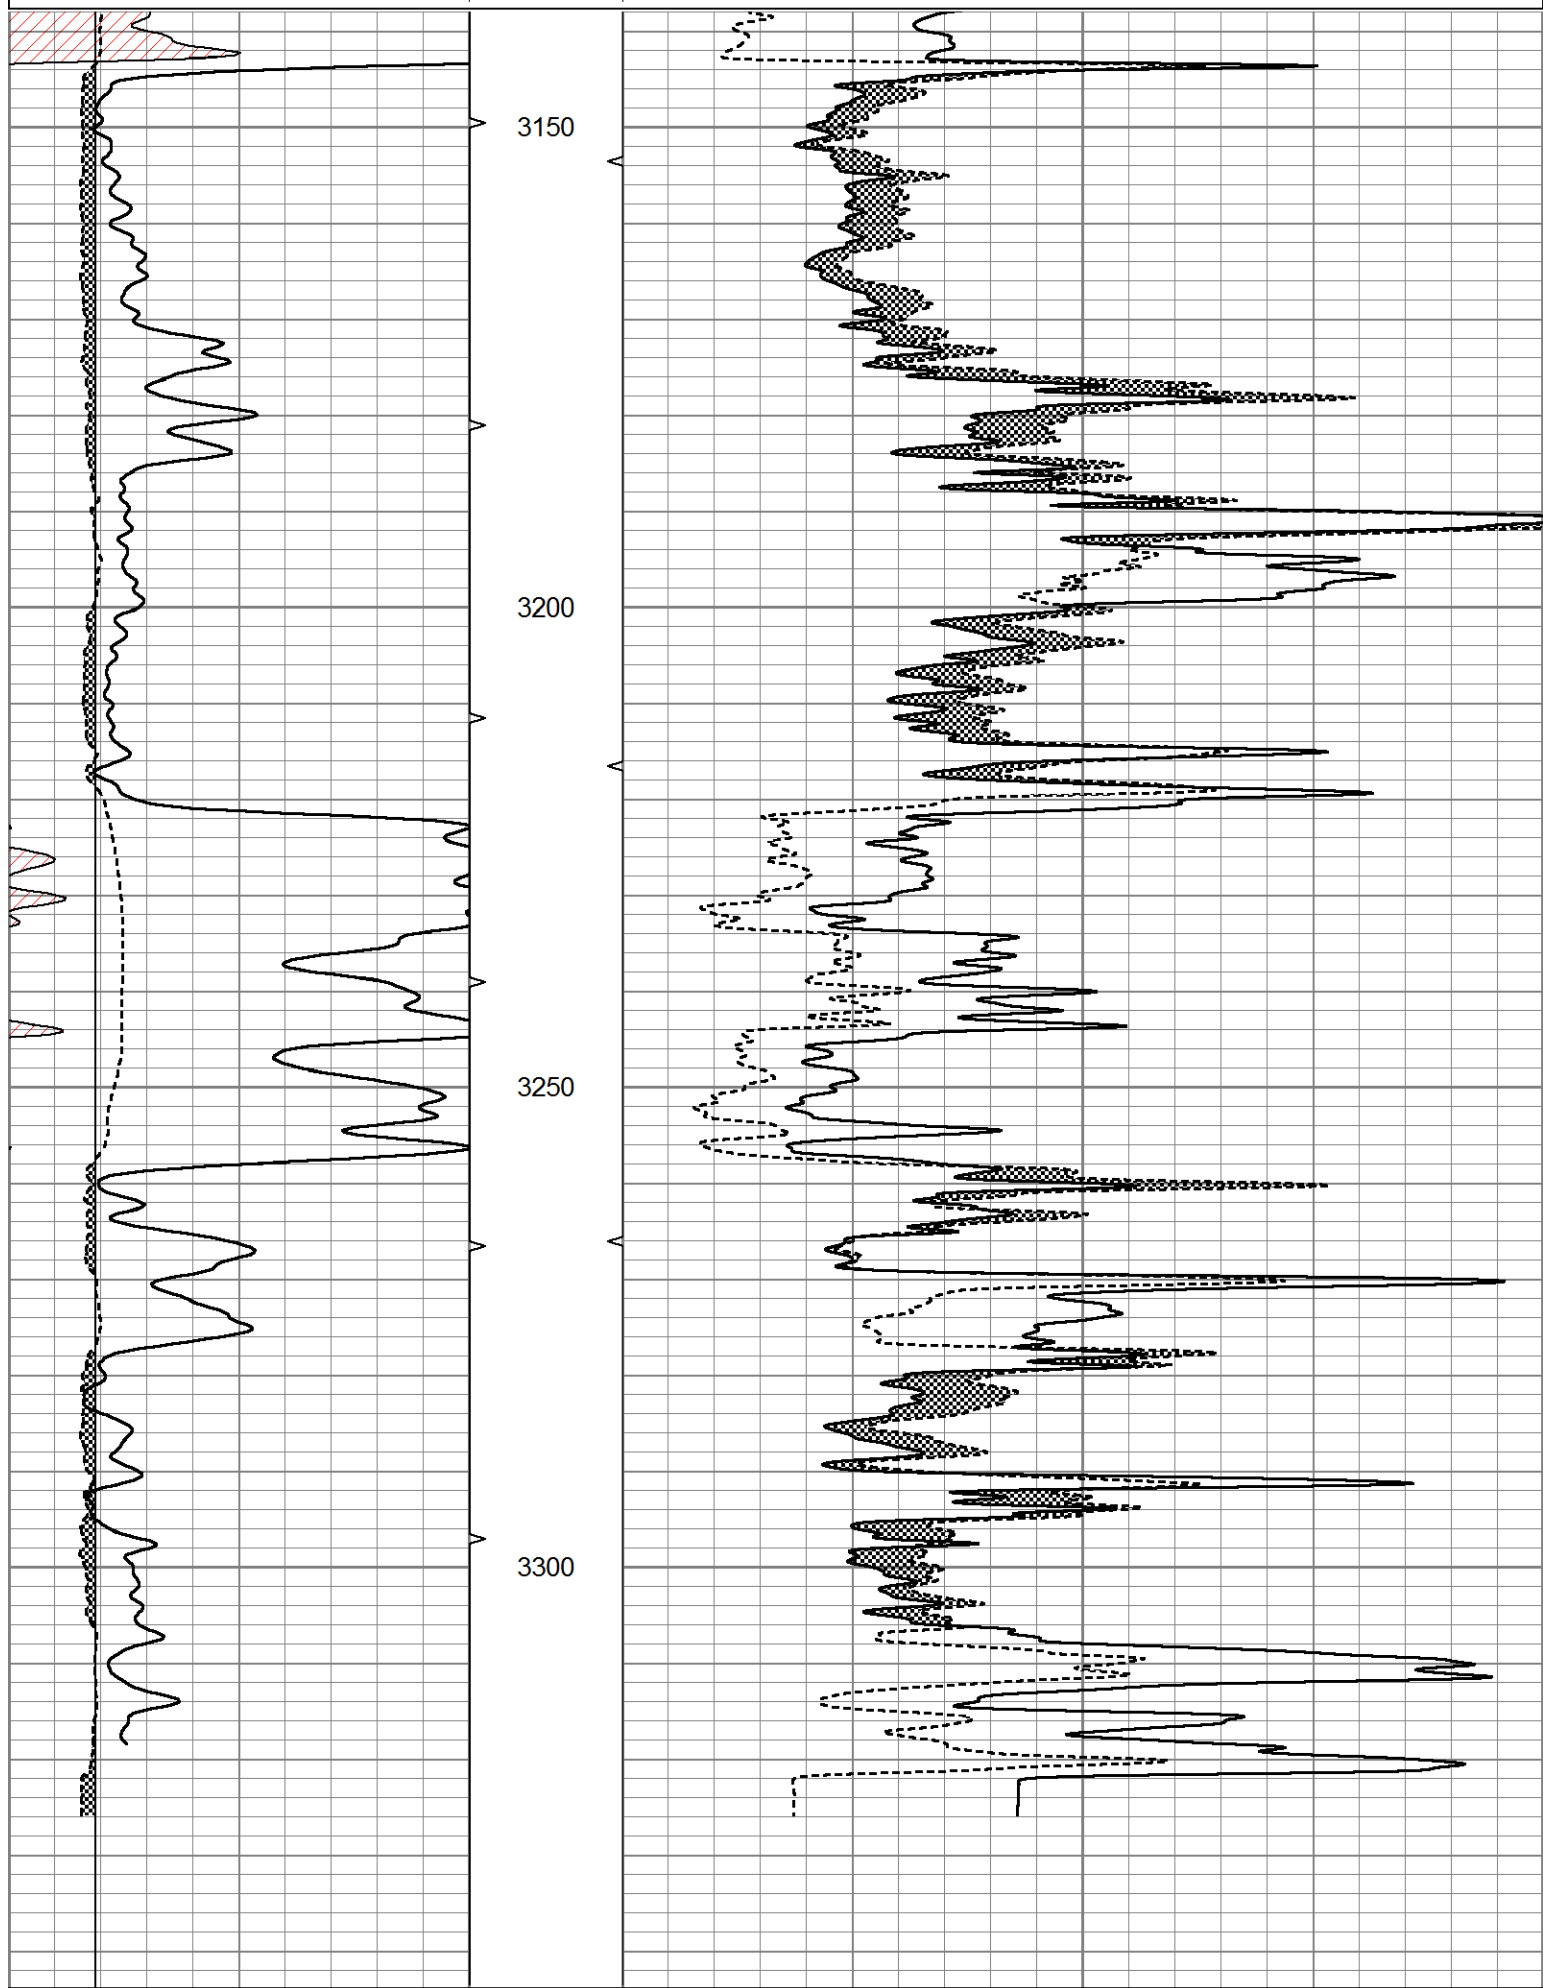

6	MELCAL (in)	16	10 (ft3)	0	0	MEL15 (Ohm-m)	40
			ABHV				
			0 (ft3)	10			

Calibration Report			
Database File	5660ddn.db		
Dataset Pathname	pass6.1M		
Dataset Creation	Tue Sep 21 13:27:41 2021		
MICRO Calibration Report			
Serial Number:	070912		
Tool Model:	ProbeN		
Performed:	Thu Sep 16 07:46:14 2021		
Caliper Calibration:	Gain=3.478	Offset=0.696	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	2.100	4.400	
1.5" Calibration:	Gain=32.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.239	
2" Calibration:	Gain=38.000	Offset=0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.075	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Wed Sep 08 16:32:59 2021		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3600	GAPI/cps	