00-15s-34w-999
CRD NO.

00-15s-34w
DMT NO.

PRO-STAKE LLC

Construction Site Staking

P.O. Box 2324 Garden City, Kansas 67846
Office/Fax: (620) 276-6159 – Cell: (620) 272-1499
burt@prostakellc.com

13292
INVOICE NO.

Concorde Resources Corporation
OPERATOR

Logan County, KS
COUNTY

27	15s	34w
Sec.	Twp.	Rng.

McDaniels 27
LEASE NAME

2360′ FSL – 1572′ FWL (M)
2383′ FSL – 1563′ FWL (A)
LOCATION SPOT

2995.8′ – Main
2995.9′ - Alternate
GR. ELEVATION

SCALE: 1″ = 1000′
DATE STAKED: Jan. 27th, 2017
MEASURED BY: Bryen M.
DRAWN BY: Cody N.
AUTHORIZED BY: Bill W.
DATE REVISED:

N

LEGEND

- irr. well
- water hydrant
- tank battery
- staked loc.
- prod. well / aband. well
- house
- building
- gas line
- water line
- transmission powerline
- 3 phase powerline
- single phase powerline
- fence
- gravel / sand rd.
- gravel trail / lease rd.
- dirt rd.
- dirt trail / lease rd.
- Hwy / blacktop rd.

DIRECTIONS: From the West side of Russel Springs, KS at the intersection of HWY 25 & Broadway St. – Now go 0.75 miles East on Broadway St. to "T" in the road at North-bound curve with CR 270 South-bound turn-off (turn right onto CR 270 and stay South-bound at "Y" in road) – Now go 11.85 miles South on CR 270, through curve(s), to a "3-way-split" in the road (Stay South towards intersection) – Now go 4.9 miles East on Dakota Rd. – Now go 1.5 miles South on CR 320 to West-bound curve onto Bison Rd. (0.5 miles south of the NEc of Sec. 27-15s-34w at the intersection of CR 320 & Coyote Rd.) – Now go 0.7 miles West and SW on Bison Rd. to ingress stake NW into – Now go approximately 115' NW, through pasture grass (with cattle), into Main staked location. **Note** – Fence requires removal/disassembly.

Final ingress must be verified with landowner or operator.

This drawing does not constitute a monumented survey or a land survey plat.
This drawing is for construction purposes only.

Contact Info:
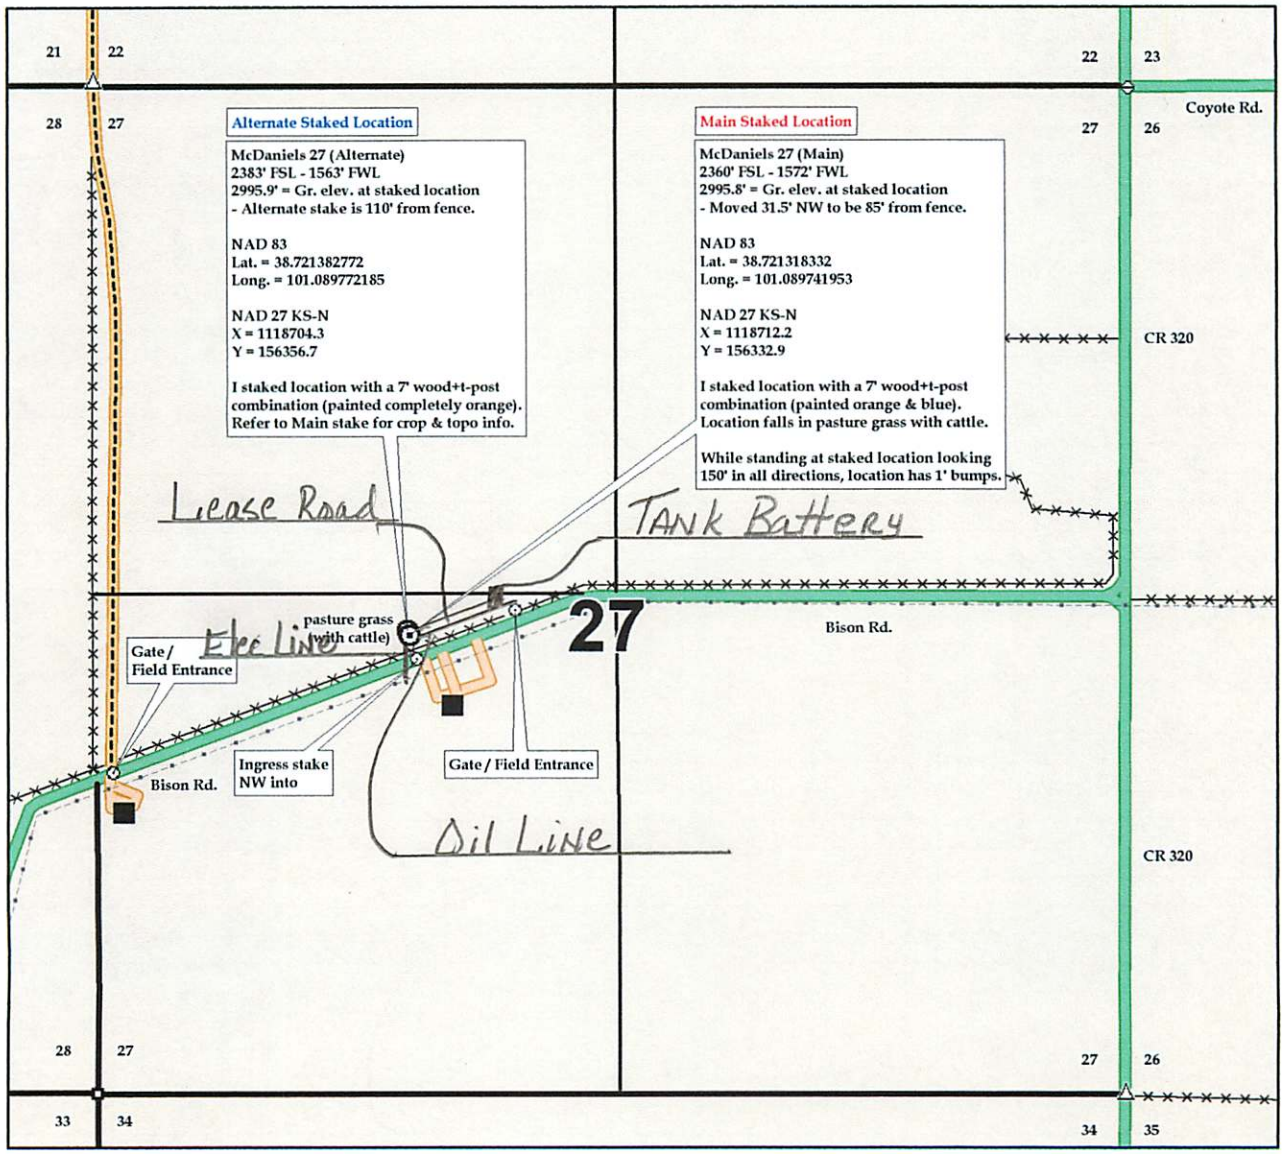
Jeremy McDaniels - (620) - 214 – 3501 (Son of Landowner)