03-23s-24w-bar-999
CRD NO.

00-23s-24w
DMT NO.

PRO-STAKE LLC
Construction Site Staking

14051
INVOICE NO.

P.O. Box 2324 Garden City, Kansas 67846
Office/Fax: (620) 276-6159 – Cell: (620) 272-1499
burt@prostakellc.com

Shakespeare Oil Company, Inc.
OPERATOR

Hodgeman County, KS
COUNTY

11	23s	24w
Sec.	Twp.	Rng.

Schroeder #1-11
LEASE NAME

2299′ FNL – 690′ FEL
LOCATION SPOT

2362.9
GR ELEVATION

38.067316466
NAD 83 LAT

99.919614629
NAD 83 LONG

SCALE: 1″ = 1000′
DATE STAKED: November 5th, 2018
MEASURED BY: Pierce R.
DRAWN BY: Pierce R.
AUTHORIZED BY: Alex B.
DATE REVISED:

N

LEGEND

- irr. well
- water hydrant
- tank battery
- staked loc.
- prod. well / aband. well
- house
- building
- gas line
- water line
- transmission powerline
- 3 phase powerline
- single phase powerline
- fence
- gravel / sand rd.
- gravel trail / lease rd.
- dirt rd.
- dirt trail / lease rd.
- Hwy / blacktop rd.

DIRECTIONS: From the South side of Jetmore, KS at the intersection of Hwy. 283 & L Rd./South St – Now go approx. 1.3 miles West on L Rd. to the NE corner of section 11-23s-24w – Now go approx. 0.25 miles South on SW 217 Rd. to ingress stake South into a 4-wire gate – Now enter gate and go approx. 0.15 miles South through pasture with cattle to ingress stake West into – Now go approx. 625' West through pasture with cattle into stake location

Final ingress must be verified with landowner or operator.
This drawing does not constitute a monumented survey or a land survey plat.
This drawing is for construction purposes only.

LANDOWNER/CONTACT :

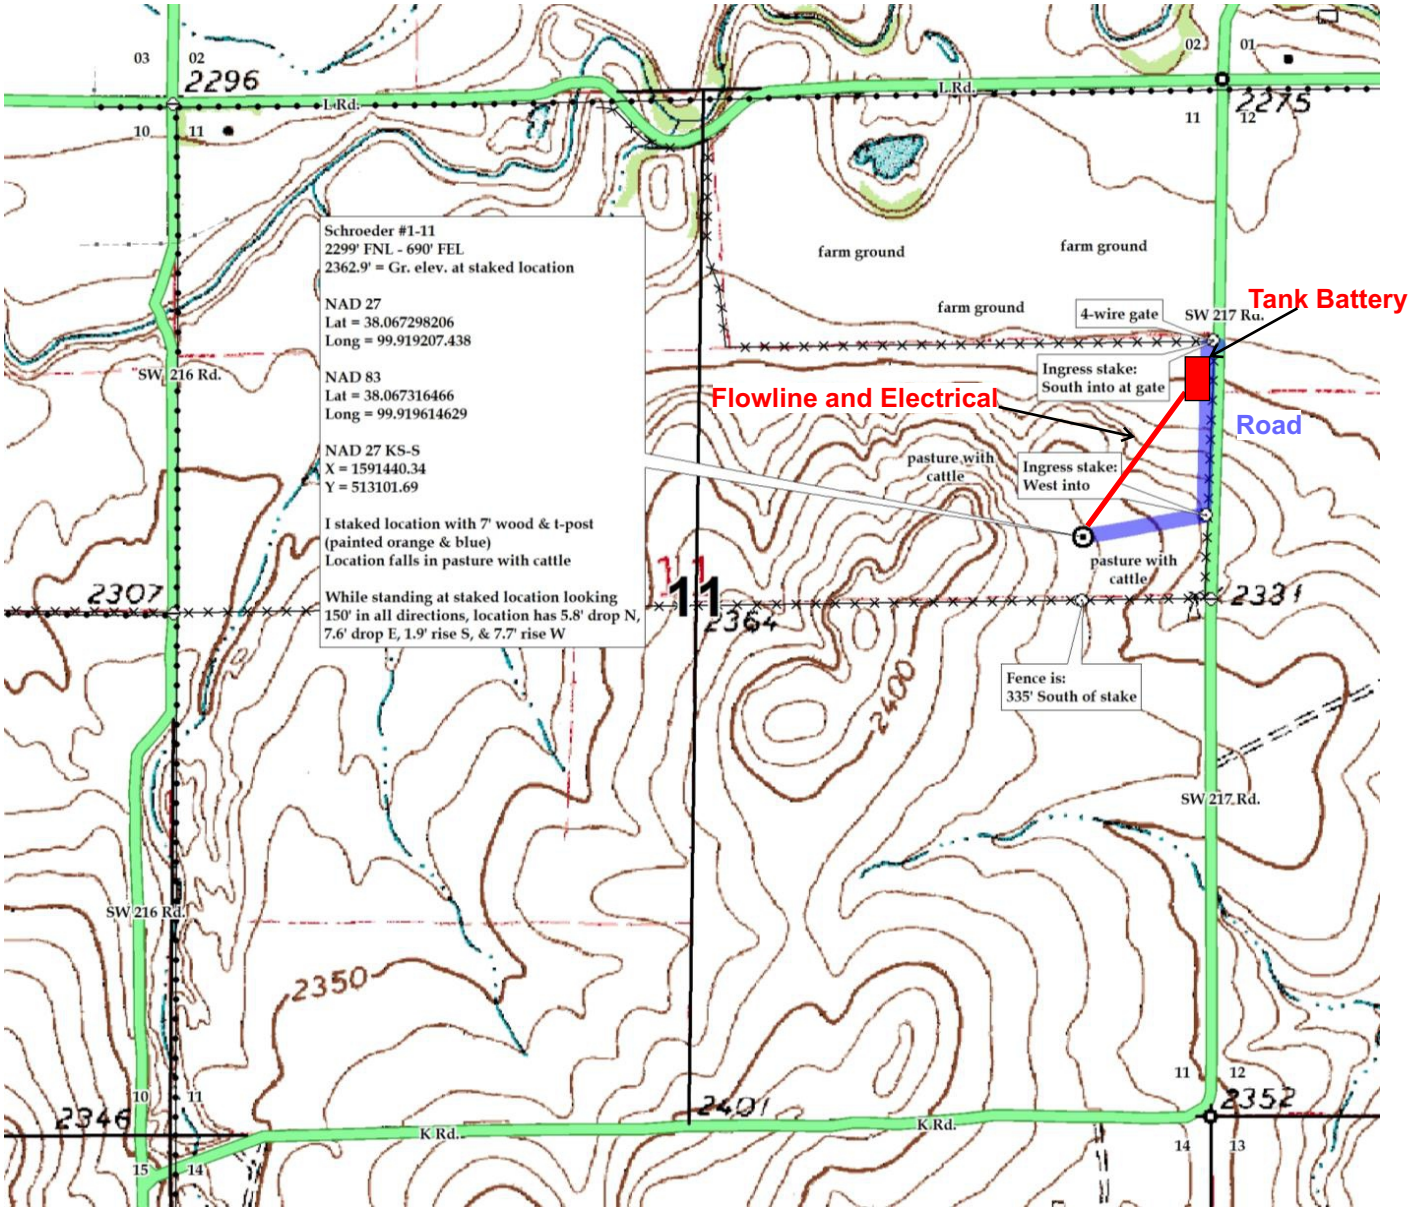

Preliminary non-binding estimate of tank battery, flowline & road