



**CONSOLIDATED**  
Oil Well Services, LLC

TICKET NUMBER 35003  
LOCATION Oxtawa KS  
FOREMAN Fred Maden

PO Box 884, Chanute, KS 66720  
620-431-9210 or 800-467-8676

**FIELD TICKET & TREATMENT REPORT**  
**CEMENT**

DATE	CUSTOMER #	WELL NAME & NUMBER	SECTION	TOWNSHIP	RANGE	COUNTY
10/9/12	7806	Wittman # 9-I-W	SE 16	20	20	AN
CUSTOMER Tailwater Inc			TRUCK # DRIVER TRUCK # DRIVER			
MAILING ADDRESS 6421 Avondale Drive			389 Fred Mad Safety Mfg			
CITY STATE ZIP CODE Oklahoma City OK 73116			495 Kai Car KC			
			675 Kai Det KD			
			548 Mik Naa MN			

JOB TYPE Logging HOLE SIZE 5 7/8 HOLE DEPTH 225 CASING SIZE & WEIGHT 2 7/8 EOE  
CASING DEPTH 765 DRILL PIPE \_\_\_\_\_ TUBING \_\_\_\_\_ OTHER \_\_\_\_\_  
SLURRY WEIGHT \_\_\_\_\_ SLURRY VOL \_\_\_\_\_ WATER gal/sk \_\_\_\_\_ CEMENT LEFT in CASING 2 1/2" Plug  
DISPLACEMENT 4.45 BBL DISPLACEMENT PSI \_\_\_\_\_ MIX PSI \_\_\_\_\_ RATE 50 BPM

REMARKS: Establish pump rate Mix + Pump 100# Gel Flush, Mix + Pump  
5ks 50/50 Por Mix Cement 2% Gel, Cement to Surface  
Flush pump + mix clean Displace 2 1/2" Rubber Plug to  
Casing ID. Pressure to 800 # PSI. Hold + Monitor Pressure  
for 30 min MIT. Release pressure to Set Float Valve.  
Shut in casing

Evans Energy Dev. Inc. Travis

*Fred Maden*


ACCOUNT CODE	QUANTITY or UNITS	DESCRIPTION of SERVICES or PRODUCT	UNIT PRICE	TOTAL
5401	1	PUMP CHARGE	495	1030 <sup>00</sup>
5406	-	MILEAGE		NIC
5402	765	Casing Footage		NIC
5407	1/2 Minimum	Ten Miles		175 <sup>00</sup>
5502C	2 hrs	80 BBL Vac Truck		160 <sup>00</sup>
1124	1155KS	50/50 Por Mix Cement		1259 <sup>25</sup>
1118B	294#	Premium Gel		61 <sup>74</sup>
14402	1	2 1/2" Rubber Plug		25 <sup>00</sup>
				105 <sup>22</sup>
			7.00	
			SALES TAX	
			ESTIMATED	
			TOTAL	2839 <sup>21</sup>

Ravin 3737

AUTHORIZATION [Signature] TITLE \_\_\_\_\_ DATE \_\_\_\_\_

I acknowledge that the payment terms, unless specifically amended in writing on the front of the form or in the customer's account records, at our office, and conditions of service on the back of this form are in effect for services identified on this for

253636

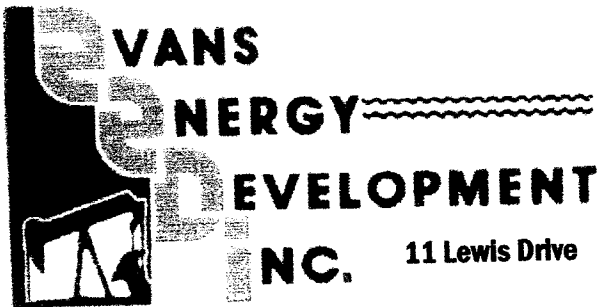

11 Lewis Drive

Paola, KS 66071

**Oil & Gas Well Drilling**  
**Water Wells**  
**Geo-Loop Installation**

Phone: 913-557-9083

Fax: 913-557-9084

**WELL LOG**

Tailwater, Inc.

Wittman #9-IW

API#15-003-25,346

October 8 - October 9, 2012

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
16	soil & clay	16
104	shale	120
36	lime	156
19	shale	175
10	lime	185
37	shale	222
10	lime	232
4	shale	236
35	lime	271
6	shale	277
24	lime	301
3	shale	304
16	lime	320 base of the Kansas City
173	shale	493
3	lime	496
6	shale	502
7	lime	509 oil show
11	shale	520
11	oil sand	531 green, good bleeding
2	shale	533
1	coal	534
17	shale	551
4	sand	555 grey, no oil show
1	coal	556
3	shale	559
8	lime	567
17	shale	584
3	lime	587
18	shale	605
11	lime	616
81	shale	697
1	lime & shells	698
6	oil sand	704 brown, good bleeding
4	broken sand	708 brown & grey sand, good bleeding
4	shale	712
4	sand	716 black, no oil show
24	shale	740

35

broken sand

775 brown & grey, no oil show  
775 TD

Drilled a 9 7/8" hole to 21'  
Drilled a 5 5/8" hole to 775'

Set 21' of 7" surface casing cemented with 6 sacks of cement.

Set 765' of 2 7/8" threaded and coupled 8 round upset tubing with 3 centralizers, 1 float shoe and 1 clamp.