K G.S LIBRARY

FORM 925265

Dresser Atlas

DRESSER

Compensated **Densilog**
Compensated **Neutron**

FILE NO. 353

C

COMPANY TEXAS OIL & GAS CORPORATION
WELL KIRKPATRICK NO. 2X
FIELD PLEASANT VALLEY
COUNTY FORD STATE KANSAS

RELEASED
NO SMALL SCALE

LOCATION: C E/2 CE/2 NE
1320' FNL, 330' FEL

SEC 10 TWP 28S RGE 21W

Other Services
DIFL

Permanent Datum GROUND LEVEL Elev. 2349
Log Measured from KELLY BUSHING , 6 Ft. Above Permanent Datum
Drilling Measured from KELLY BUSHING

Elevations:
KB 2355
DF -
GL 2349

K.G.S. LIBRARY

Date	11-9-80			
Run No.	ONE			
Service Order	41604			
Depth—Driller	5150			
Depth—Logger	5137			
Bottom Logged Interval	5136			
Top Logged Interval	2500			
Casing—Driller	8-5/8 @ 599	@	@	@
Casing—Logger	604			
Bit Size	7-7/8"			
Type Fluid in Hole	CHEMICAL			
Density and Viscosity	9.1 51			
pH and Fluid Loss	10.5 18.0 cc	cc	cc	cc
Source of Sample	FLOWLINE			
Rm @ Meas. Temp.	.187 @ 74 °F	.111 @ 124 °F	@ °F	@ °F
Rmf @ Meas. Temp.	.14 @ 74 °F	.083 @ 124 °F	@ °F	@ °F
Rmc @ Meas. Temp.	.243 @ 74 °F	.144 @ 124 °F	@ °F	@ °F
Source of Rmf and Rmc	MEAS	CALC.		
Rm @ BHT	.111 @ 124 °F	@ °F	@ °F	@ °F
Time Since Circ.	8 HRS.			
Max. Rec. Temp. Deg. F.	124 °F	°F	°F	°F
Equip. No. and Location	4060 GB			
Recorded By	HERMANSKI			
Witnessed By	MR. ROBERSON			

FORM 925265-A

GAMMA RAY

API UNITS

0 150

CALIPER

HOLE SIZE-INCHES

6 16

DEPTH

5"=100'
LR
2500

DENSITY — POROSITY %

ρ_{ma} 2.71 ρ_f 1.0

45 30 15 0

NEUTRON POROSITY %

LM MATRIX

45 30 15 0

TENSION
←LBS 500 /CD

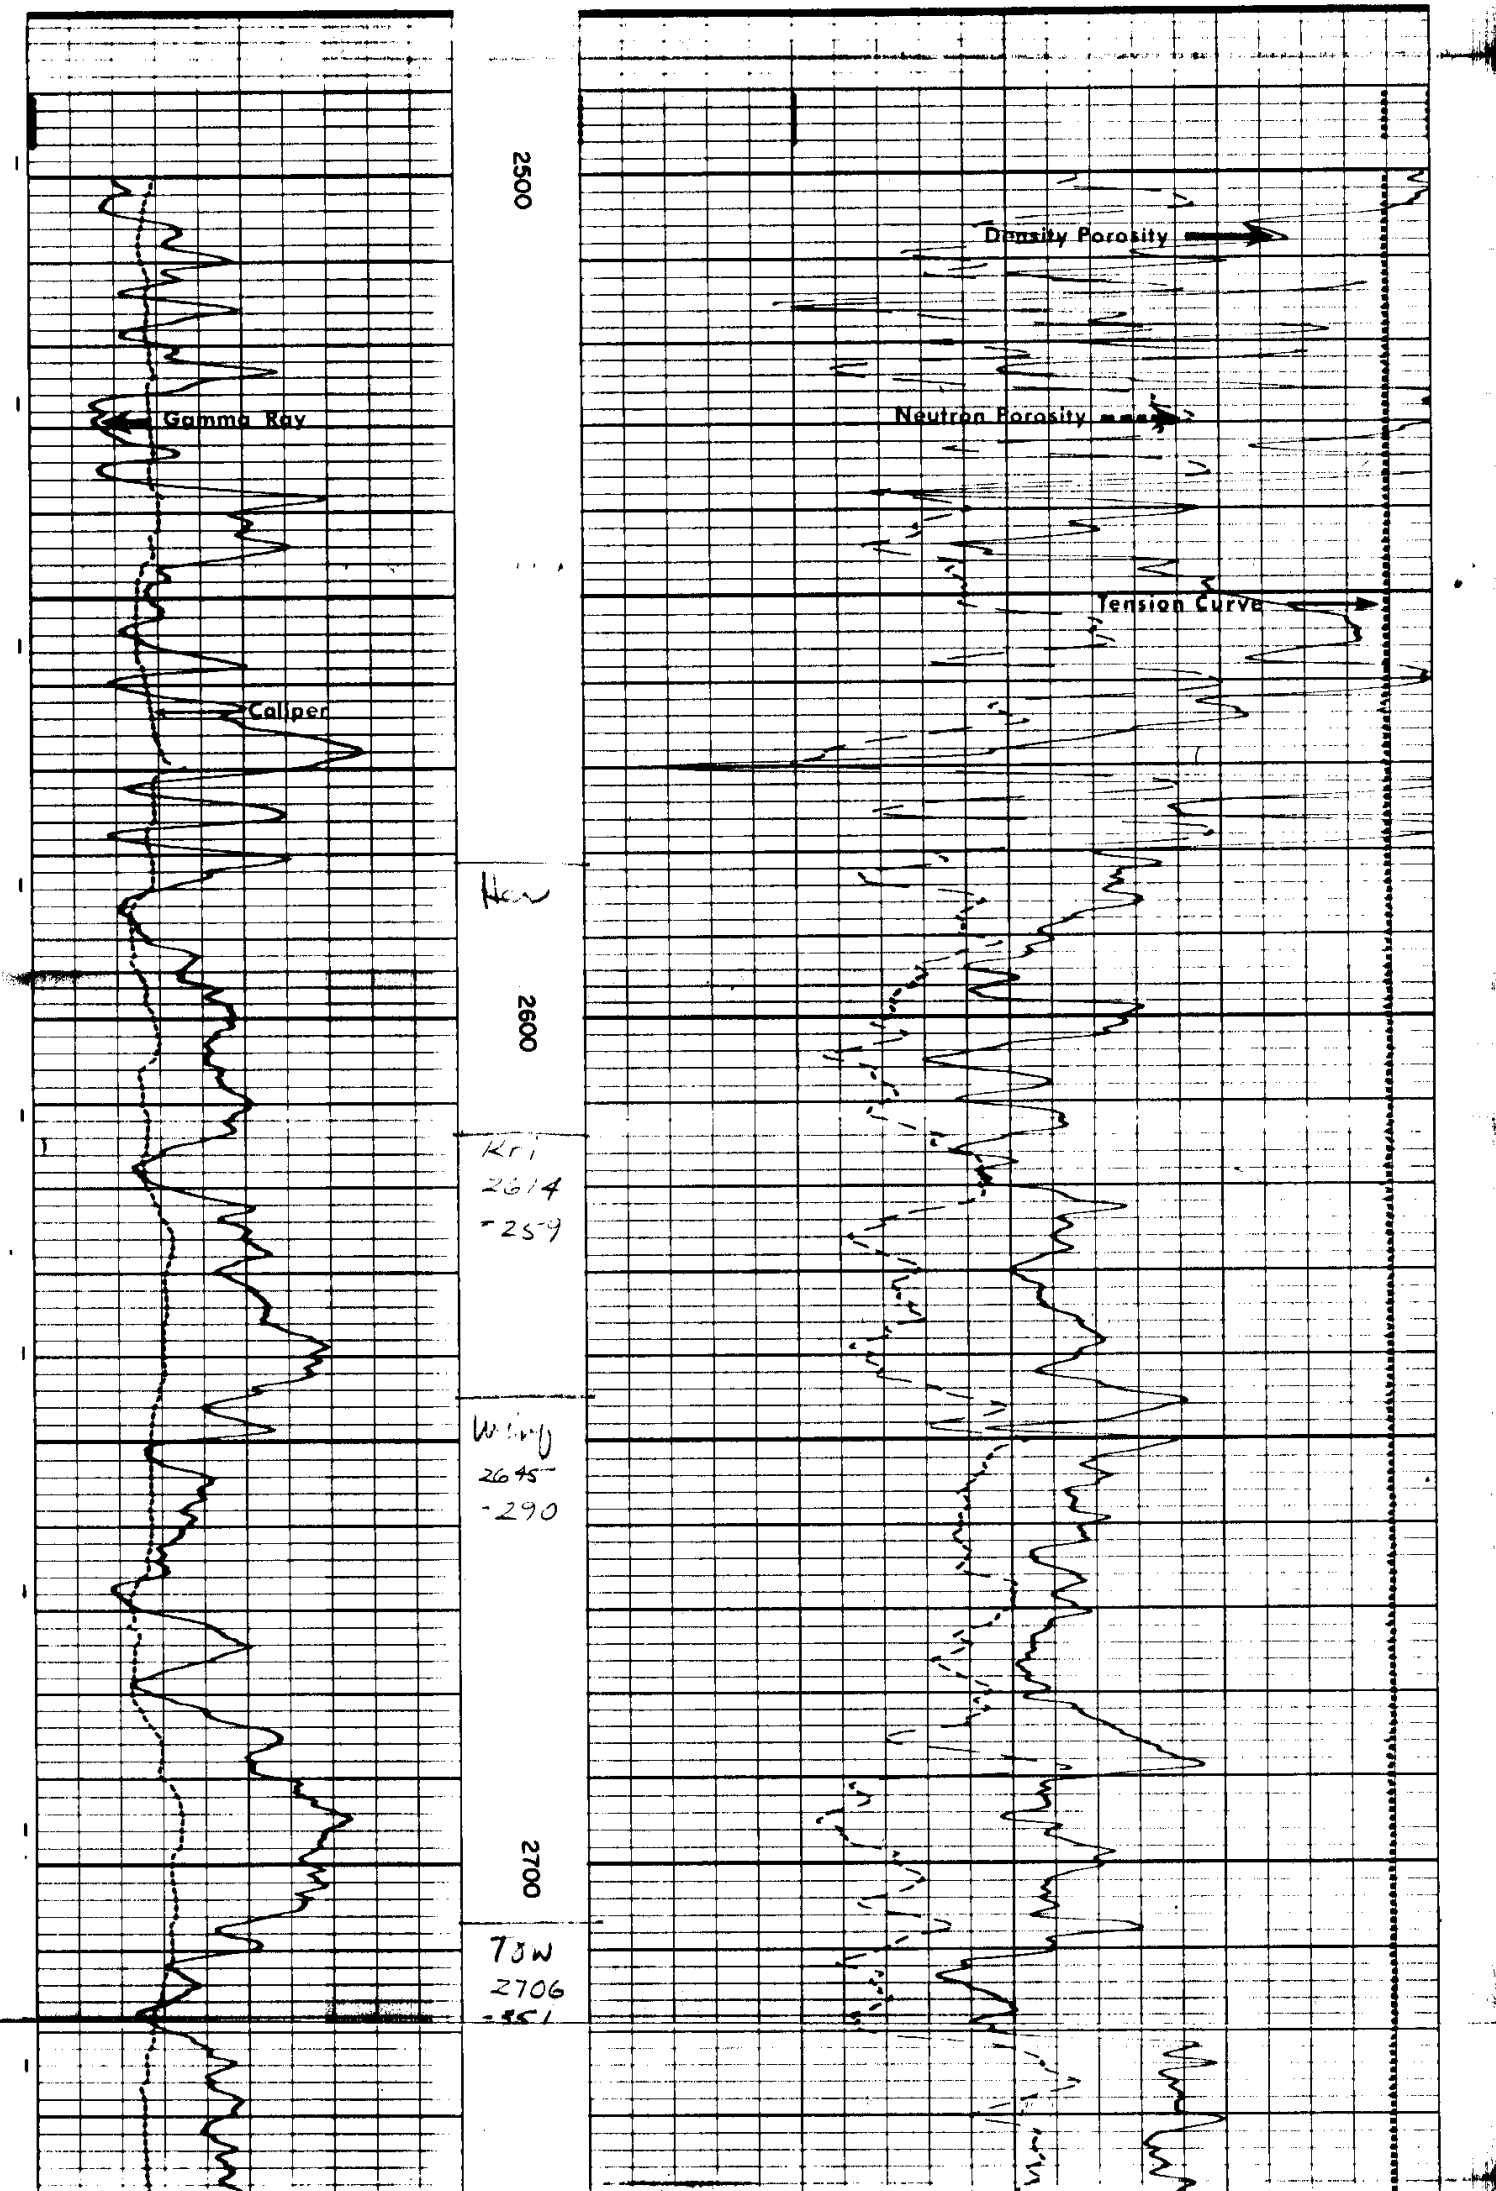

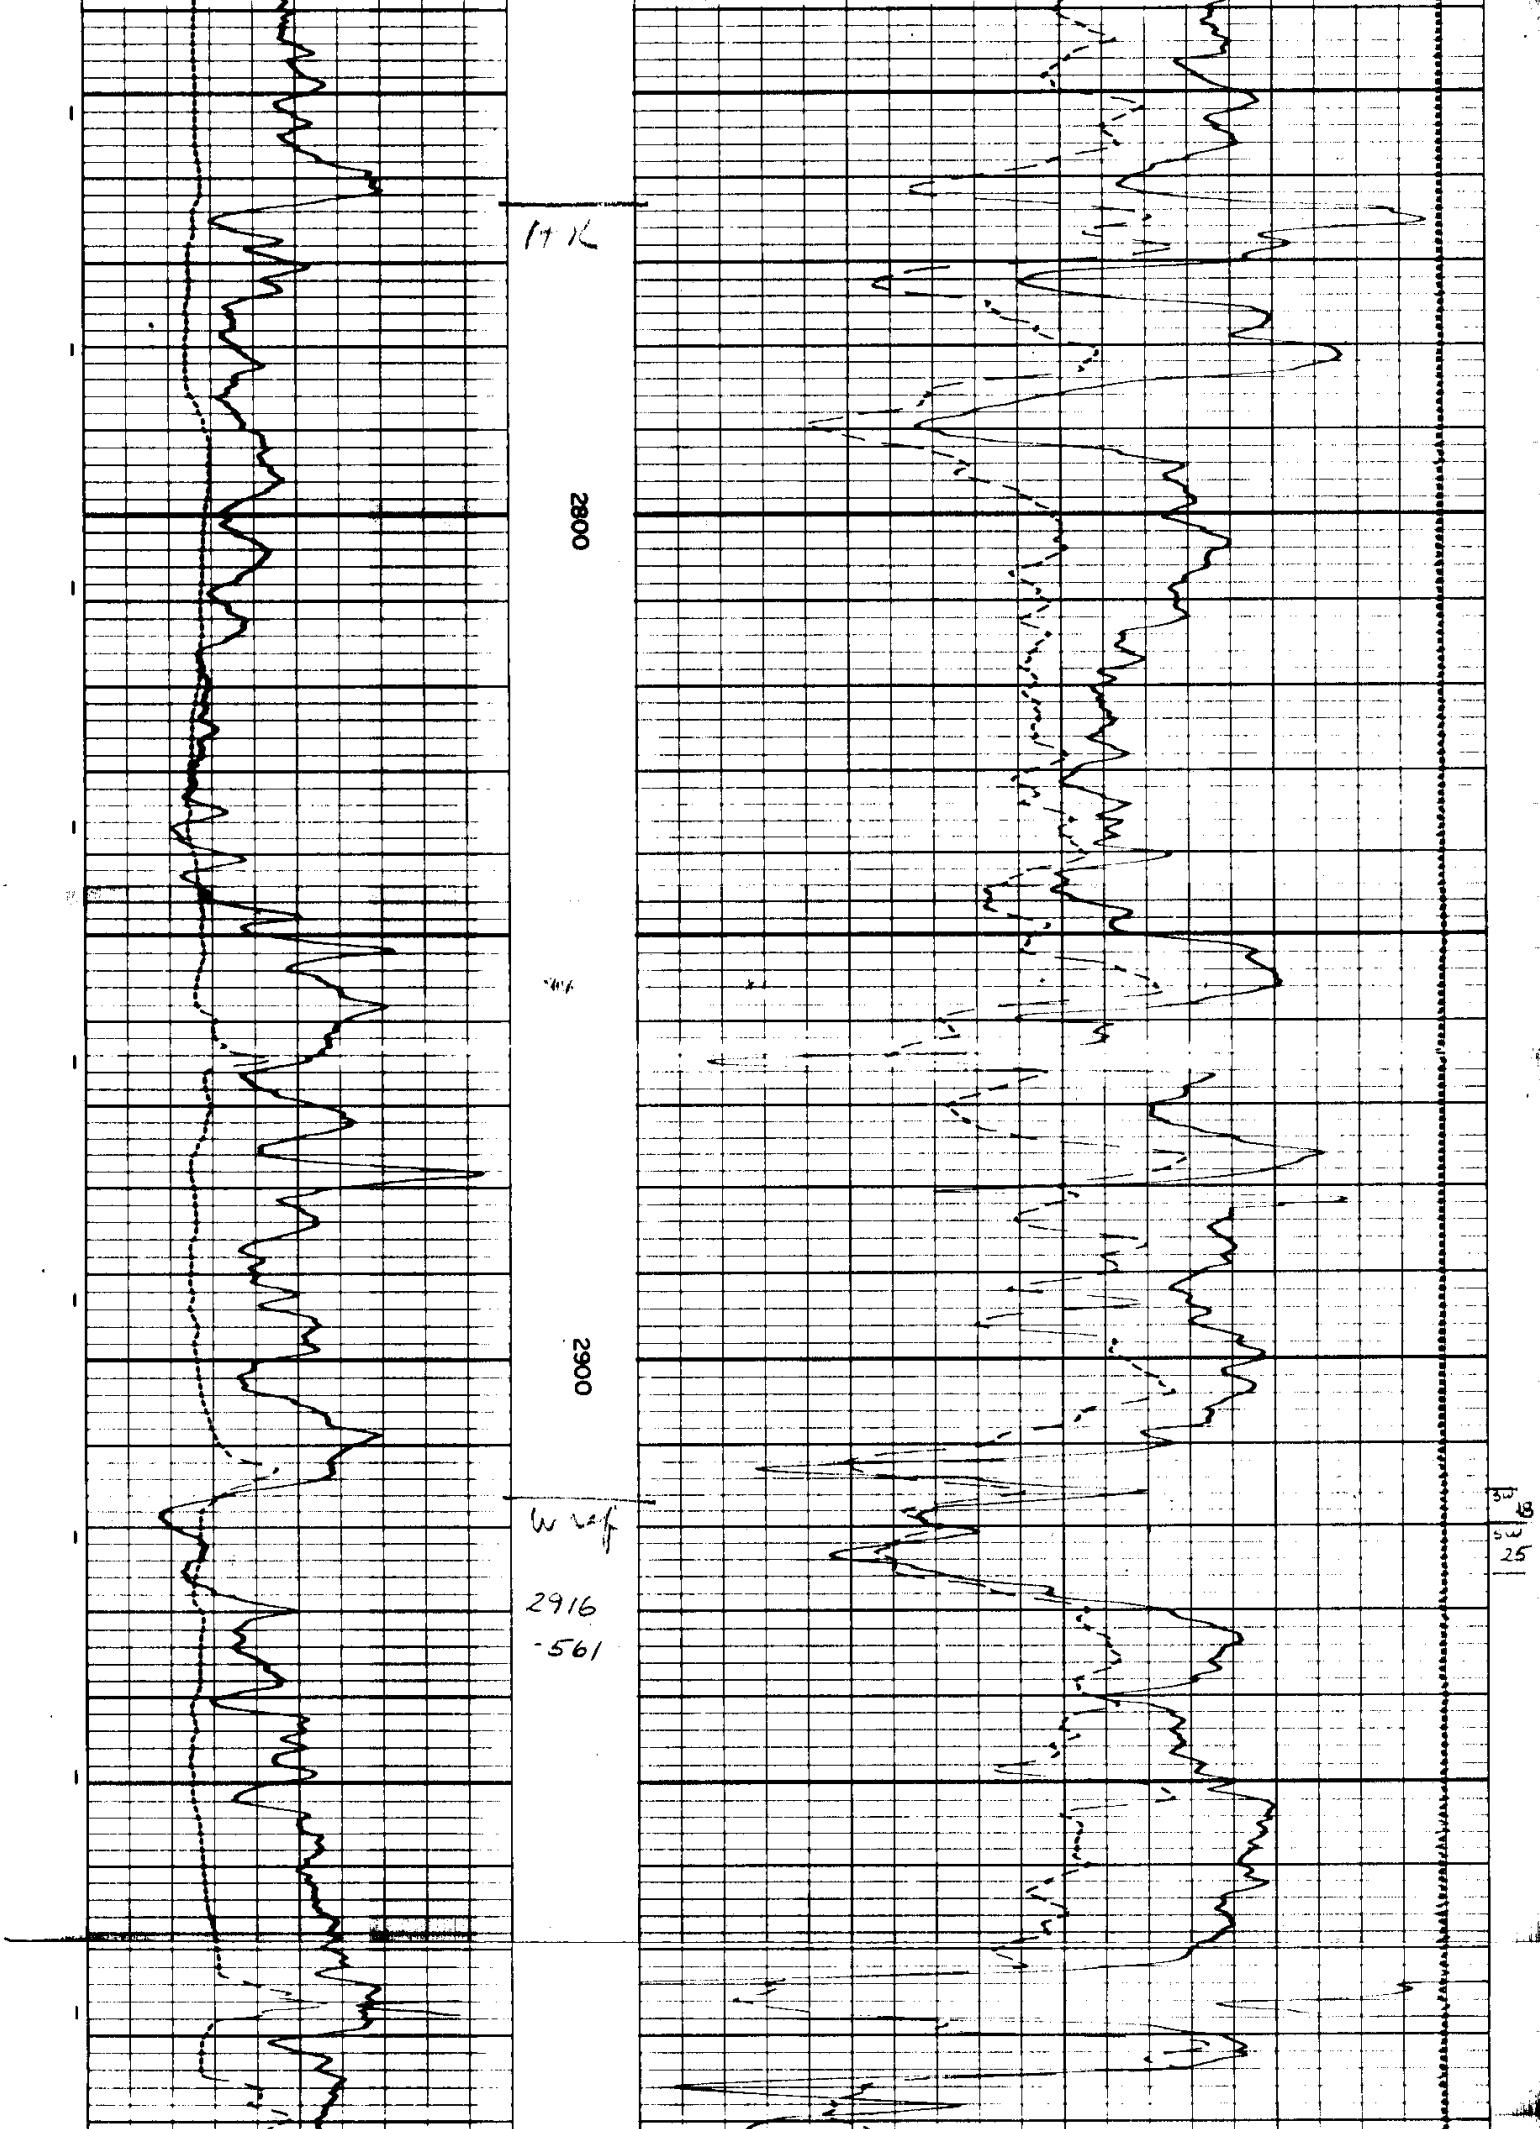

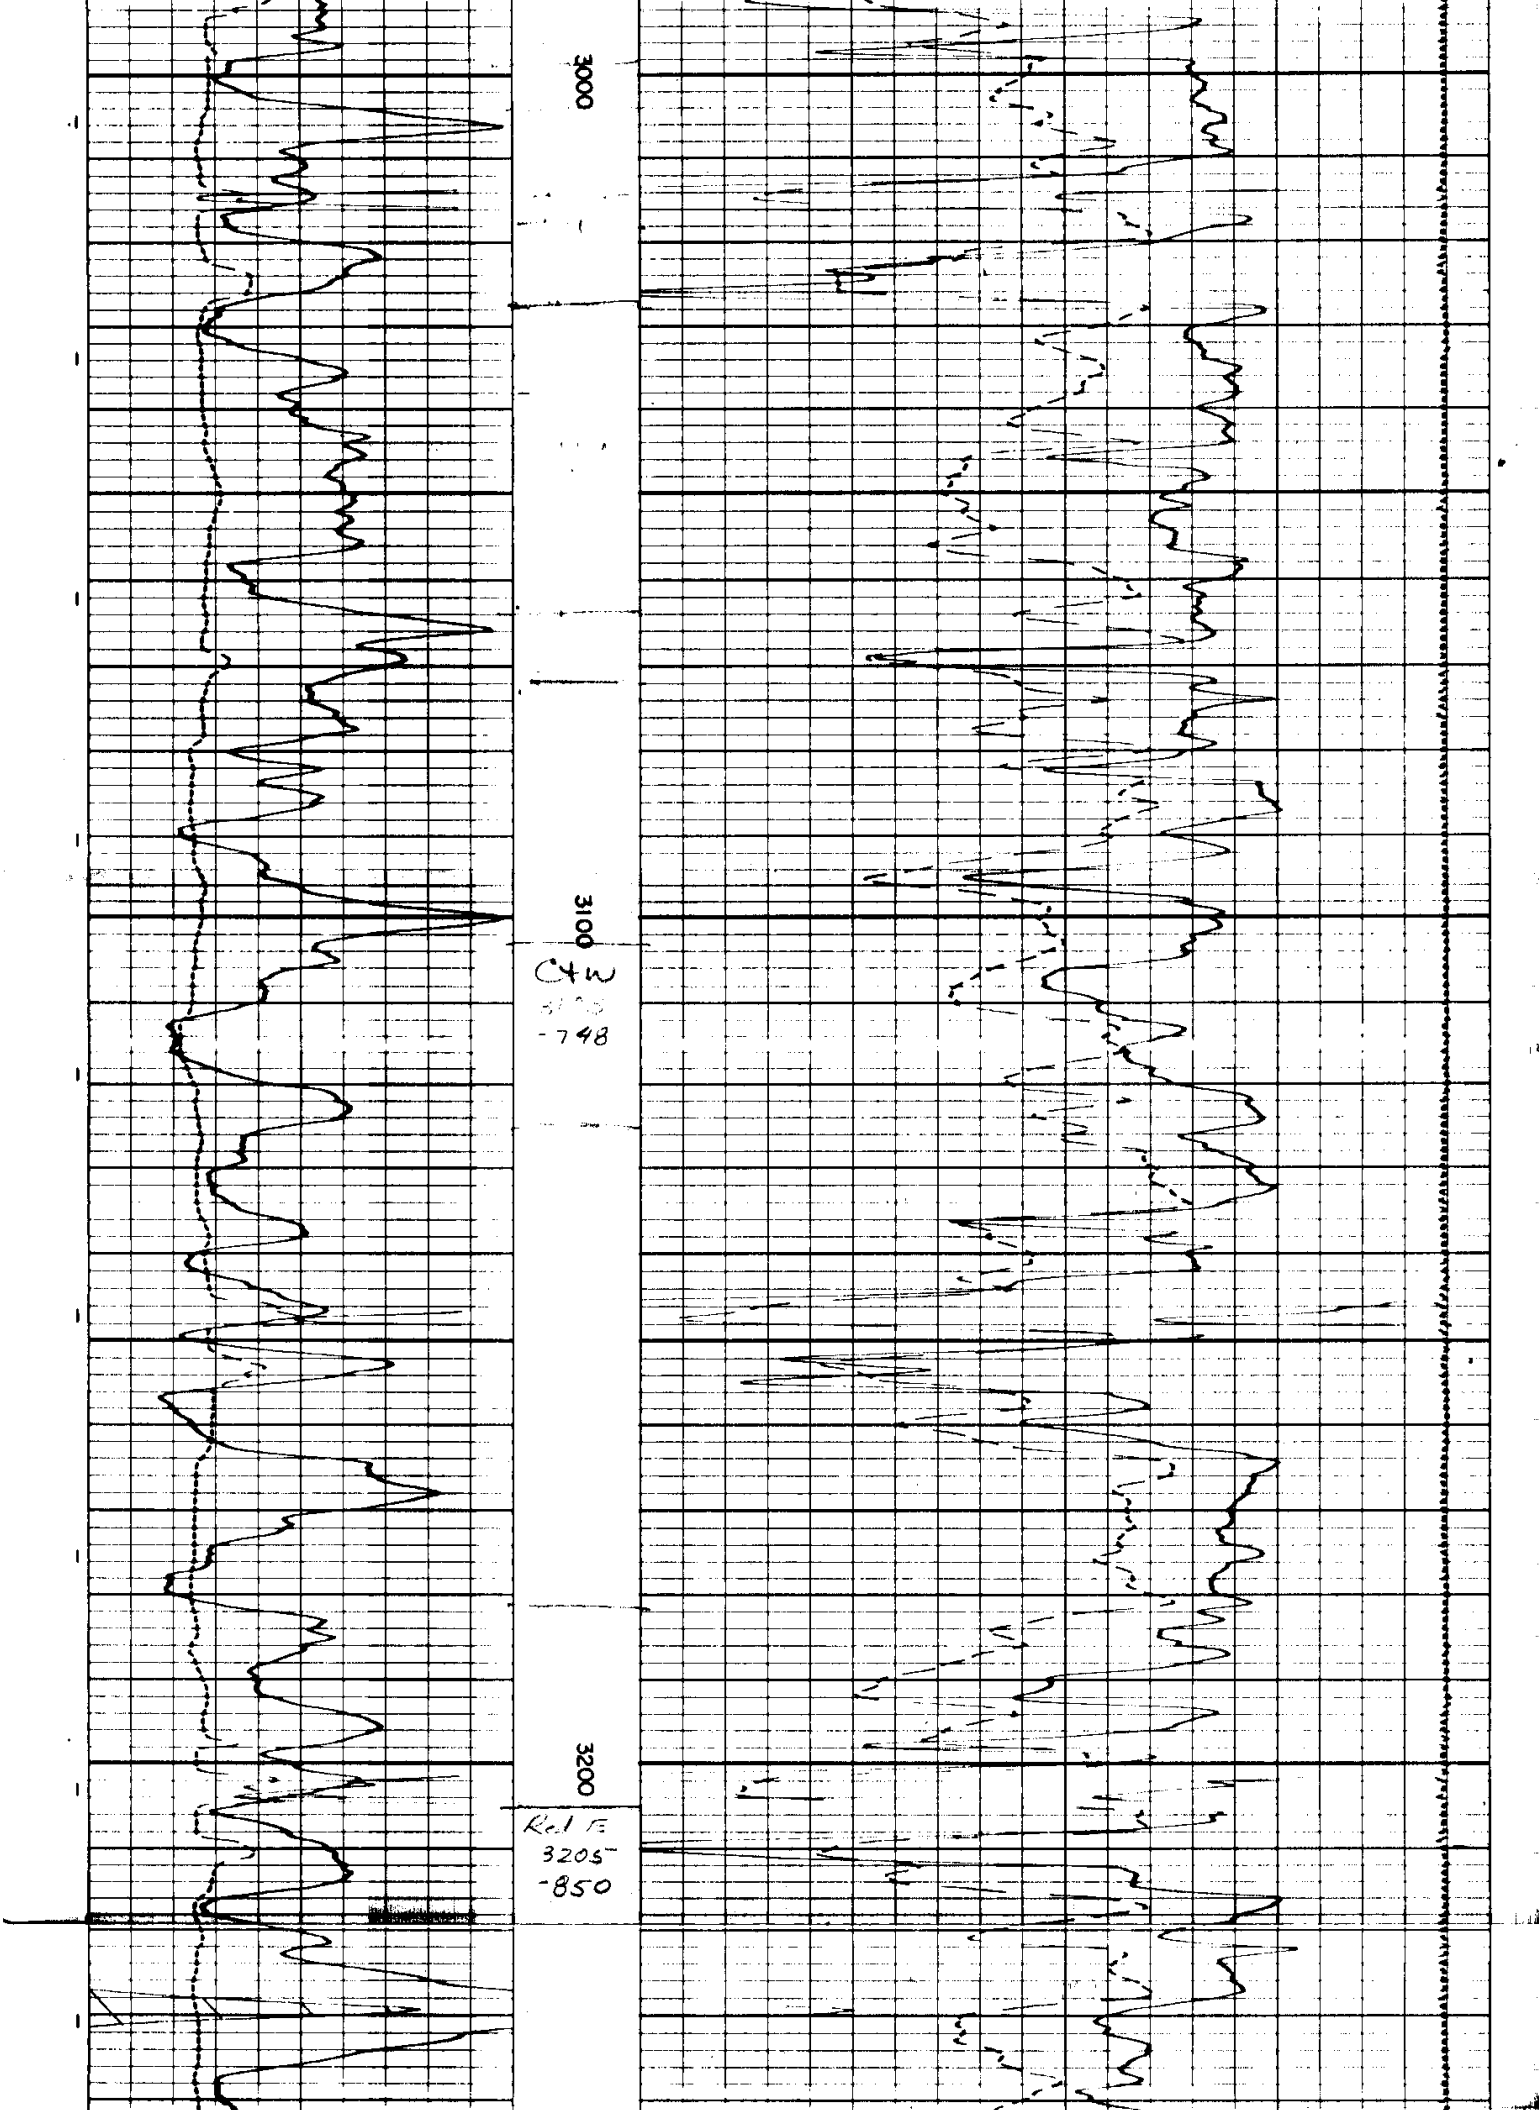

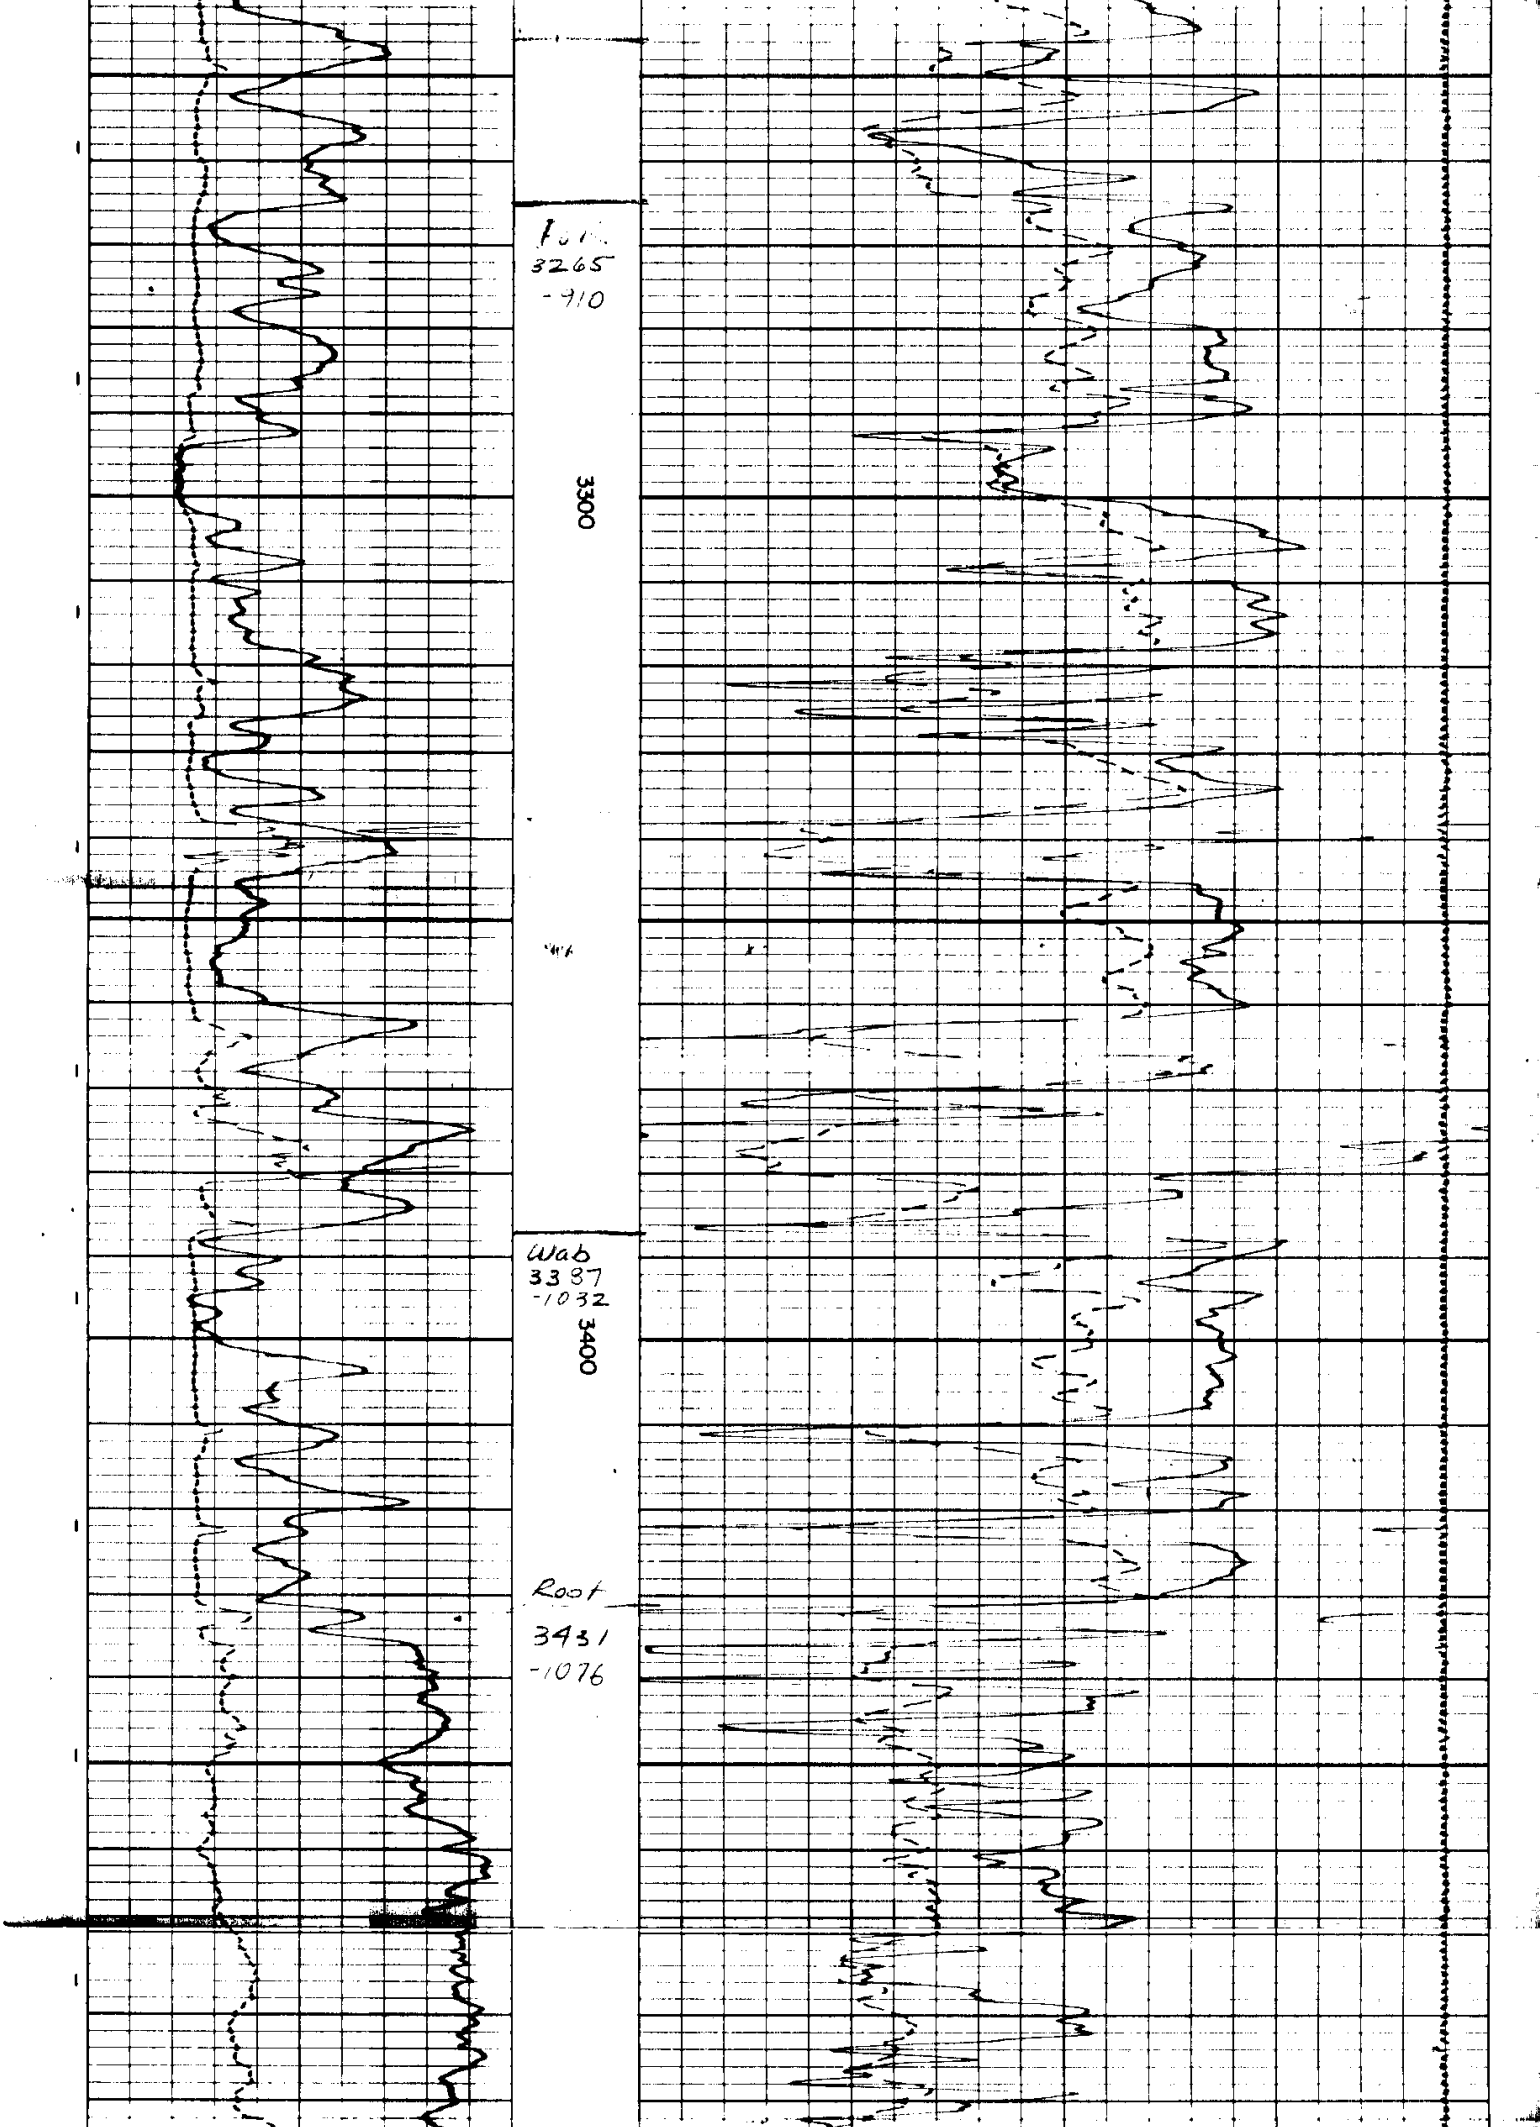

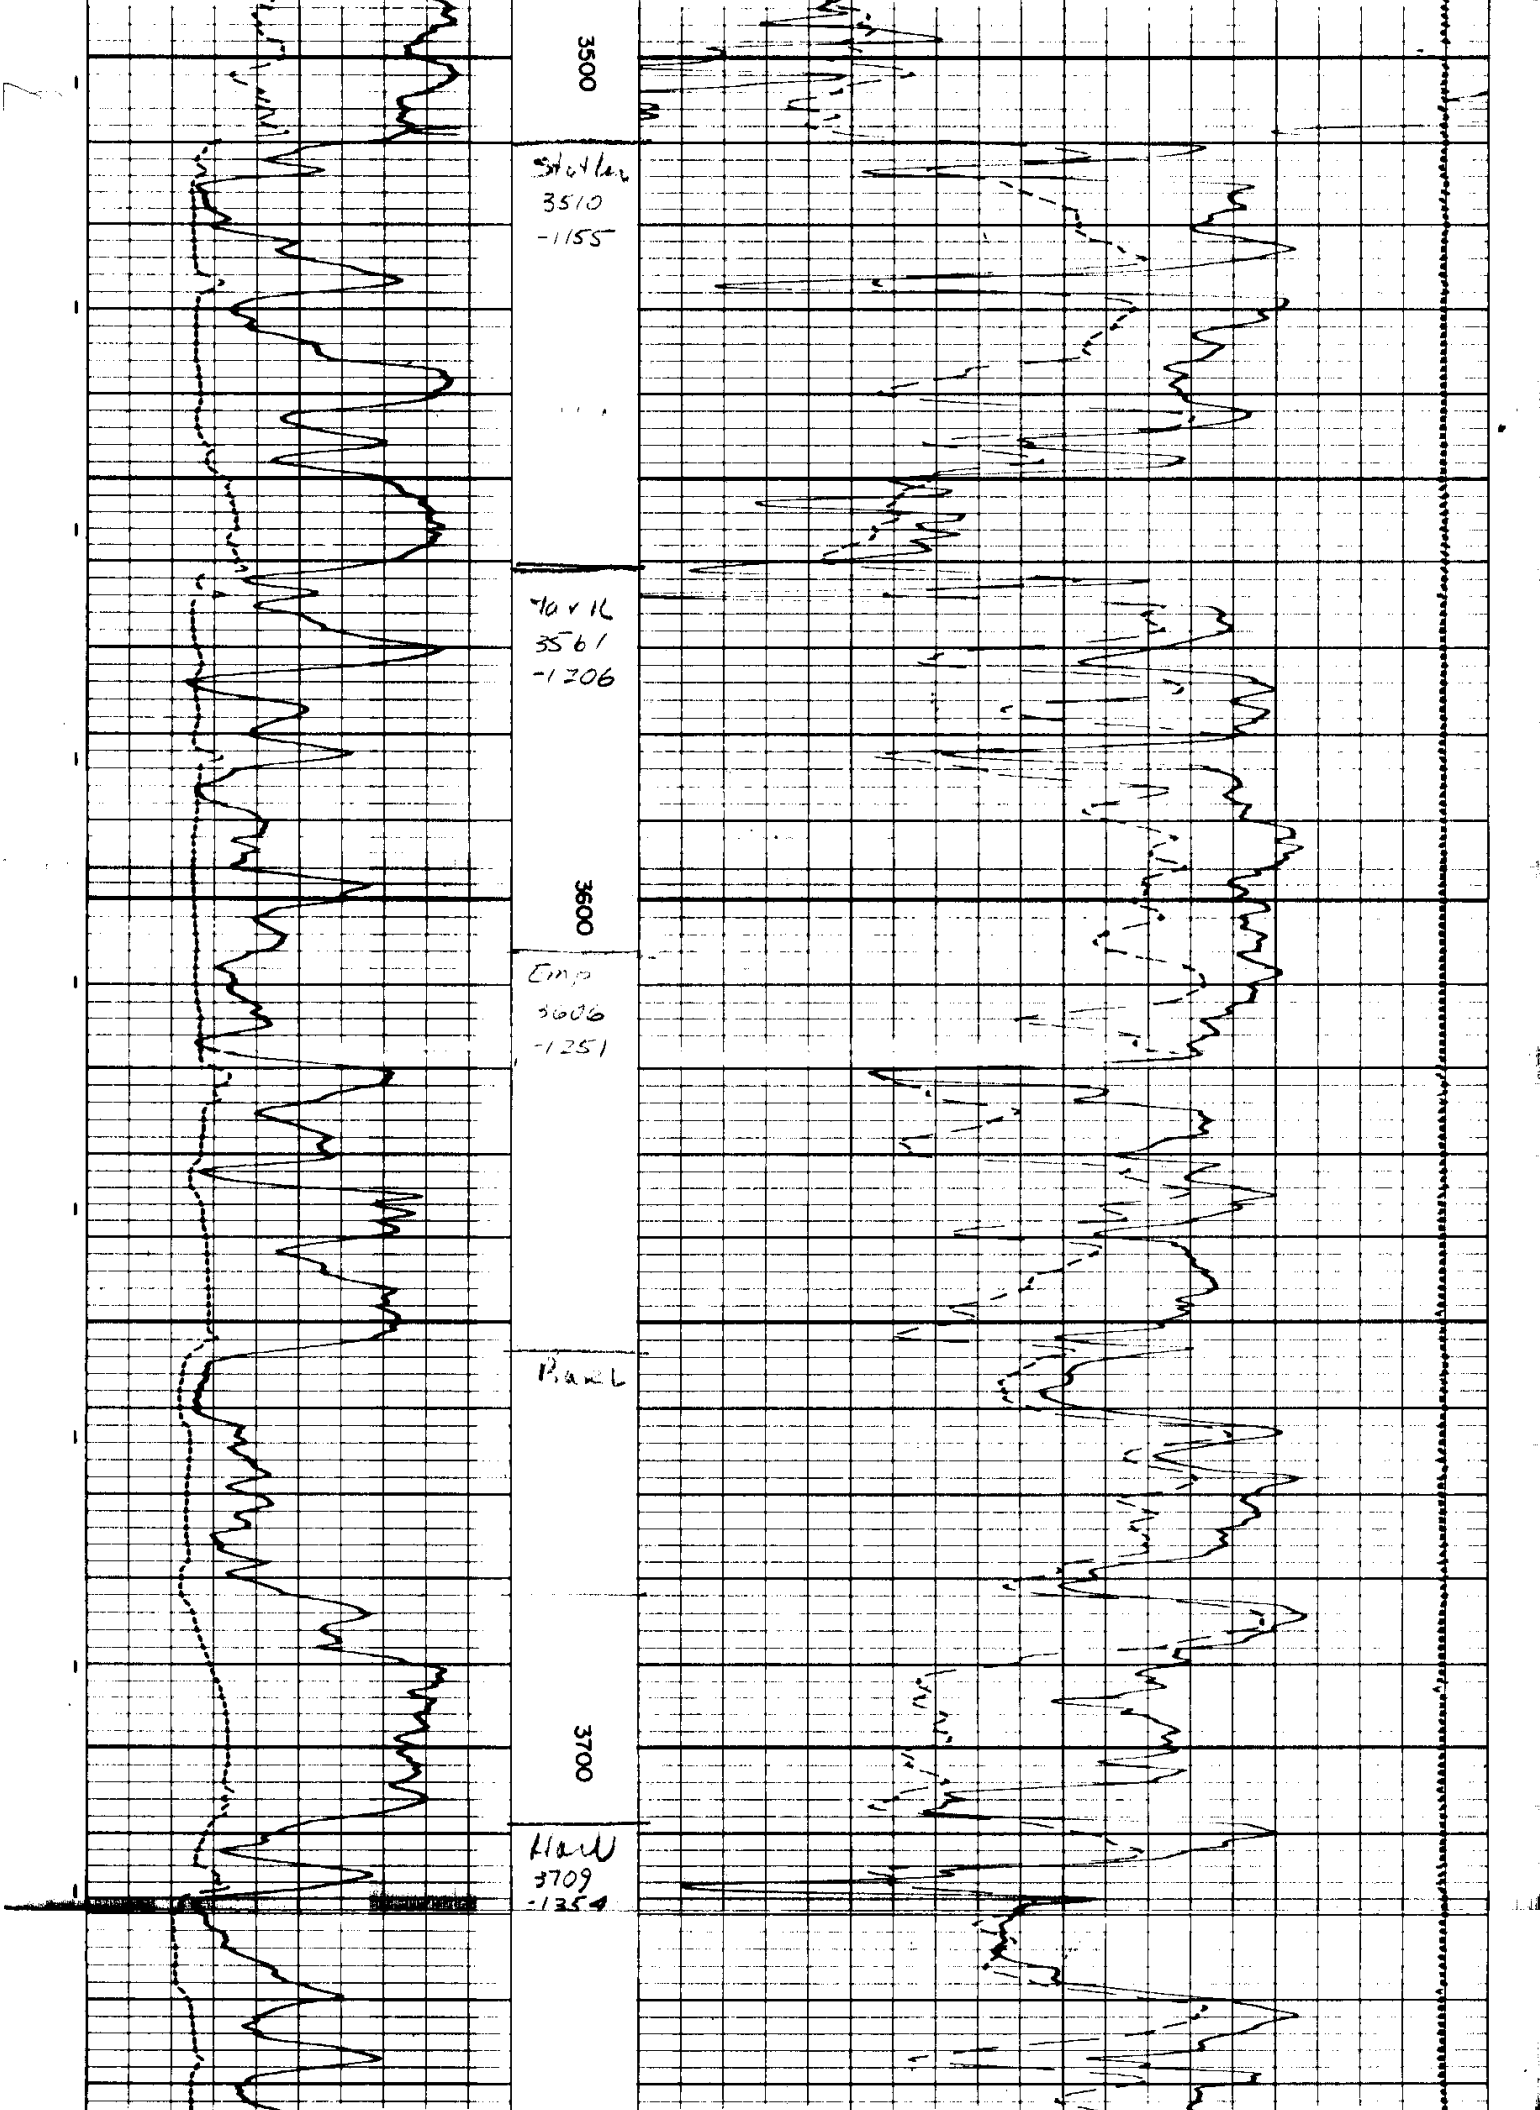

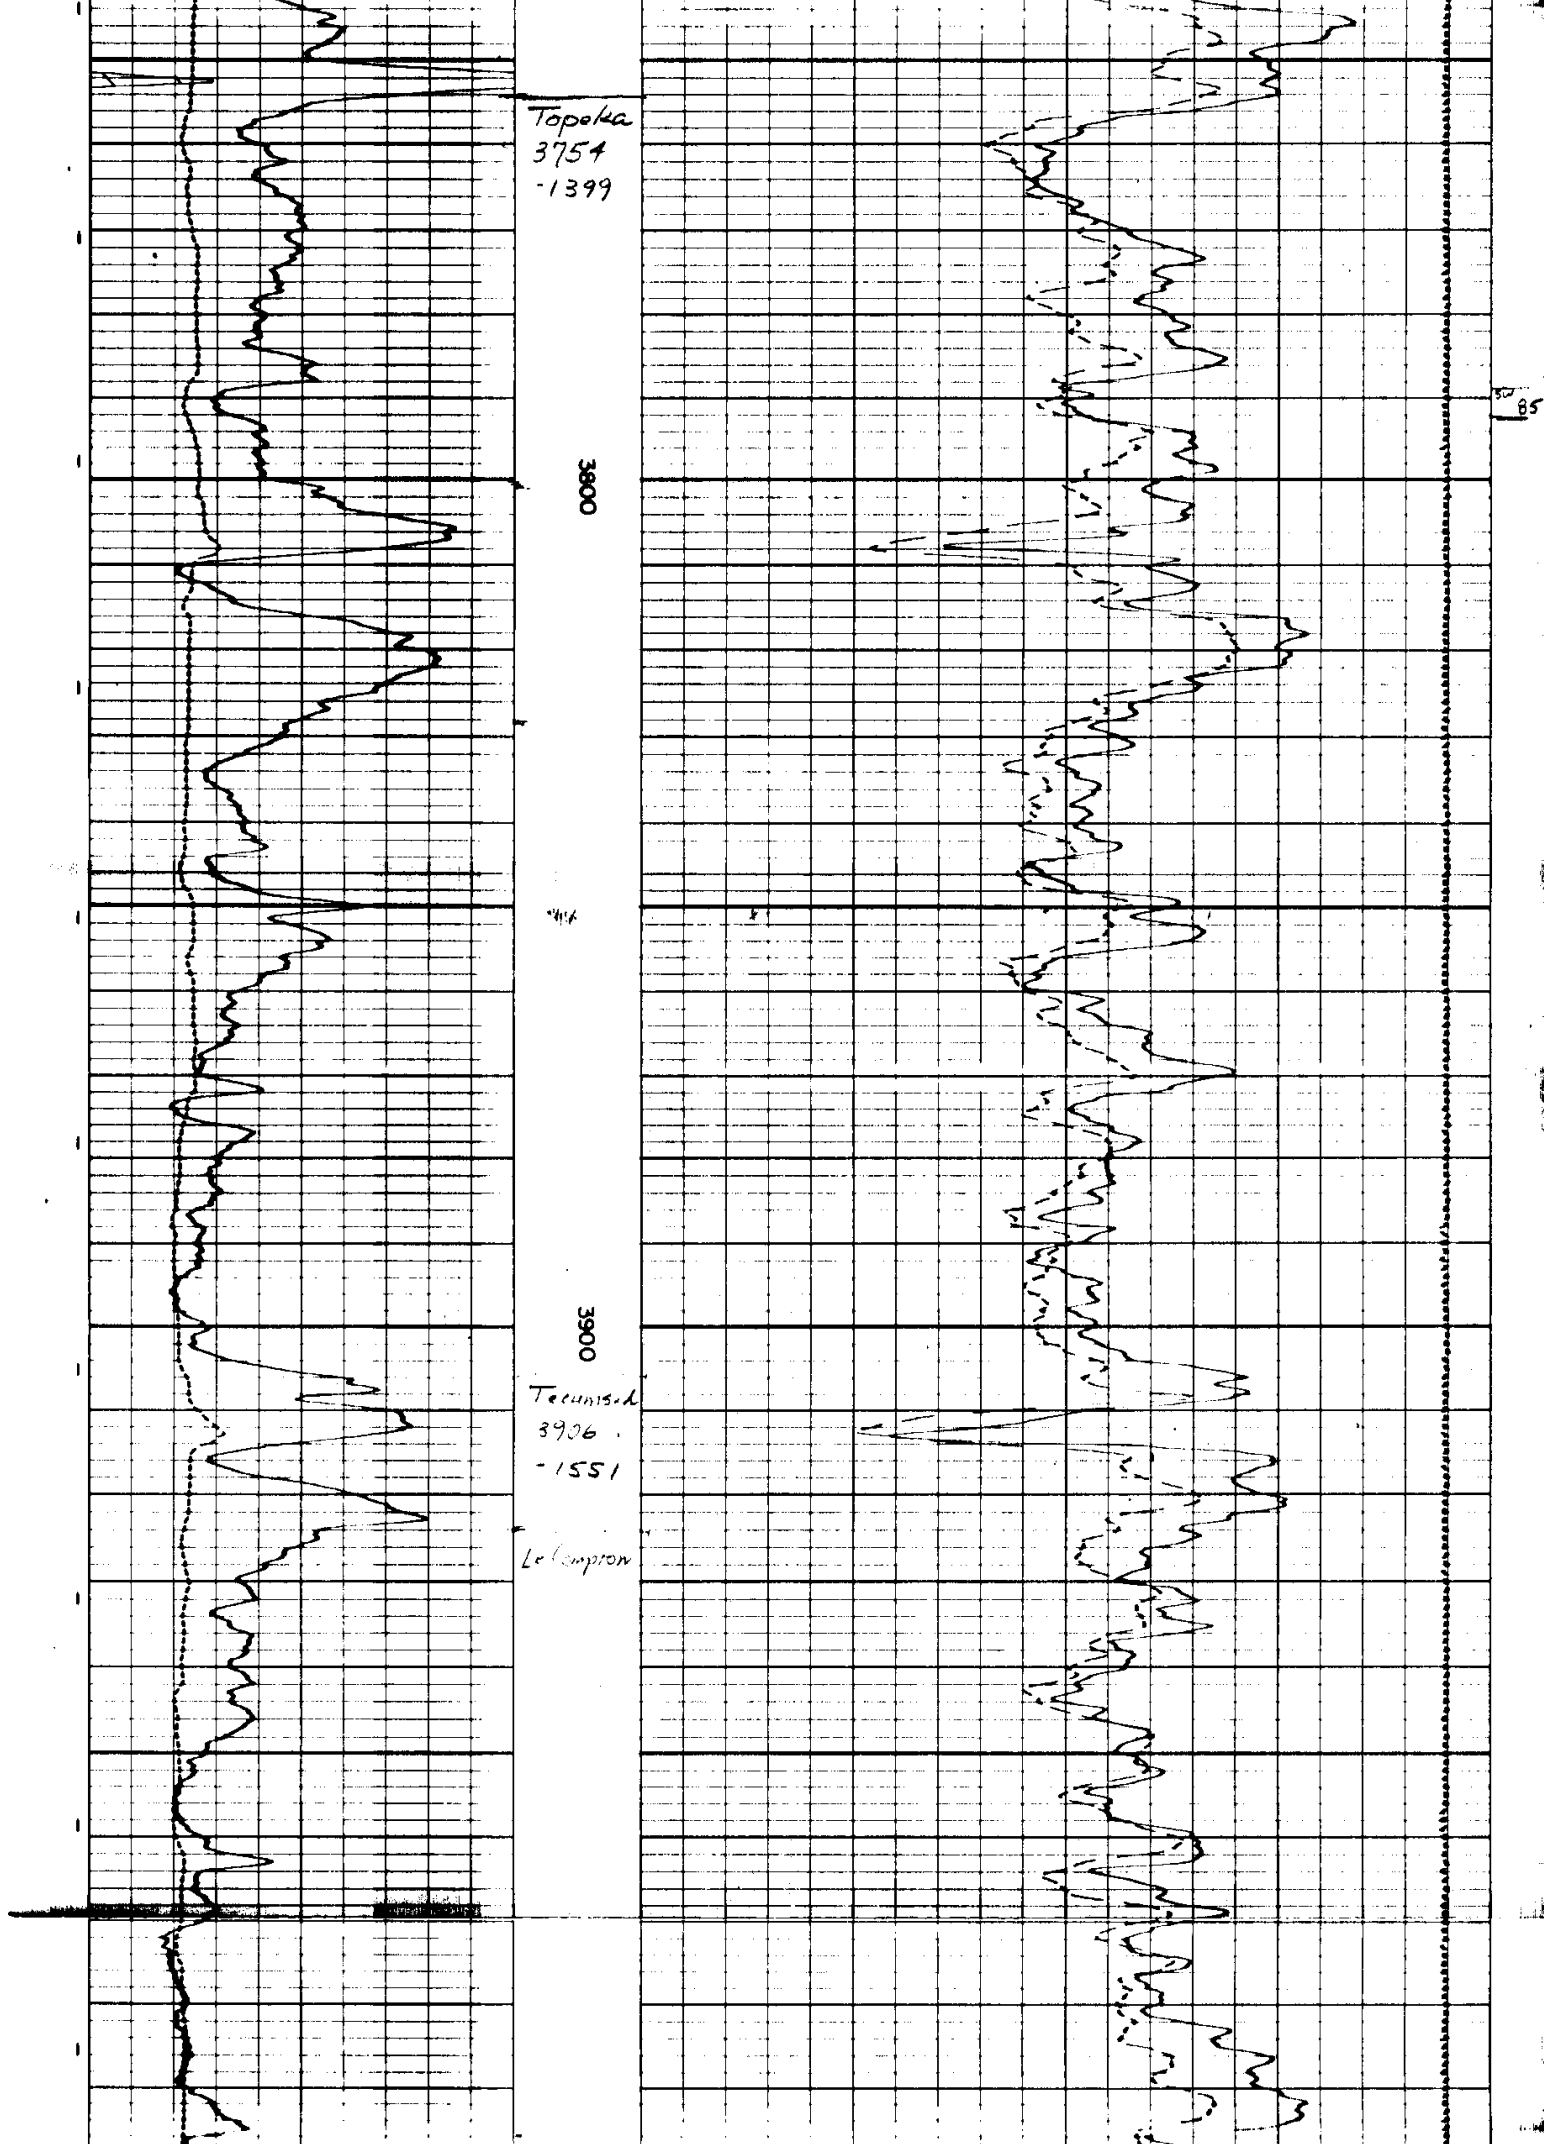

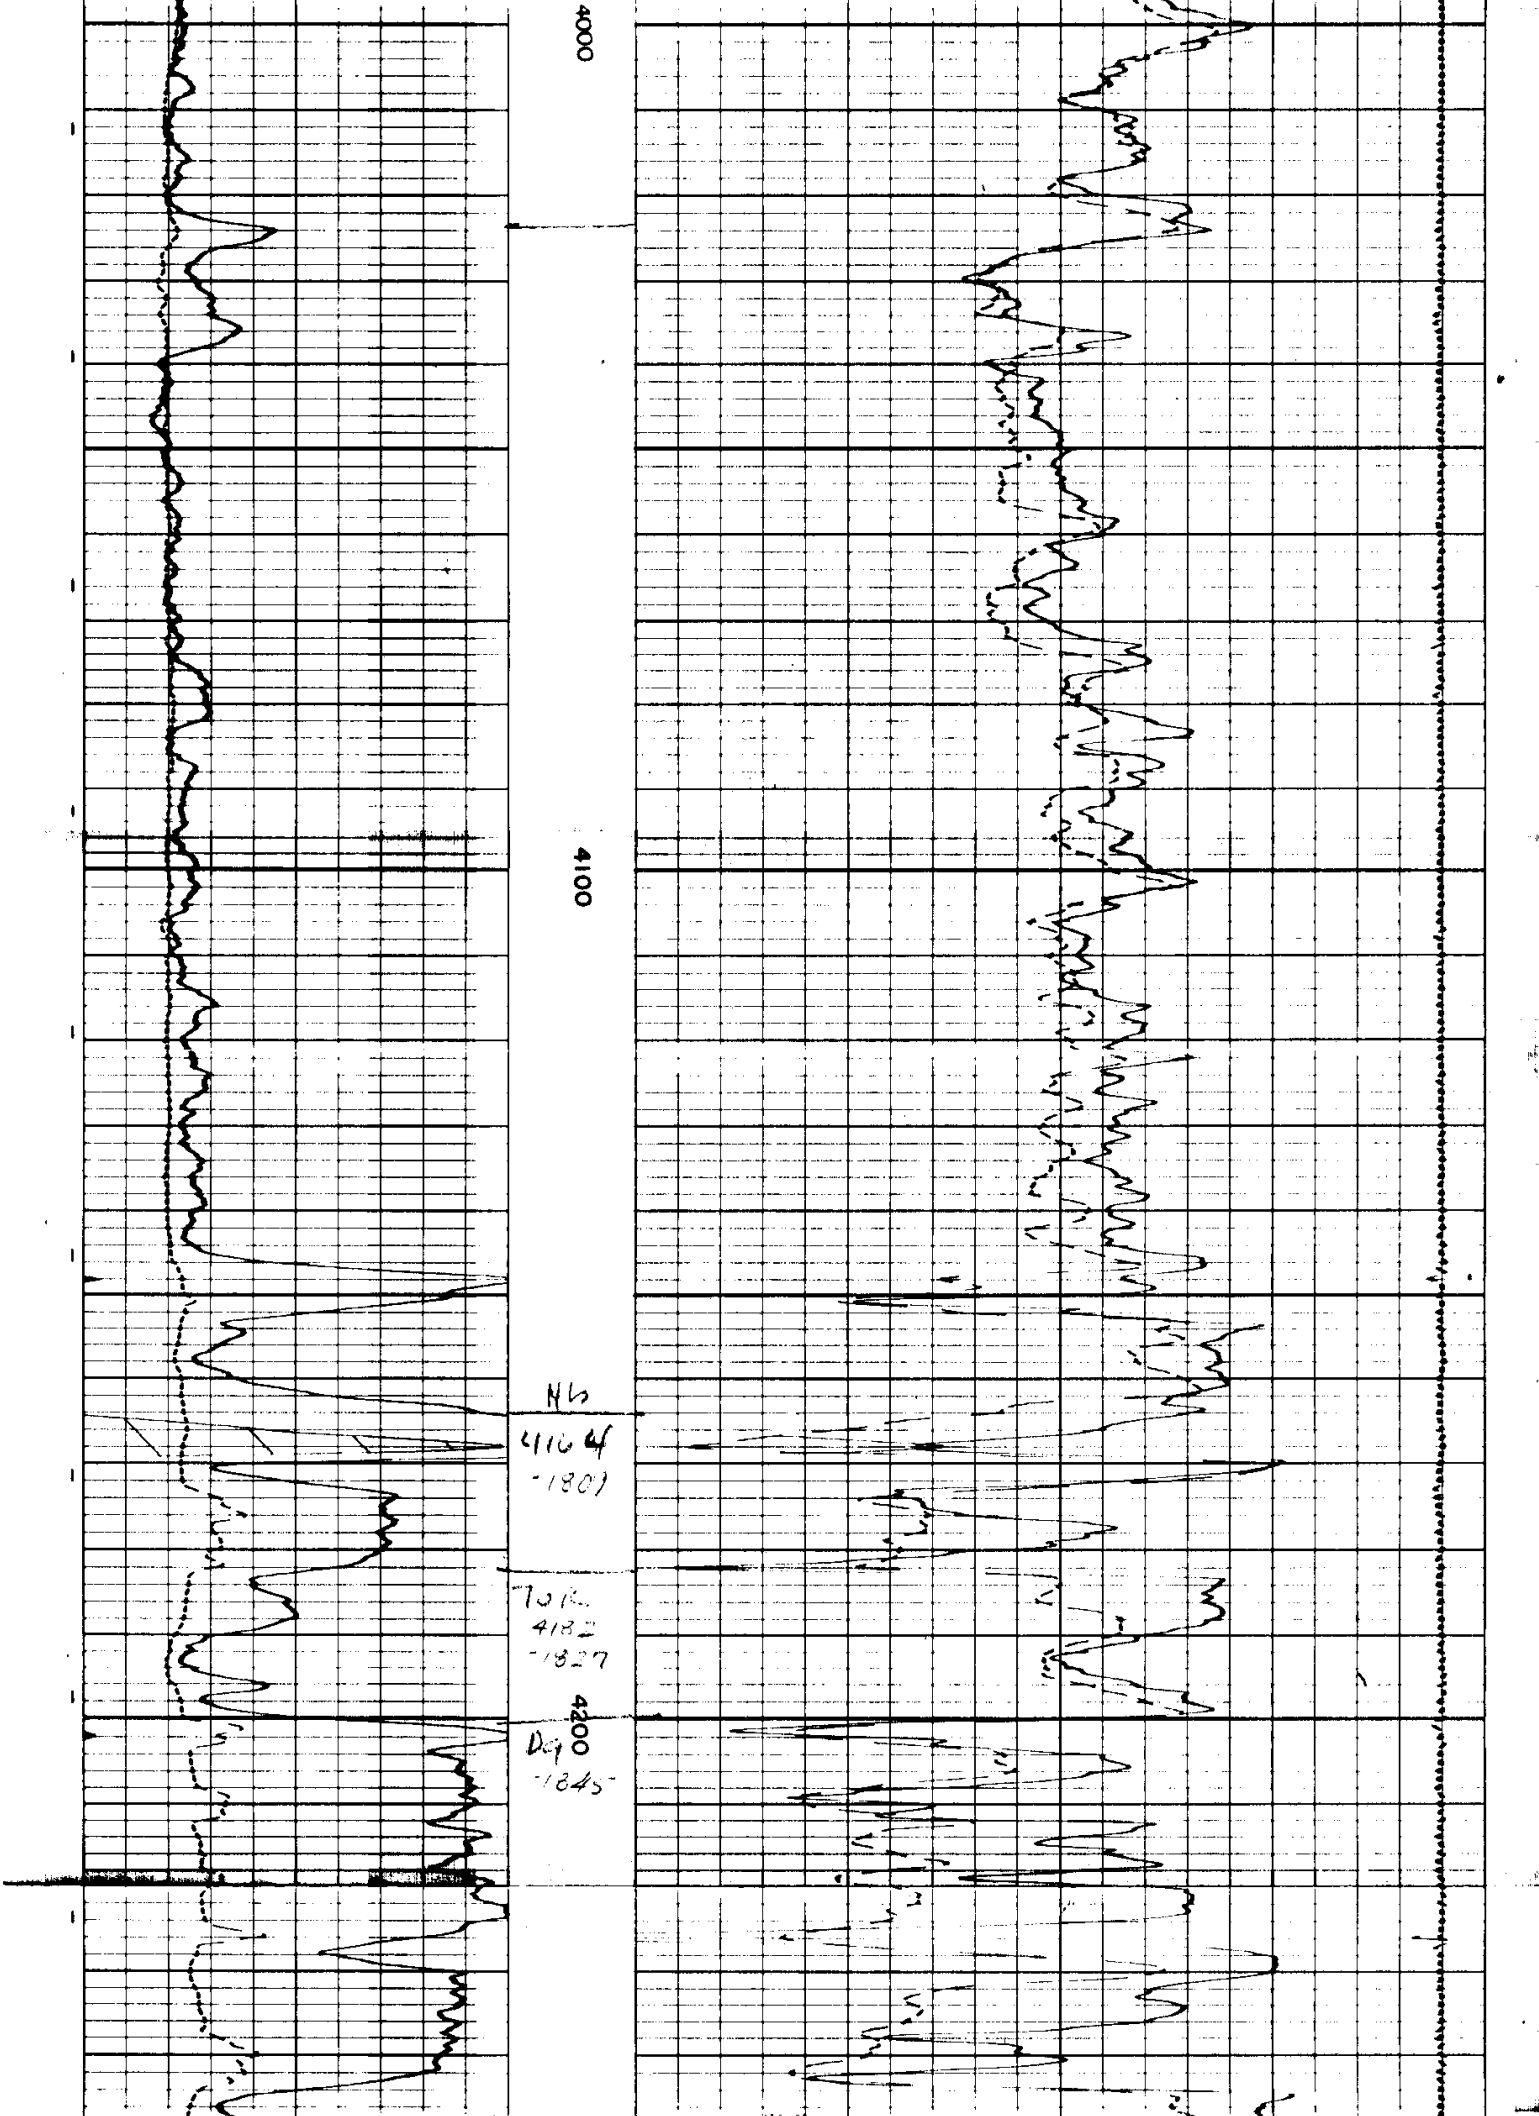

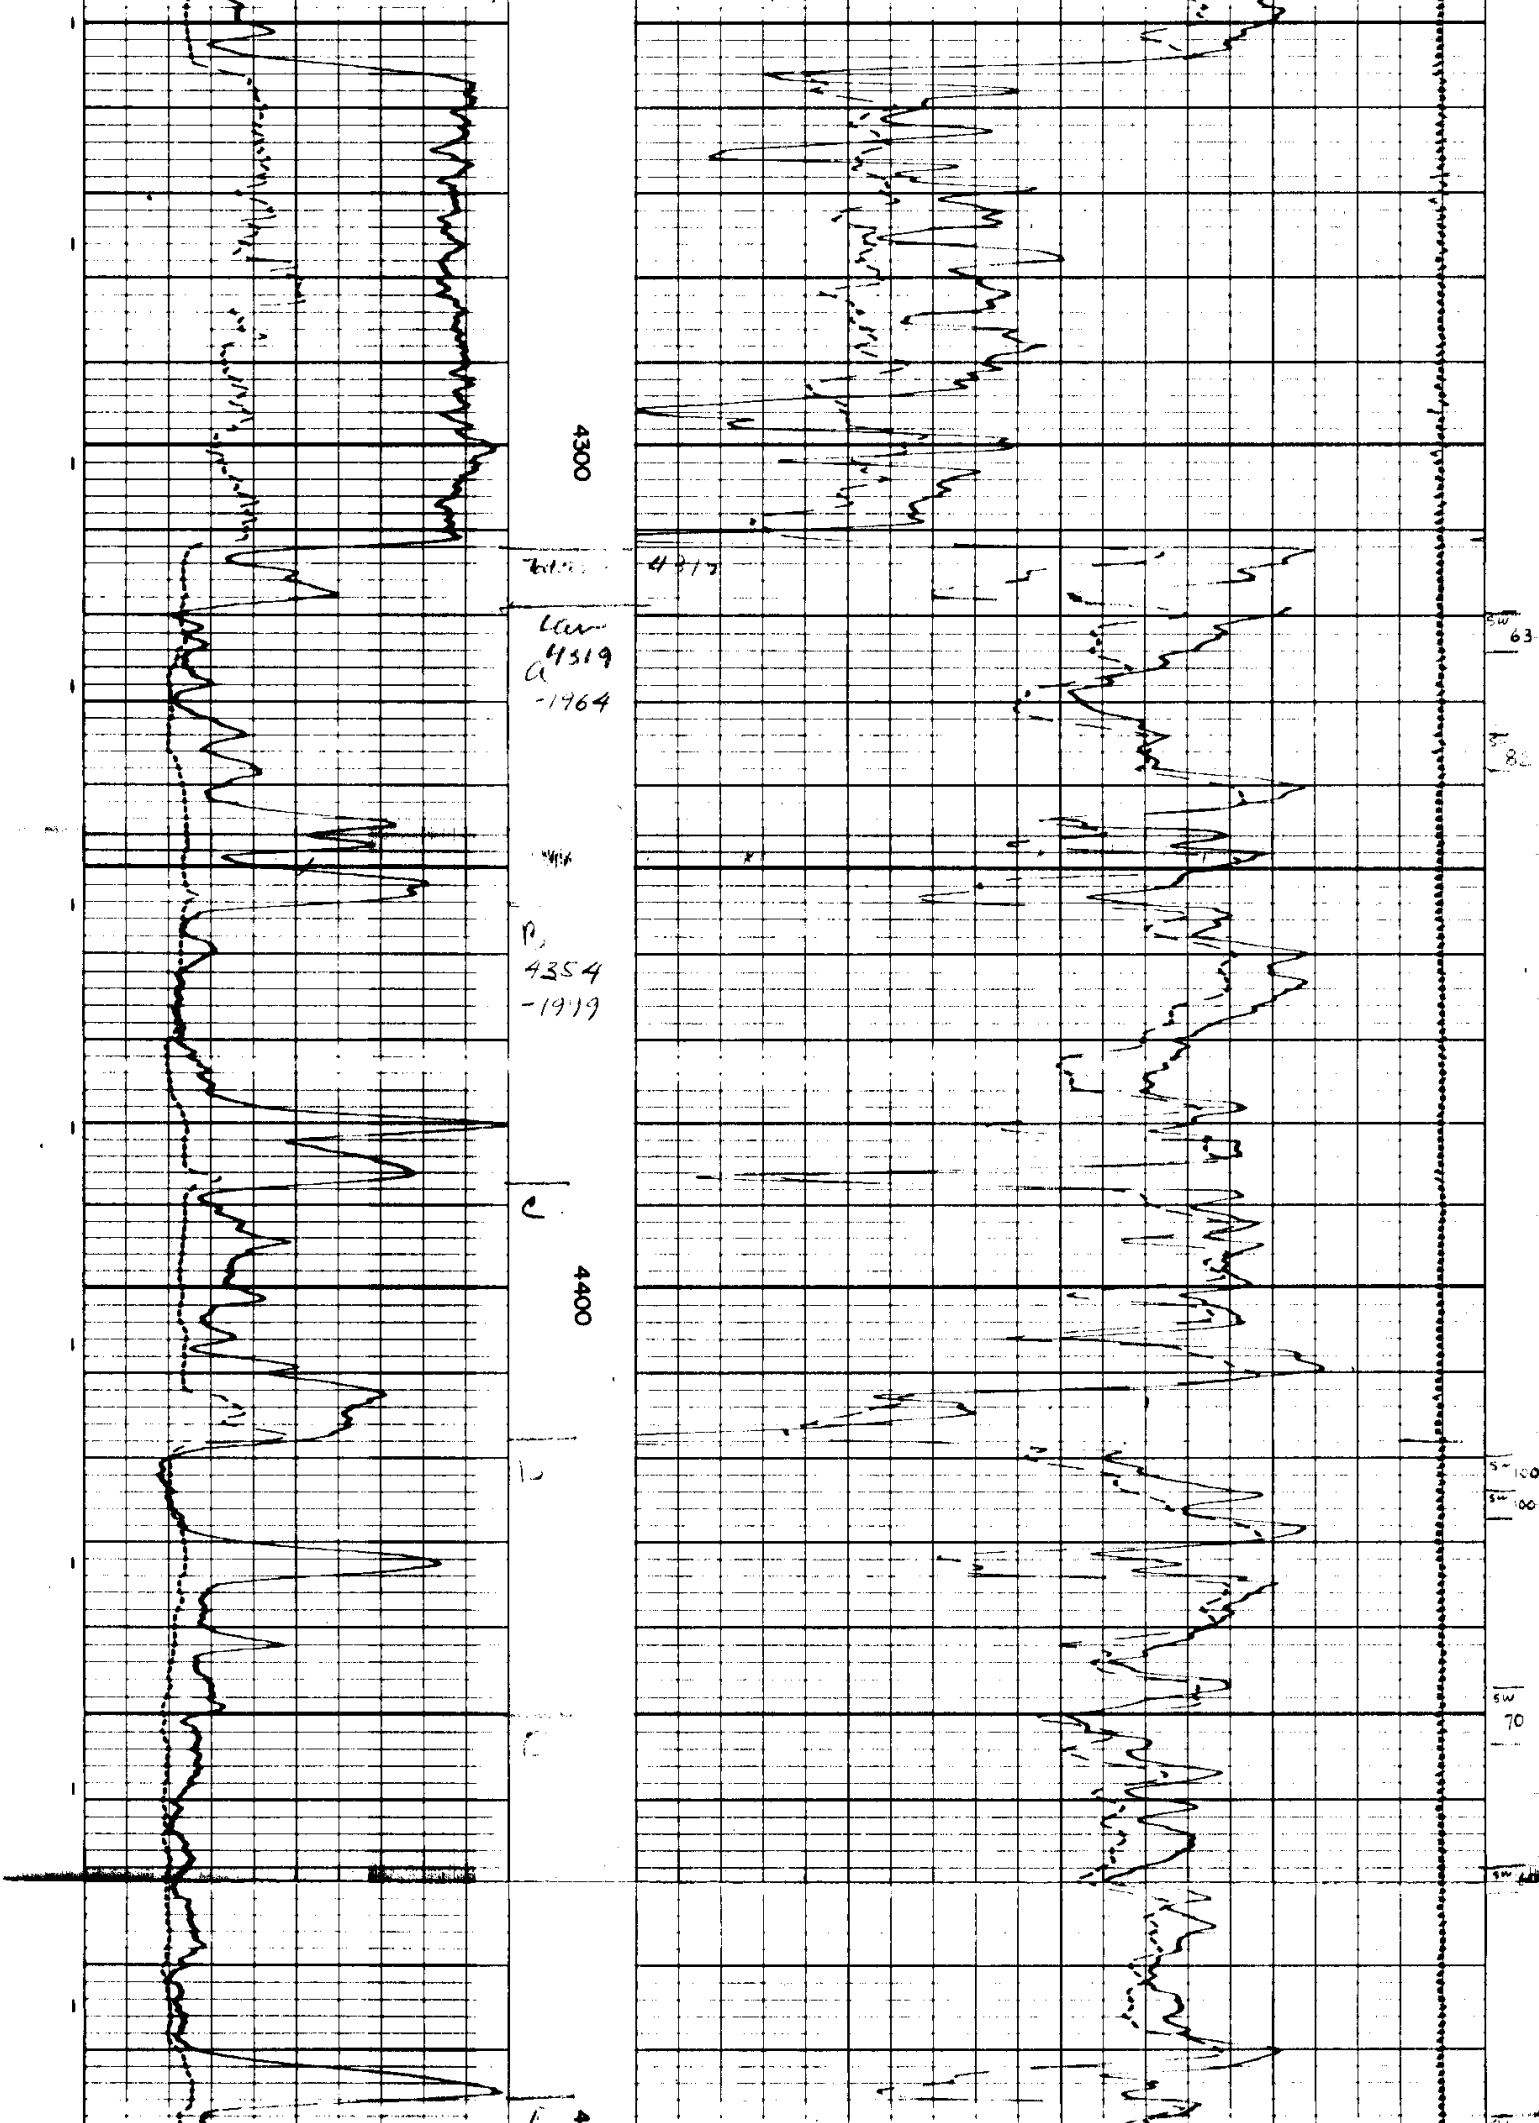

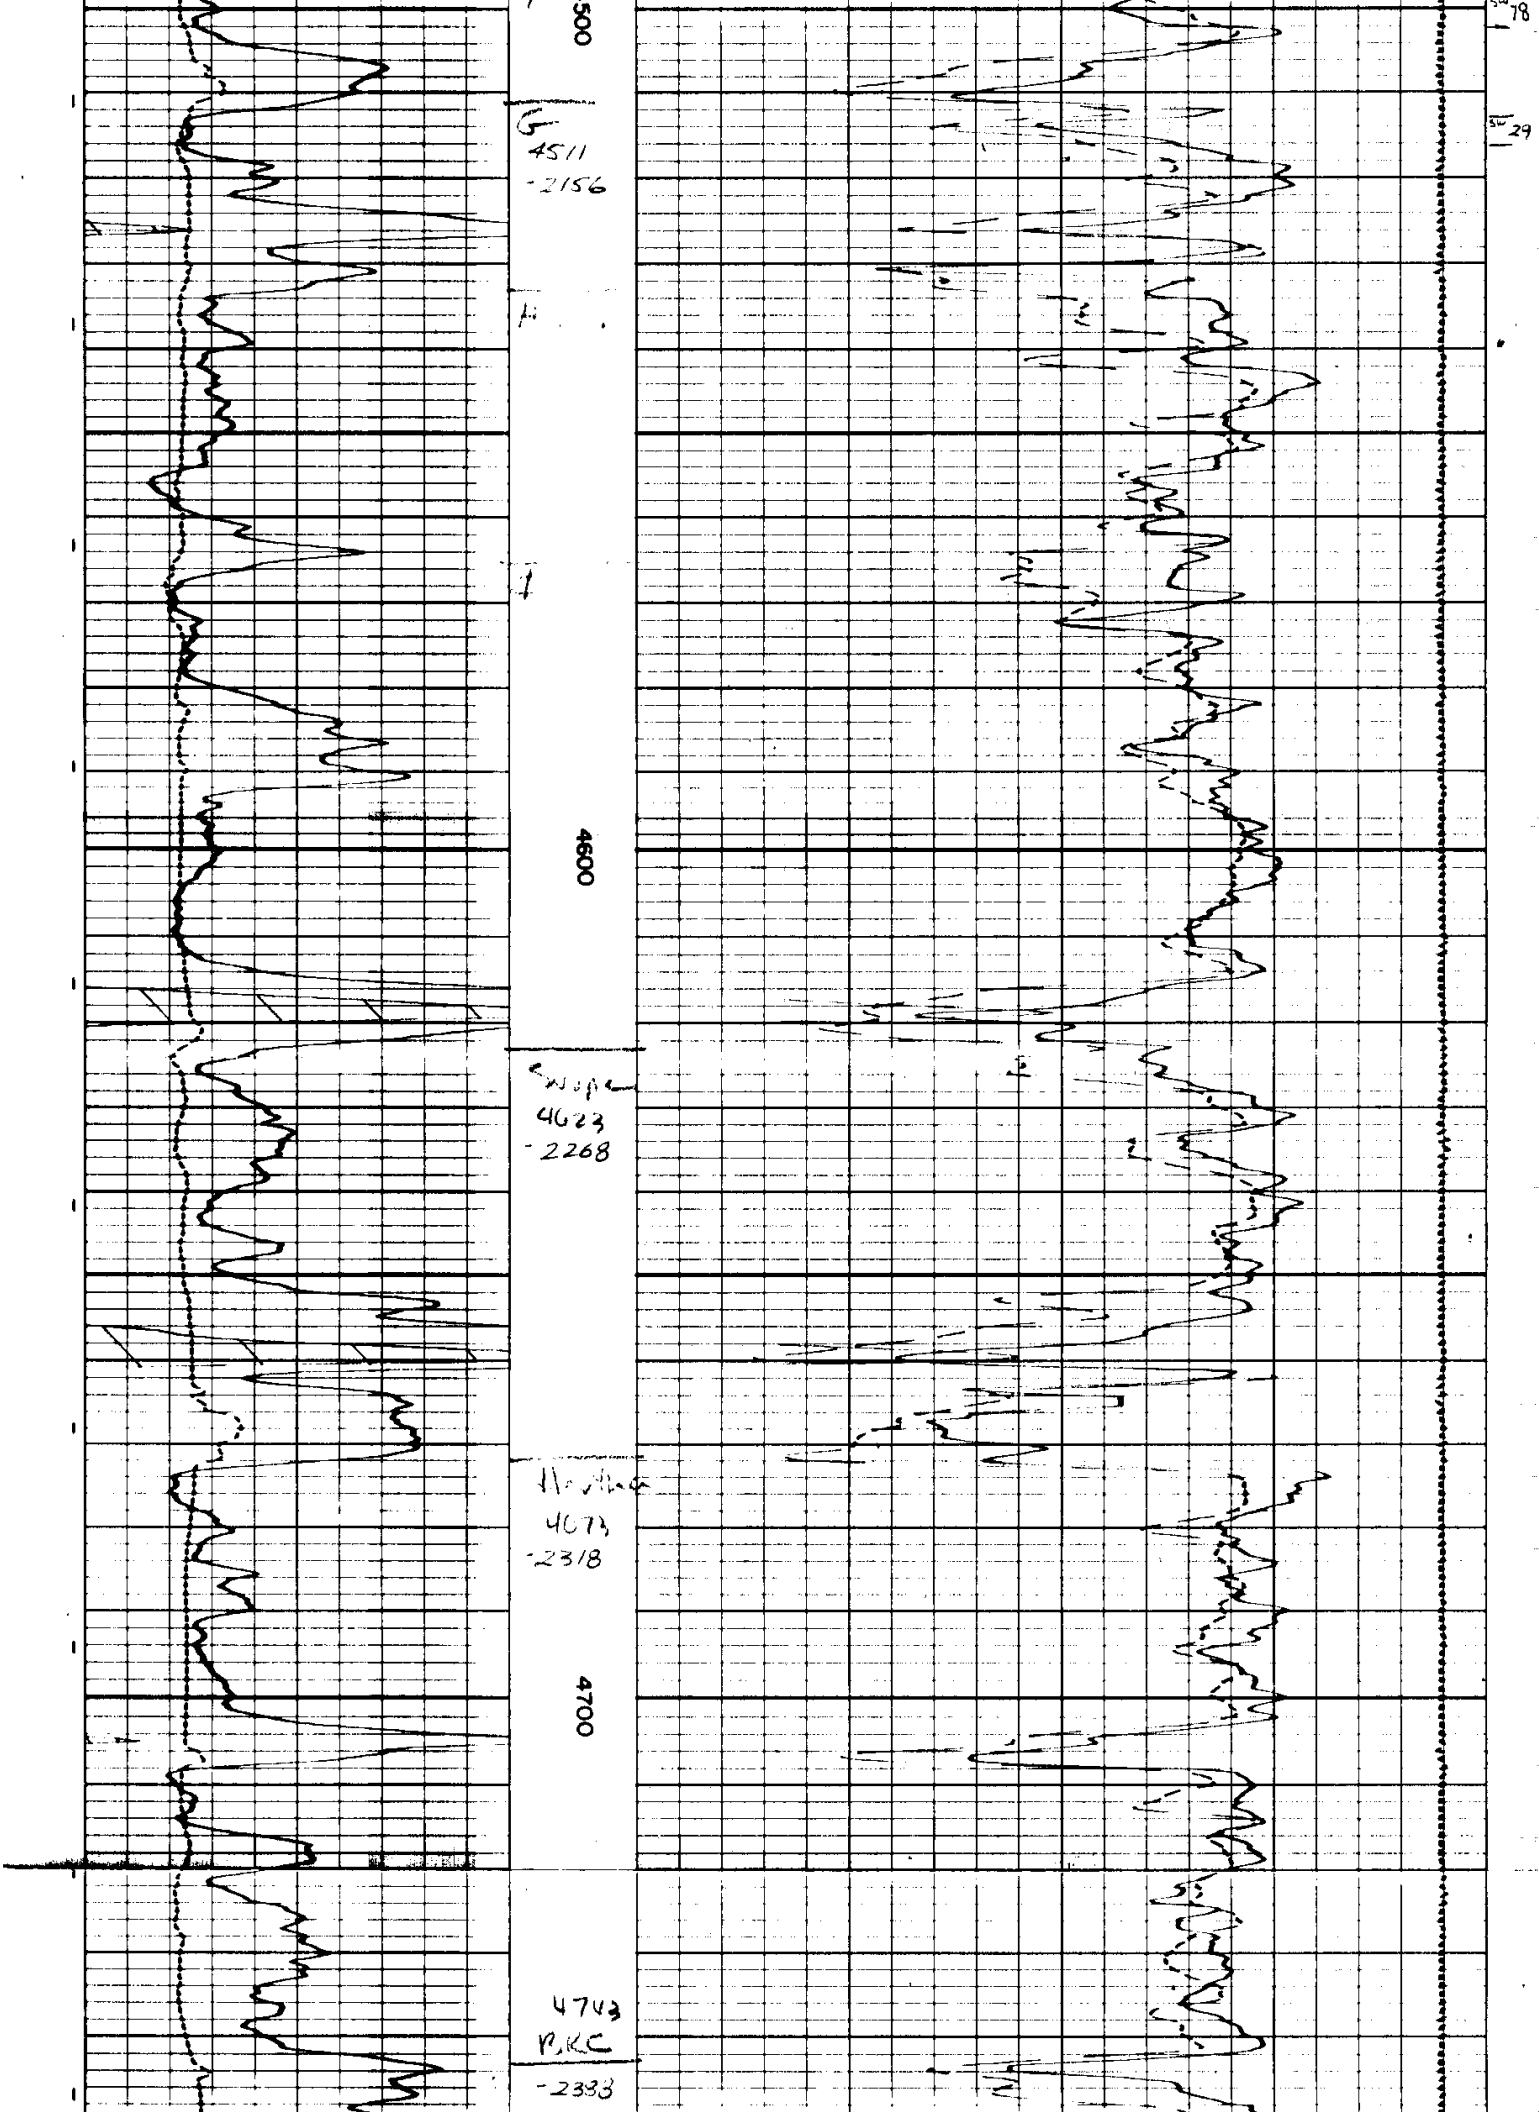

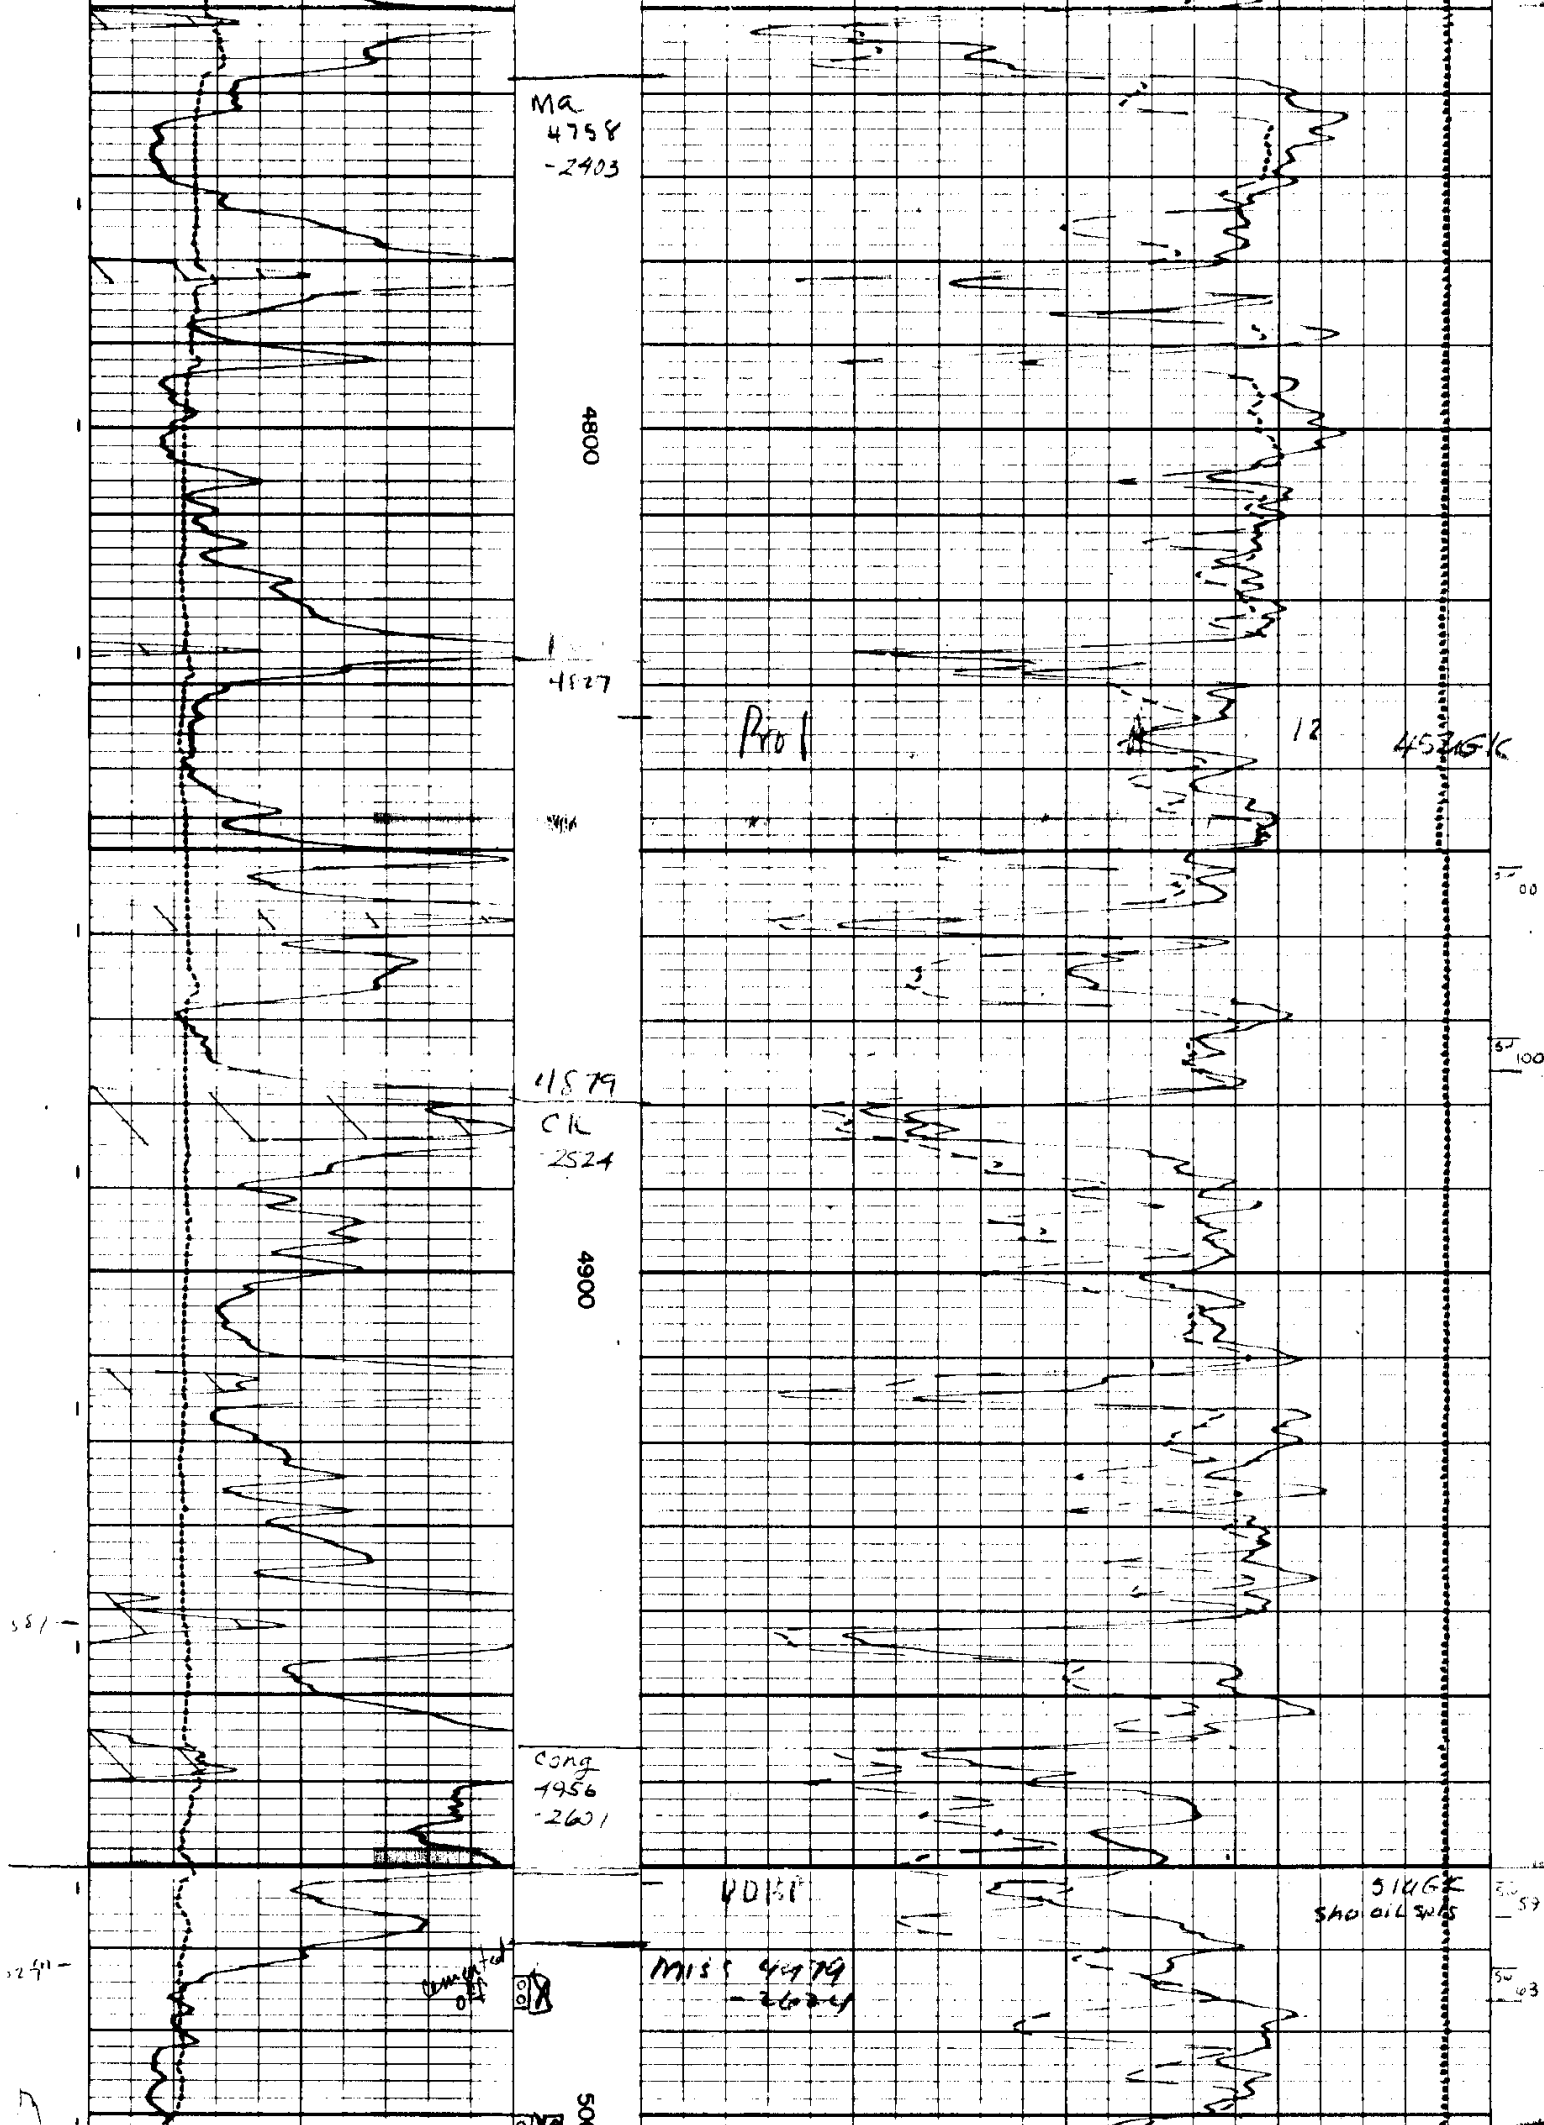

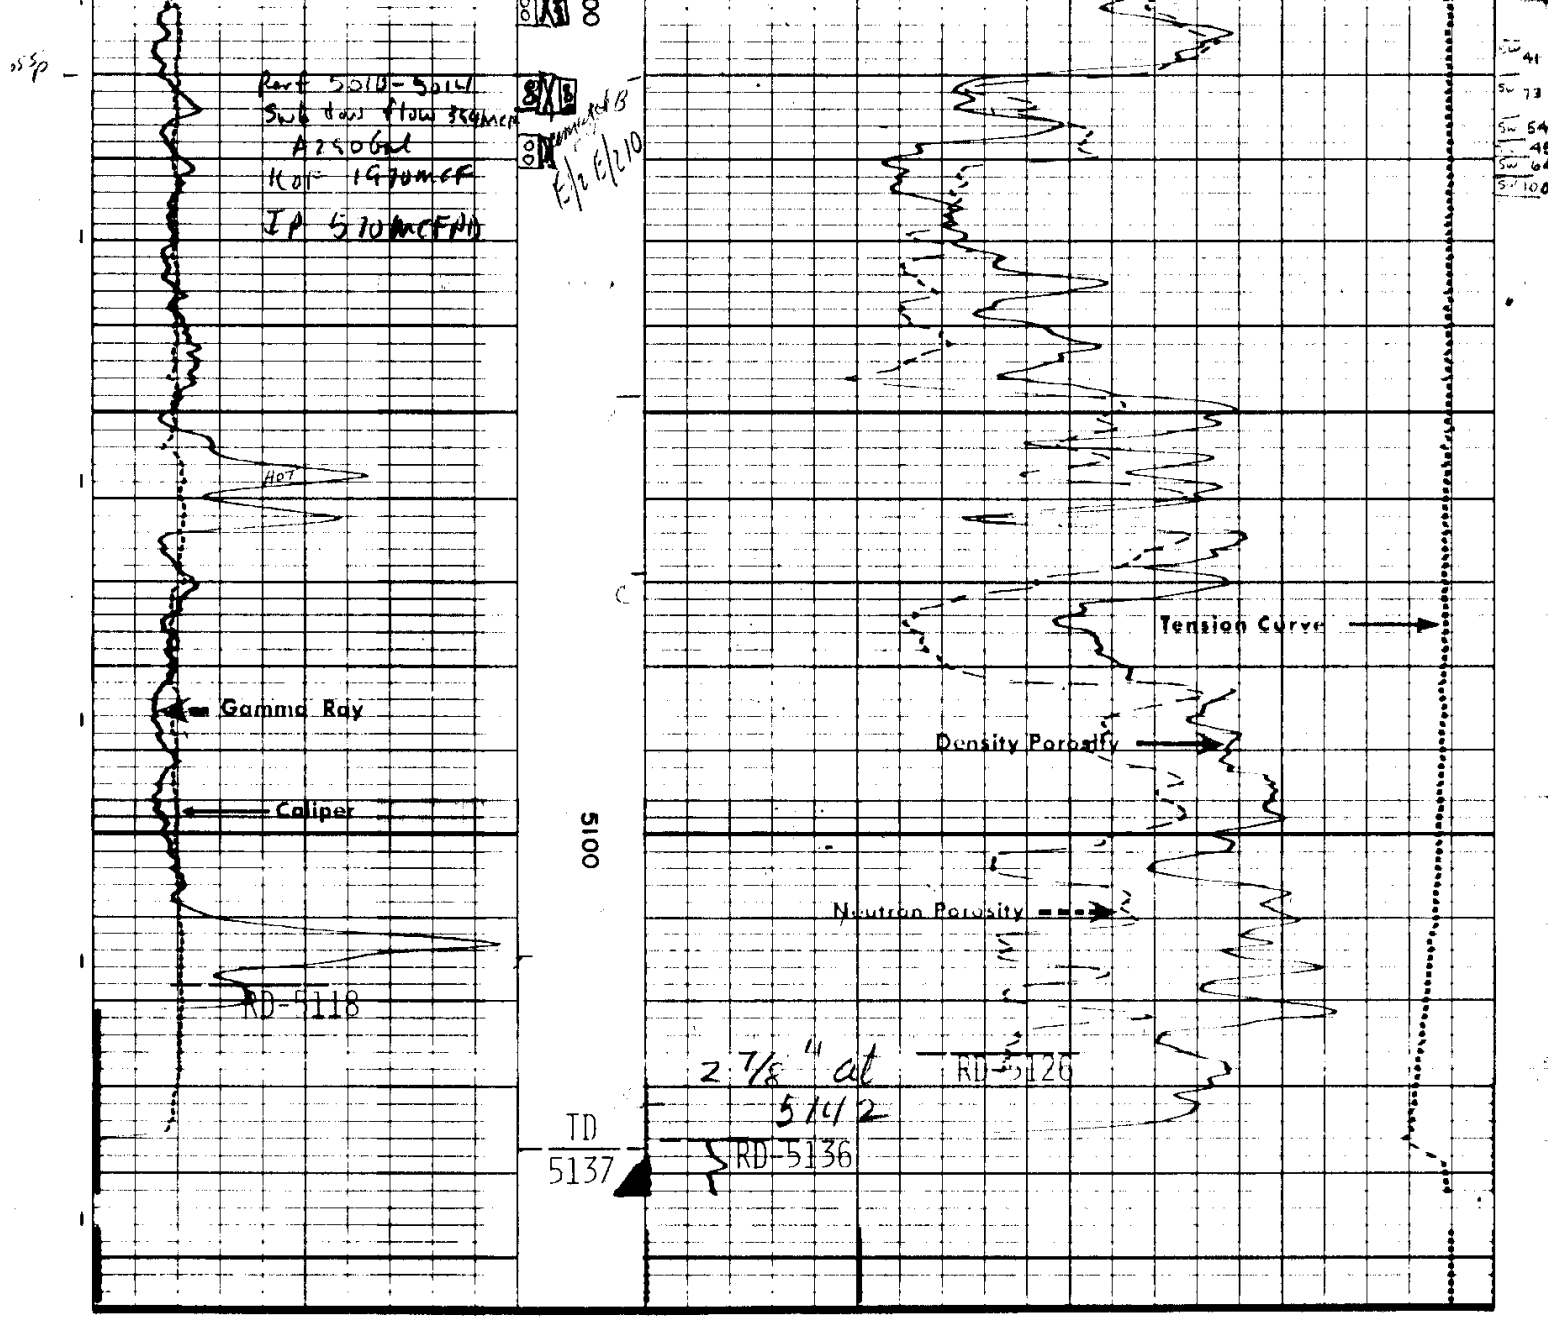

TENSION
LBS 500 /CD

6 — 16 HOLE SIZE-INCHES **CALIPER**	45 — 30 — 15 — 0 LM MATRIX **NEUTRON POROSITY %**
0 — 150 API UNITS **GAMMA RAY**	45 — 30 — 15 — 0 ρma 2.71 ρf 1.0 **DENSITY — POROSITY %**

DEPTH

Company	TEXAS OIL & GAS CORPORATION	**Drillers T.D.**	5150
Well	KIRKPATRICK NO. 2X	**Log F.R.**	5136
Field	PLEASANT VALLEY	**Log T.D.**	5137
County	FORD	**Elevations:**	
State	KANSAS	**K.B.** 2355 **D.F.** -	**G.L.** 2349

GAMMA RAY & CALIPER	DEPTH	BULK DENSITY GRAMS/CC
API UNITS 0 150		CORRECTION -.5 0 +.5 2.0 2.5 3.0