



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Jones Oil, LLC.
 112 N. Gray St.
 St. John, KS 67576-1923
 ATTN: Keaton Jones


2-24s-14w Stafford Co., KS
Bookstore 3
 Job Ticket: 51829 **DST#: 1**
 Test Start: 2013.12.16 @ 22:58:44

GENERAL INFORMATION:

Formation: **Lansing B**
 Deviated: No Whipstock: 0.00 ft (KB)
 Time Tool Opened: 01:11:29
 Time Test Ended: 06:40:59
 Interval: **3636.00 ft (KB) To 3656.00 ft (KB) (TVD)**
 Total Depth: 3656.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair
 Test Type: Conventional Bottom Hole (Initial)
 Tester: Ryan Reynolds
 Unit No: 48
 Reference Elevations: 1963.00 ft (KB)
 1958.00 ft (CF)
 KB to GR/CF: 5.00 ft

Serial #: 6773 Inside
 Press@RunDepth: 93.99 psig @ 3637.00 ft (KB) Capacity: 8000.00 psig
 Start Date: 2013.12.16 End Date: 2013.12.17 Last Calib.: 2013.12.17
 Start Time: 22:58:44 End Time: 06:40:59 Time On Btm: 2013.12.17 @ 01:03:44
 Time Off Btm: 2013.12.17 @ 04:37:29

TEST COMMENT: IF: Strong blow . BOB @ 2min. No GTS.
 IS: No blow
 FF: Strong blow . BOB immed. GTS @ 57min. TSTM
 FS: Weak 1" BB.

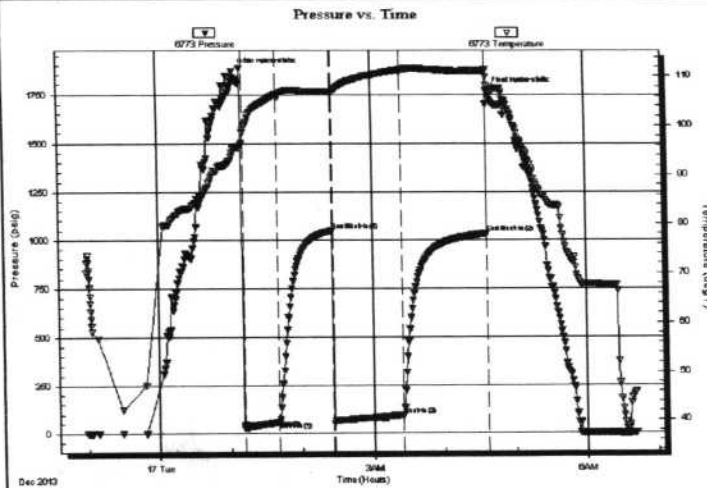

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1869.29	95.27	Initial Hydro-static
8	22.68	98.58	Open To Flow (1)
37	56.29	106.36	Shut-In(1)
83	1047.60	106.93	End Shut-In(1)
83	47.77	106.97	Open To Flow (2)
142	93.99	111.33	Shut-In(2)
213	1031.68	111.08	End Shut-In(2)
214	1769.99	109.85	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
120.00	SLI OCMW 2%oil, 30%mud, 68%w tr	0.62
90.00	OWGCM 2%oil, 15%w tr, 20%gas, 63%ml	1.26

Gas Rates

	Chole (inches)	Pressure (psig)	Gas Rate (Mcf/d)