



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Jones Oil, LLC.
 112 N. Gray St.
 St. John, KS 67576-1923
 ATTN: Keaton Jones


2-24s-14w Stafford Co., KS
Bookstore 3
 Job Ticket: 51830 DST#: 2
 Test Start: 2013.12.17 @ 16:25:11

GENERAL INFORMATION:

Formation: **Lansing F**
 Deviated: No Whipstock: 0.00 ft (KB)
 Time Tool Opened: 17:45:26
 Time Test Ended: 21:57:41
 Test Type: Conventional Bottom Hole (Reset)
 Tester: Ryan Reynolds
 Unit No: 48
 Interval: **3679.00 ft (KB) To 3697.00 ft (KB) (TVD)**
 Total Depth: 3697.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair
 Reference Elevations: 1963.00 ft (KB)
 1958.00 ft (CF)
 KB to GR/CF: 5.00 ft

Serial #: 6773 Inside
 Press@RunDepth: 58.20 psig @ 3680.00 ft (KB) Capacity: 8000.00 psig
 Start Date: 2013.12.17 End Date: 2013.12.17 Last Calib.: 2013.12.17
 Start Time: 16:25:11 End Time: 21:57:41 Time On Btm: 2013.12.17 @ 17:44:11
 Time Off Btm: 2013.12.17 @ 20:16:11

TEST COMMENT: IF: Weak blow . 1/4 - 1" - Dead @ 23min.
 IS: No blow
 FF: Weak blow . 2" - surf.
 FSI: No blow

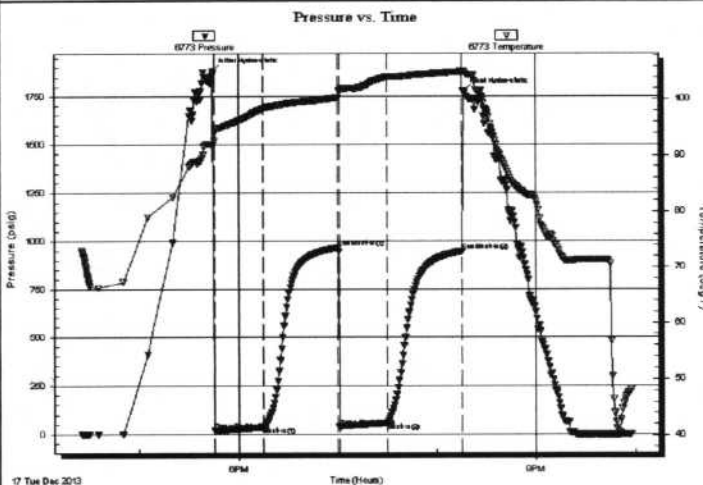

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1882.81	91.75	Initial Hydro-static
2	18.88	92.54	Open To Flow (1)
31	36.93	98.38	Shut-In(1)
76	966.46	100.36	End Shut-In(1)
77	38.55	101.52	Open To Flow (2)
106	58.20	104.13	Shut-In(2)
152	949.46	105.05	End Shut-In(2)
152	1776.52	105.14	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
90.00	OWCM 10%oil, 25%w tr, 65%mud	0.44
0.00	180' GIP	0.00

* Recovery from multiple tests

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)