



**TRILOBITE  
TESTING, INC.**

# DRILL STEM TEST REPORT

Blue Goose Drilling Company, Inc

**4-18-27w Lane Co KS**

P.O. Box 1413  
Great Bend KS  
67530  
ATTN: Ken Wallace

**Borell H 1**

Job Ticket: 64483

**DST#: 1**

Test Start: 2015.11.04 @ 14:26:15

## GENERAL INFORMATION:

Formation: **L**  
 Deviated: **No** Whipstock: **ft (KB)** Test Type: **Conventional Bottom Hole (Initial)**  
 Time Tool Opened: **16:09:00** Tester: **Mike Roberts**  
 Time Test Ended: **18:51:45** Unit No: **65**  
**Interval: 4213.00 ft (KB) To 4250.00 ft (KB) (TVD)** Reference Elevations: **2623.00 ft (KB)**  
 Total Depth: **4250.00 ft (KB) (TVD)** **2614.00 ft (CF)**  
 Hole Diameter: **7.88 inches** Hole Condition: **Fair** KB to GR/CF: **9.00 ft**


## Serial #: 8846

**Inside**

Press @ Run Depth: **84.05 psig @ 4245.00 ft (KB)** Capacity: **8000.00 psig**  
 Start Date: **2015.11.04** End Date: **2015.11.04** Last Calib.: **2015.11.04**  
 Start Time: **14:26:15** End Time: **18:51:45** Time On Btm: **2015.11.04 @ 16:08:45**  
 Time Off Btm: **2015.11.04 @ 17:10:00**

TEST COMMENT: IF:Weak Surface blow died in 3 minutes  
 IS:No return blow  
 FF:No blow  
 FS:No return blow

## PRESSURE SUMMARY

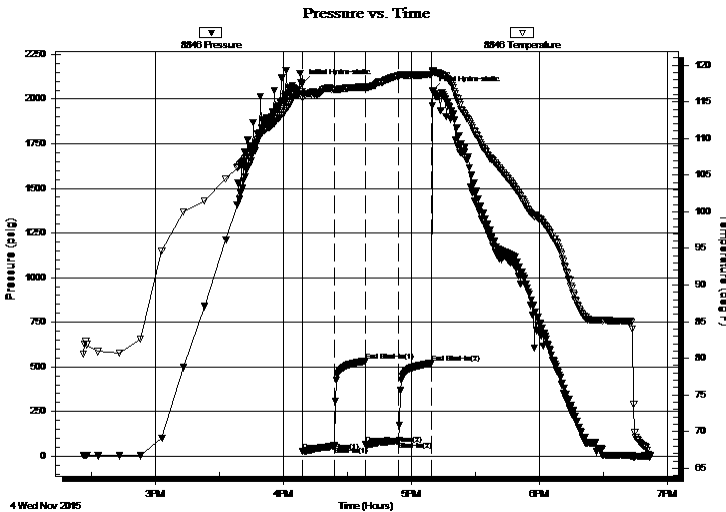

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2087.30	116.44	Initial Hydro-static
1	28.03	115.50	Open To Flow (1)
15	57.15	116.64	Shut-In(1)
30	531.76	117.03	End Shut-In(1)
30	65.84	116.75	Open To Flow (2)
46	84.05	118.56	Shut-In(2)
61	519.69	118.74	End Shut-In(2)
62	2048.58	119.29	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)
124.00	mud 100% m	0.61

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (MMcf/d)



**TRILOBITE TESTING, INC.**

# DRILL STEM TEST REPORT

Blue Goose Drilling Company, Inc

**4-18-27w Lane Co KS**

P.O. Box 1413  
Great Bend KS  
67530  
ATTN: Ken Wallace

**Borell H 1**

Job Ticket: 64483

**DST#: 1**

Test Start: 2015.11.04 @ 14:26:15

## GENERAL INFORMATION:

Formation: **L**  
 Deviated: **No** Whipstock: **ft (KB)** Test Type: **Conventional Bottom Hole (Initial)**  
 Time Tool Opened: **16:09:00** Tester: **Mike Roberts**  
 Time Test Ended: **18:51:45** Unit No: **65**  
**Interval: 4213.00 ft (KB) To 4250.00 ft (KB) (TVD)** Reference Elevations: **2623.00 ft (KB)**  
 Total Depth: **4250.00 ft (KB) (TVD)** **2614.00 ft (CF)**  
 Hole Diameter: **7.88 inches** Hole Condition: **Fair** KB to GR/CF: **9.00 ft**


**Serial #: 8737**

**Outside**

Press @ Run Depth: **psig @ 4245.00 ft (KB)** Capacity: **8000.00 psig**  
 Start Date: **2015.11.04** End Date: **2015.11.04** Last Calib.: **2015.11.04**  
 Start Time: **14:26:15** End Time: **18:52:00** Time On Btm:  
 Time Off Btm:

**TEST COMMENT:** IF:Weak Surface blow died in 3 minutes  
 IS:No return blow  
 FF:No blow  
 FS:No return blow

## PRESSURE SUMMARY

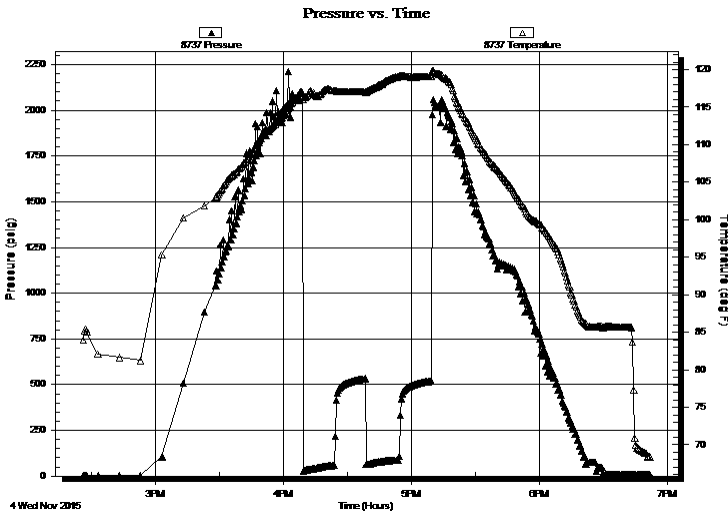


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

## Recovery

Length (ft)	Description	Volume (bbl)
124.00	mud 100% m	0.61

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (MMcf/d)

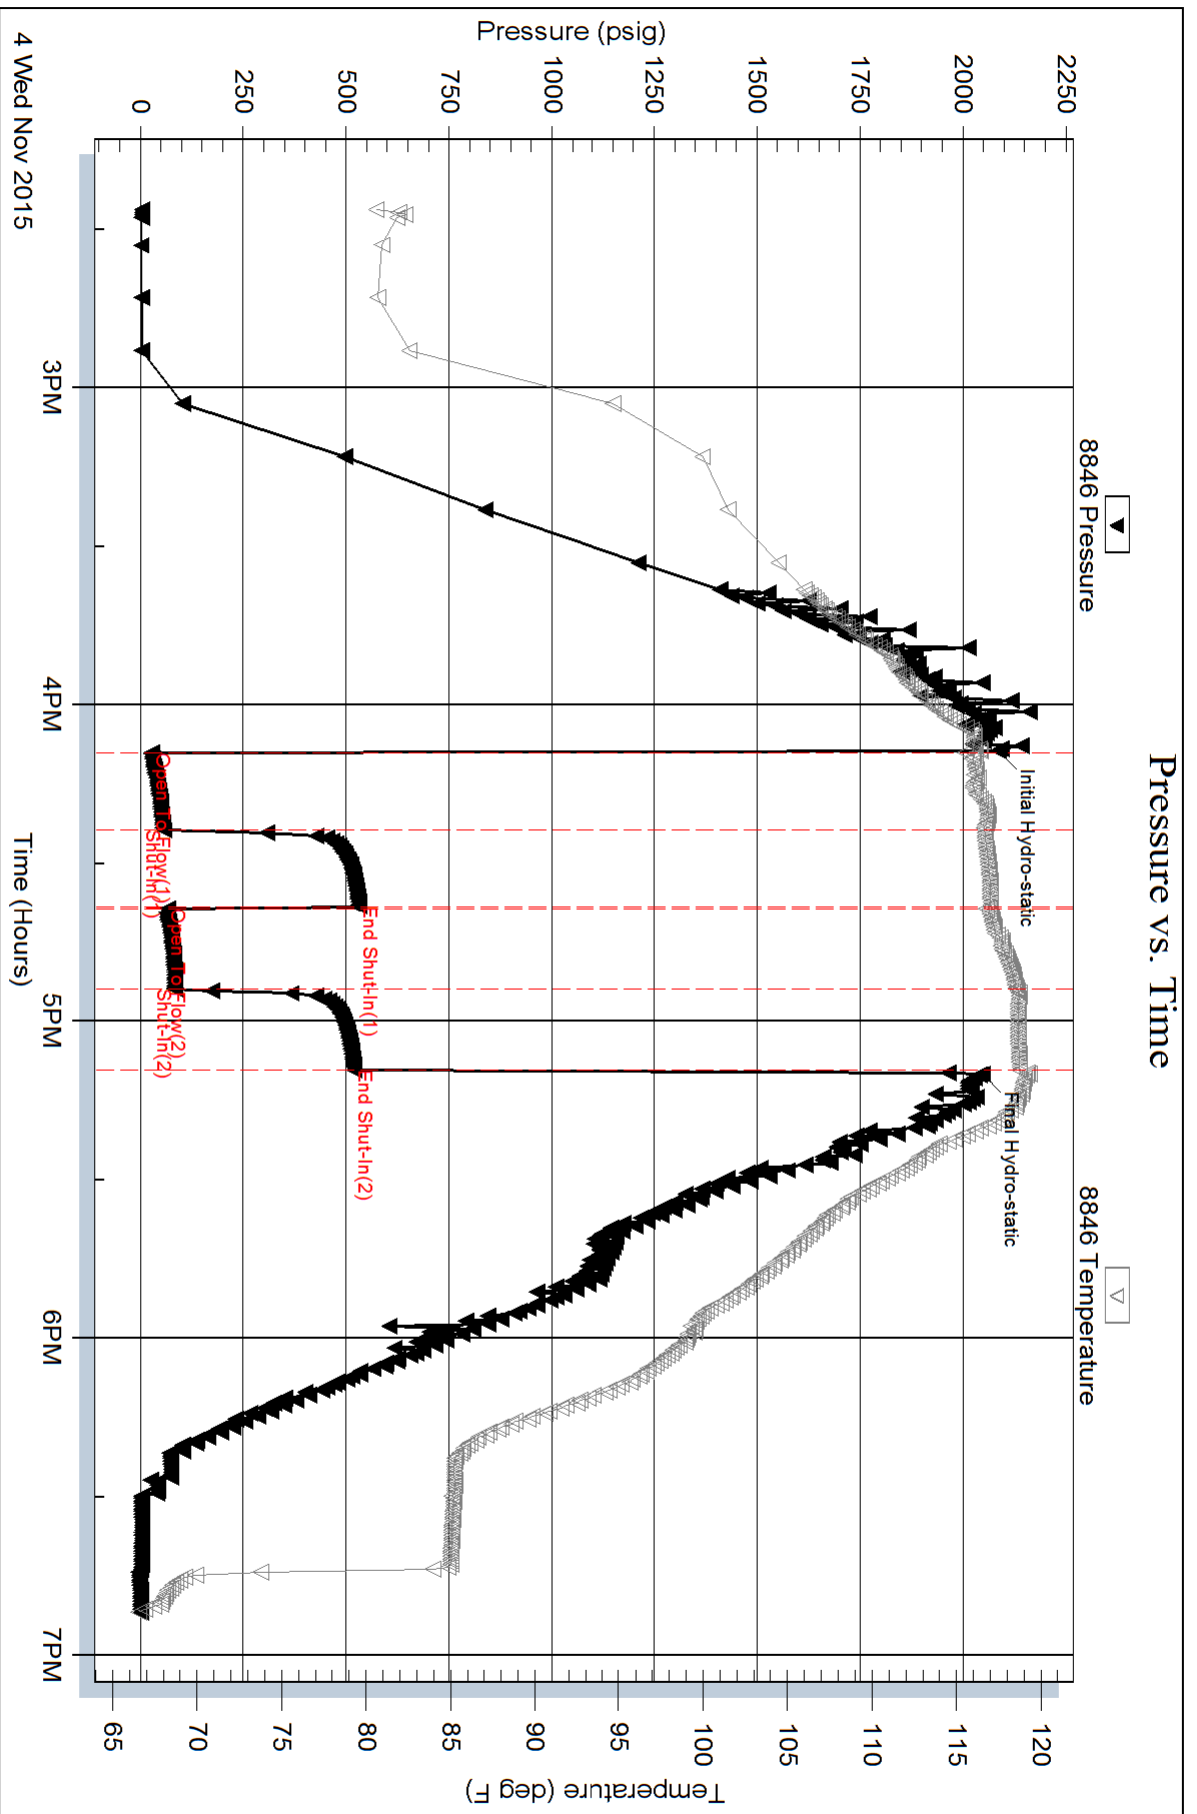

Serial #: 8737

Outside

Blue Goose Drilling Company, Inc

Borell H 1

DST Test Number: 1

