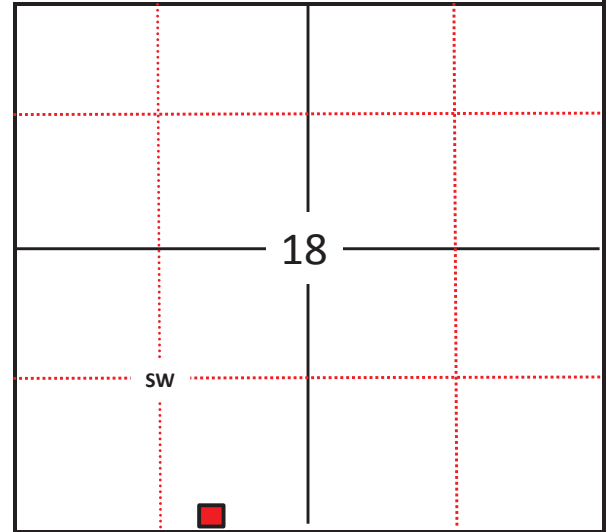


RECTIFIER AND GROUND BED INFORMATION

LINE LETTER	WM	
RECTIFIER NAME	Hays WM Rectifier	
RECTIFIER NO.	1089	ANODE SPACING FT. 10
RATING: VOLTS	10	AMPS 10
ANODE TYPE	Graphite End Connect	
ANODE NO.	5	SIZE 3" X 60"
HOLE DEPTH FT.	100	HOLE DIAMETER IN. 8
WIRE TYPE	HMWPE Direct Burial	
WIRE FT.	350	SIZE 8
WIRE TYPE	HMWPE Direct Burial	
WIRE FT.	140	SIZE 2
CADWELDS NO.	1	SCOTCH CAST NO. 0
COKE BREEZE LBS.	1700	COKE TYPE Loresco SWS
RIGHT-OF-WAY	25'x25'	
CRIMPETS	NO. 0	SIZE
	NO. 0	SIZE

**LOCATION**

Landowner: Thomas D. Adcock

Power Company: Midwest Energy

Groundbed Drilled and Completed by CPMasters, Wayne Nugent- Driller on 12-12-13

6" WM
GoodmanDeep Anode Bed 8" x 100' Hole
15' North of Power PoleHays WM Rectifier #1089
12V-10A Output , 4020
Bullhorn Unit25' x 25' New
Easement10' x 82.5'
New Cable

Fenceline/N Road ROW

Power Pole

Fairground Road

DISTRICT NO. 5007

MAP NO. DT2.WM.004

PROJECT NO. (S) C54961

**LEGAL INFORMATION FOR GROUND BED INSTALLATION**

1/4 SEC.	SW	SEC.	18	TWN.	13S	RNG.	18W
COUNTY.	ELLIS		STATE.	Kansas			

REVISIONS

PREPARED BY.	Denny Nieman
REVIEWED BY.	
BUDGET PRIORITY. 1, 2, OR 3	1
DATE: 1/31/2014	