

PI SUPPLEMENTAL

29-11-2012


AFFIDAVIT AND COMPLETION FOR State Geological Survey ACC-1
WICHITA, BRANCH

INT

This form must be filed in triplicate with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within five days after the completion of the well, regardless of how the well was completed. Circle one: Oil, gas, dry, SWD, OWWO, injection. Please type. Complete ALL sections. Applications must be filed for dual completion, commingling, salt water disposal and injection. Attach wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.) KCC#-(316) 263-3238.

OPERATOR Ainsworth Drilling Company API NO. 15-051-22,817
 ADDRESS P. O. Box 1269 COUNTY Ellis
Colorado Springs, Colorado FIELD _____
 **CONTACT PERSON G. Embery 80901 LEASE Huber
 PHONE (303) 576-5300 PROD. FORMATION _____
 PURCHASER _____ WELL NO. 1
 ADDRESS _____ WELL LOCATION NE/4 SW/4 NW/4
 _____ Ft. from _____ Line and
 _____ Ft. from _____ Line of
 the SEC. 29 TWP. 11S RGE. 20W

DRILLING CONTRACTOR Red Tiger Drilling Company
 ADDRESS 1720 KSB Building
Wichita, Kansas 67202
 PLUGGING CONTRACTOR Red Tiger Drilling Company
 ADDRESS 1720 KSE Building, Wichita, Ks. 67202
 TOTAL DEPTH 3,976' PBTD _____
 SPUD DATE 1/21/82 DATE COMPLETED 1/28/82
 ELEV: GR _____ DF _____ KB 2,276'

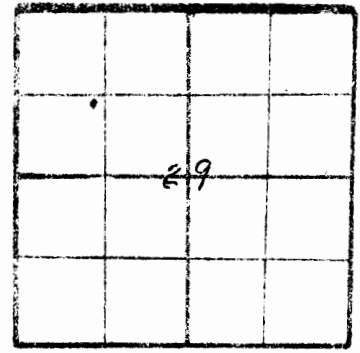

WELL PLAT
 (Quarter) or (Full) Section - Please indicate.

KCC _____
 KGS _____
 MISC. _____

DRILLED WITH (~~RAMM~~) (ROTARY) (~~MAX~~) TOOLS
 Report of all strings set - surface, intermediate, production, etc. (New) / (~~XXXX~~) casing.

| Purpose of string | Size hole drilled | Size casing set (in O.D.) | Weight lbs/ft. | Setting depth | Type cement | Sacks | Type and percent additives |
|-------------------|-------------------|---------------------------|----------------|---------------|-------------|--------|----------------------------|
| Surface | 12 1/4" | 8 5/8" | 24# | 253' | Common | 160 sx | 2% Gel, 3% C.C. |
| | | | | | | | |
| | | | | | | | |

| LINER RECORD | | | PERFORATION RECORD | | |
|--------------|-------------|--------------|--------------------|-------------|----------------|
| Top, ft. | Bottom, ft. | Sacks cement | Shots per ft. | Size & type | Depth interval |
| | | | | | |
| | | | | | |

| TUBING RECORD | | |
|---------------|---------------|---------------|
| Size | Setting depth | Packer set at |
| | | |

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

91224 29-11-20w

Name of lowest fresh water producing stratum Unknown Depth 100'
Estimated height of cement behind pipe 246'

WELL LOG

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

| FORMATION DESCRIPTION, CONTENTS, ETC. | TOP | BOTTOM | NAME | DEPTH |
|---------------------------------------|------|--------|------|-------|
| Clay, Post Rock, Sand & Shale | 0 | 260 | | |
| Shale | 260 | 320 | | |
| Shale w/Sand Streaks | 320 | 1120 | | |
| Shale & Sand | 1120 | 1179 | | |
| Sand | 1179 | 1395 | | |
| Red Bed | 1395 | 1705 | | |
| Anhydrite | 1705 | 1751 | | |
| Shale | 1751 | 2225 | | |
| Lime & Shale | 2225 | 3337 | | |
| Lime | 3337 | 3976 | | |
| RTD | | 3976 | | |

RECEIVED
STATE CORPORATION COMMISSION
FEB 12 1960
CONSERVATION DIVISION
Wichita, Kansas

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

A F F I D A V I T

STATE OF Colorado, COUNTY OF El Paso SS,

Pyne A. Granly OF LAWFUL AGE, BEING FIRST DULY SWORN UPON HIS OATH, DEPOSES AND SAYS: