

PI 30-15-25W

TYPE AFFIDAVIT OF COMPLETION FORM ACO-1 WELL HISTORY Compt. _____

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

(F)

Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

(C)

Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 5181 EXPIRATION DATE 06/30/85

OPERATOR DONALD C. SLAWSON API NO. 15-195-21,469

ADDRESS 200 Douglas Building COUNTY Trego
Wichita, Kansas 67202 FIELD

** CONTACT PERSON Sherry Kendall PROD. FORMATION
PHONE 316-263-3201

PURCHASER N/A LEASE Stutz 'G'
ADDRESS WELL NO. 1

DRILLING SLAWSON DRILLING CO., INC. #5657 WELL LOCATION APP 150' N of S/2 S/2 NE
CONTRACTOR 200 Douglas Building 2160'Ft. from North Line and
ADDRESS Wichita, Kansas 67202 1340'Ft. from East Line of ~~XXX~~
the NE (Qtr.) SEC 30 TWP 15S RGE 25W (W).

PLUGGING Halliburton Services
CONTRACTOR Box 579
ADDRESS Great Bend, Kansas 67530

TOTAL DEPTH 4594' PBD N/A

SPUD DATE March 10, 1984 DATE COMPLETED March 20, 1984

ELEV: GR 2557' DF 2560' KB 2563'

DRILLED WITH ~~CABLE~~ (ROTARY) ~~AXIS~~ TOOLS.

SOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE


Amount of surface pipe set and cemented 345' DV Tool Used? no

THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

WELL PLAT

(Office Use Only)

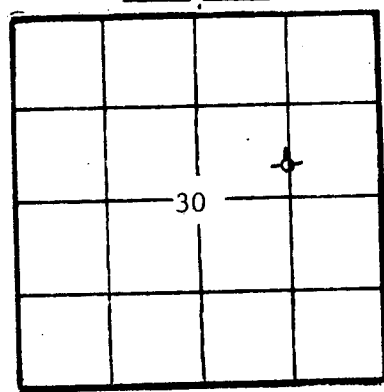

KCC
KGS
SWD/REP
PLG.

A F F I D A V I T

William R. Horigan, being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

William R. Horigan

W26-21-08

311308

SIDE TWO

ACO-1 WELL HISTORY ~~XXX~~

OPERATOR

DONALD C. SLAWSON

LEASE

Stutz 'G'

SEC. 30 TWP. 15S RGE. 25W (W)

Well No. 1

FILL IN WELL INFORMATION AS REQUIRED:

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Check if no Drill Stem Tests Run.				
0 - 760 sand & shale			LOG TOPS	
760 - 1973 shale			ANHY 1973	(+ 590)
1973 - 2017 Anhy			B/ANHY 2013	(+ 550)
2017 - 3795 shale			HEEB 3831	(-1268)
3795 - 4070 shale & lime			LANS 3870	(-1307)
4070 - 4150 shale			MUN CRK 4024	(-1461)
4150 - 4165 lime			STK 4108	(-1545)
4165 - 4300 shale			BKC 4174	(-1611)
4300 - 4480 shale & lime			PAW 4274	(-1711)
4480 - 4595 lime			FT SC 4380	(-1817)
4595 RTD			L/CHER 4406	(-1843)
			MISS 4518	(-1955)
			LTD 4594	(-2031)
<p>DST #1 4016-4150 (140', 160', 180', 200' Zn) 30-30-30-30, Weak blow/died. Rec. 60' Mud. IFP 17-26#, ISIP 1198#, FFP 35-44#, FSIP 1100#.</p> <p>DST #2 4362-4410 (FT SC Zn) 30-60-30-30, Wk blow/died, Rec. 20' Mud. IFP 16-17#, ISIP 453#, FFP 17-26#, FSIP 53#.</p>				

If additional space is needed use Page 2, Side 2

Report of all strings set — surface, intermediate, production, etc. CASING RECORD (New) or (Used)

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
SURFACE	12 1/2"	8 5/8	24#	345'	60/40 Poz	225 sx	2% gel, 3%cc

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

TUBING RECORD

Size	Setting depth	Packer set at