

Becken Oil Corp.
Gleason 1

32-23s-21w
15-083-21508

Superior Testers Enterprises, Inc.

R.R. 3, Box 295B, Great Bend, Kansas 67530

(316) 792-6902

Date 11/1/05 Location 32 23s 21w Elevation 2255 County Hodgeman
Company Becker Oil Corp. Number of Copies 5
Charts Mailed to P.O. Box 1150 Ponca City OK. 74602
Drilling Contractor Cheyenne Drilling Rig #11
Length Drill Pipe 1894 I.D. Drill Pipe 3.8 Tool Joint Size 4 1/2 x H
Length Weight Pipe _____ I.D. Weight Pipe _____ Tool Joint Size _____
Length Drill Collars 630 I.D. Drill Collars _____ Tool Joint Size _____
Top Packer Depth 2540 Bottom Packer Depth 2545 Number of Packers 2 Packer Size 6 3/4
TESTED FROM 2545 TO 2570 ANCHOR LENGTH 25 TOTAL DEPTH 2570 Hole Size 7 7/8
LEASE & WELL NO. Gleason 1 FORMATION TESTED _____ TEST NO. 2
Mud Weight 9.7 Viscosity 41 Water Loss 12.0 Chlorides - Pits 50,000 D.S.T. _____
Maximum Temp. 94 °F. Initial Hydrostatic Pressure (A) 1408 P.S.I. Final Hydrostatic Pressure (H) 1406 P.S.I.

Tool Open I.F.P. from 8:15 a.m. to 8:35 m 20 min
Tool Closed I.C.I.P. from 8:35 m to 9:05 m 30 min
Tool Open F.F.P. from 9:05 m to 9:35 m 30 min
Tool Closed F.C.I.P. from 9:35 m to 10:20 m 45 min
Initial Blow Weak Surface Blow, made 8 inches into Bucket in 20 min
Final Blow Weak Surface Blow, made 3 inches into Bucket in 30 min
Total Feet Recovered 86 Gravity of Oil _____ Corrected _____

Feet of	% Gas	% Oil	% Mud	% Water
<u>0 Slightly gassy mud</u>				

Remarks _____

Extra Equipment - Jars NO Safety Joint NO Extra Packer NO Straddle NO Hook Wall NO
Top Recorder No. 4005 Clock No. Elect Depth 2566 Cir. Sub _____ Sampler NO
Bottom Recorder No. 5463 Clock No. 47491 Depth 2567 Insurance _____

Price of Job _____
Tool Operator Leonard Ramsey
Approved By _____
NO 14103


Superior Testers Enterprises, Inc. shall not be liable for damage of any kind to the property or personnel of the one for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through the use of its equipment, or its statements or opinion concerning the results of any test. Tools lost or damaged in the hole shall be paid for at cost by the party for whom the test is made.

SUPERIOR TESTERS ENTERPRISES L.L.C.

1 (800) 792-6902

DRILL STEM TEST REPORT

GREAT BEND, KANSAS 67530

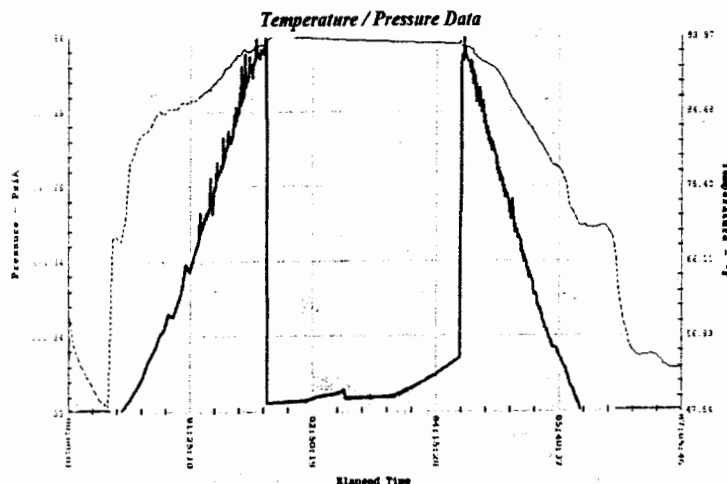

1	Initial Hydrostatic Pressure	1408
2	Initial Flow Pressure	36
3	Final Initial Flow Pressure	41
4	Initial Shut-In Pressure	79
5	Initial Final Flow Pressure	50
6	Final Flow Pressure	58
7	Final Shut-In Pressure	200
8	Final Hydrostatic Pressure	1406

Maximum Temperature 94

GENERAL INFORMATION

COMPANY NAME BECKER OIL CORP.

TEST DATE 11/1/05

SECTION-TOWN-RANGE 32 23S 21W

STATE KANSAS

COUNTY HODGEMAN

ELEVATION GROUND LEVEL 2255

COMPANY REPRESENTATIVE JIM MUSGROVE

LEASE AND WELL NUMBER GLEASON 165/135

FORMATION TESTED

DRILL STEM TEST NUMBER #2

REPORT NUMBER 14103

ELEVATION KELLY BUSHINGS 2261

TESTING ENGINEER LEONARD RAMSEY

TOOL SETTING INFORMATION

TEST INTERVAL (From) 2545

TEST INTERVAL (to) 2570

ANCHOR LENGTH 25

TOTAL DEPTH (ft) 2570

TOP PACKER DEPTH 2540

BOTTOM PACKER DEPTH 2545

NUMBER OF PACKERS 2

PACKER SIZE 6 3/4

HOLE SIZE 7 7/8

FLOW TIMES

TOOL OPEN (from) 8:15

TOOL OPEN (from) 9:05

INITIAL OPEN TOOL OPEN (to) 8:35

FINAL OPEN TOOL OPEN (to) 9:35A

DURATION (min.) 20MIN

DURATION (min.) 30MIN

TOOL CLOSED (from) 8:35

TOOL CLOSED (from) 9:35

INITIAL SHUT-IN TOOL CLOSED (to) 9:05

FINAL SHUT-IN TOOL CLOSED (to) 10:20A

DURATION (min.) 30MIN

DURATION (min.) 45MIN

RECEIVED
KANSAS CORPORATION COMMISSION
DEC 17 2007
CONSERVATION DIVISION
WICHITA, KS

INITIAL FLOW

WEAKSURFACE BLOW MADE 8INCHES INTO BUCKET IN 20 MIN 20MIN


FINAL FLOW

WEAK SURFACE BLOW MADE 3INCHES INTO BUCKET 30 MIN 30MIN

FEET OF Recovery	RECOVERY DESCRIPTION	% GAS	% OIL	% MUD	% WATER
1) 86	SLIGHTLY GAS CUT MUD				
2)					
3)					
4)					
5)					
6)					

Company: BECKER OIL CORP. Lease & Well No. GLEASON #165 Test #: 2Date: 11/01/05 SEC. 32 TWP. 23S RGE. 21W

Temperature / Pressure Data

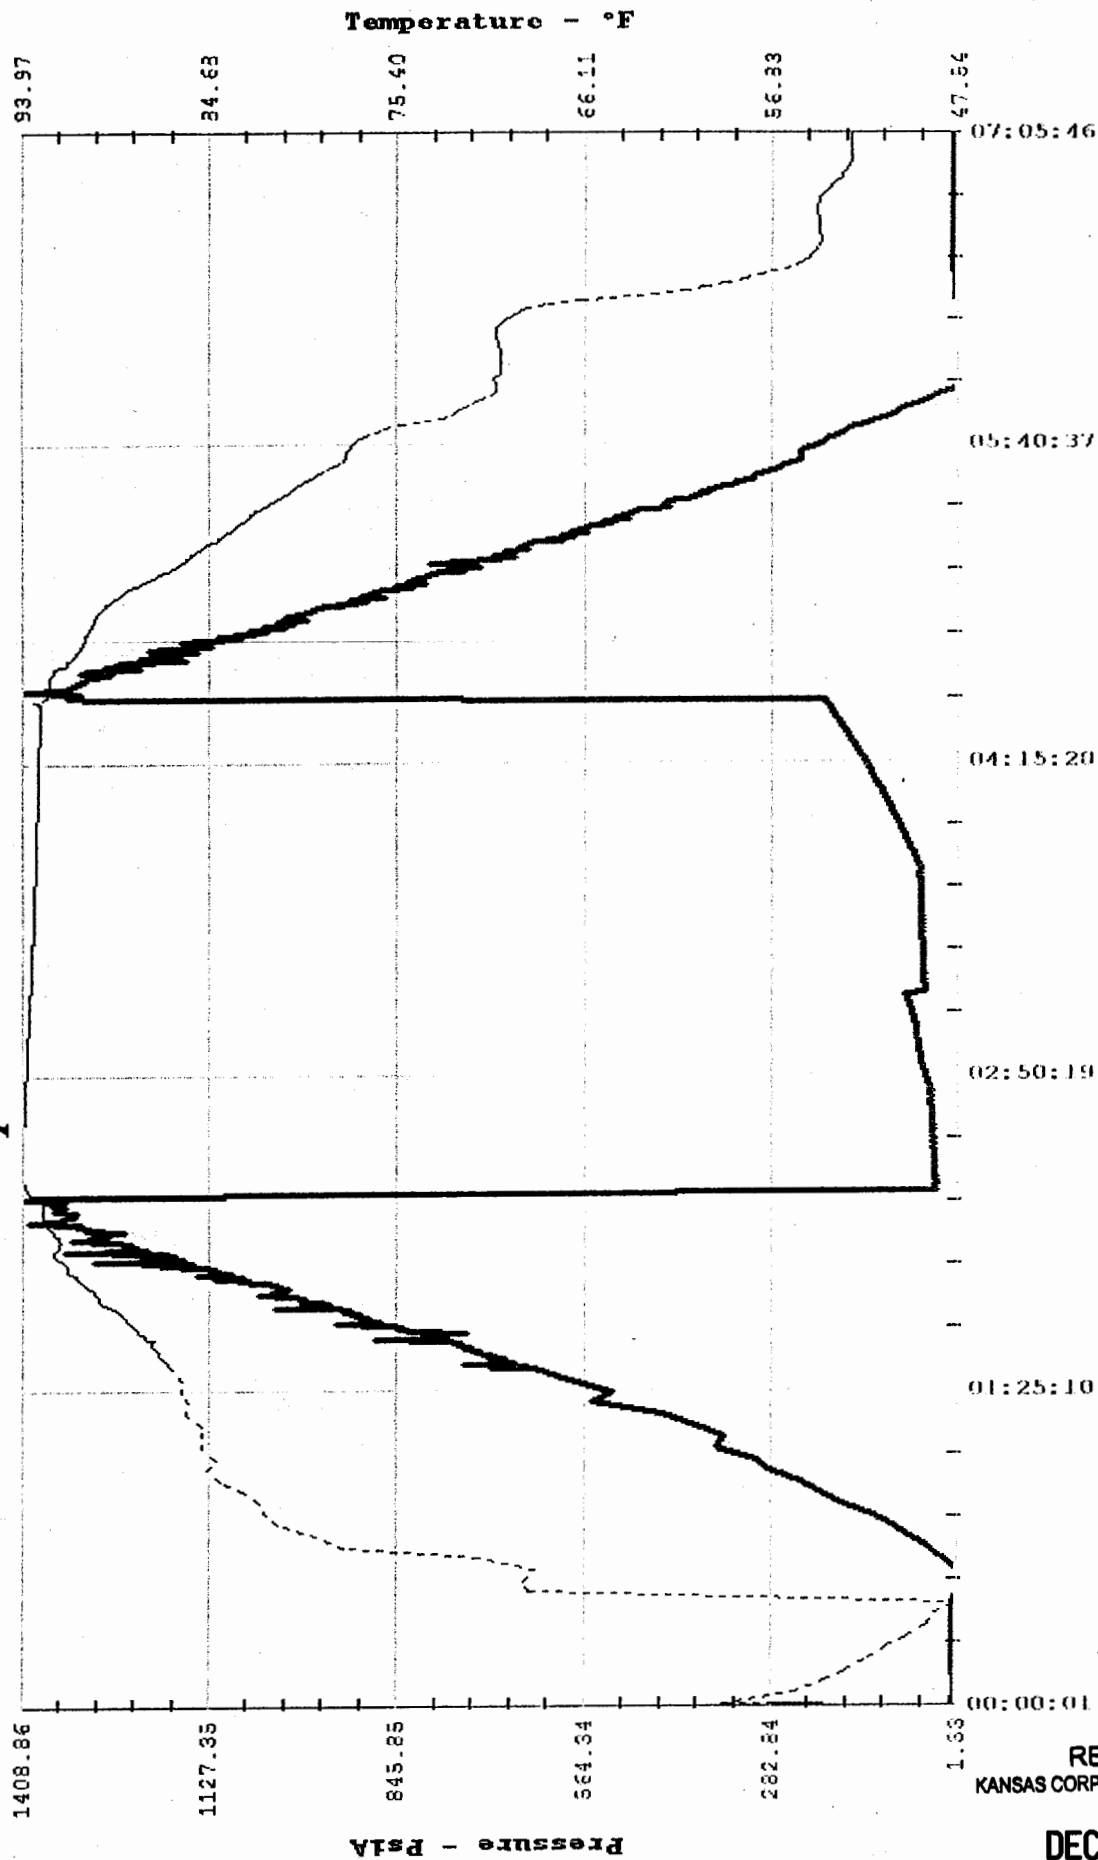

RECEIVED
KANSAS CORPORATION COMMISSION

DEC 17 2007

CONSERVATION DIVISION
WICHITA, KS

BECKER OIL CORP. GLEASON 165/135 32 23S 21W 11/01/05