


K# 1323

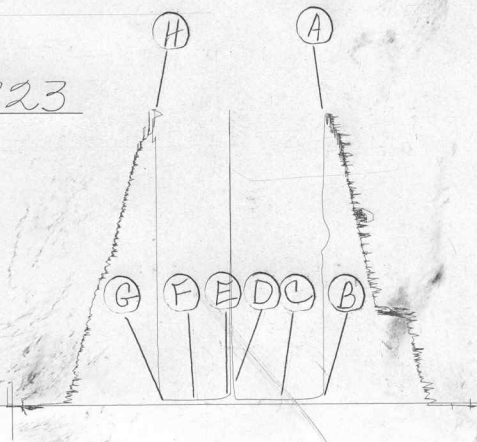

15-1163-2084D

HILL CITY, KANSAS 67642

12-85-202

12-85

Recorder No. 10216 Type AK-1 Range 4200 PSI

Recorder Depth 3179

Tool Open Before I. S. I. 30 Mins.

Initial Shut-in _____ 30 _____ Mins.

Flow Period 30 Mins.

Final Shut-in _____ 30 _____ Mins.

Surface Choke Size 1"

Bottom Choke Size 3/4"

Main Hole Size 7 7/8"

Rubber Size 6 3/4"

Tool Open @ 10:15 P.M.

Blow Very Weak. Blow died in 10 min


Remarks on first opening. Flushed

tool after 5 min., on secon open.

Drill Collar L.D. Ft. Run

Price of Job \$400.00

TR # 1324

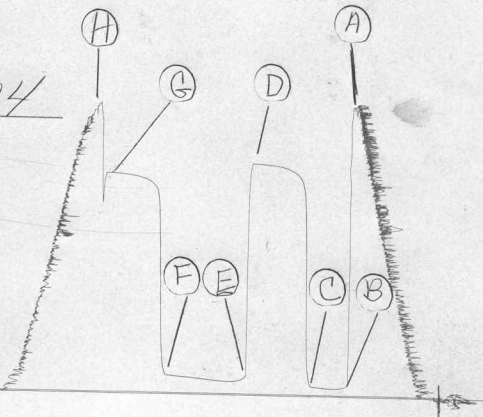

CHENEY TESTING COMPANY

P. O. BOX 3

HILL CITY, KANSAS 67642

DRILL-STEM TEST DATA

Company	Abercrombie Drlg Inc	Test No.	2
Well Name & Number	Gosselin #1	Zone Tested	
Company Address	801 Union Center, Wichita, Kan.	Date	9-2-78
Comp. Rep.	Bob Jenkins	Tester	Orman Bell
Contractor	Co. Tools	Elevation	1967 K.B.
Location: Sec. 12 Twp. 8S Rge. 20W	Co. Rooks State Kan.	Est. Feet of Pay	

Recorder No. 6730 Type AK-1 Range 4200 PSI

Recorder Depth 3262

(A) Initial Hydrostatic Mud 1584 PSI

(B) First Initial Flow Pressure 21 PSI

(C) First Final Flow Pressure 53 PSI

(D) Initial Closed-in Pressure 1267 PSI

(E) Second Initial Flow Pressure 64 PSI

(F) Second Final Flow Pressure 86 PSI

(G) Final Closed-in Pressure 1194 PSI

(H) Final Hydrostatic Mud 1574 PSI

Temperature 103

Mud Weight 9.2 Viscosity 42

Fluid Loss 9.0 cc

Interval Tested 3215-3265

Anchor Length 50

Top Packer Depth 3210

Bottom Packer Depth 3215

Total Depth 3265

Drill Pipe Size 4 1/2 F.H.

Wt. Pipe I. D. 2.7 Ft. Run 210

Recovery—Total Feet 180

Recovered 180 Feet Of Salt Water

Recovered _____ Feet Of _____

Recovered _____ Feet Of _____

Recovered _____ Feet Of _____

Extra Equipment None

Recorder No. 10216 Type AK-1 Range 4200 PSI

Recorder Depth 3259

Tool Open Before I. S. I. 30 Mins.

Initial Shut-in 45 Mins.

Flow Period 60 Mins.

Final Shut-in 45 Mins.

Surface Choke Size 1"

Bottom Choke Size 3/4"

Main Hole Size 7 7/8"

Rubber Size 6 3/4"

Tool Open @ 3:00 P.M.


Blow Medium blow 3"-4" in bucket.

Remarks _____

Drill Collar I. D. _____ Ft. Run _____

Price of Job \$400.00

TK # 1325

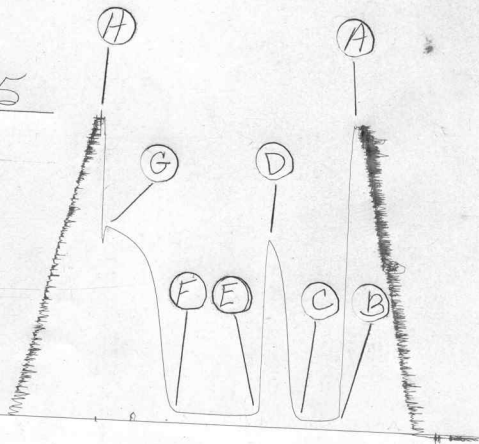

CHENEY TESTING COMPANY

P. O. BOX 3

HILL CITY, KANSAS 67642

DRILL-STEM TEST DATA

Company	Abercrombie Drlg. Inc.	Test No.	3
Well Name & Number	Gosselin #1	Zone Tested	
Company Address	Wichita, Kan.	Date	9-3-78
Comp. Rep.	Bob Jenkins	Tester	Orman Bell
Contractor	Co. Tools	Elevation	1967 K.B.
Location: Sec. 12 Twp. 8S Rge. 20W Co. Rooks State Kan.		Est. Feet of Pay	

Recorder No. 6730 Type AK-1 Range 4200 PSI

Recorder Depth 3397

(A) Initial Hydrostatic Mud 1668 PSI

(B) First Initial Flow Pressure 21 PSI

(C) First Final Flow Pressure 32 PSI

(D) Initial Closed-in Pressure 1025 PSI

(E) Second Initial Flow Pressure 53 PSI

(F) Second Final Flow Pressure 64 PSI

(G) Final Closed-in Pressure 1067 PSI

(H) Final Hydrostatic Mud 1658 PSI

Temperature 105

Mud Weight 9.3 Viscosity 43

Fluid Loss 9.6 cc

Interval Tested 3323-3400

Anchor Length 77

Top Packer Depth 3318

Bottom Packer Depth 3323

Total Depth 3400

Drill Pipe Size 4 1/2 F.H.

Wt. Pipe I. D. 2.7 Ft. Run 210

Recovery—Total Feet 120

Recovered 65 Feet Of Gas

Recovered 15 Feet Of Clean Oil

Recovered 20 Feet Of Oil Cut Mud

Recovered 20 Feet Of Oil Cut Heavy Mud

Extra Equipment

Recorder No. 10216 Type AK-1 Range 4200 PSI

Recorder Depth 3394

Tool Open Before I. S. I. 30 Mins.

Initial Shut-in 30 Mins.

Flow Period 60 Mins.

Final Shut-in 60 Mins.

Surface Choke Size 1"

Bottom Choke Size 3/4"

Main Hole Size 7 7/8"

Rubber Size 6 3/4"

Tool Open @ 11:30 A.M.


Blow Medium blow 3"-4" in bucket.

Remarks

Drill Collar I. D. Ft. Run

None Price of Job \$400.00

TK# 1376

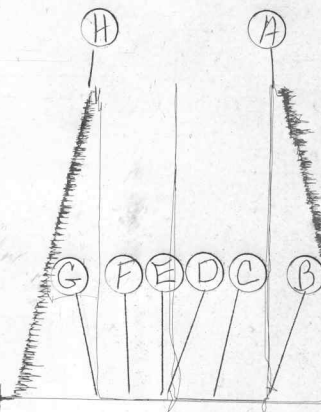

CHENEY TESTING COMPANY

P. O. BOX 3

HILL CITY, KANSAS 67642

DRILL-STEM TEST DATA

Company	Abercrombie Drlg. Inc.	Test No.	4
Well Name & Number	Gosselin #1	Zone Tested	Arbuckle
Company Address	Wichita, Kan.	Date	9-4-78
Comp. Rep.	Bob Jenkins	Tester	Orman Bell
Contractor	Co. Tools	Elevation	1967 K.B.
Location: Sec.12 Twp. 8S Rge.20W Co. Rooks State Kan.		Est. Feet of Pay	

Recorder No. 6730 Type AK-1 Range 4200 PSI

Recorder Depth 3452

(A) Initial Hydrostatic Mud 1753 PSI

(B) First Initial Flow Pressure 5 PSI

(C) First Final Flow Pressure 5 PSI

(D) Initial Closed-in Pressure 5 PSI

(E) Second Initial Flow Pressure 5 PSI

(F) Second Final Flow Pressure 5 PSI

(G) Final Closed-in Pressure 5 PSI

(H) Final Hydrostatic Mud 1743 PSI

Temperature 105

Mud Weight 9.2 Viscosity 40

Fluid Loss 9.6 cc

Interval Tested 3445-3455

Anchor Length 10

Top Packer Depth 3440

Bottom Packer Depth 3445

Total Depth 3455

Drill Pipe Size 4 1/2 F.H.

Wt. Pipe I. D. 2.7 Ft. Run 210

Recovery—Total Feet 1

Recovered 1 Feet Of Mud

Recovered Feet Of

Recovered Feet Of

Recovered Feet Of

Extra Equipment None

Recorder No. 10216 Type AK-1 Range 4200 PSI

Recorder Depth 3449

Tool Open Before I. S. I. 30 Mins.

Initial Shut-in 30 Mins.

Flow Period 30 Mins.

Final Shut-in 30 Mins.

Surface Choke Size 1"

Bottom Choke Size 3/4"

Main Hole Size 7 7/8"

Rubber Size 6 3/4"

Tool Open @ 3:45 A.M.

Blow Very weak blow. Died in 11 min

Remarks on first opening. Flushed
tool on first and second opening.

Drill Collar I. D. Ft. Run

Price of Job \$400.00