


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

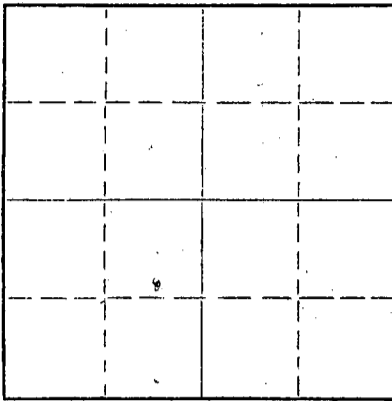

Locate well correctly on above
Section Plat

Sedgwick County. Sec. 11 Twp. 26 Rge. 2 (E) (XX)
Location as "NE/CNWxSWx" or footage from lines C-S/2 NE/4 SW/4
Lease Owner Sohio Petroleum Company
Lease Name Stollei Well No. 3
Office Address Box 673, Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed August 1936
Application for plugging filed December 27 1955
Application for plugging approved December 28 1955
Plugging commenced January 3 1956
Plugging completed January 9 1956
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production May 1949
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Viola Depth to top 3156 Bottom 3158 Total Depth of Well 3158 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	3105	5 1/2		847'
		0	2868	7		72'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped 25 sax mud into well. Circulated between 7" & 12"
Dug out cellar to 12 1/2" casing - Pumped in 50 sax cement
Top cement 100' Filled hole to 10'. Placed rock bridge &
dumped 8 sax common cement to bottom of cellar. Filled
cellar with dirt.

RECEIVED
CONSERVATION DIVISION
JAN 12 1956
WICHITA, KANSAS

Name of Plugging Contractor West Supply Company
Address Chase, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
J. H. Bond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. H. Bond

(Address)

SUBSCRIBED AND SWORN to before me this 11th day of January, 1956

January 24, 1959

Clement B. Brown
Notary Public.



PLUGGING
FILE SEC 11 T 26 R 2E
BOOK PAGE 27 LINE 21

WELL LOG

Stollei #3

Casing Record:

12-1/2" - 169' Left In
 10" - 1370' Pulled
 8-1/4" - 2490' Pulled
 6-5/8" - 2868' Left In
 5-3/16" - 3105' Left In

Company - Aylward Production Co.
 Contractor - Aylward Production Co.
 Commenced - July 15, 1936
 Completed - August 18, 1936

Location:
 SE/4 NE/4 SW/4 of
 Sec. 11-26S-2E,
 Sedgwick Co., Ks.
 Elevation - 1358'

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Cellar	0	10	
Clay Yellow	10	40	
Shale blue	40	100	H.F.W. at 40'
Lime	100	110	
Shale	110	130	
Shale light	130	140	
Shale blue	140	155	
Lime	155	169	Set 12 1/2" Casing at 169'
Slate	169	190	
Lime	190	200	
Slate	200	230	
Lime	230	245	
Slate	245	270	
Red Rock	270	275	
Lime	275	305	
Shale blue	305	310	
Lime	310	320	
Slate	320	330	
Lime	330	420	
Slate	420	425	
Lime	425	455	
Slate	455	465	
Lime	465	480	
Shale blue	480	485	
Lime	485	520	
Red rock	520	525	
Lime	525	535	
Slate	535	550	
Lime	550	565	
Slate	565	580	
Lime	580	600	
Slate	600	610	
Lime	610	625	
Slate	625	665	
Lime	665	675	
Slate	675	685	
Lime	685	695	
Slate	695	760	
Lime	760	785	1 BWPB at 765-70'
Slate	785	800	
Lime	800	810	
Slate	810	820	
Lime	820	830	
Shale blue	830	835	
Lime	835	845	
Slate	845	850	
Lime	850	865	
Slate	865	885	
Lime	885	895	
Slate	895	915	
Red rock	915	925	
Slate	925	940	
Lime	940	950	
Red rock	950	955	
Slate	955	965	
Red rock	965	975	
Shale blue	975	980	
Lime	980	985	
Shale blue	985	1035	
Shale black	1035	1050	
Lime	1050	1060	
Slate dark	1060	1070	

RECEIVED
 STATE CORPORATE COMMISSION
 CONSERVATION DIVISION
 Wichita, Kansas

RECEIVED
 STATE CORPORATE COMMISSION
 JAN 13 1956
 CONSERVATION DIVISION
 Wichita, Kansas

(Continued on Next Page)

PLUGGING
 SEC 11 T 26 S 2 E
 BOOK PAGE 27 LINE 21

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Red rock	1070	1075	
Slate dark	1075	1085	
Lime	1085	1095	
Slate	1095	1100	
Lime	1100	1105	
Slate	1105	1115	
Lime	1115	1125	
Slate	1125	1150	
Lime	1150	1170	
Slate	1170	1175	
Lime	1175	1180	
Shale blue	1180	1195	
Lime	1195	1210	
Slate	1210	1215	
Lime	1215	1230	
Slate	1230	1240	
Lime	1240	1250	
Slate	1250	1350	
Sandy lime	1350	1370	HFW @1350-70'. Set 10" Csg. @1370'.
Lime	1370	1390	
Slate	1390	1405	
Lime	1405	1415	
Slate	1415	1440	
Lime	1440	1475	1 B.W.P.H. at 1440-50'.
Slate	1475	1480	
Lime	1480	1490	
Slate	1490	1495	
Lime	1495	1530	
Slate	1530	1550	
Lime	1550	1570	
Lime	1570	1580	
Slate	1580	1590	
Lime	1590	1605	
Slate	1605	1615	
Lime	1615	1625	
Shale Blue	1625	1640	
Lime	1640	1655	
Shale blue	1655	1665	
Lime	1665	1680	
Slate	1680	1685	
Lime	1685	1690	
Slate	1690	1700	
Lime	1700	1730	
Shale blue	1730	1735	
Lime	1735	1740	
Shale blue	1740	1750	
Lime	1750	1760	
Lime	1760	1845	2 B.W.P.H. at 1820-30'
Shale blue	1845	1850	
Lime	1850	1880	
Slate	1880	1895	
Lime	1895	1905	
Slate	1905	2010	
Lime	2010	2015	
Slate	2015	2035	
Lime	2035	2045	
Slate	2045	2055	
Lime	2055	2070	
Red rock	2070	2075	
Slate	2075	2095	
Lime	2095	2110	
Slate	2110	2165	
Lime	2165	2175	
Slate	2175	2190	
Lime	2190	2205	
Lime	2205	2290	
Slate	2290	2300	
Lime	2300	2330	2 B.W.P.H. at 2275-80'
Slate	2330	2365	
Lime	2365	2385	
Slate	2385	2400	
Lime	2400	2510	More water at 2465-75' Set 8-1/4" Casing at 2490'
Shale blue	2510	2515	
Lime	2515	2550	
slate	2550	2555	

RECEIVED
STATE COMMISSION
DEC 29 1955
CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE COMMISSION

JAN 12 1956
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 11 T 26 R 2 E
BOOK PAGE 27 LINE 21

<u>Formation</u>	<u>From</u>	<u>To</u>	<u>Remarks</u>
Lime	2555	2565	
Slate	2565	2610	
Lime	2610	2615	
Slate	2615	2660	
Lime	2660	2685	
Red rock	2685	2690	
Slate	2690	2700	
Lime	2700	2760	
Slate	2760	2770	
Lime	2770	2795	
Slate	2795	2810	
Lime	2810	2815	
Slate	2815	2820	
Vari-colored shale	2820	2840	Set 6-5/8" Casing at 2835'
Vari-colored shale & lime shells	2840	2855	
Shale light	2855	2865	
Chat	2865	2880	Some oil & water at 2865-70'
Lime	2880	3105	U.R. 6-5/8" Casing at 2868' (Corrected)
Slate black	3105	3120	Hole corrected from 2870-75' HFW @2880'
Shale black	3120	3173	Set 5-3/16" Casing at 3105'
Lime	3173	3175	Measure corrected - 3175' equals 3158'

RECEIVED
STATE CORPORATION COMMISSION

DEC 29 1955

CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE CORPORATION COMMISSION

JAN 1 1956

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC 11 T 26 R 2E
BOOK PAGE 27 LINE 21