

KANSAS CORPORATION COMMISSION

ONE POINT STABILIZED OPEN FLOW OR DELIVERABILITY TEST

Type Test:

- Open Flow
 Deliverability

(See Instructions on Reverse Side)

Test Date: 1 April 1999

API No. 15-017-19027-00-00

Company Knighton Oil Company, Inc.			Lease Davis		Well Number #42
County Chase	Location C N/2 Lot 12	Section 18	TWP 18S	RNG (E/W) 8E	Acres Attributed 10
Field Davis		Reservoir Admire	Gas Gathering Connection Cottonwood Gas		
Completion Date 22 May 1964		Plug Back Total Depth	Packer Set at		
Casing Size 2 7/8"	Weight 6.4#	Internal Diameter 2 1/2"	Set at 413	Perforations Open Hole	To
Tubing Size	Weight	Internal Diameter	Set at	Perforations	To
Type Completion (Describe) Single		Type Fluid Production N/A	Pump Unit or Traveling Plunger? Yes / No		
Producing Thru (Annulus / Tubing) Tubing		% Carbon Dioxide .27%	% Nitrogen 33.23%	Gas Gravity - G _g .7201	
Vertical Depth(H)		Pressure Taps		(Meter Run) (Prover) Size	
Pressure Buildup: Shut in _____ 19 ____ at _____ (AM) (PM) Taken _____ 19 ____ at _____ (AM) (PM)					
Well on Line: Started _____ 19 ____ at _____ (AM) (PM) Taken _____ 19 ____ at _____ (AM) (PM)					

OBSERVED SURFACE DATA

Duration of Shut-in 72 Hours

Static / Dynamic Property	Orifice Size inches	Circle one: Meter or Prover Pressure psig	Pressure Differential in (h) Inches H ₂ O	Flowing Temperature t	Well Head Temperature t	Casing Wellhead Pressure (P _w) or (P _i) or (P _c)		Tubing Wellhead Pressure (P _w) or (P _i) or (P _c)		Duration (Hours)	Liquid Produced (Barrels)
						psig	psia	psig	psia		
Shut-In	1/8"					30				72	
Flow											

FLOW STREAM ATTRIBUTES

Plate Coefficient (F _s) (F ₃) Mcfd	Circle one: Meter or Prover Pressure psia	Press Extension $\sqrt{P_m \times H_w}$	Gravity Factor F _g	Flowing Temperature Factor F _{tt}	Deviation Factor F _{sv}	Metered Flow R (Mcfd)	GOR (Cubic Feet/ Barrel)	Flowing Fluid Gravity G _m

(OPEN FLOW) (DELIVERABILITY) CALCULATIONS

(P_c)² = _____ : (P_w)² = _____ : P_d = _____ % (P_c - 14.4) + 14.4 = _____ : (P_a)² = 0.207
(P_d)² = _____

(P _c) ² - (P _a) ² or (P _c) ² - (P _d) ²	(P _c) ² - (P _w) ²	Choose formula 1 or 2: 1. P _c ² - P _a ² 2. P _c ² - P _d ² divided by: P _c ² - P _w ²	LOG of formula 1. or 2. and divide by: $\left[\frac{P_c^2 - P_w^2}{P_c^2 - P_a^2} \right]$	Backpressure Curve Slope = "n" ----- or ----- Assigned Standard Slope	n x LOG $\left[\frac{P_c^2 - P_w^2}{P_c^2 - P_a^2} \right]$	Antilog	Open Flow Deliverability Equals R x Antilog Mcfd

Open Flow Mcfd @ 14.65 psia Deliverability Mcfd @ 14.65 psia

The undersigned authority, on behalf of the Company, states that he is duly authorized to make the above report and that he has knowledge of the facts stated therein, and that said report is true and correct. Executed this the 1st day of April, 1999.

Witness (if any)

For Commission

Carl M. Knighton Jr.
For Company

Checked by

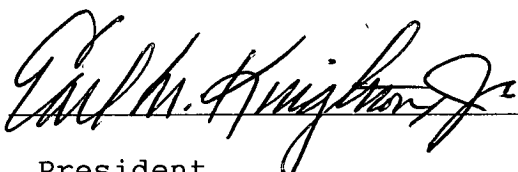
I declare under penalty or perjury under the laws of the state of Kansas that I am authorized to request exempt status under Rule K.A.R. 82-3-304 on behalf of the operator Knighton Oil Company, Inc. and that the foregoing information and statements contained on this application form are true and correct to the best of my knowledge and belief based upon gas production records and records of equipment installation and/or of type completion or upon use of the gas well herein named.

I hereby request a permanent exemption from open flow testing for the Davis #42 gas well on the grounds that said well:

(Check one)

- is a coalbed methane producer
- is cycled on plunger lift due to water
- is a source of natural gas for injection into an oil reservoir undergoing ER
- is on vacuum at the present time; KCC approval Docket No. _____
- is incapable of producing at a daily rate in excess of 150 mcf/D

Date: 1 April 1999

Signature: 
Title: President

Instructions: All active gas wells must have at least an original G-2 form on file with the conservation division. If a gas well meets the eligibility criteria set out in KCC regulation K.A.R. 82-3-304, the operator may complete the statement provided above in order to obtain a testing exemption.

At some point during the succeeding calendar year, wellhead shut-in pressure shall be measured after a minimum of 24 hours shut-in/buildup time and shall be reported on the front side of this form under "observed surface data." Shut-in pressure shall thereafter be reported yearly in the same manner.

The G-2 form conveying the newest shut-in pressure reading shall be filed with the Wichita office no later than thirty (30) days after the taking of the pressure reading. The form must be signed and dated on the front side as though it was a verified report of test results.