

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-191-21880-00-01  
Spot: W2SWSE Sec/Twnshp/Rge: 17-35S-4W  
660 feet from S Section Line, 2342 feet from E Section Line  
Lease/Unit Name: DALRYMPLE Well Number: 1-17  
County: SUMNER Total Vertical Depth: 5250 feet

Operator License No.: 31253  
Op Name: FAGADAU ENERGY CORP.  
Address: 4849 GREENVILLE #1600  
DALLAS, TX 75206

Production Casing Size: 4.5 feet: 5230 300 SX CMT  
Surface Casing Size: 8.625 feet: 258 200 SX CMT

# 170<sup>63</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 08/05/2002 12:00 PM  
Plug Co. License No.: 33041 Plug Co. Name: MACKELLAR SERVICES, INC.  
Proposal Rcvd. from: BOB DILLIN Company: MACKELLAR SERVICES, INC. Phone: (405) 640-4482

Proposed  
Plugging  
Method:

PER KCC REGULATIONS.

RECEIVED  
KCC DISTRICT #2  
OCT 2 2003  
WICHITA, KS

Plugging Proposal Received By: STEVE VANGIESON  
Date/Time Plugging Completed: 08/07/2002 12:00 PM

Witness Type: Plugging Operations Partially Witnessed  
KCC Agent: STEVE VANGIESON

**Actual Plugging Report:**

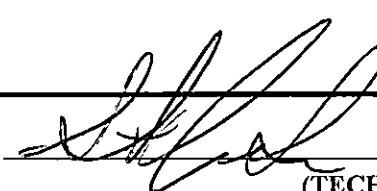
A CIBP WAS SET AT 4585', TO COVER THE PERFORATIONS. THE CASING WAS PULLED TO 1030', WHERE 35 SKS OF CEMENT WAS SPOTTED. THE CASING WAS PULLED TO 680', WHERE 35 SKS OF CEMENT WAS SPOTTED. THE CASING WAS PULLED TO 321', WHERE CEMENT WAS CIRCULATED TO SURFACE

RECEIVED  
KANSAS CORPORATION COMMISSION  
OCT 06 2003  
CONSERVATION DIVISION  
WICHITA, KS

Remarks: T&C CEMENTING CLASS H CEMENT.

Plugged through: CSG

District: 02

Signed  (TECHNICIAN)

INVOICED

DATE 10.6.03  
2002060580