

15-155-19211-0001

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas


WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

RENO County. Sec. 26 Twp. 23S Rge. 4W (X) S/2 (X) NE/4

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Lease Owner OLSON DRILLING COMPANY
Lease Name D.M. VOGT Well No. 2
Office Address PETROLEUM BLDG. TULSA, OKLA.
Character of Well (completed as Oil, Gas or Dry Hole) OIL
Date well completed UNKNOWN 19
Application for plugging filed OCTOBER 1ST 19 46
Application for plugging approved OCTOBER 10TH 19 46
Plugging commenced JANUARY 20TH 19 47
Plugging completed JANUARY 24TH 19 47
Reason for abandonment of well or producing formation DRY
If a producing well is abandoned, date of last production UNKNOWN 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? YES

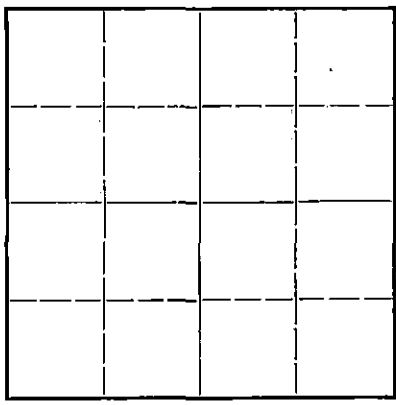

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well MR. RUEL DURKEE
Producing formation Depth to top Bottom Total Depth of Well 3275' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				16"	256'	LEFT IN
				13"	483'	
				8-5/8"	3275'	2700'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

DUMPED 8 SACKS OF CEMENT AT 3274' . SHOT PIPE OFF
AT 2700' . PULLED PIPE AND MUDDING HOLE TO 325' . DUMPED 25 SACKS OF CEMENT AT
325' . FINISHED MUDDING HOLE, AND PUT 10 SACKS OF CEMENT IN TOP OF SUR-
FACE.

26 23 4W
70 45

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to HERMAN KAISER PIPE & SUPPLY COMPANY
Address 819-20 PALACE BLDG. TULSA, OKLA.

STATE OF OKLAHOMA, COUNTY OF TULSA, SS.
BERTHOLD NEUWALD (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
described well as filed and that the same are true and correct. So help me God.

(Signature) Berthold Neuwald

SUBSCRIBED AND SWORN to before me this 30TH day of JANUARY, 19 47
819-20 PALACE BLDG. TULSA, OKLA.

My Commission Expires Nov. 3, 1950
Notary Public.

1-31-47

Olson Drilling Co.
D.M. Vogt # 2
C SW NE 26-23S-4W
Reno County, Kansas

COMMENCED 2-12-34
COMPLETED 3-23-34
ELEV. 1466'

15-155-19211-0001

0
173 Sand
257 Shale & Shell
462 Salt
531 Anhydrite
861 Shale & Shell
392 Lime
951 Shale & Shells
981 Lime
1133 Lime & shells
82 Broken Lime
1644 Shale & Shells
1801 Shale
34 Shale & Shells
60 Lime
1982 Shale & Shells
2034 Lime
2106 Lime Shells
16 Shale
98 Lime & Shale
2274 Shale & Shells
2397 Lime shells & shale
2446 Lime
2512 Sandy Shale
34 Broken Lime
80 Lime
2614 Lime & Shale
46 Lime
64 Lime, soft
7775 " & Shale
97 "
2701 SIC
71 Shale & Shells
2835 Lime & shale
2880 Lime
85 Shale
87 Lime
97 Core
2902 Lime
23 Shale & Lime
39 Por. Lime
3008 Lime & Shale
12 Lime Soft
15 Lime
48 Lime & Shale
74 Shale & shells
3197 Lime & Shale
3230 Shale & shells
3242 Var. Shale

3251 Chat
65 " Hard
68 " Soft
75 " hard
3310 "

Deepening 4-25-34

3321 Chat 21,000 M
31 "
3333 Dols. & Cherty Ls
43 " Brown
51 " Flowing by heads
3375 T.D.

CASINE RECORD

15 1/2"	252'	225	sac	cem.
12 3/4"	476'	175	"	"
8 5/8"	3250'	250	"	"
5 3/16"	3324'	(	Pulled)	)

8 5/8 3250
30 5/8 300
10 5/8 Top

