


DISTRICT CONSERVATION AGENT'S REPORT

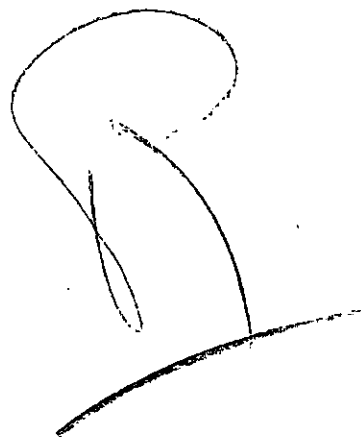

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 15-185-11457-0000

LOCATION SE. SW. 21W

SEC. 32 TWP. 23 RGE. 13-W

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 3 Lease Bell

Operator Crown Oil Co Address A. Bend - Kansas -

Field \_\_\_\_\_ County Stafford

Total Depth 3684 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2" - 321 ft. Circulated with cement.  
5 1/2" casing set at 3676 ft - Filled hole from bottom  
to 3670 ft with chat - Pumped 5 sacks of cement in the  
5 1/2" casing at 3670 ft - Shot off & pulled the 5 1/2" casing.  
Filled hole with Pottery mud - Pumped in Plug &  
100 sacks of cement - Filling hole from 320 ft - to the  
surface with cement - Halliburton Oil Well Cementing Co

C. M. Stough -  
District Conservation Agent

Date 12-7-49

**PLUGGING**  
FILE SEC 28 T 23 R 13W  
BOOK PAGE 129 LINE 2

DEC 9 - 1949  
STATE COMMISSION  
KANSAS