



SUPERIOR
Hays,
Kansas

MICRO LOG

Company VINCENT OIL CORPORATION
Well BROWN #1-28
Field WILDCAT
County FORD
State KANSAS

Company VINCENT OIL CORPORATION
Well BROWN #1-28
Field WILDCAT
County FORD State KANSAS

Location: API # : 15-057-20626-0000

560' FSL & 1050' FEL

SEC 28 TWP 28S RGE 23W

Permanent Datum GROUND LEVEL Elevation 2469
Log Measured From KELLY BUSHING 10' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC
Elevation
K.B. 2479
D.F. 2477
G.L. 2469

Date	12/15/08		
Run Number	TWO		
Depth Driller	5330		
Depth Logger	5330		
Bottom Logged Interval	5307		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 564'		
Casing Logger	562		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 12,500PPM	
Density / Viscosity	9.2/68		
pH / Fluid Loss	9.5/11.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400 @ 71F		
Rmf @ Meas. Temp	.300 @ 71F		
Rmc @ Meas. Temp	.480 @ 71F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.222 @ 128F		
Time Circulation Stopped	5.5 HOURS		
Time Logger on Bottom	11:15 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	0836		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEN LEBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785)628-6395
DIRECTIONS
KINGSDOWN, KS. E. OF TOWN ON HWY 54 TO RD. 125, 2N. TO WILBURN RD., 4W. TO RD. 121., 1
1/2N., W. INTO





SUPERIOR
Hays,
Kansas

MAIN SECTION

Database File: 003081pe.db
Dataset Pathname: pass6.2
Presentation Format: micro
Dataset Creation: Mon Dec 15 14:46:44 2008
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

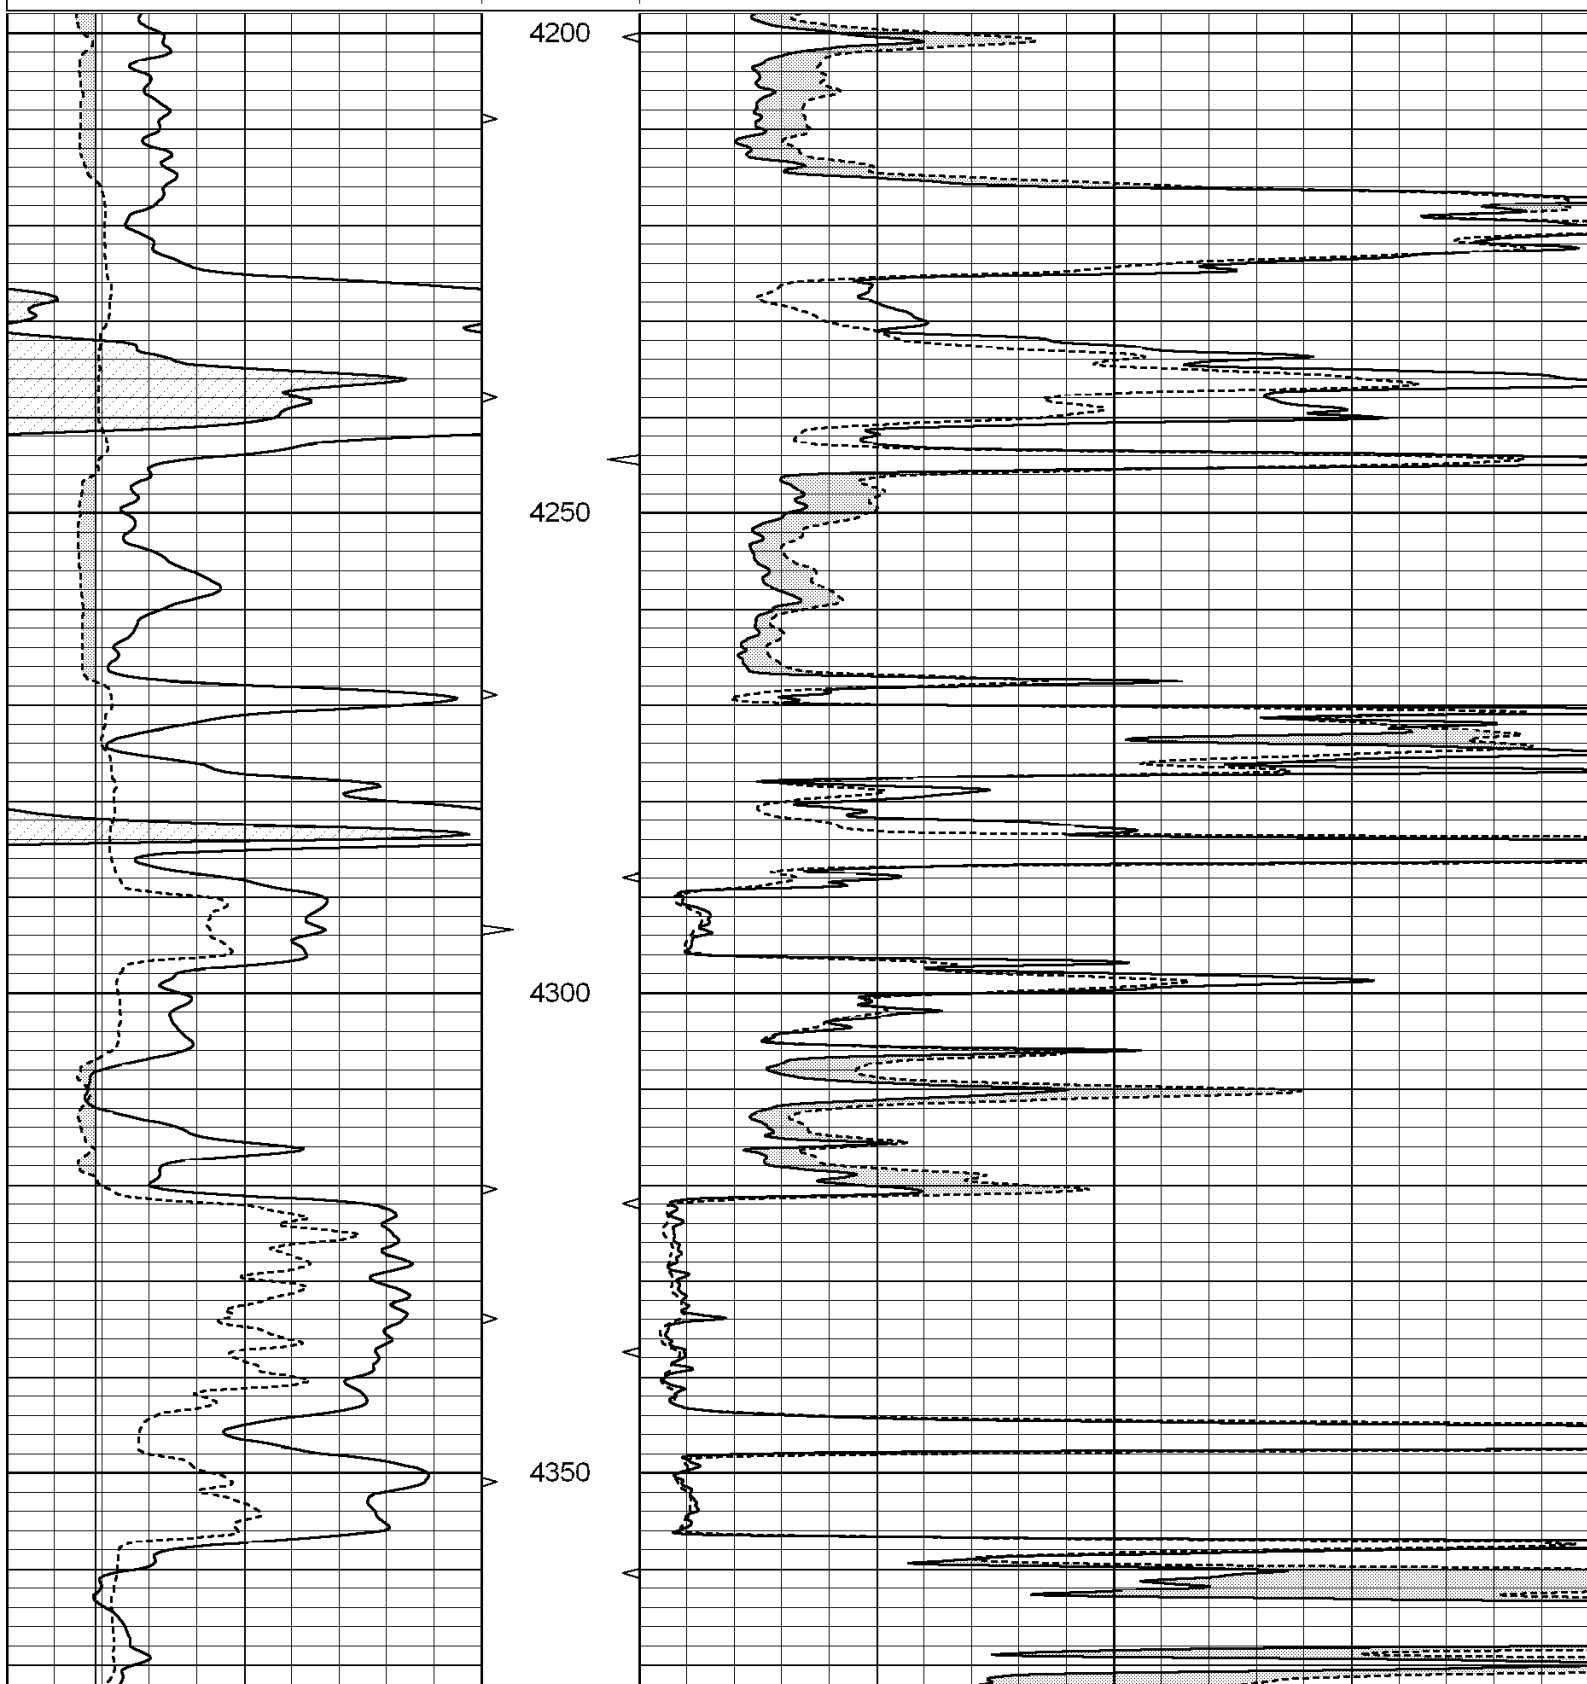

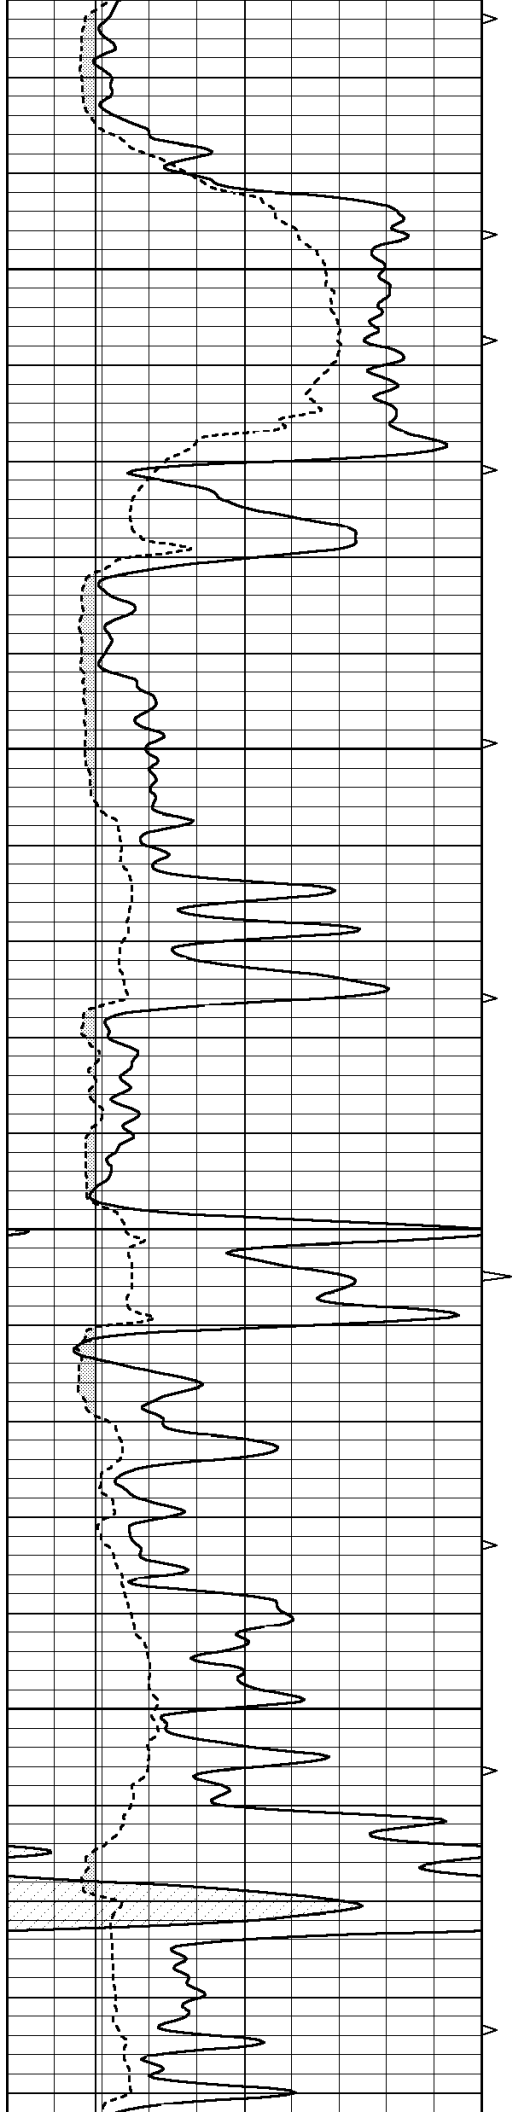



4400

4450

4500

4550

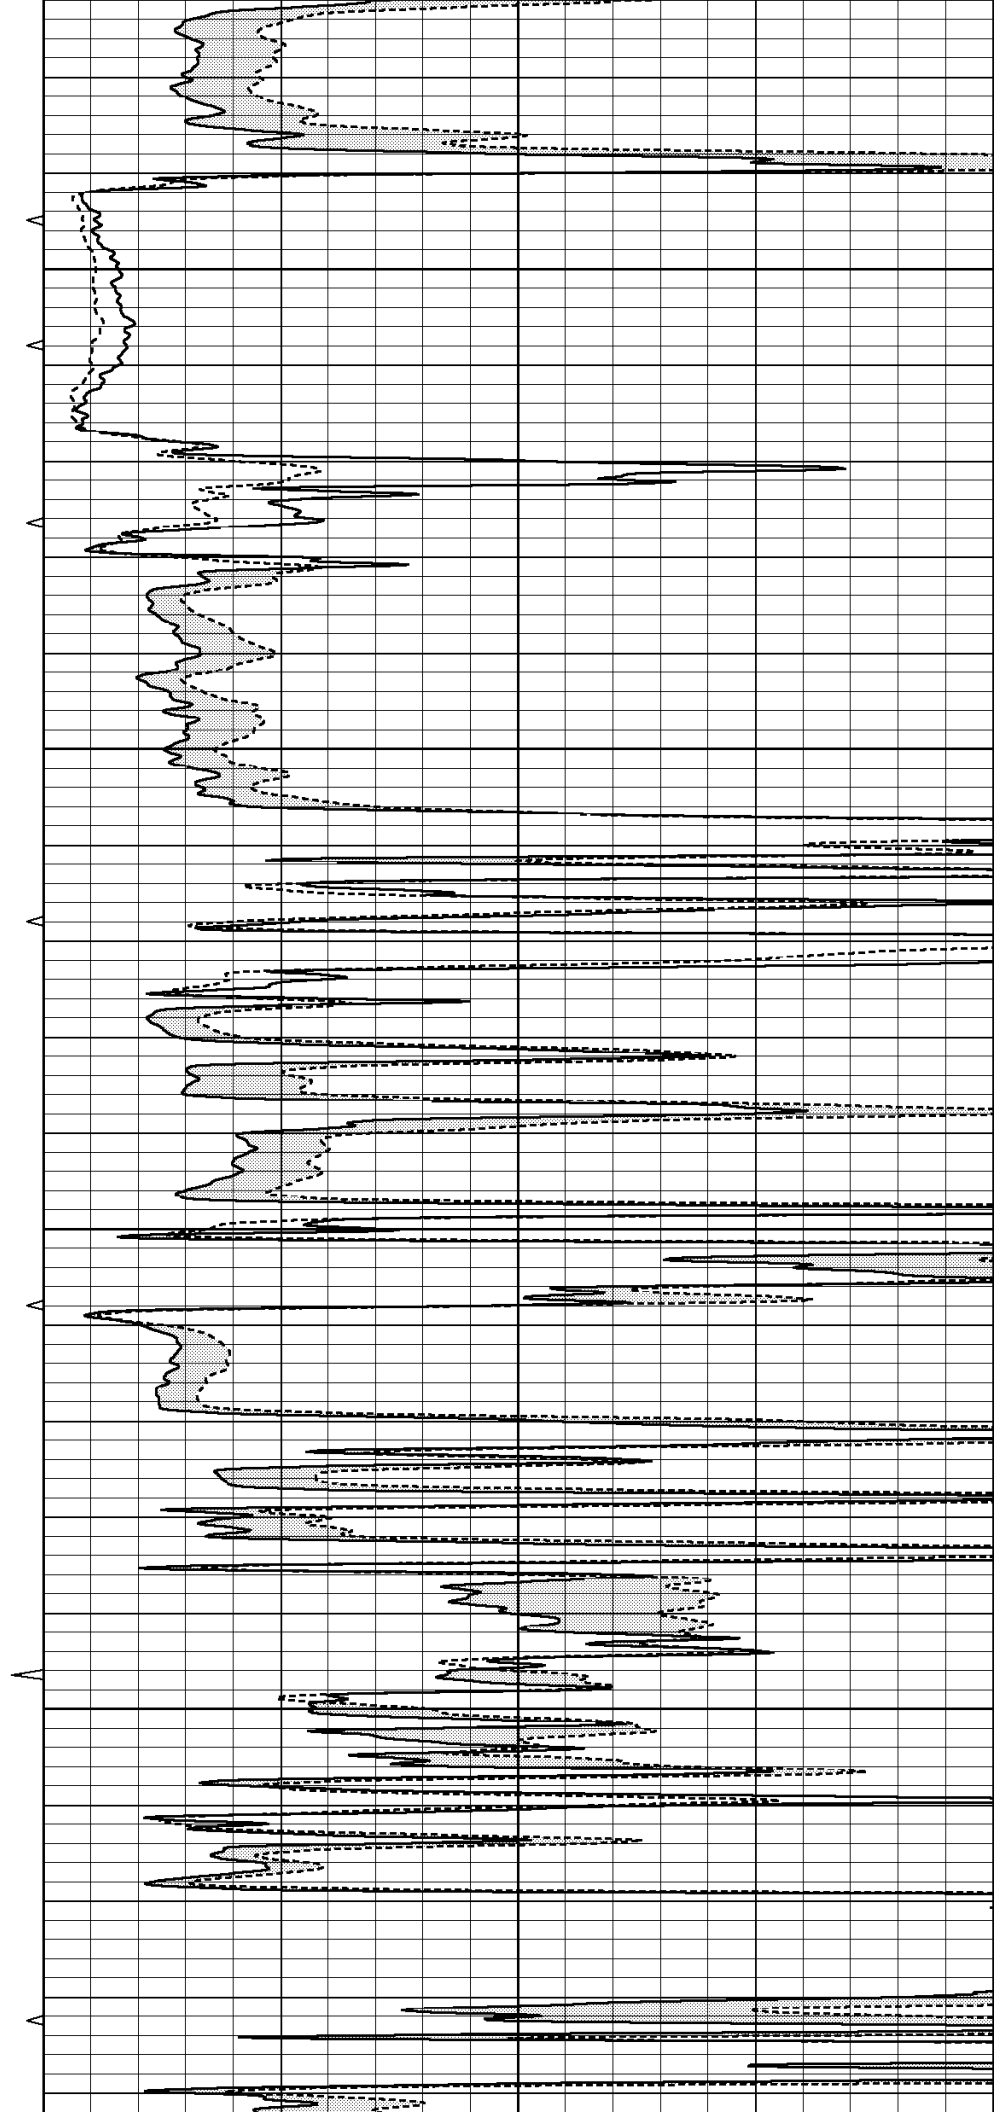

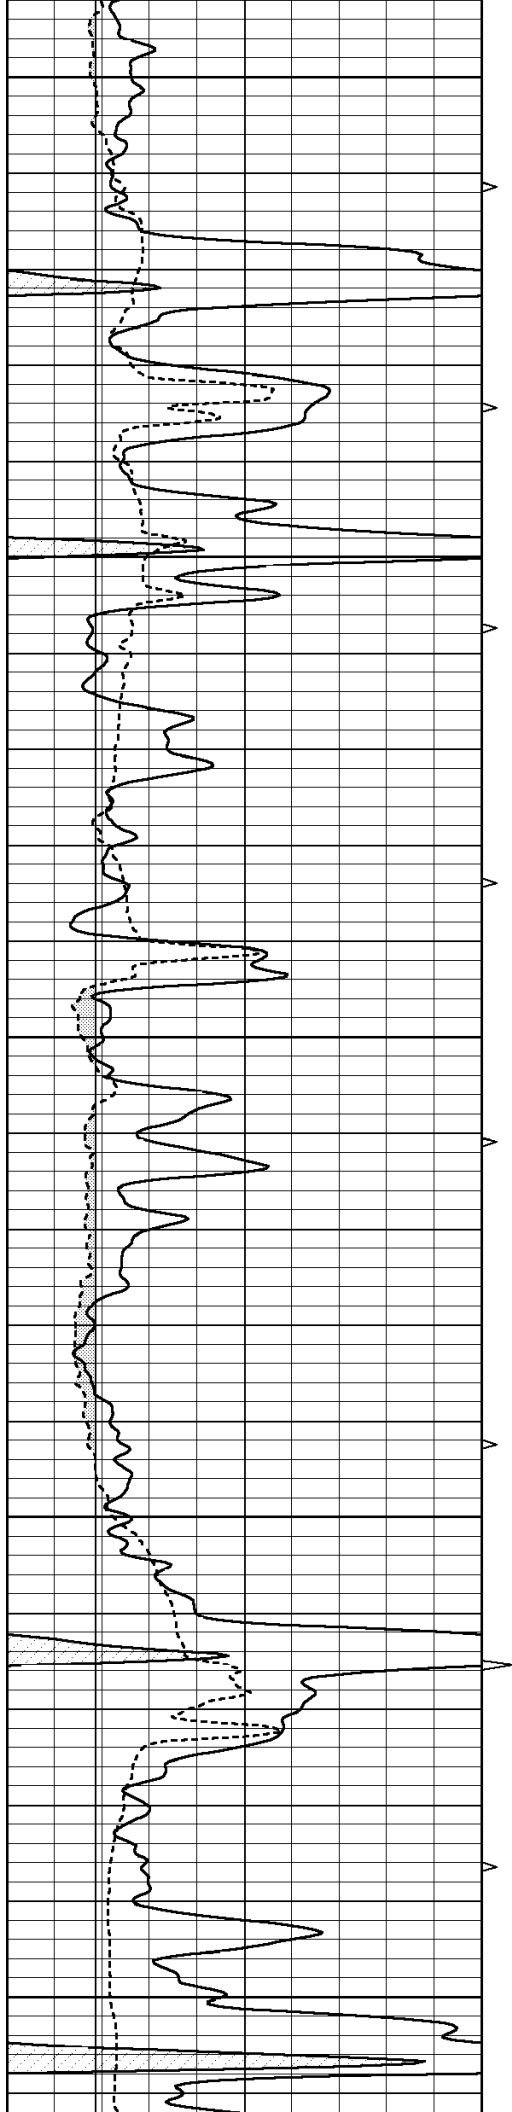


4600


4650

4700

4750

4800

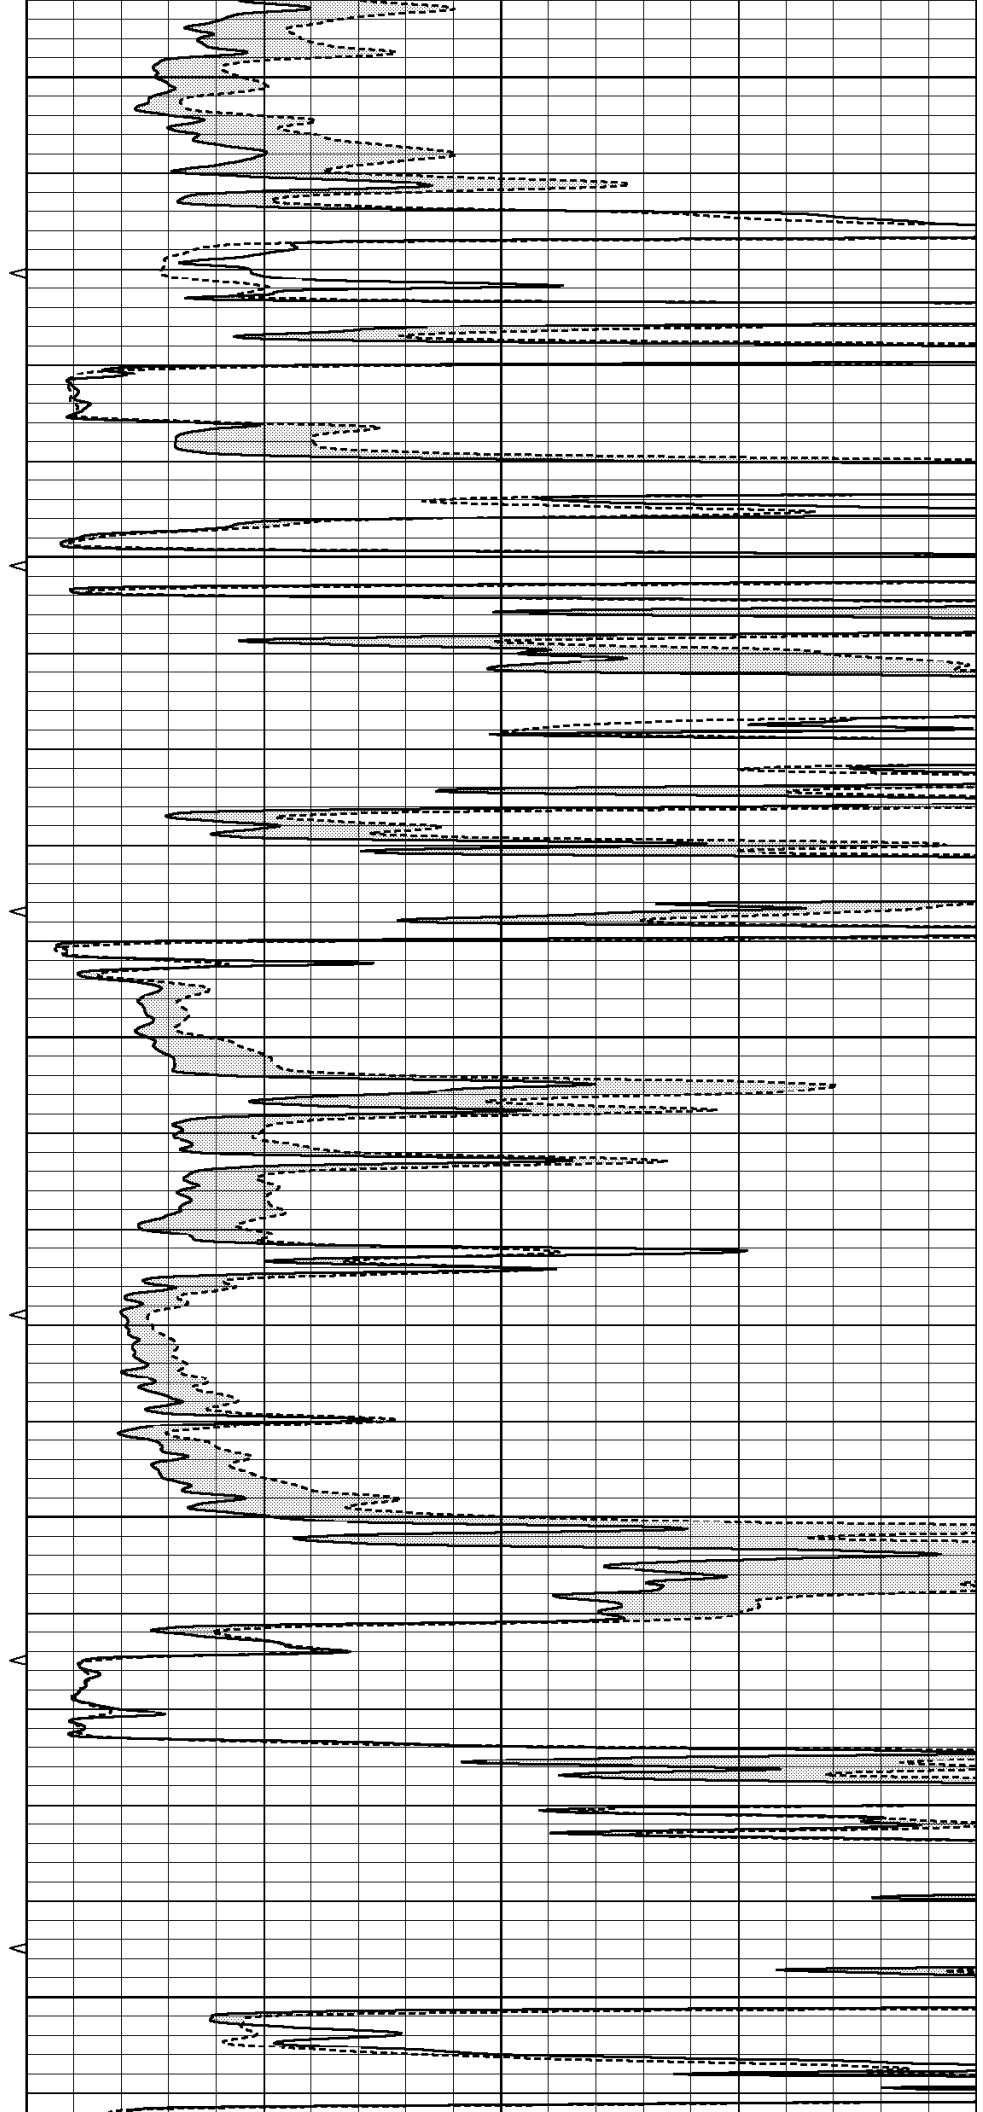

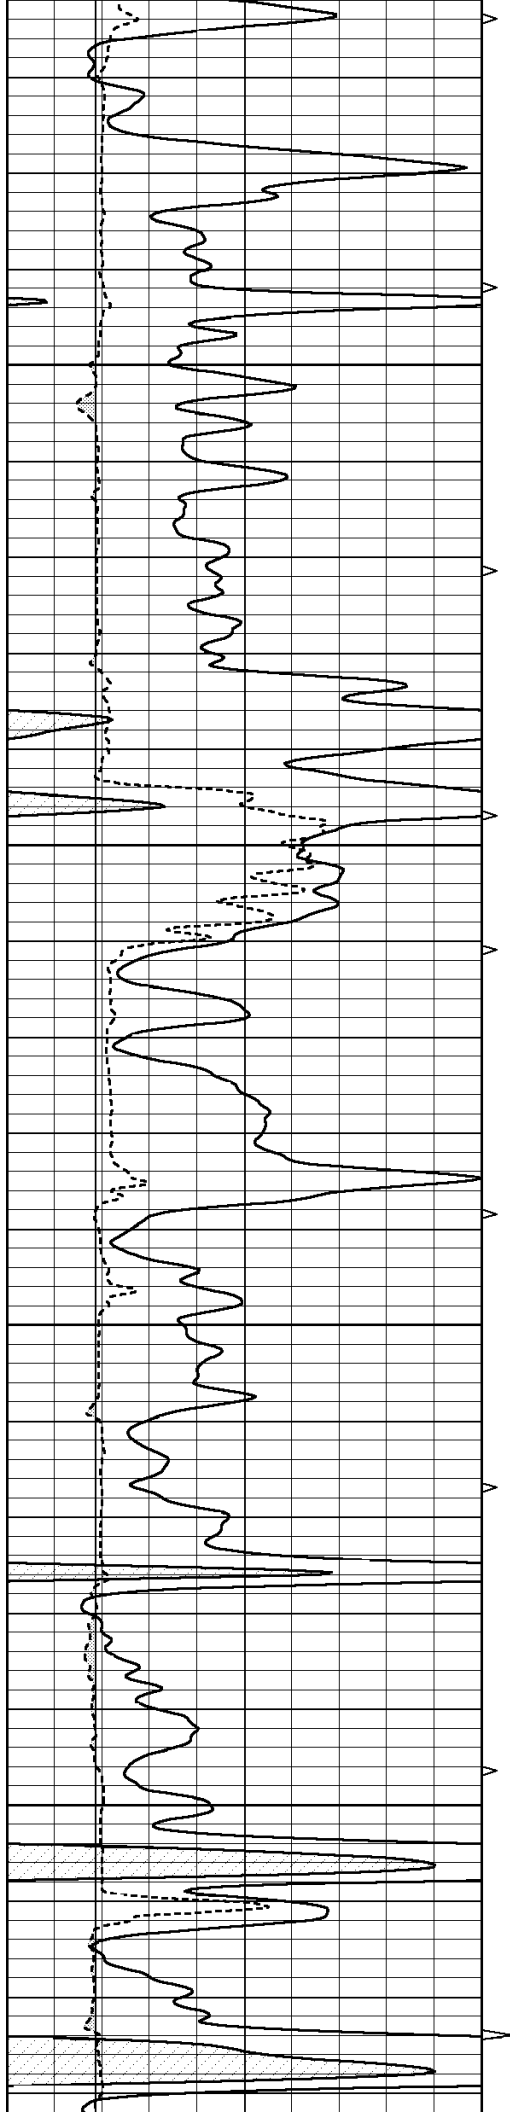



4850

4900

4950

5000

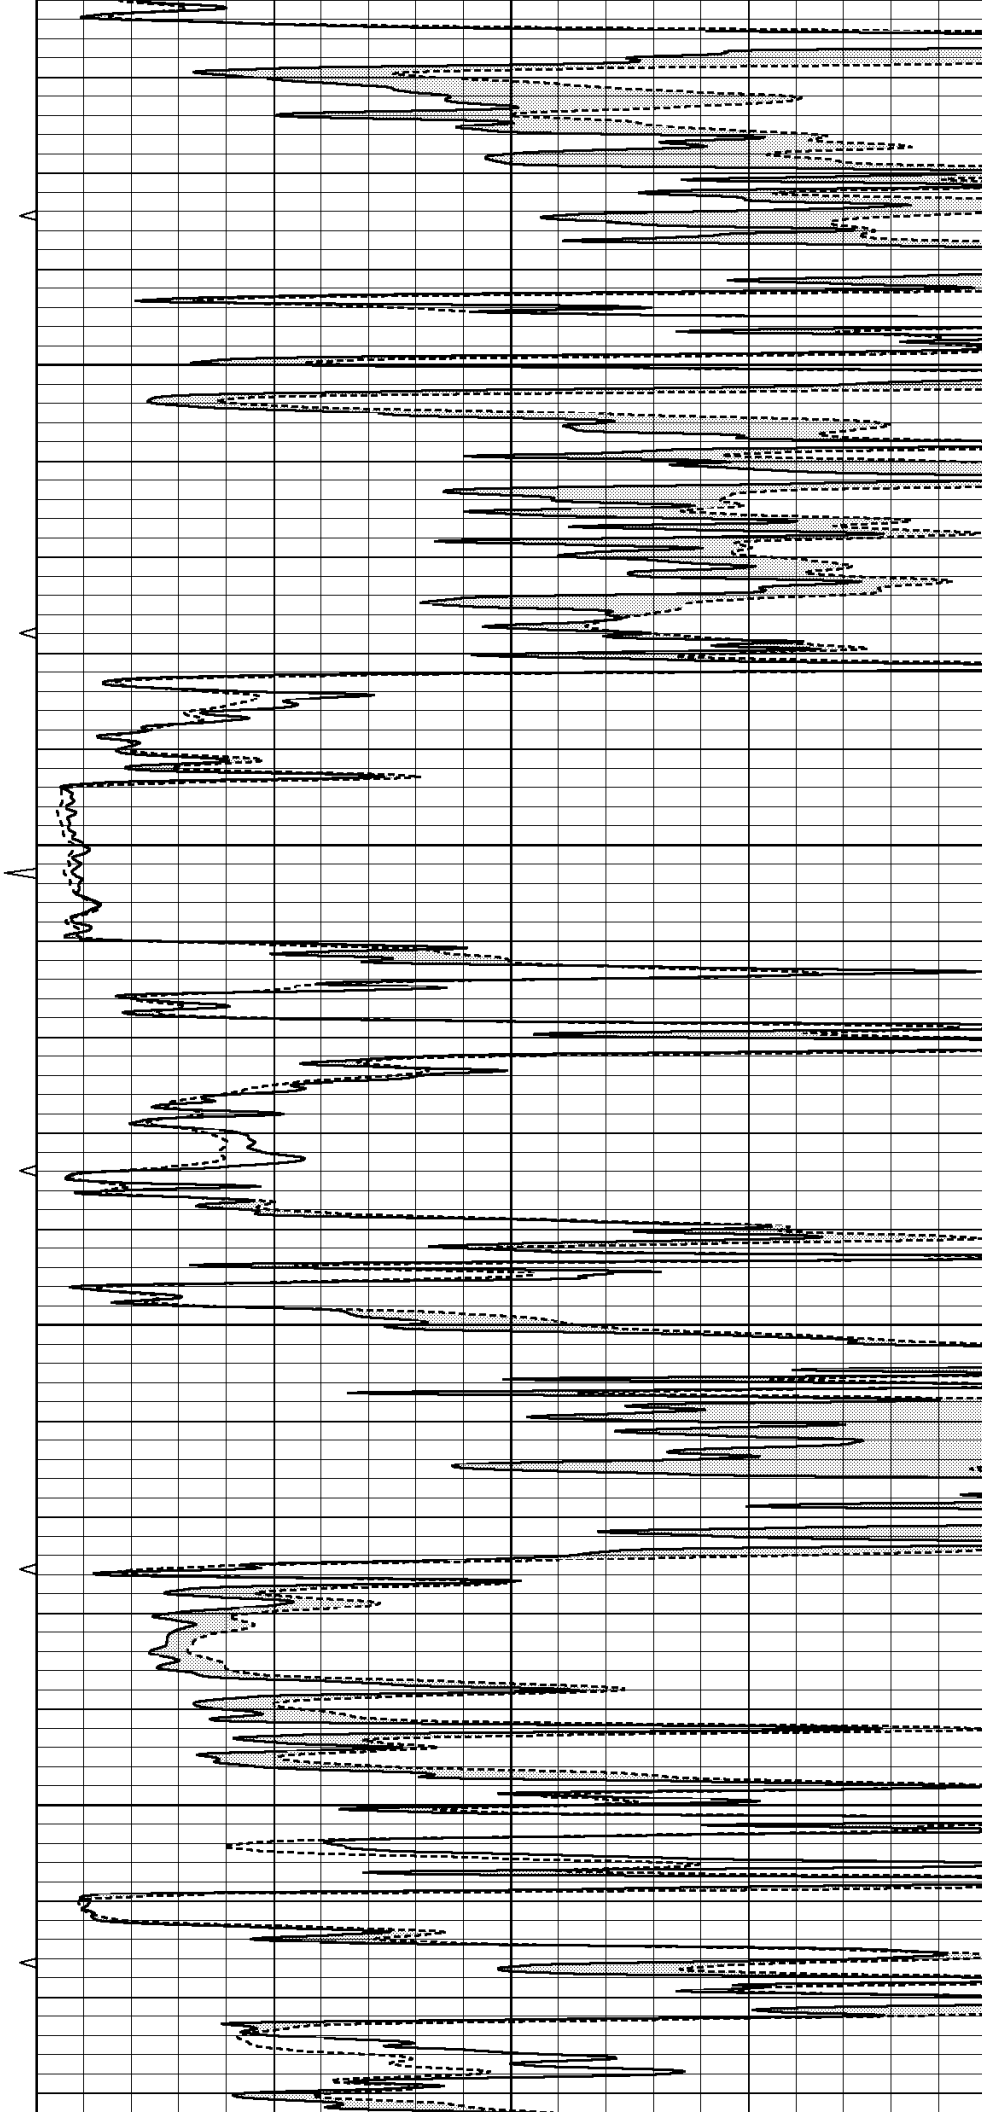

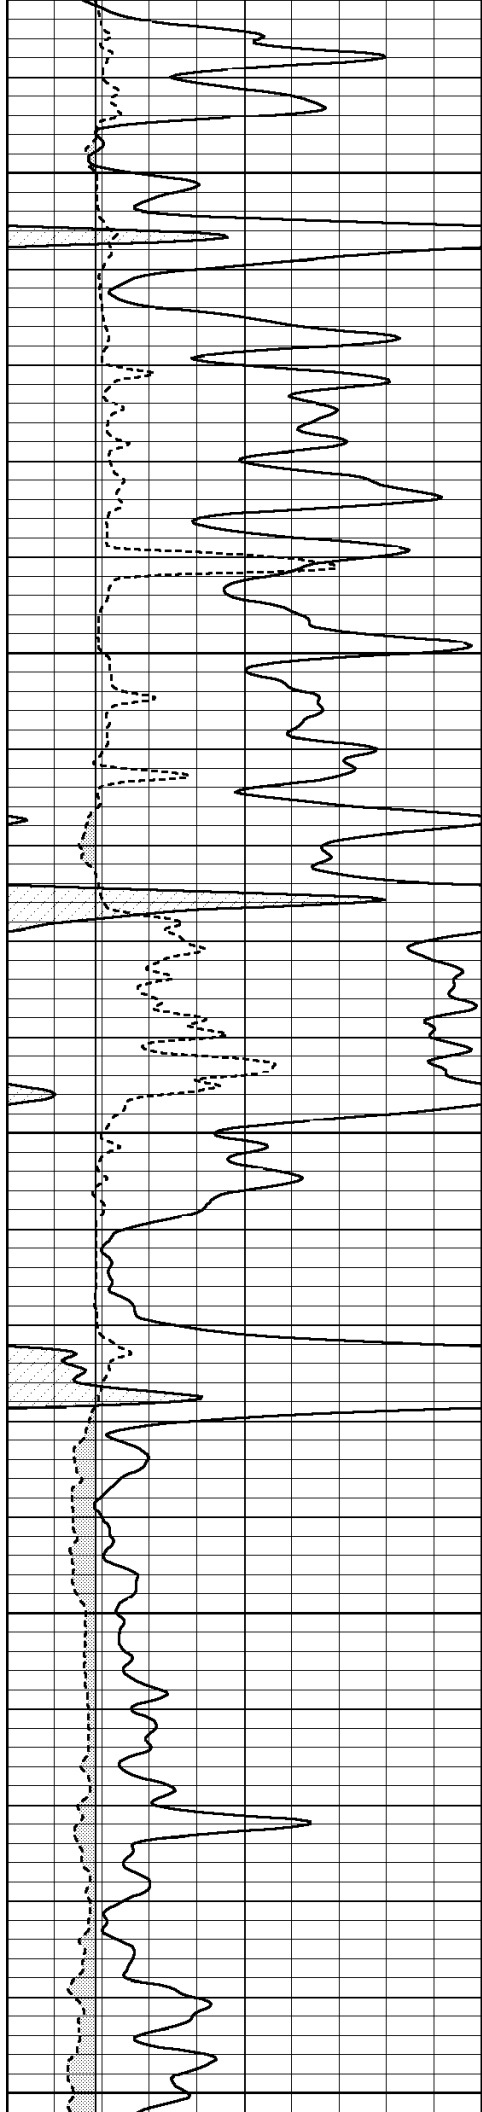


5050


5100

5150

5200

5250

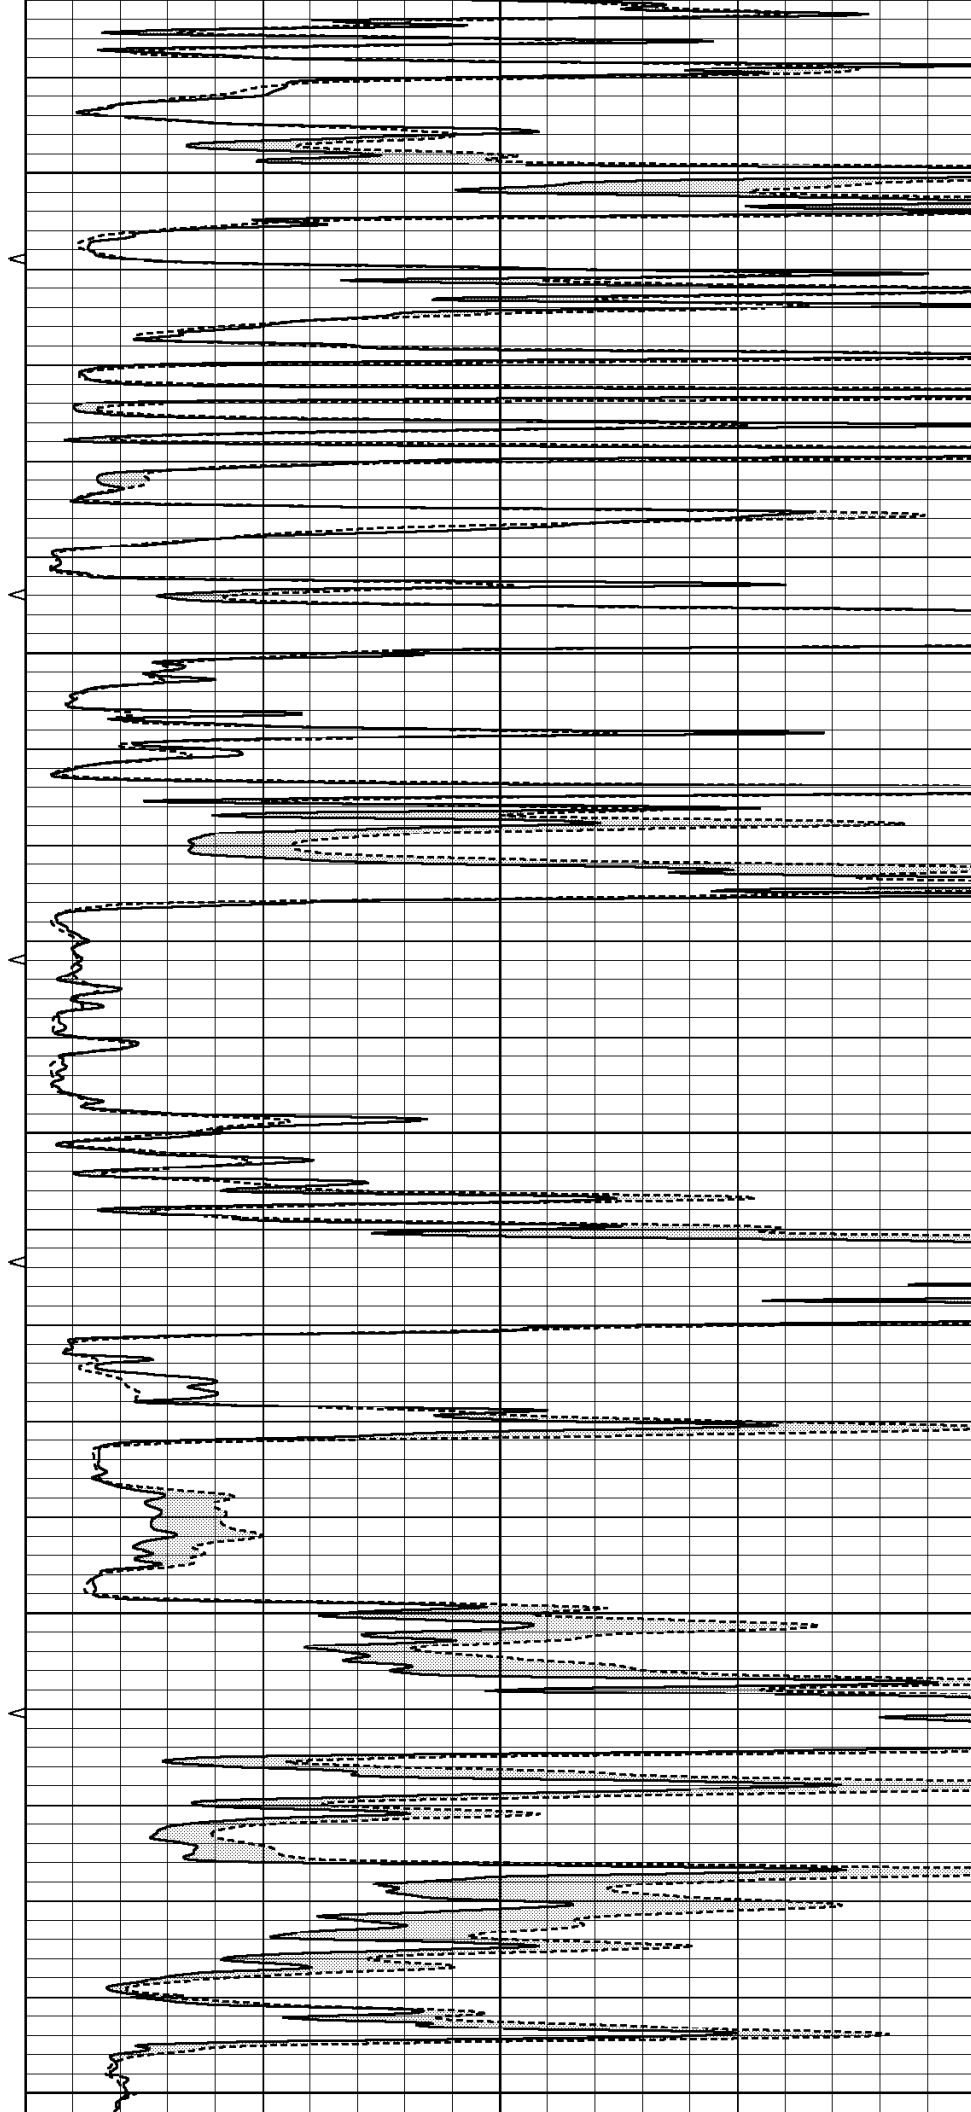

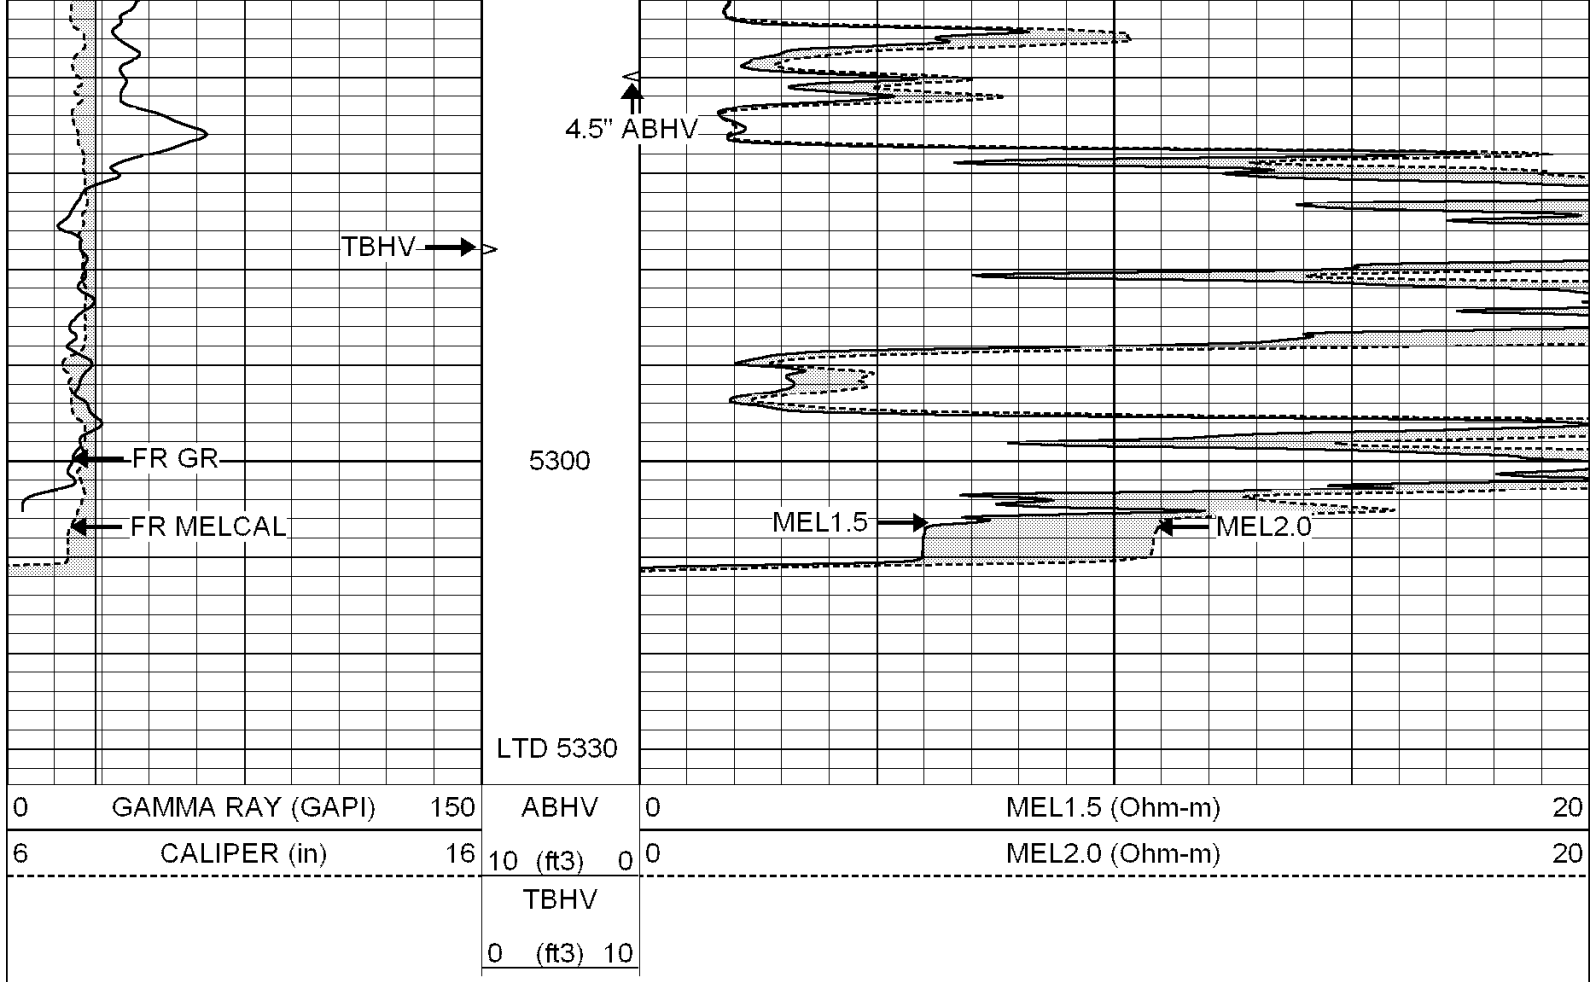





SUPERIOR
Hays,
Kansas


REPEAT SECTION

Database File: 003081pe.db
 Dataset Pathname: pass5.3
 Presentation Format: micro
 Dataset Creation: Mon Dec 15 14:41:01 2008 by Calc Open-Cased 060407
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

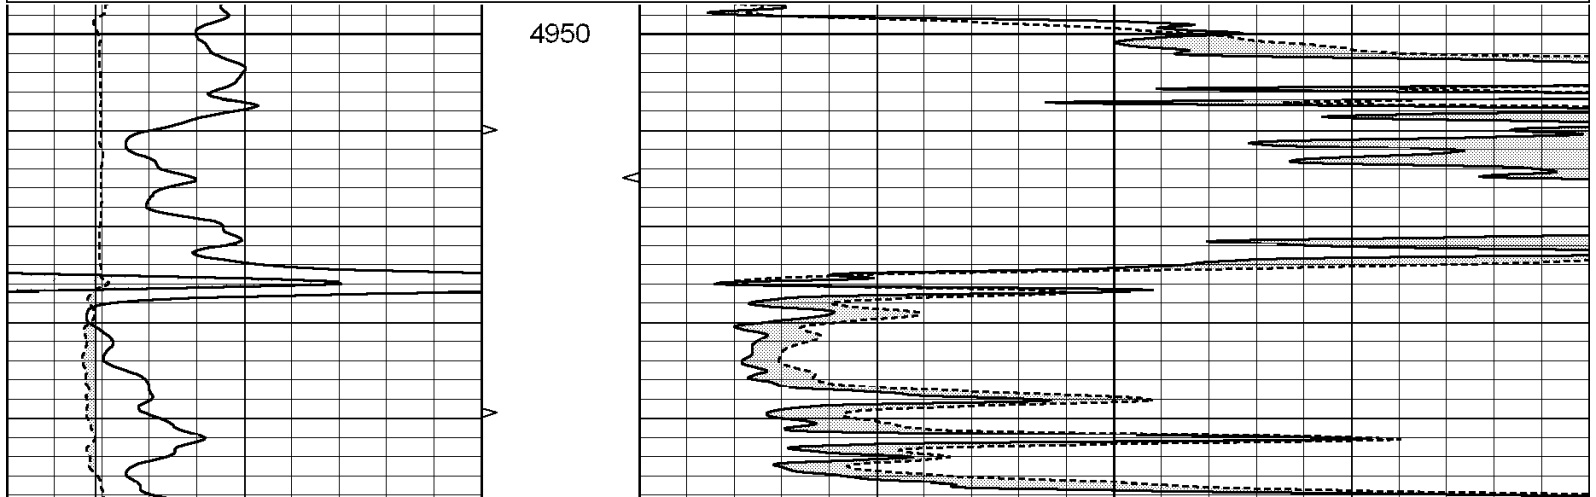

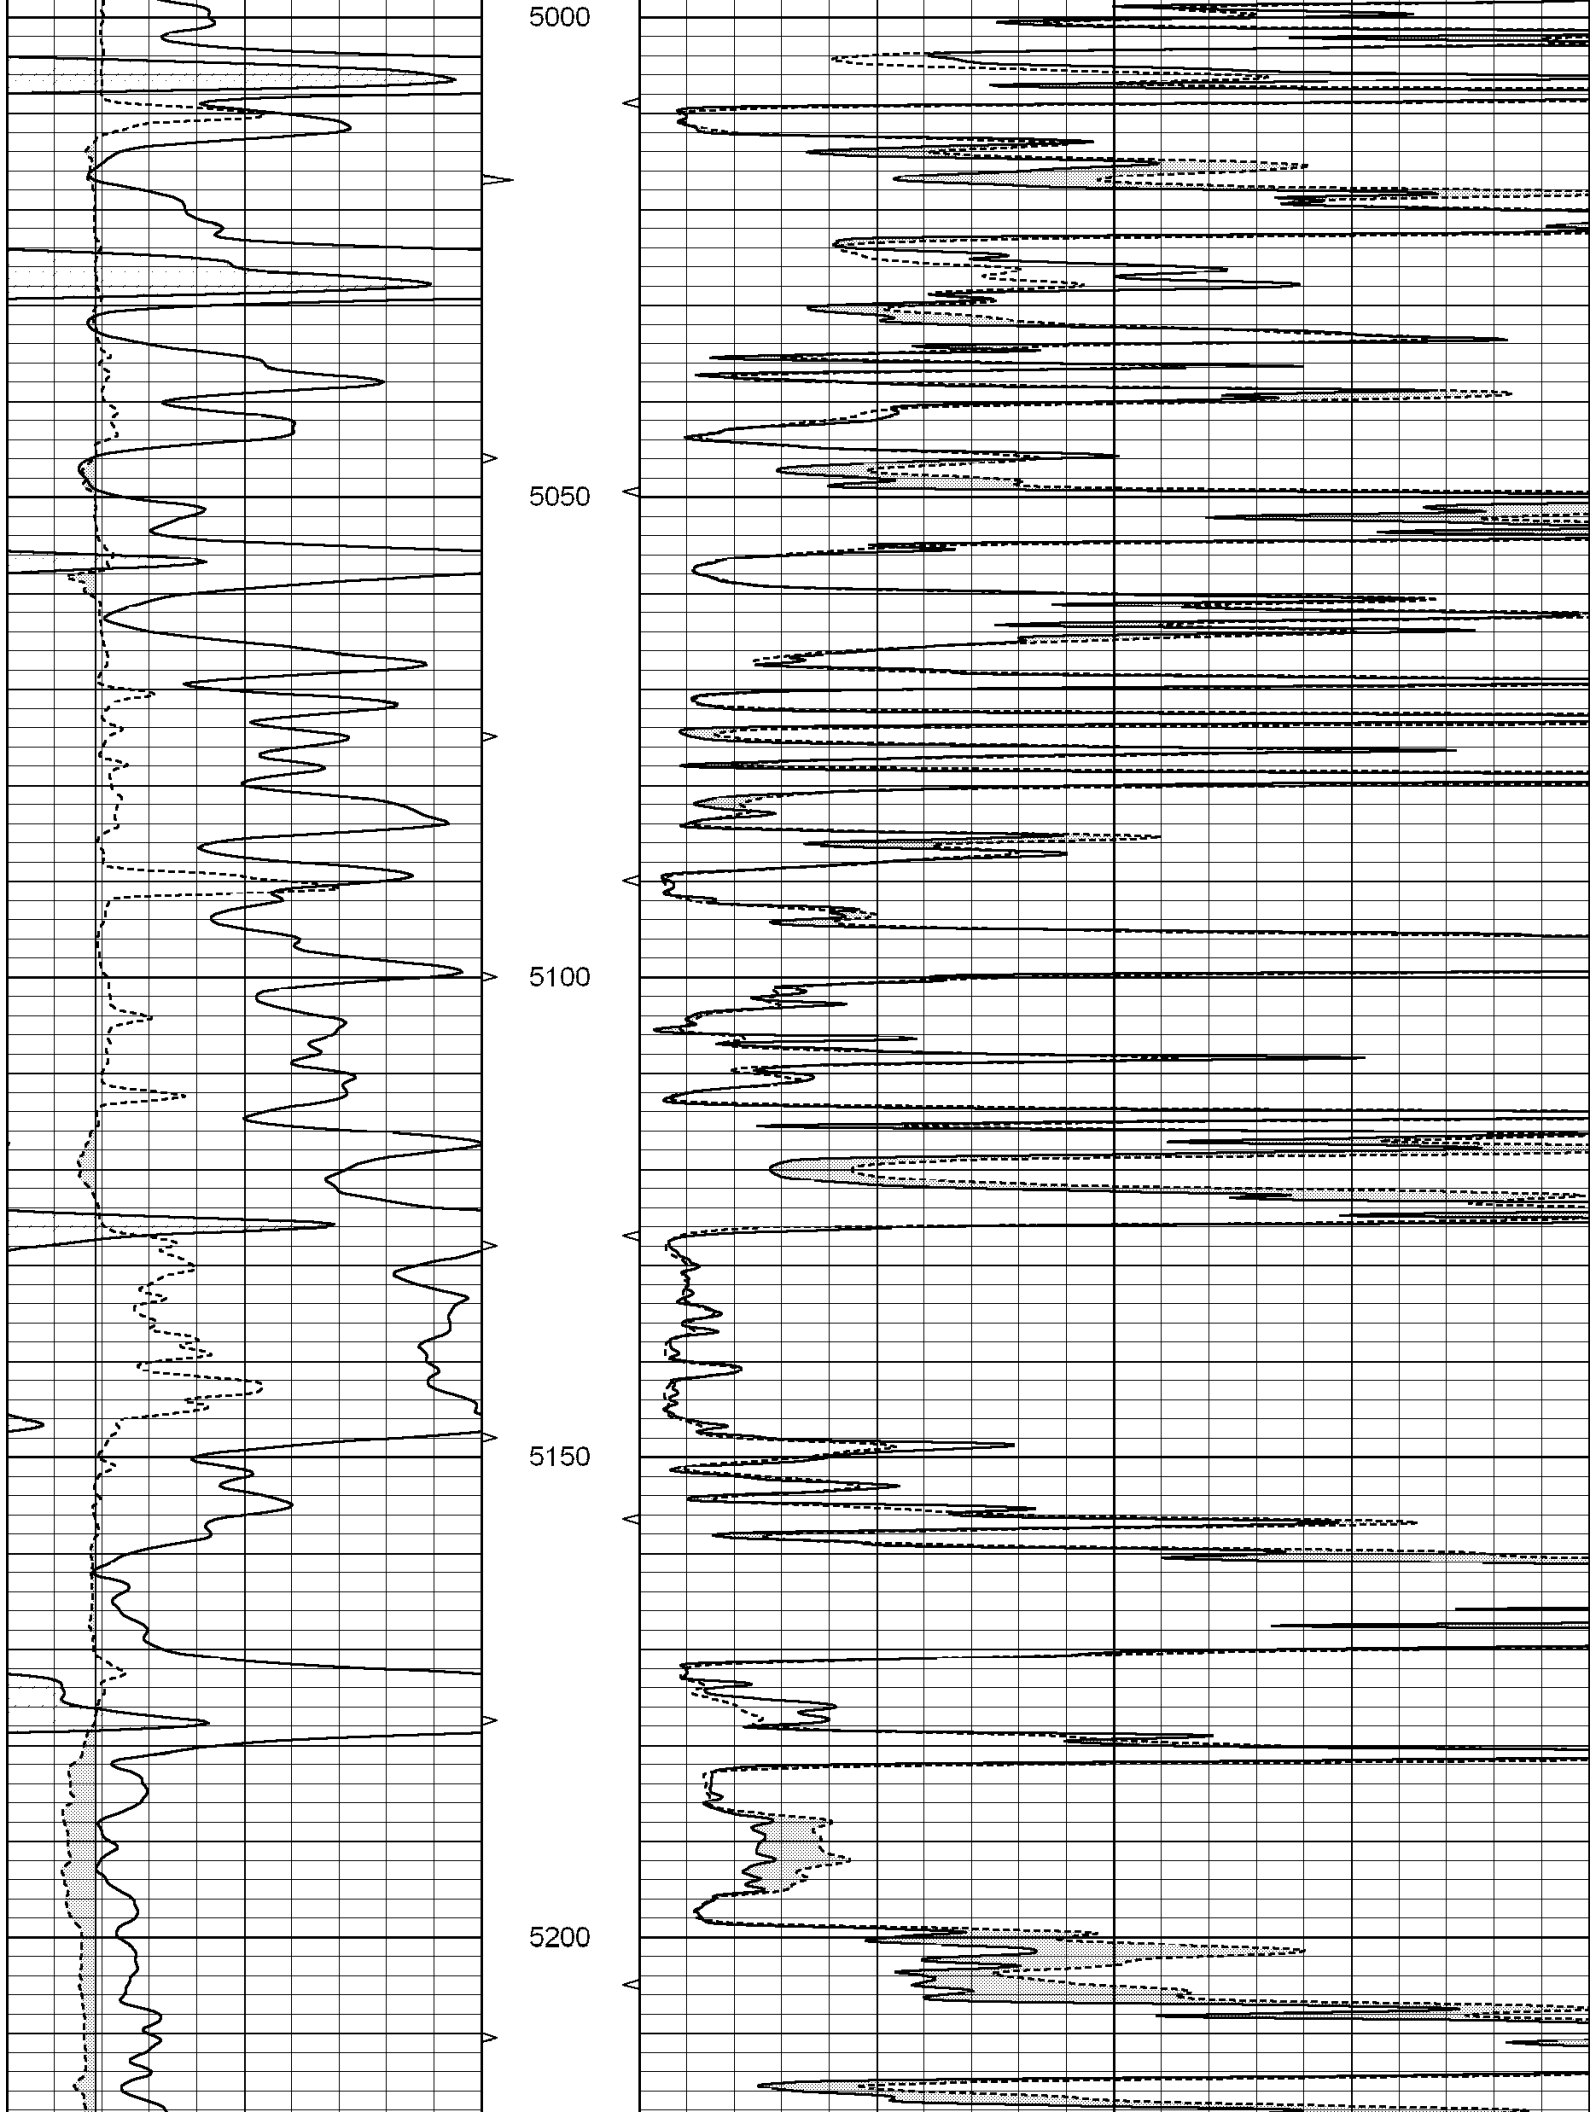

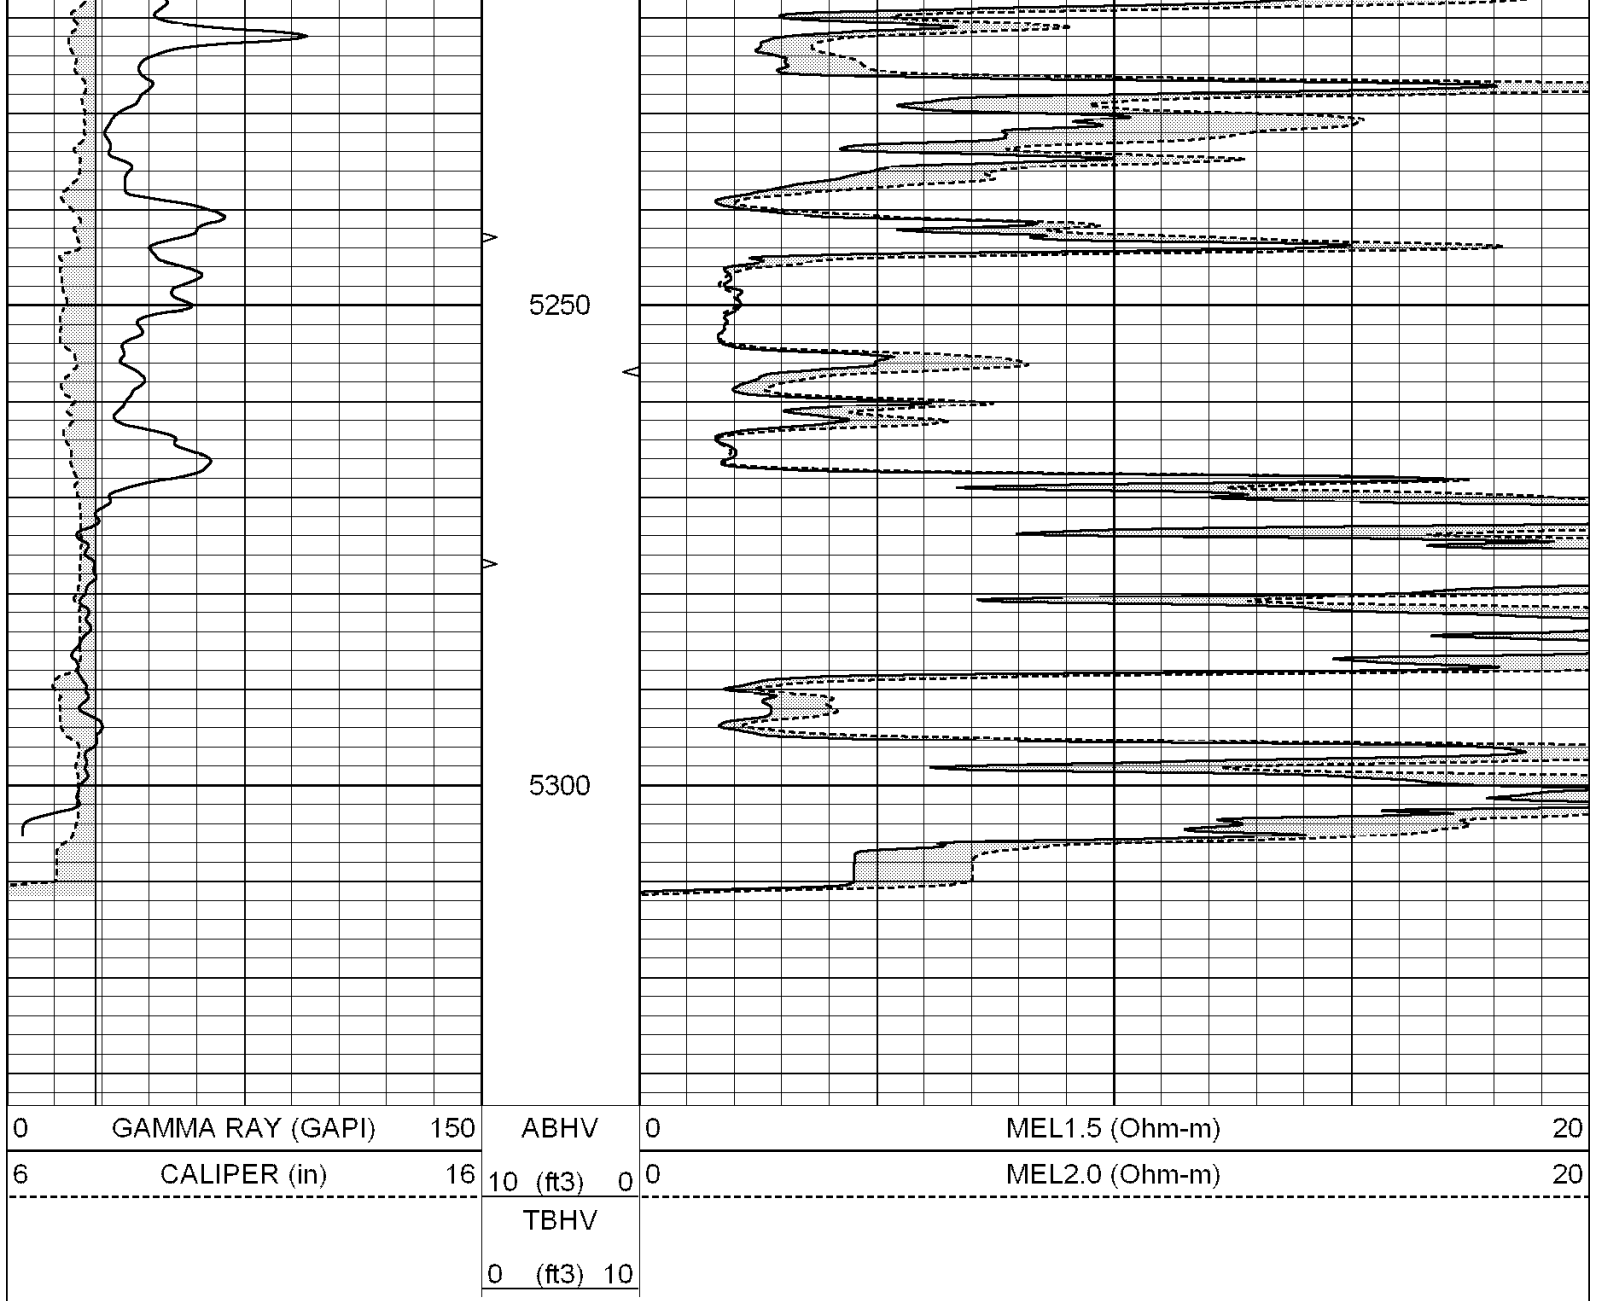

Calibration Report

Database File: 003081pe.db
 Dataset Pathname: pass6.2
 Dataset Creation: Mon Dec 15 14:46:44 2008

MICRO Calibration Report

Serial Number:	MICRO5	
Tool Model:	PROBE	
Performed:	Mon Dec 15 13:06:41 2008	
Caliper Calibration:	Gain=4.151	Offset=-8.247
References	Low Cal	High Cal
Readings	6.000	15.500
	3.433	5.721
1.5" Calibration:	Gain=25.000	Offset=-0.600
References	Low Cal	High Cal
Readings	0.000	20.000
	0.025	0.991
2" Calibration:	Gain=30.000	Offset=-0.800

References	Low Cal	High Cal
Readings	0.000	20.000
	0.018	0.809
Gamma Ray Calibration Report		
Serial Number:	GR3	
Tool Model:	OPEN	
Performed:	Mon Dec 15 13:57:46 2008	
Calibrator Value:	200.0	GAPI
Background Reading:	3.0	cps
Calibrator Reading:	186.0	cps
Sensitivity:	0.4500	GAPI/cps