



**SUPERIOR
Hays,
Kansas**

**COMPENSATED
DENSITY/NEUTRON
PE LOG**

Company	VINCENT OIL CORP.	Company	VINCENT OIL CORPORATION
Well	FEIKERT FARMS #1-8	Well	FEIKERT FARMS #1-8
Field	WILDCAT	Field	WILDCAT
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-20639-0000	Other Services	DIL MEL/SON
Permanent Datum	GROUND LEVEL	Elevation	2523
Log Measured From	KELLY BUSHING 10' A.G.L.	Elevation	K.B. 2533 D.F. 2531 G.L. 2323
Drilling Measured From	KELLY BUSHING		
SEC 8	TWP 29S	RGE 22W	
2568' FSL & 2117' FEL NE - NW - NW - SE			
Date			
Run Number	ONE		
Depth Driller	5580		
Depth Logger	5578		
Bottom Logged Interval	5554		
Top Log Interval	3000		
Casing Driller	8 5/8" @ 613'		
Casing Logger	61'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2 / 47	CHLORIDES	10.000
pH / Fluid Loss	10.5 / 11.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.35 @ 85F		
Rmf @ Meas. Temp	0.26 @ 85F		
Rmc @ Meas. Temp	0.42 @ 85F		
Source of Rmf / Rmc	CAL/CAL		
Rm @ BHT	0.23 @ 130F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	130F		
Equipment Number	680		
Location	HAYS, KS		
Recorded By	JEFF GRONEWEG		
Witnessed By	KEN LEBLANC		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING SUPERIOR WELL SERVICES
HAYS, KS. 785-628-6395


DIRECTIONS: KINGSDOWN, KS - EAST ON HWY 54 1 MILE TO RD 126
3/4 MILE NORTH - WEST INTO


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
			TBHV	0	PE	10 -0.25
			0 (ft3) 10	CORRECTION (g/cc) 0.25		

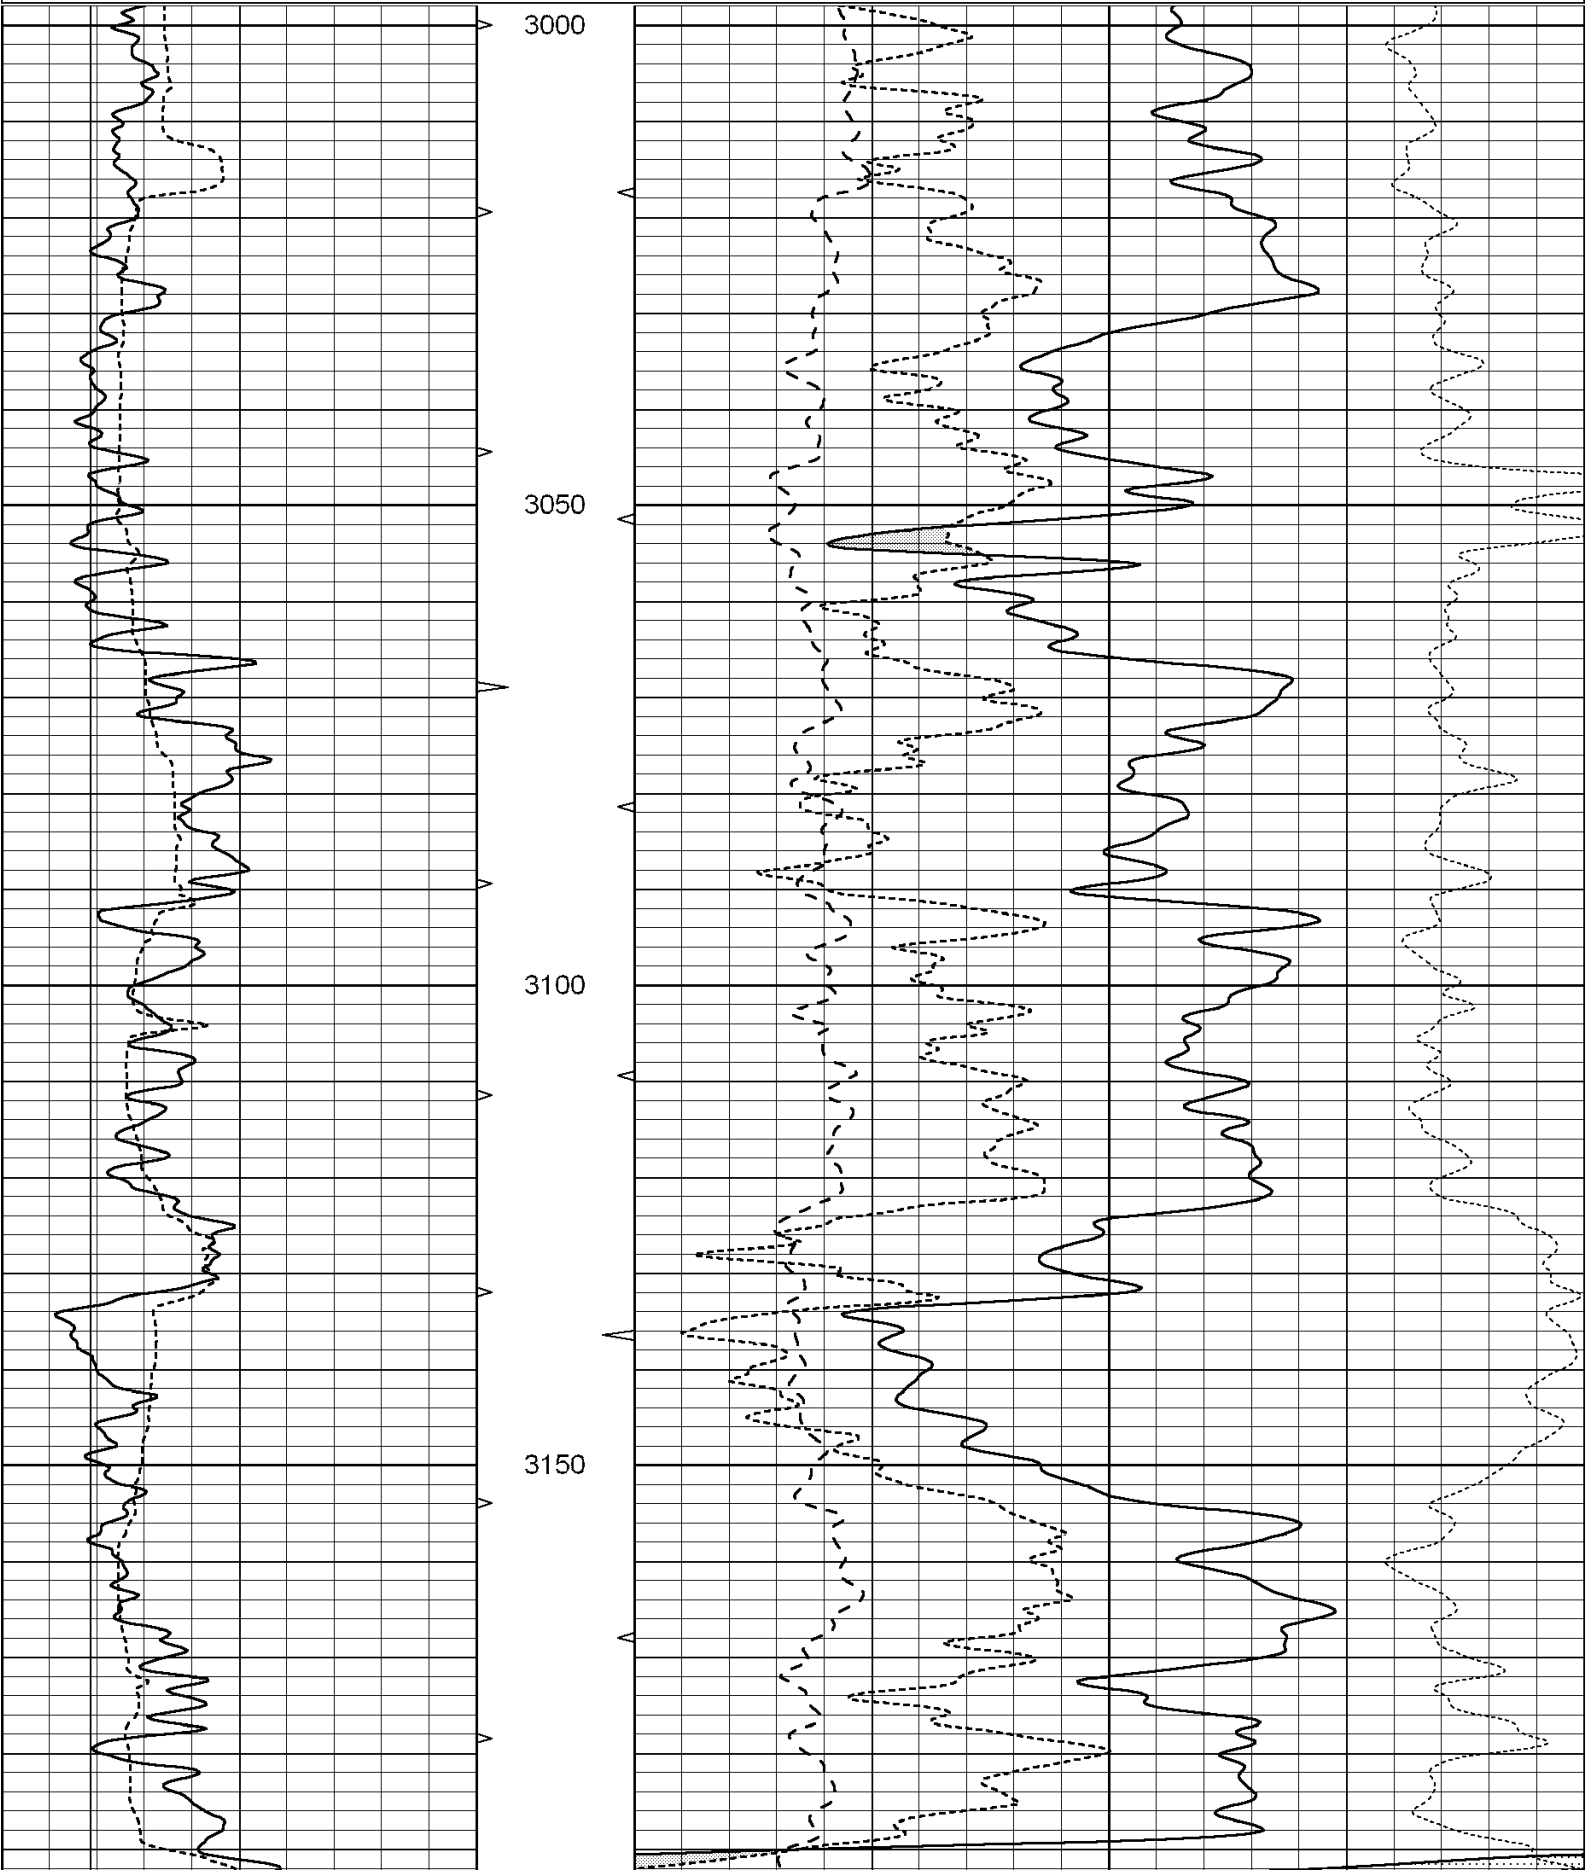


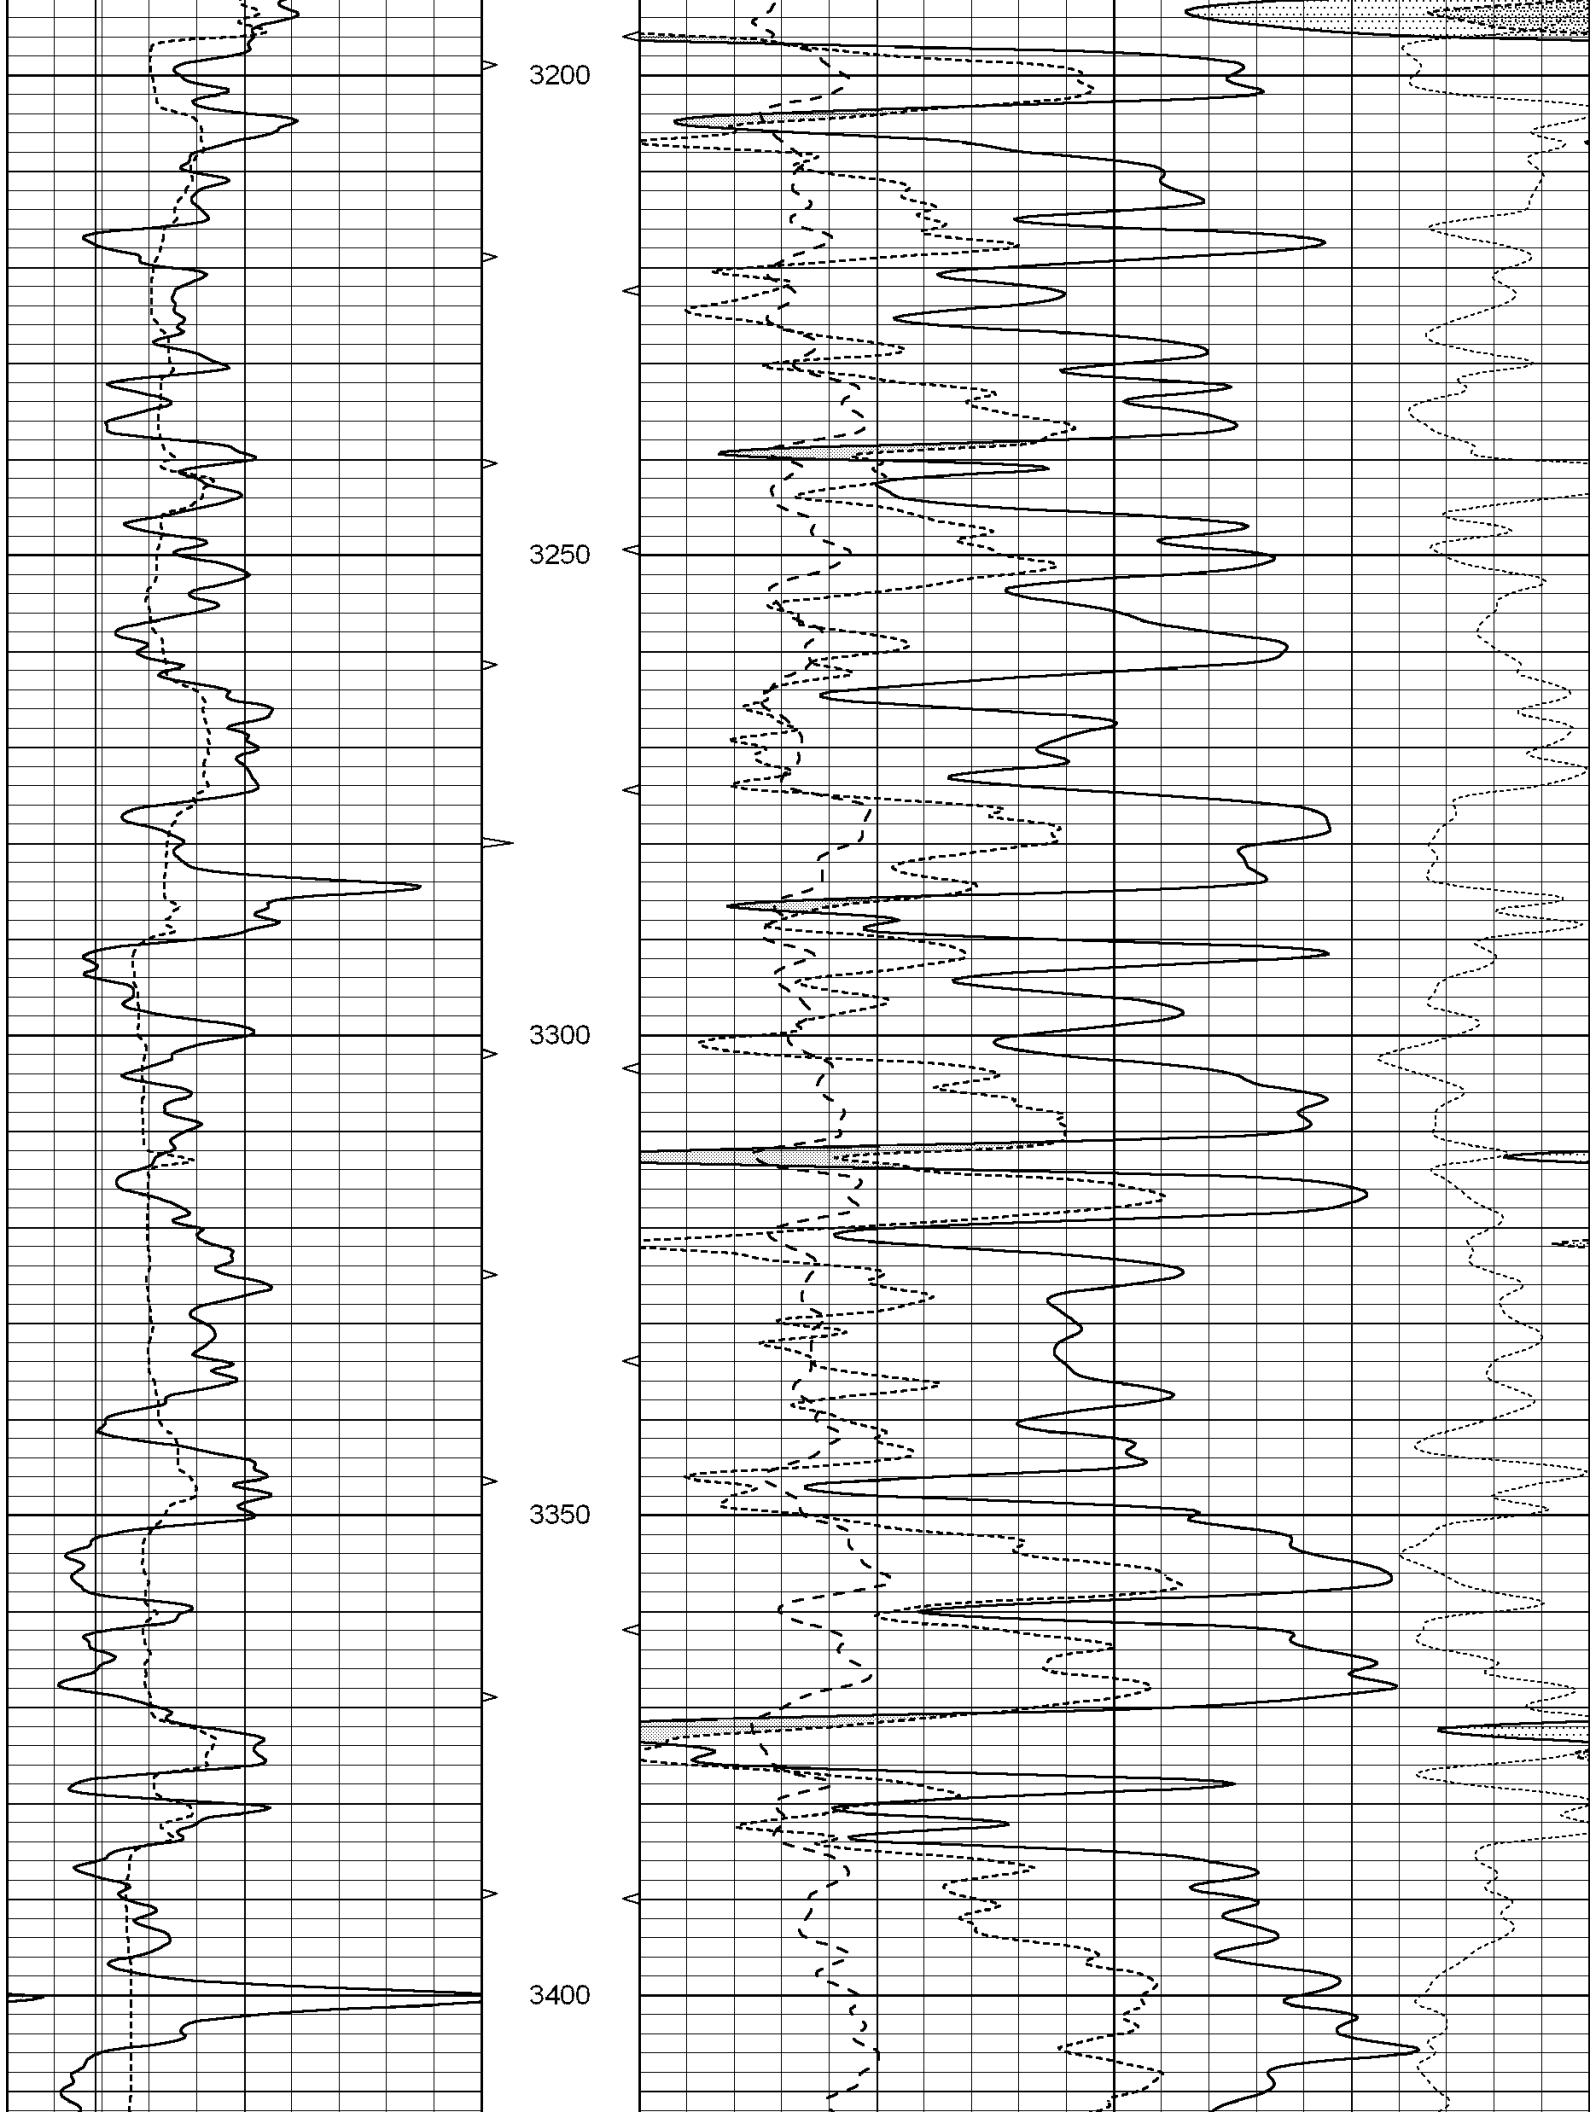


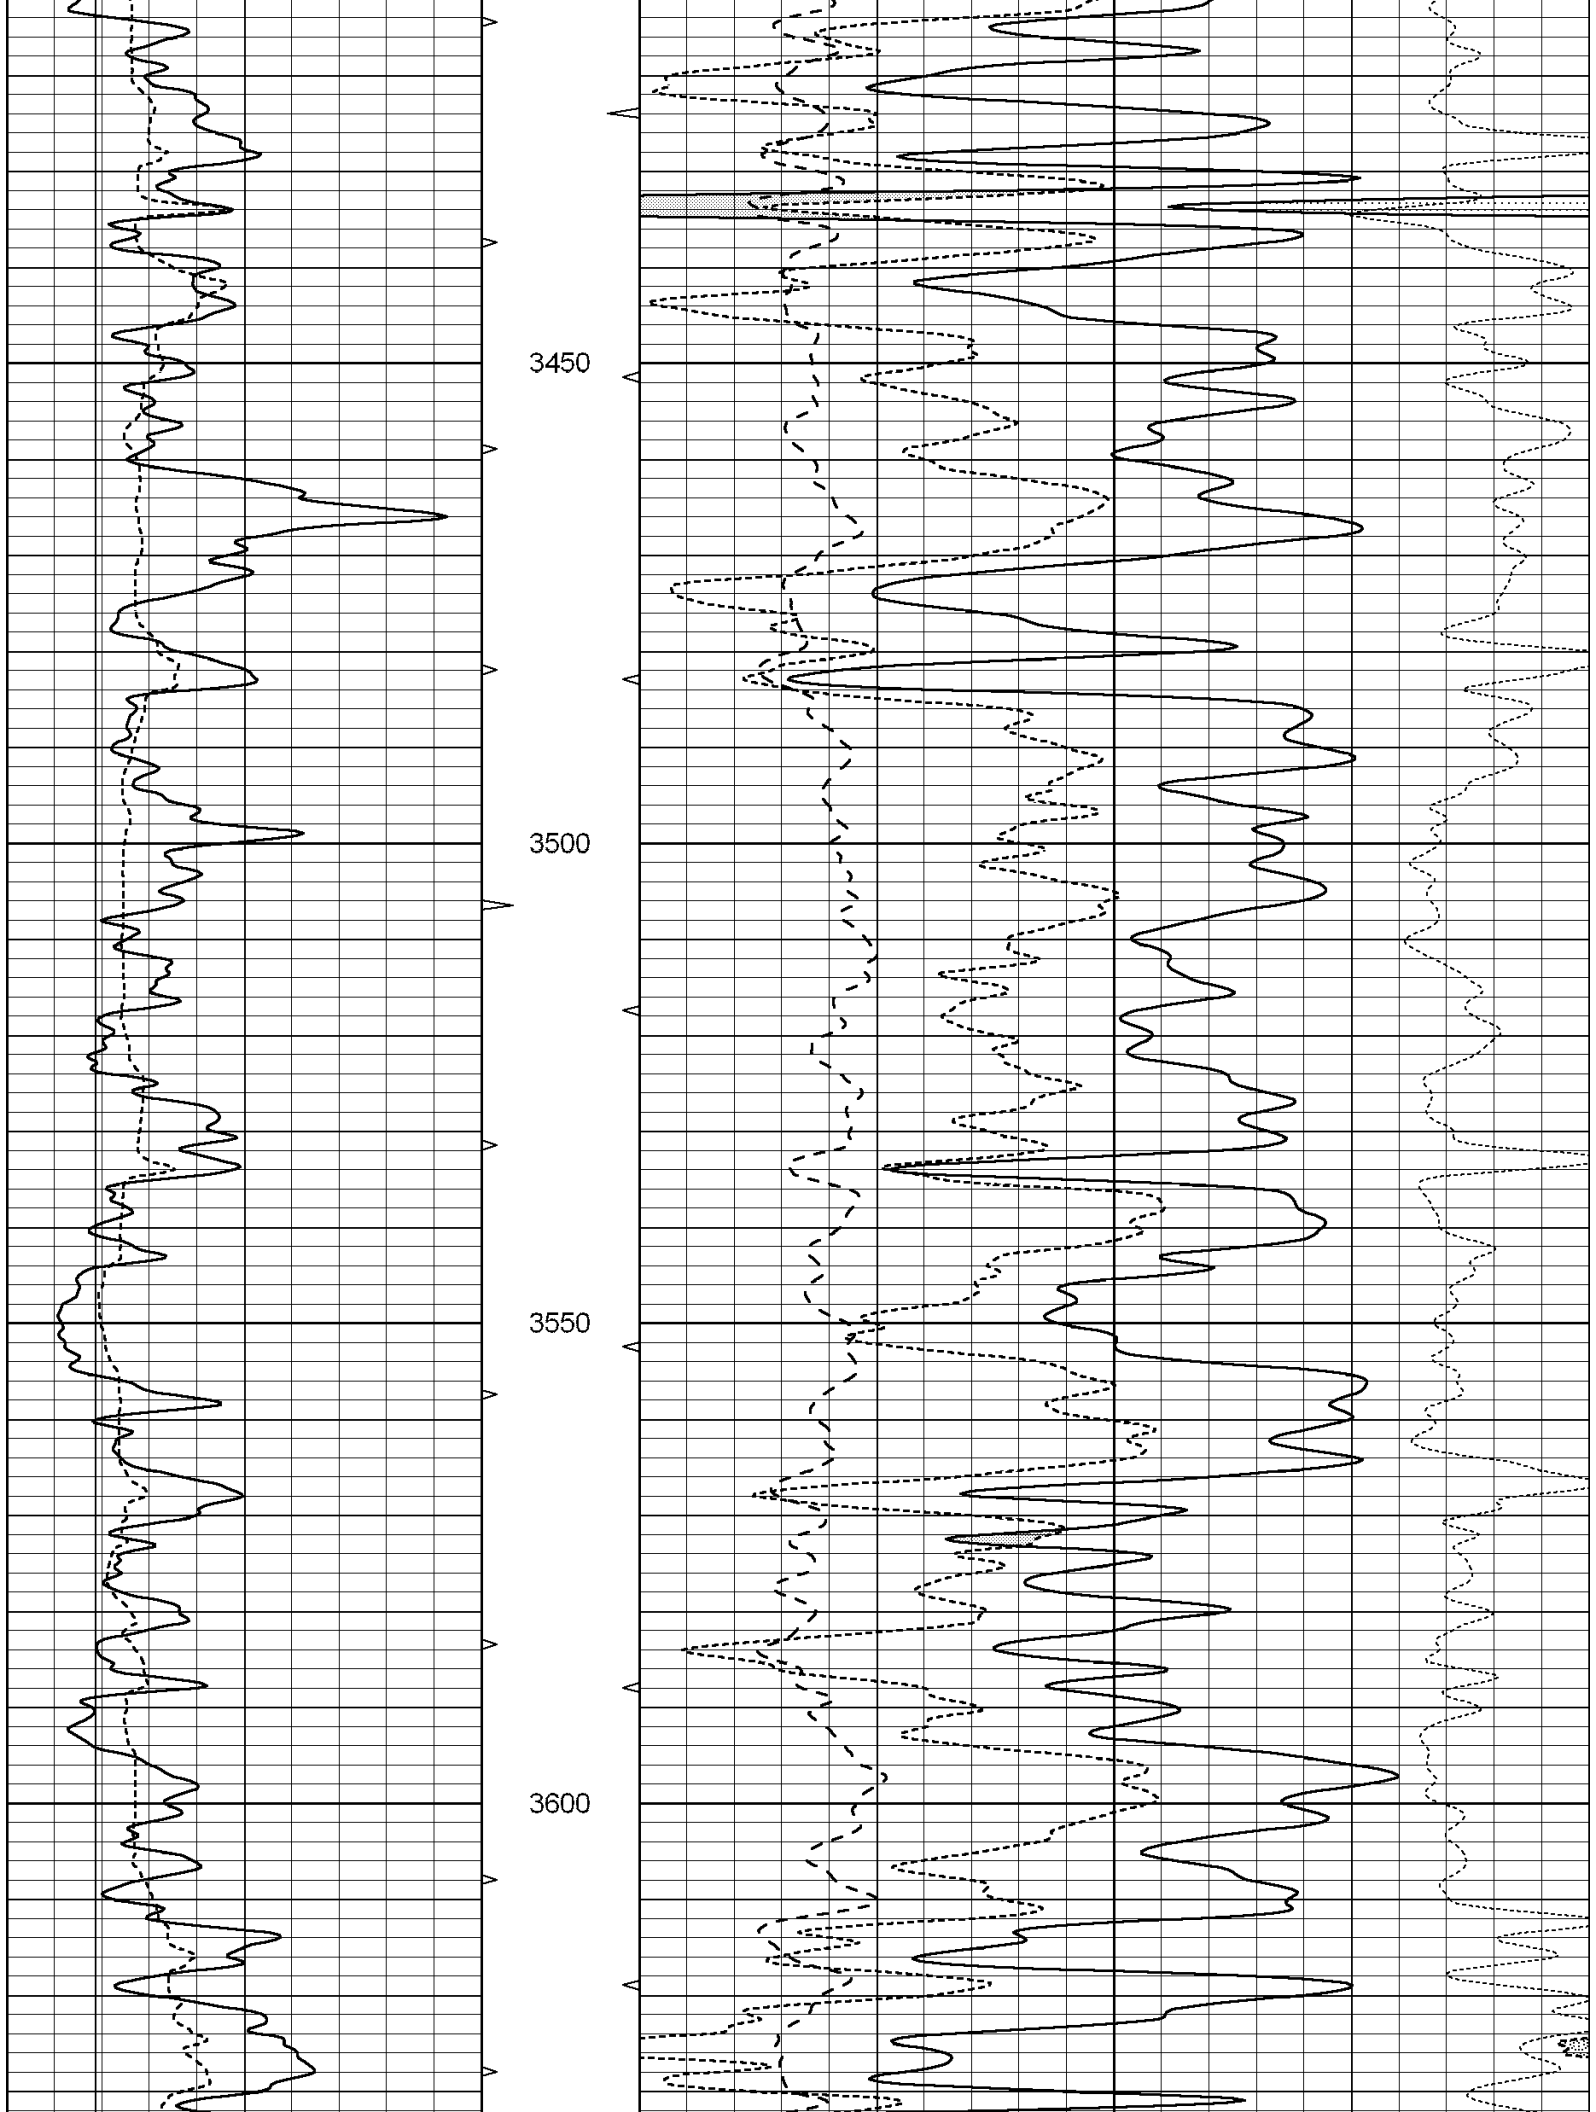


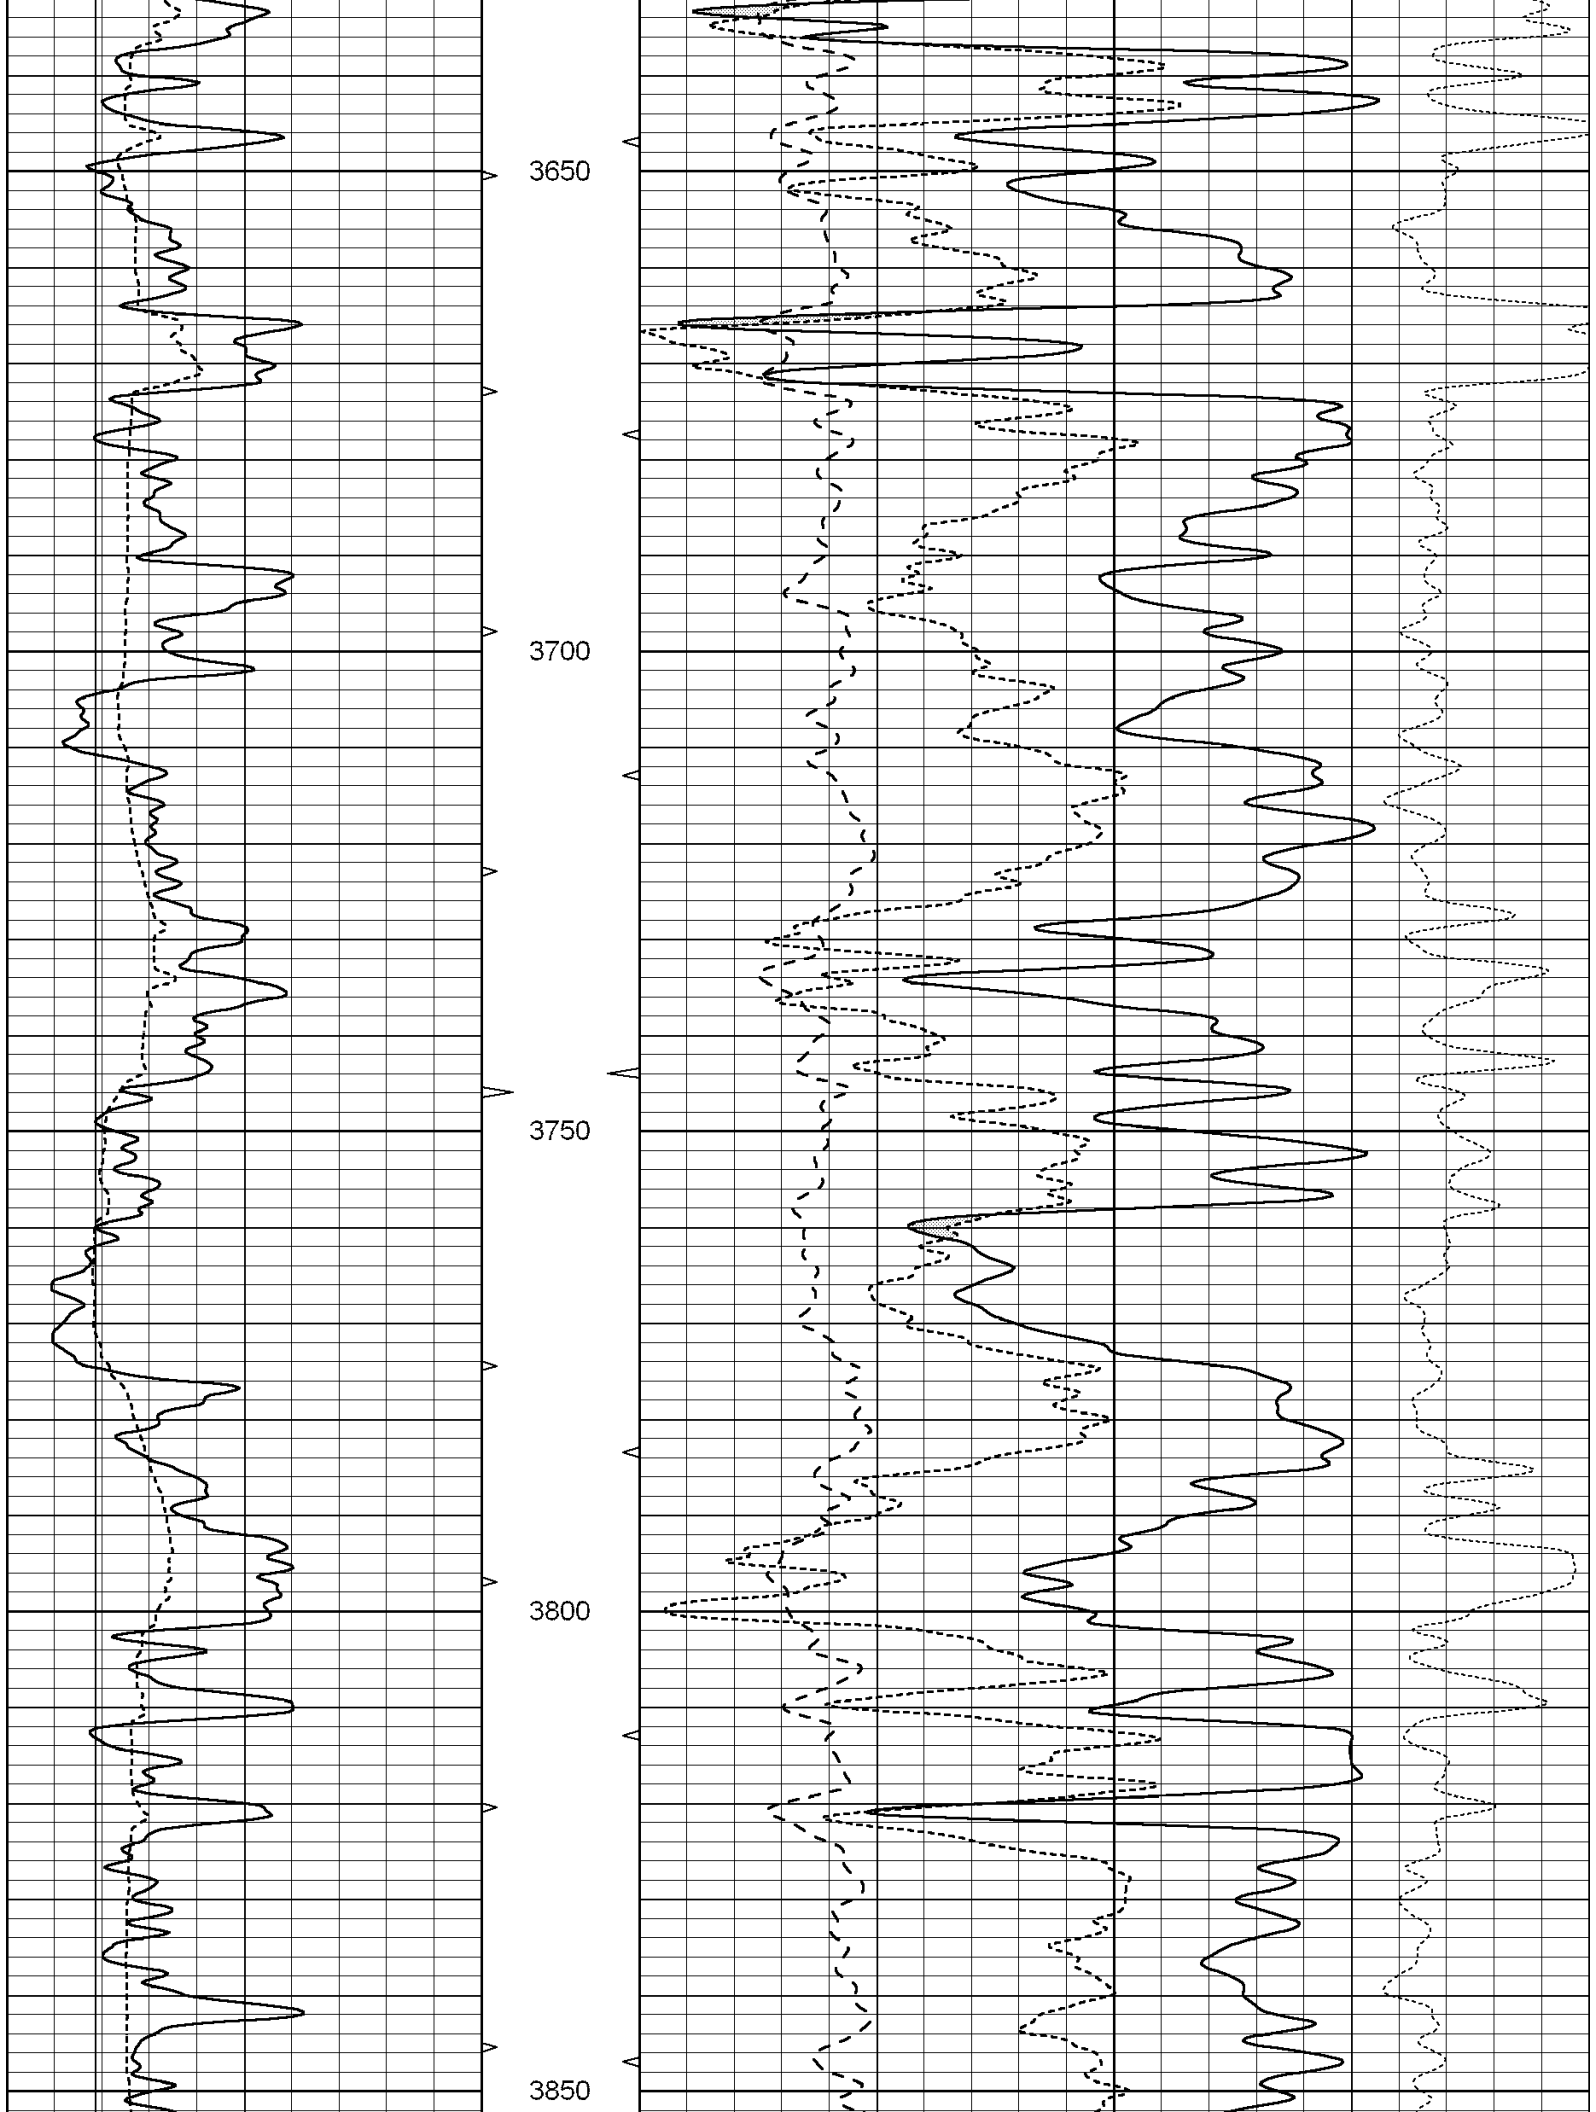


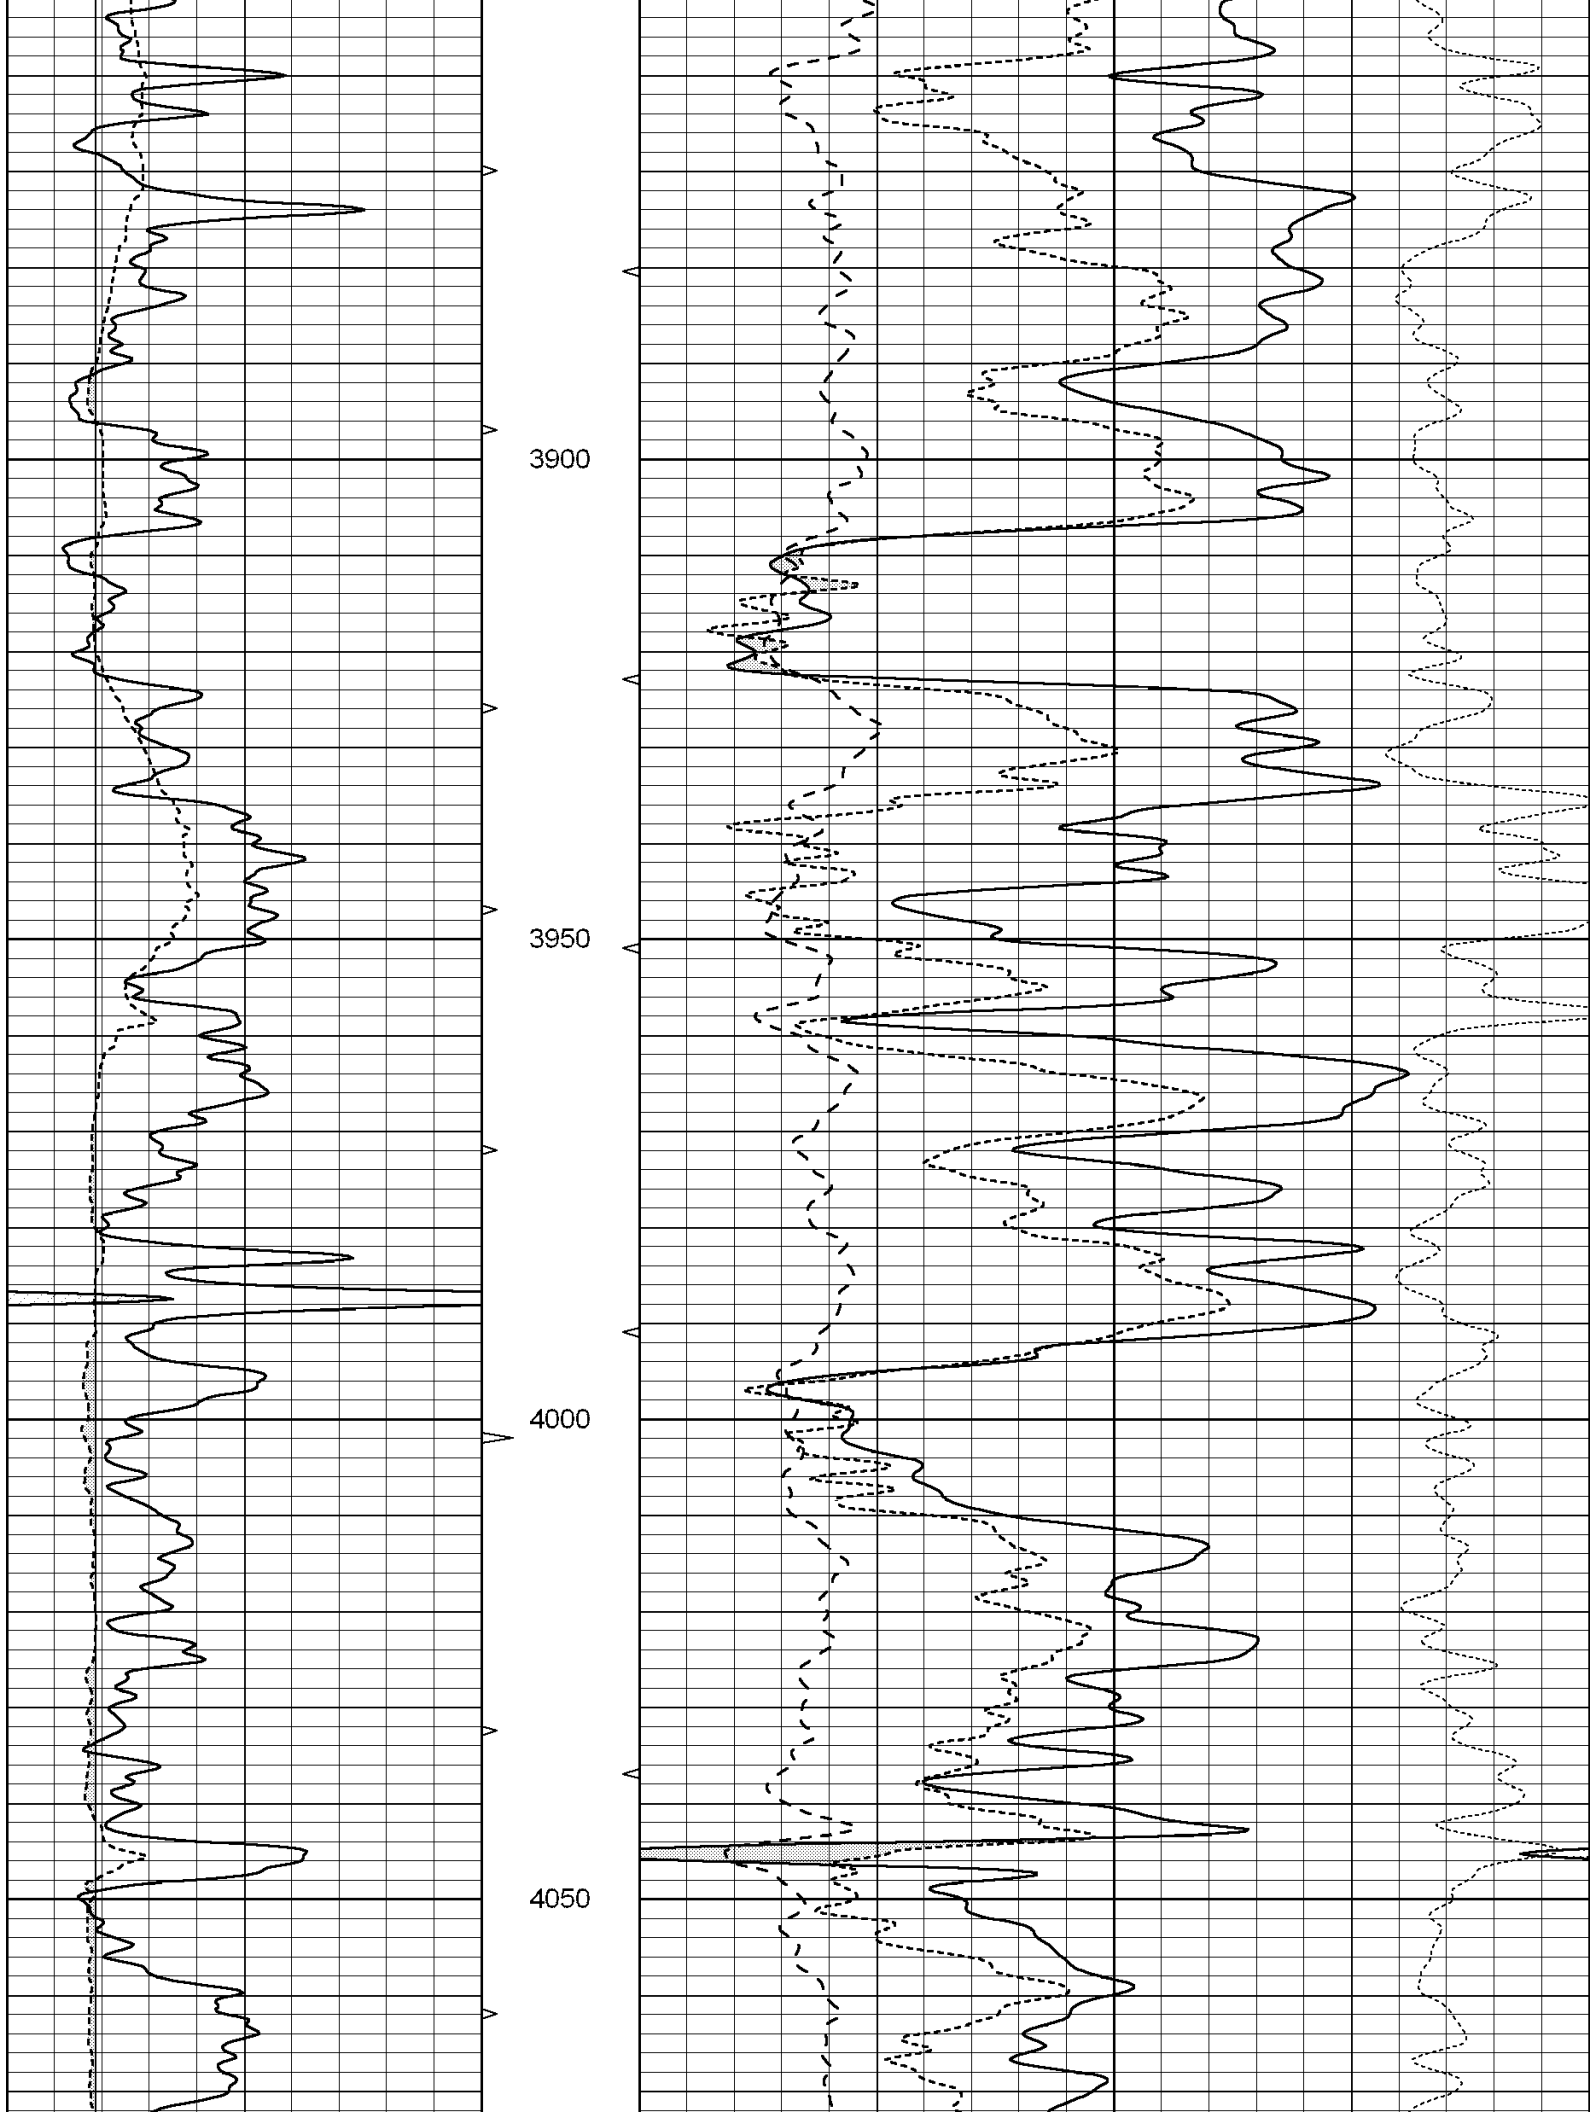


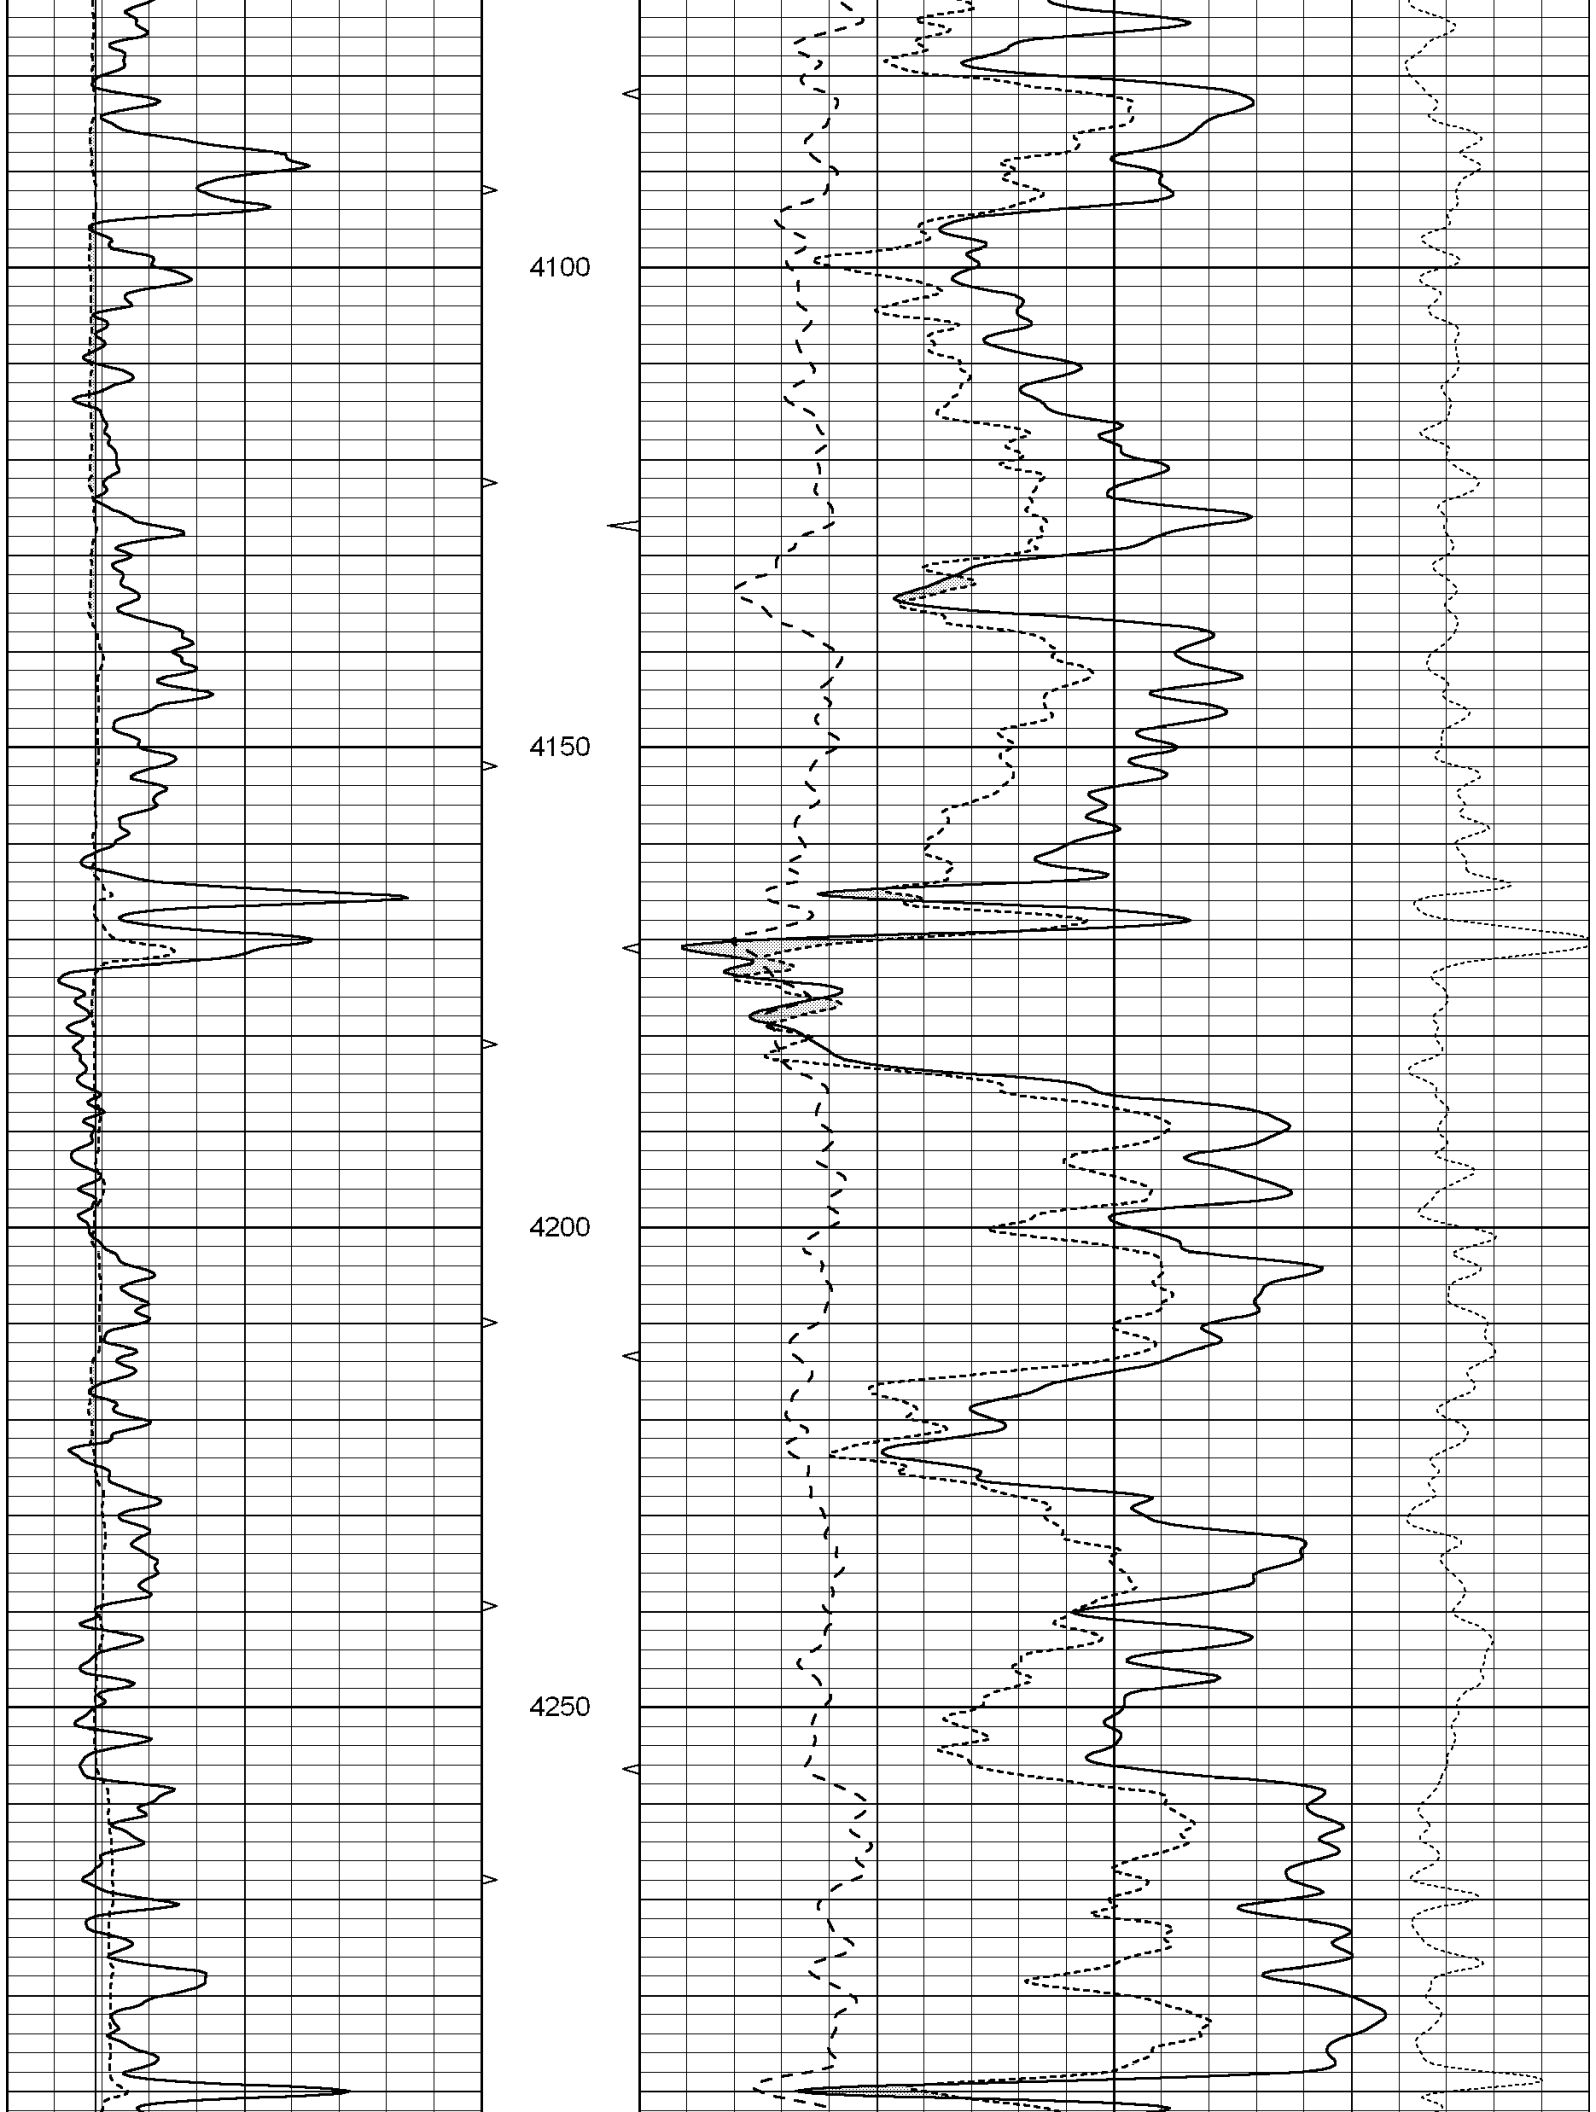


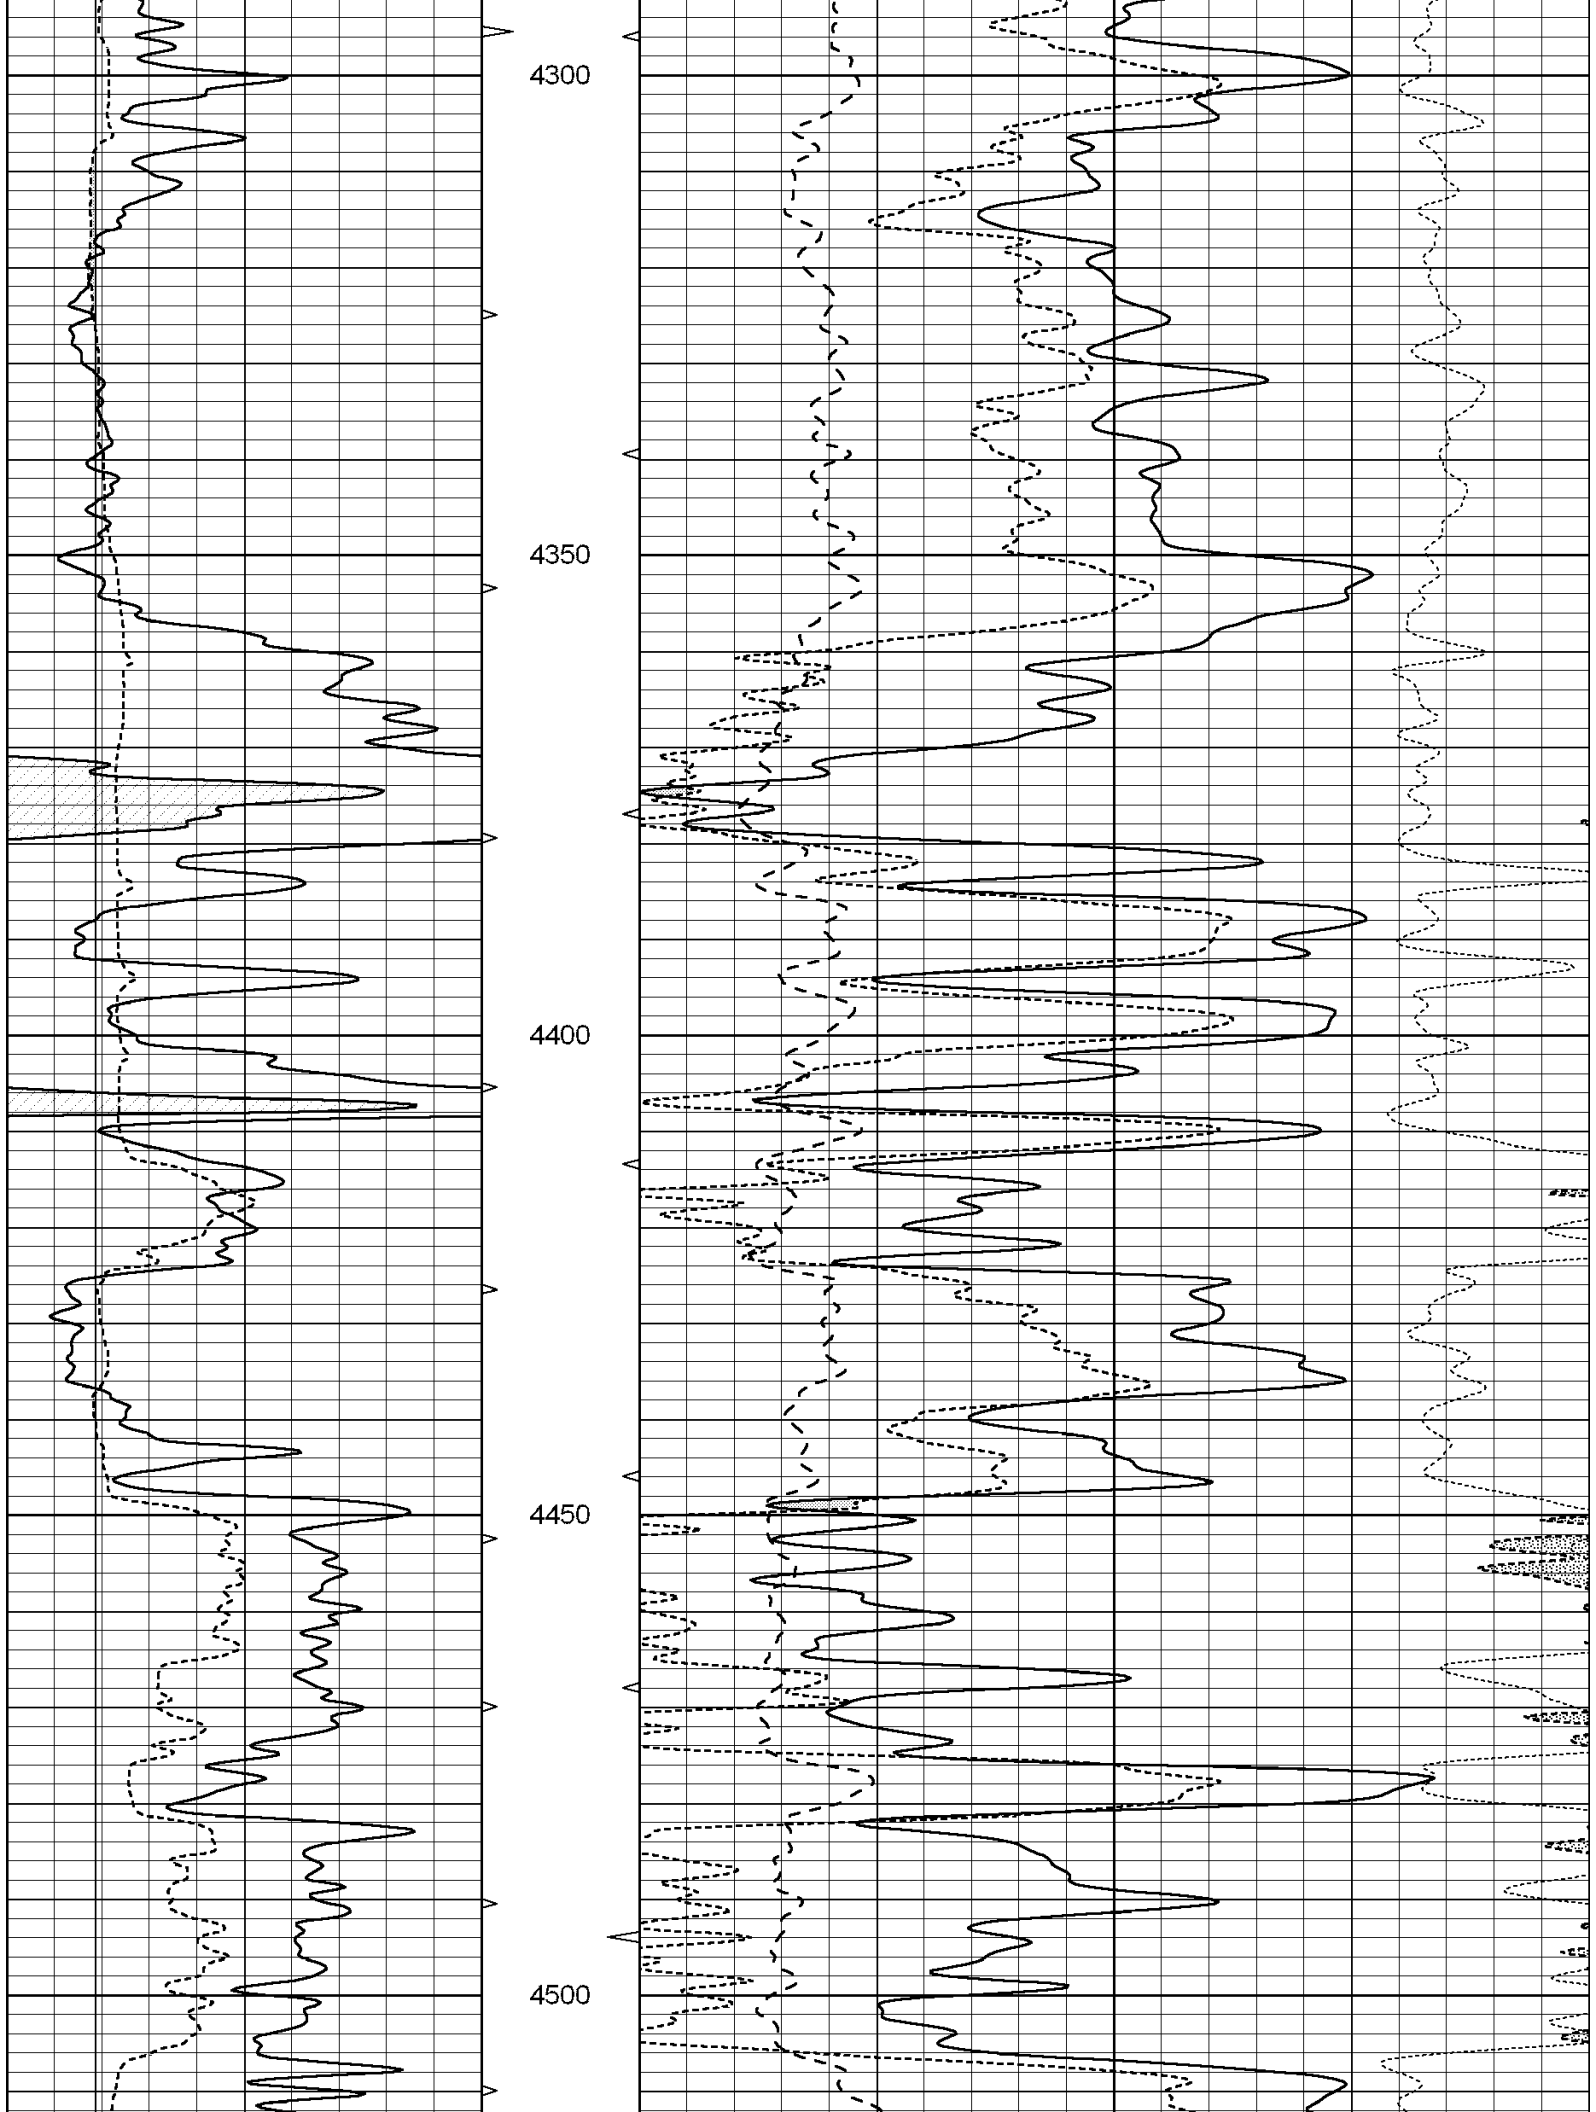


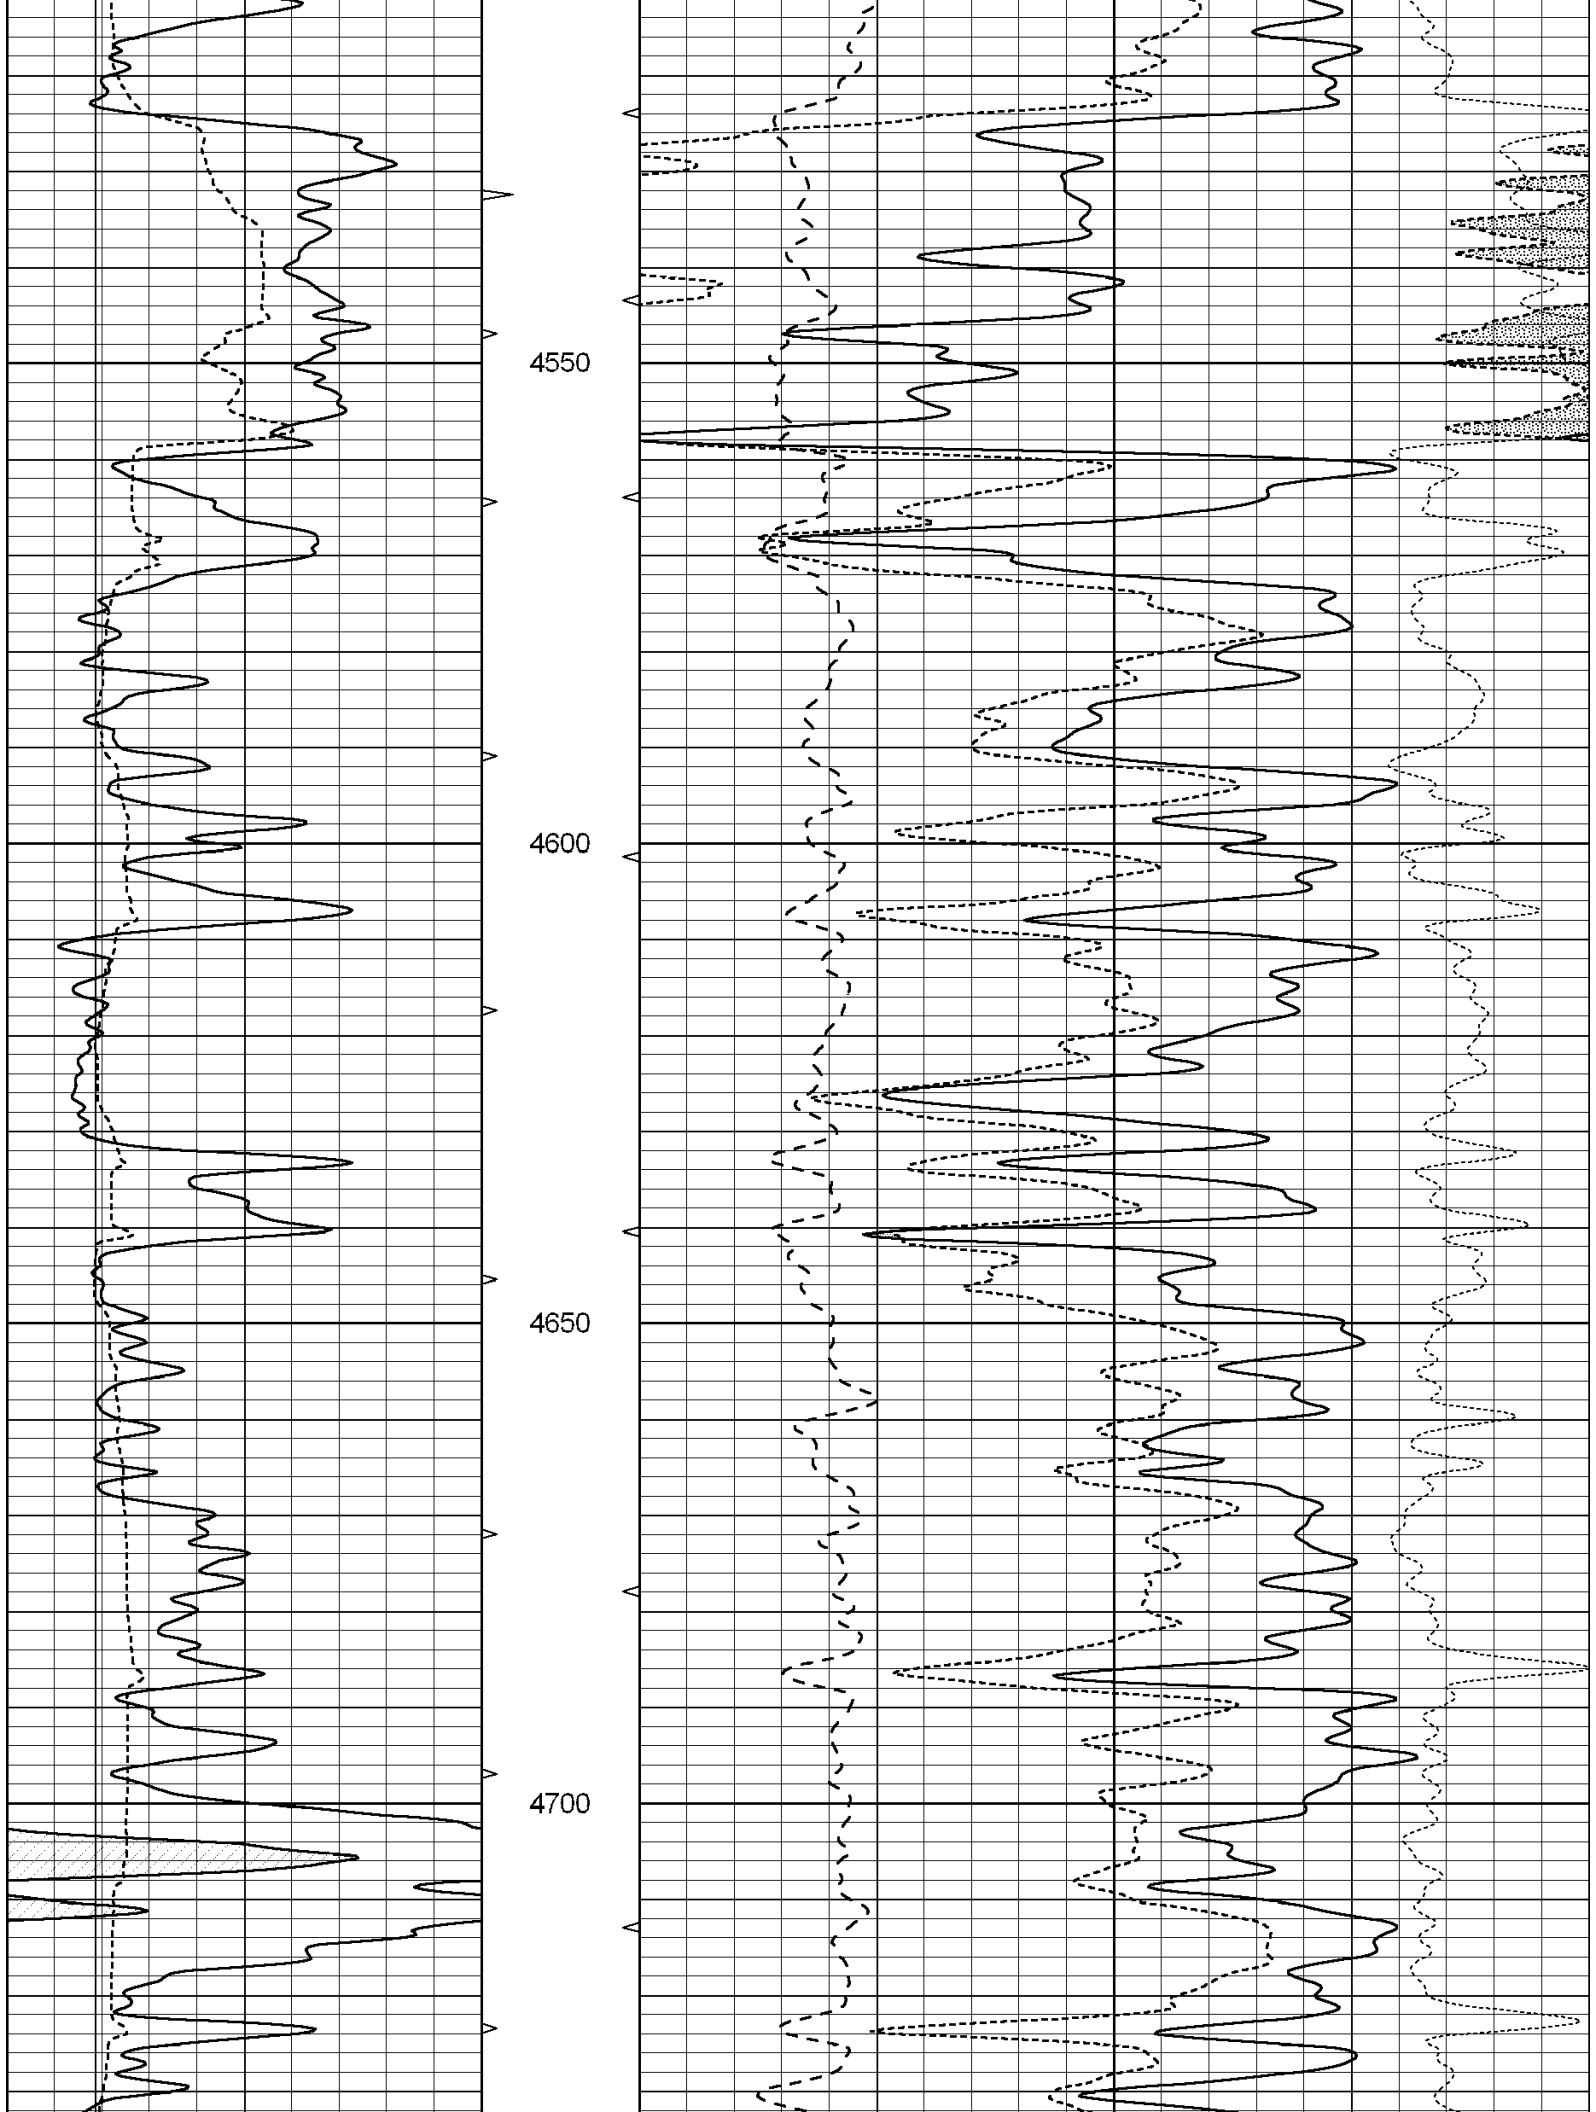

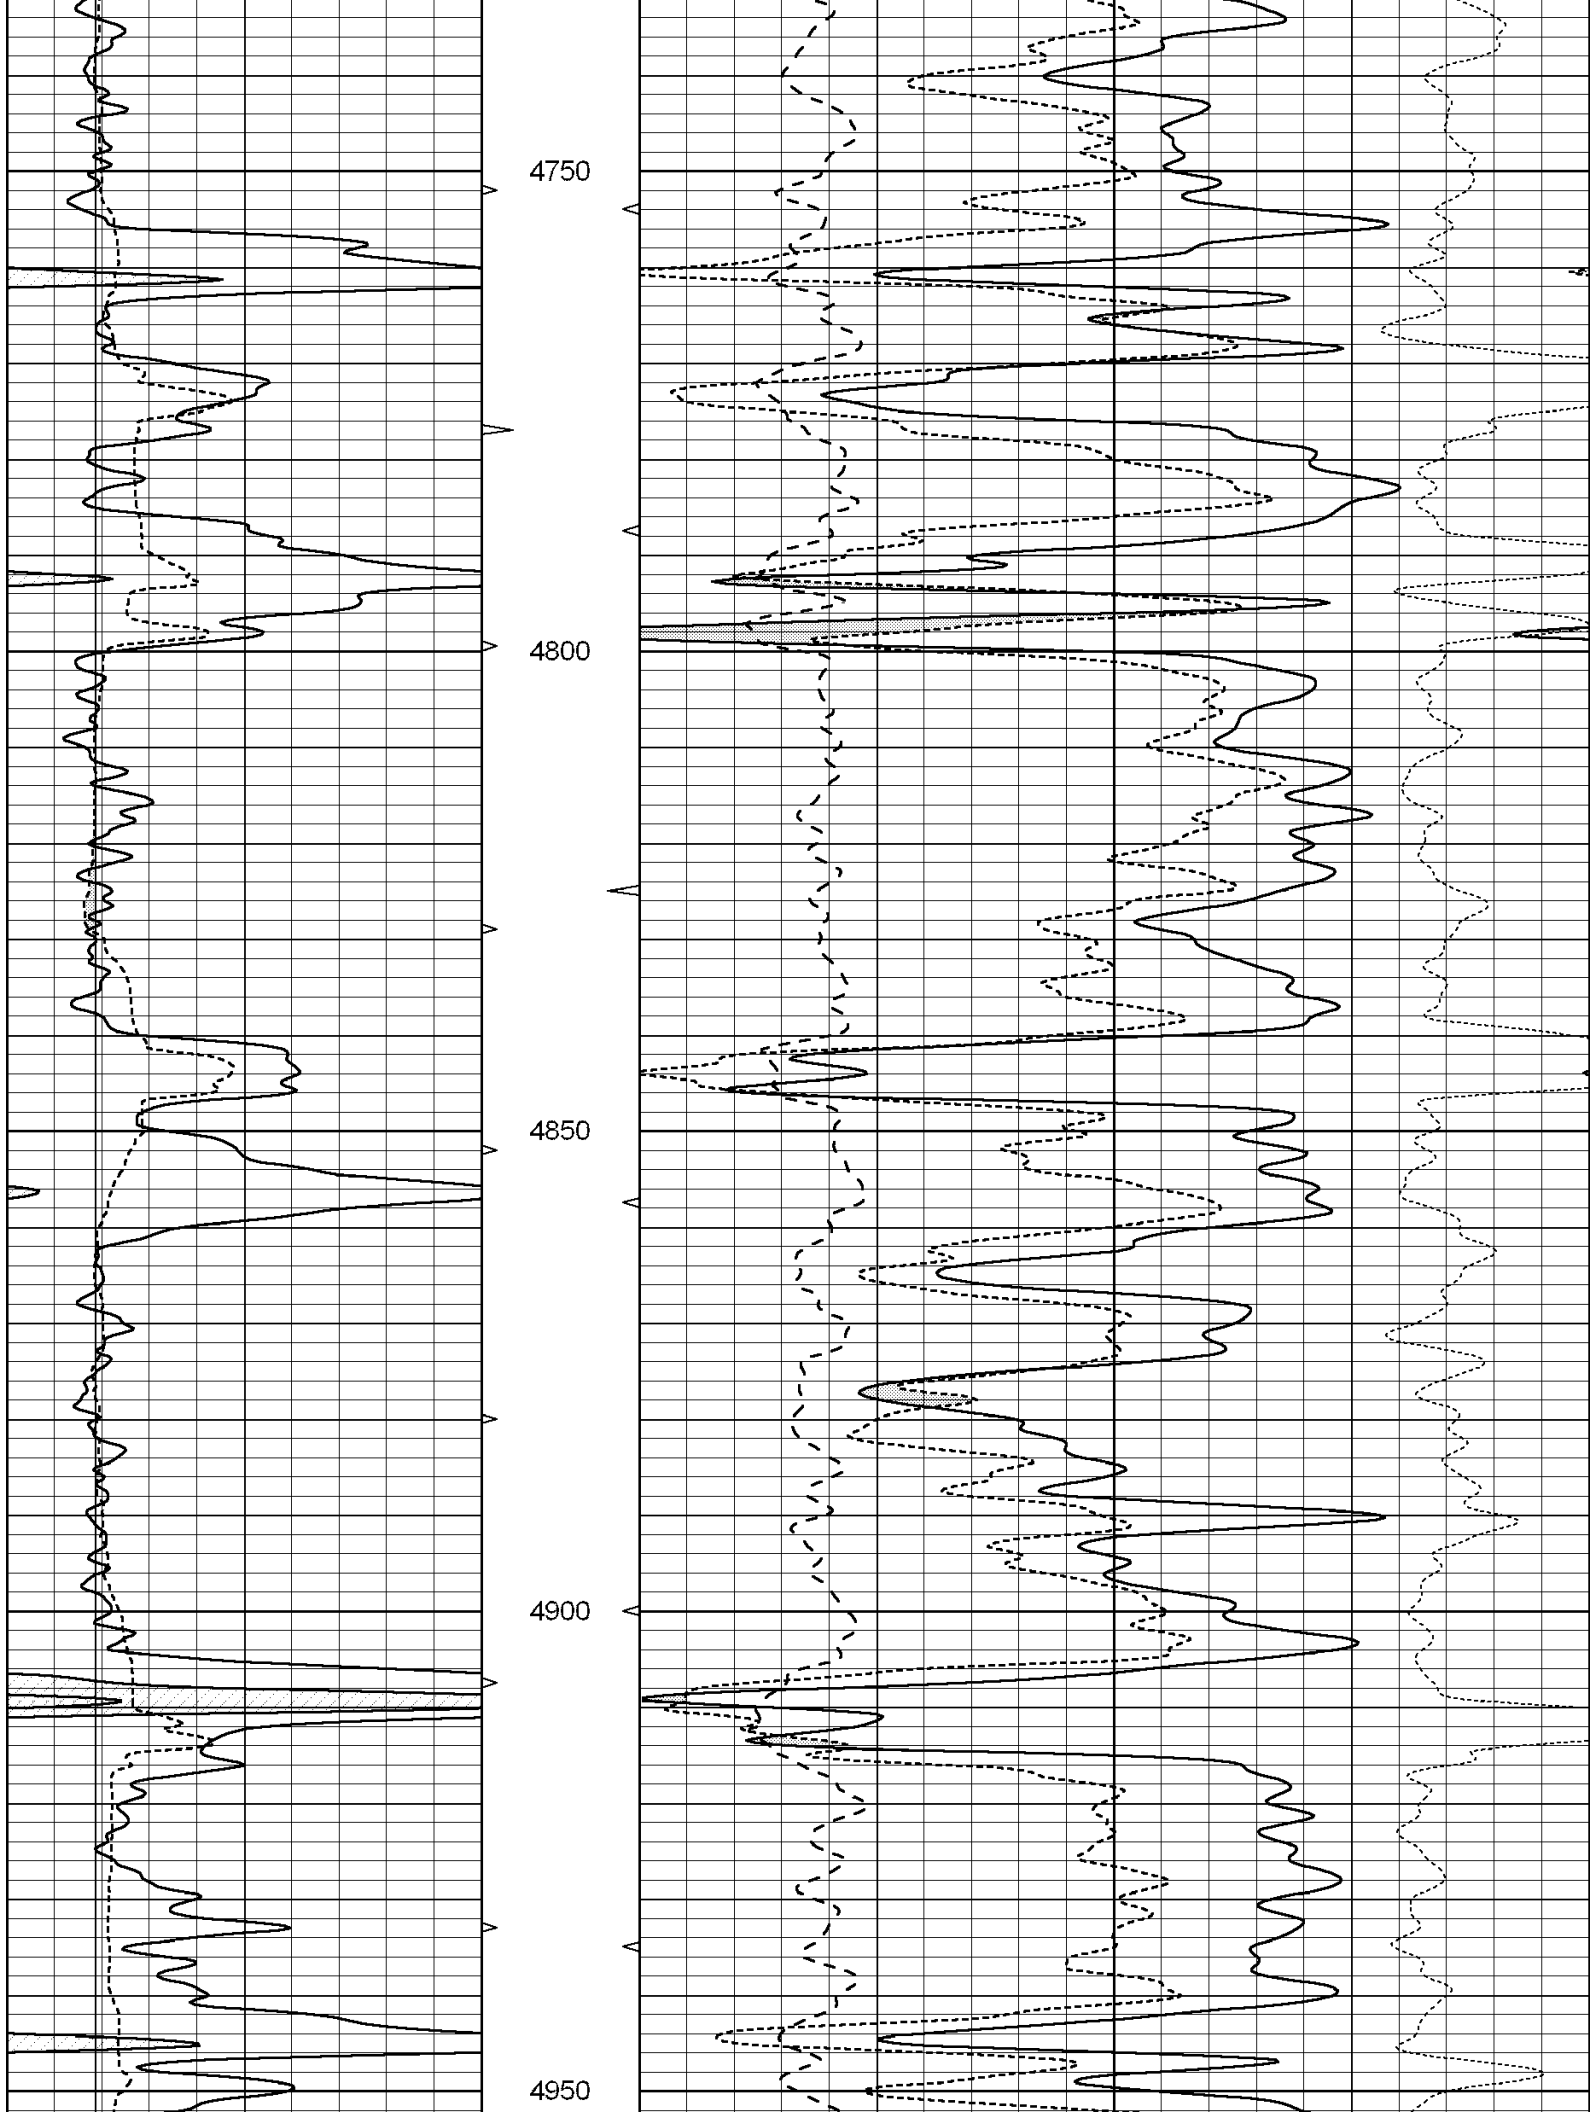

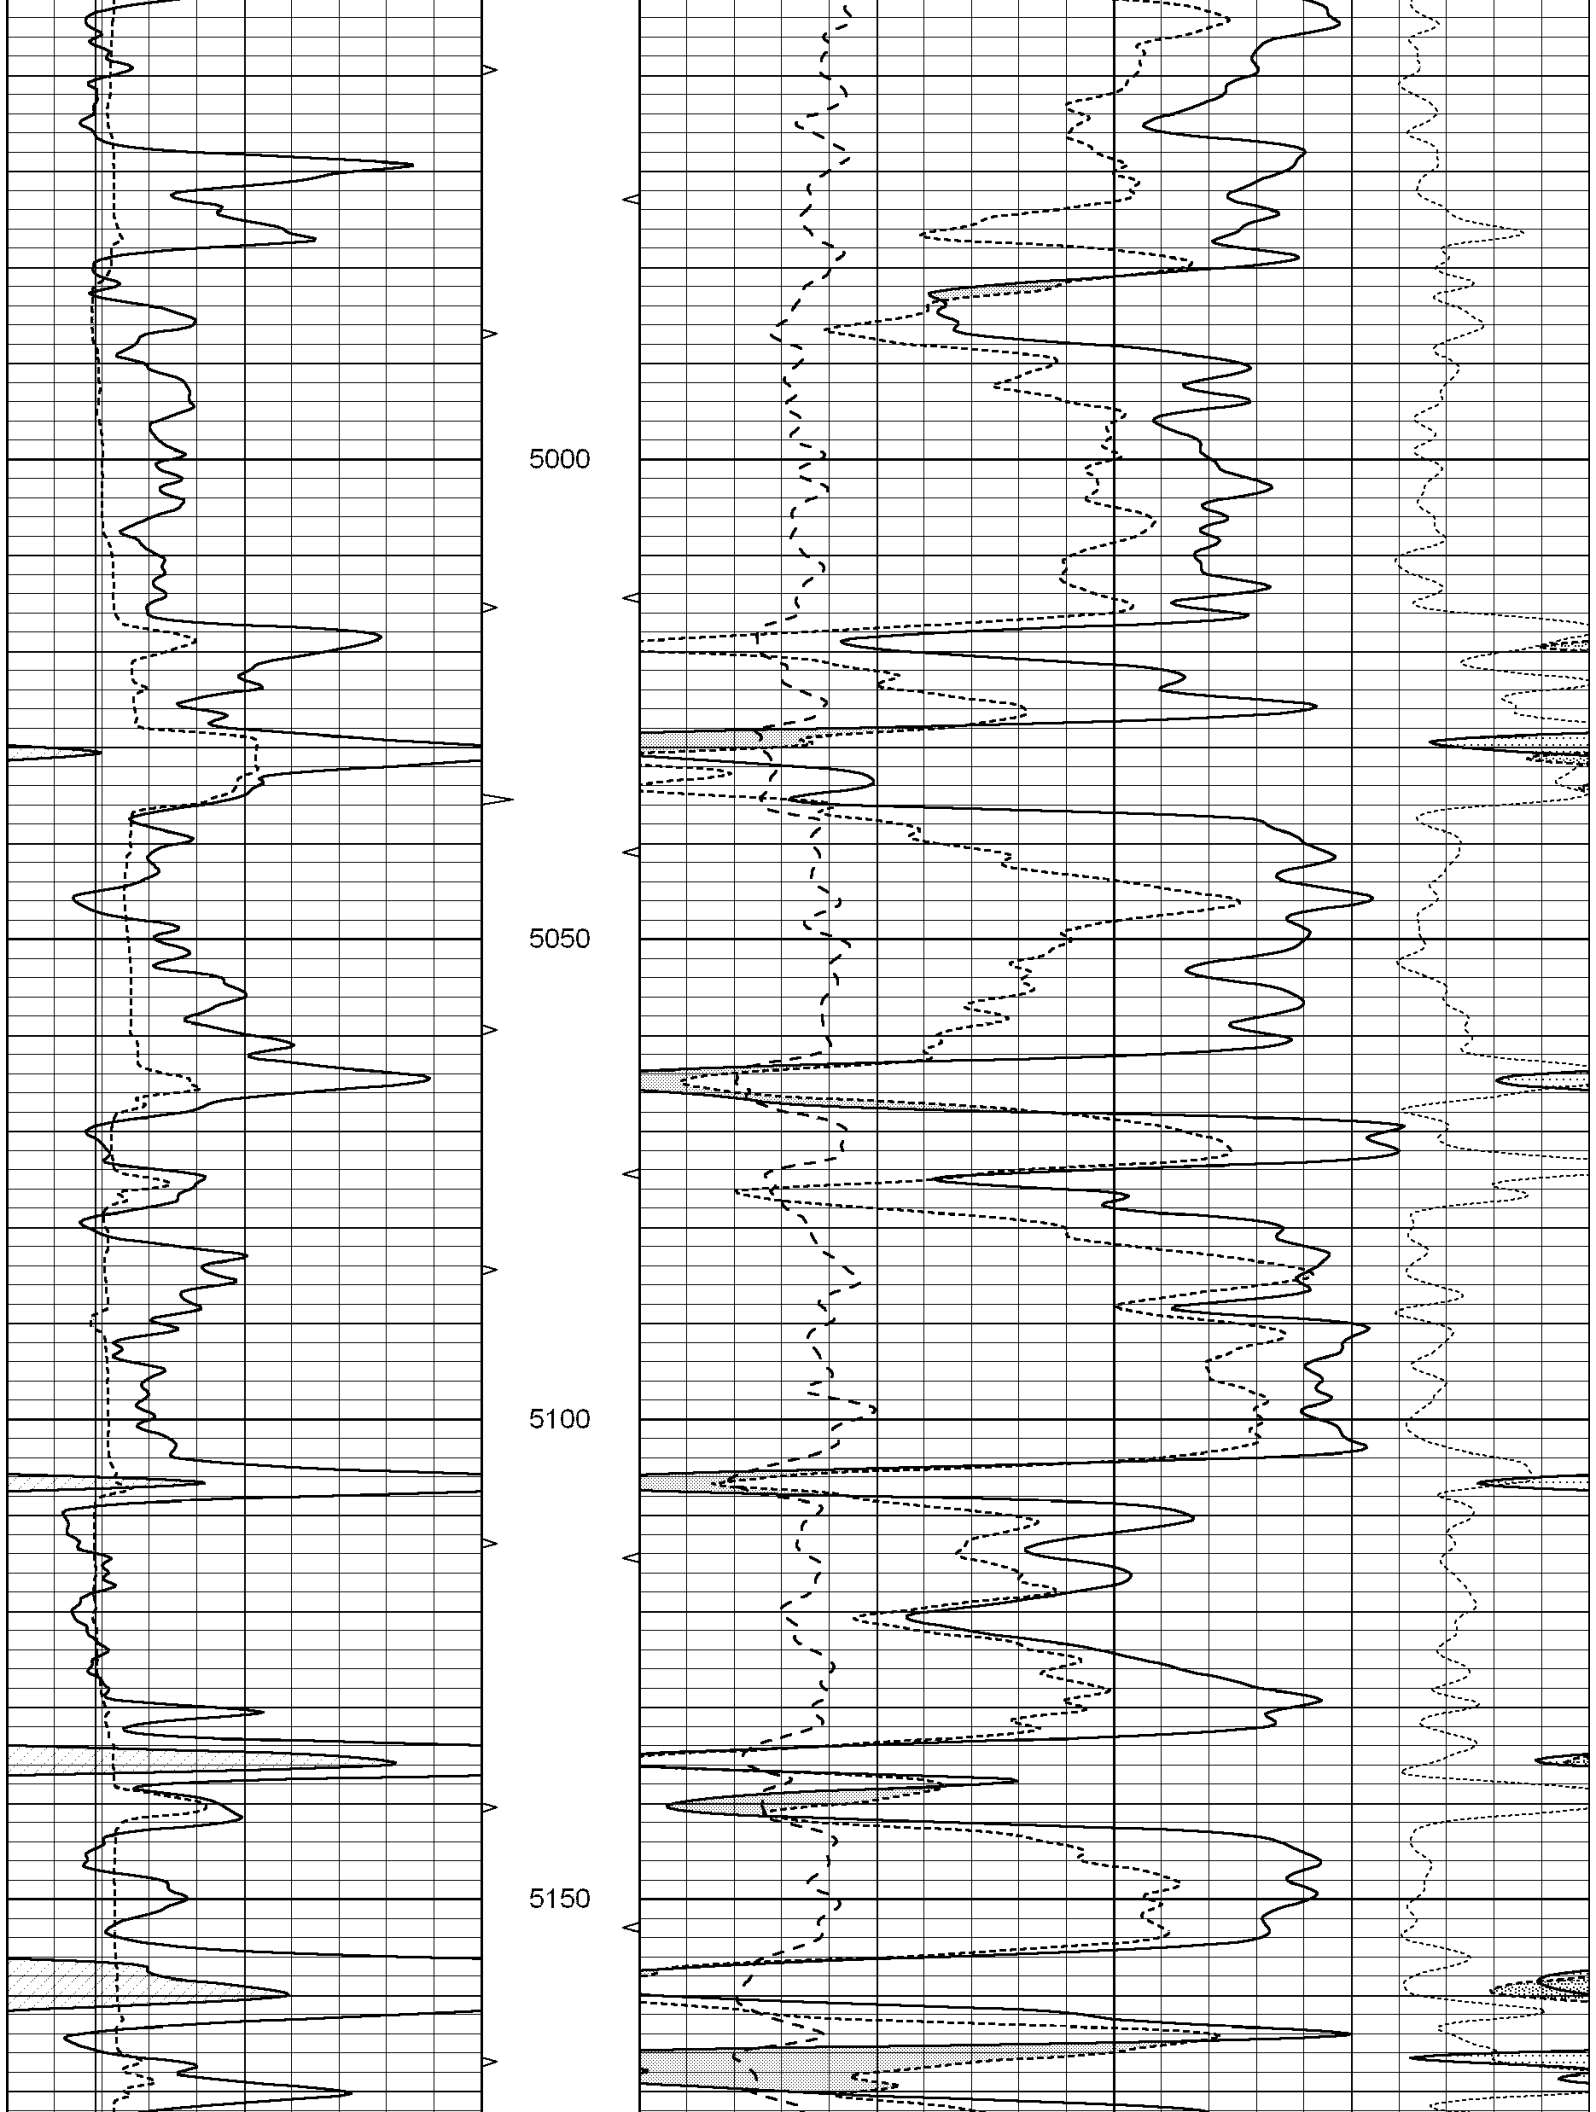

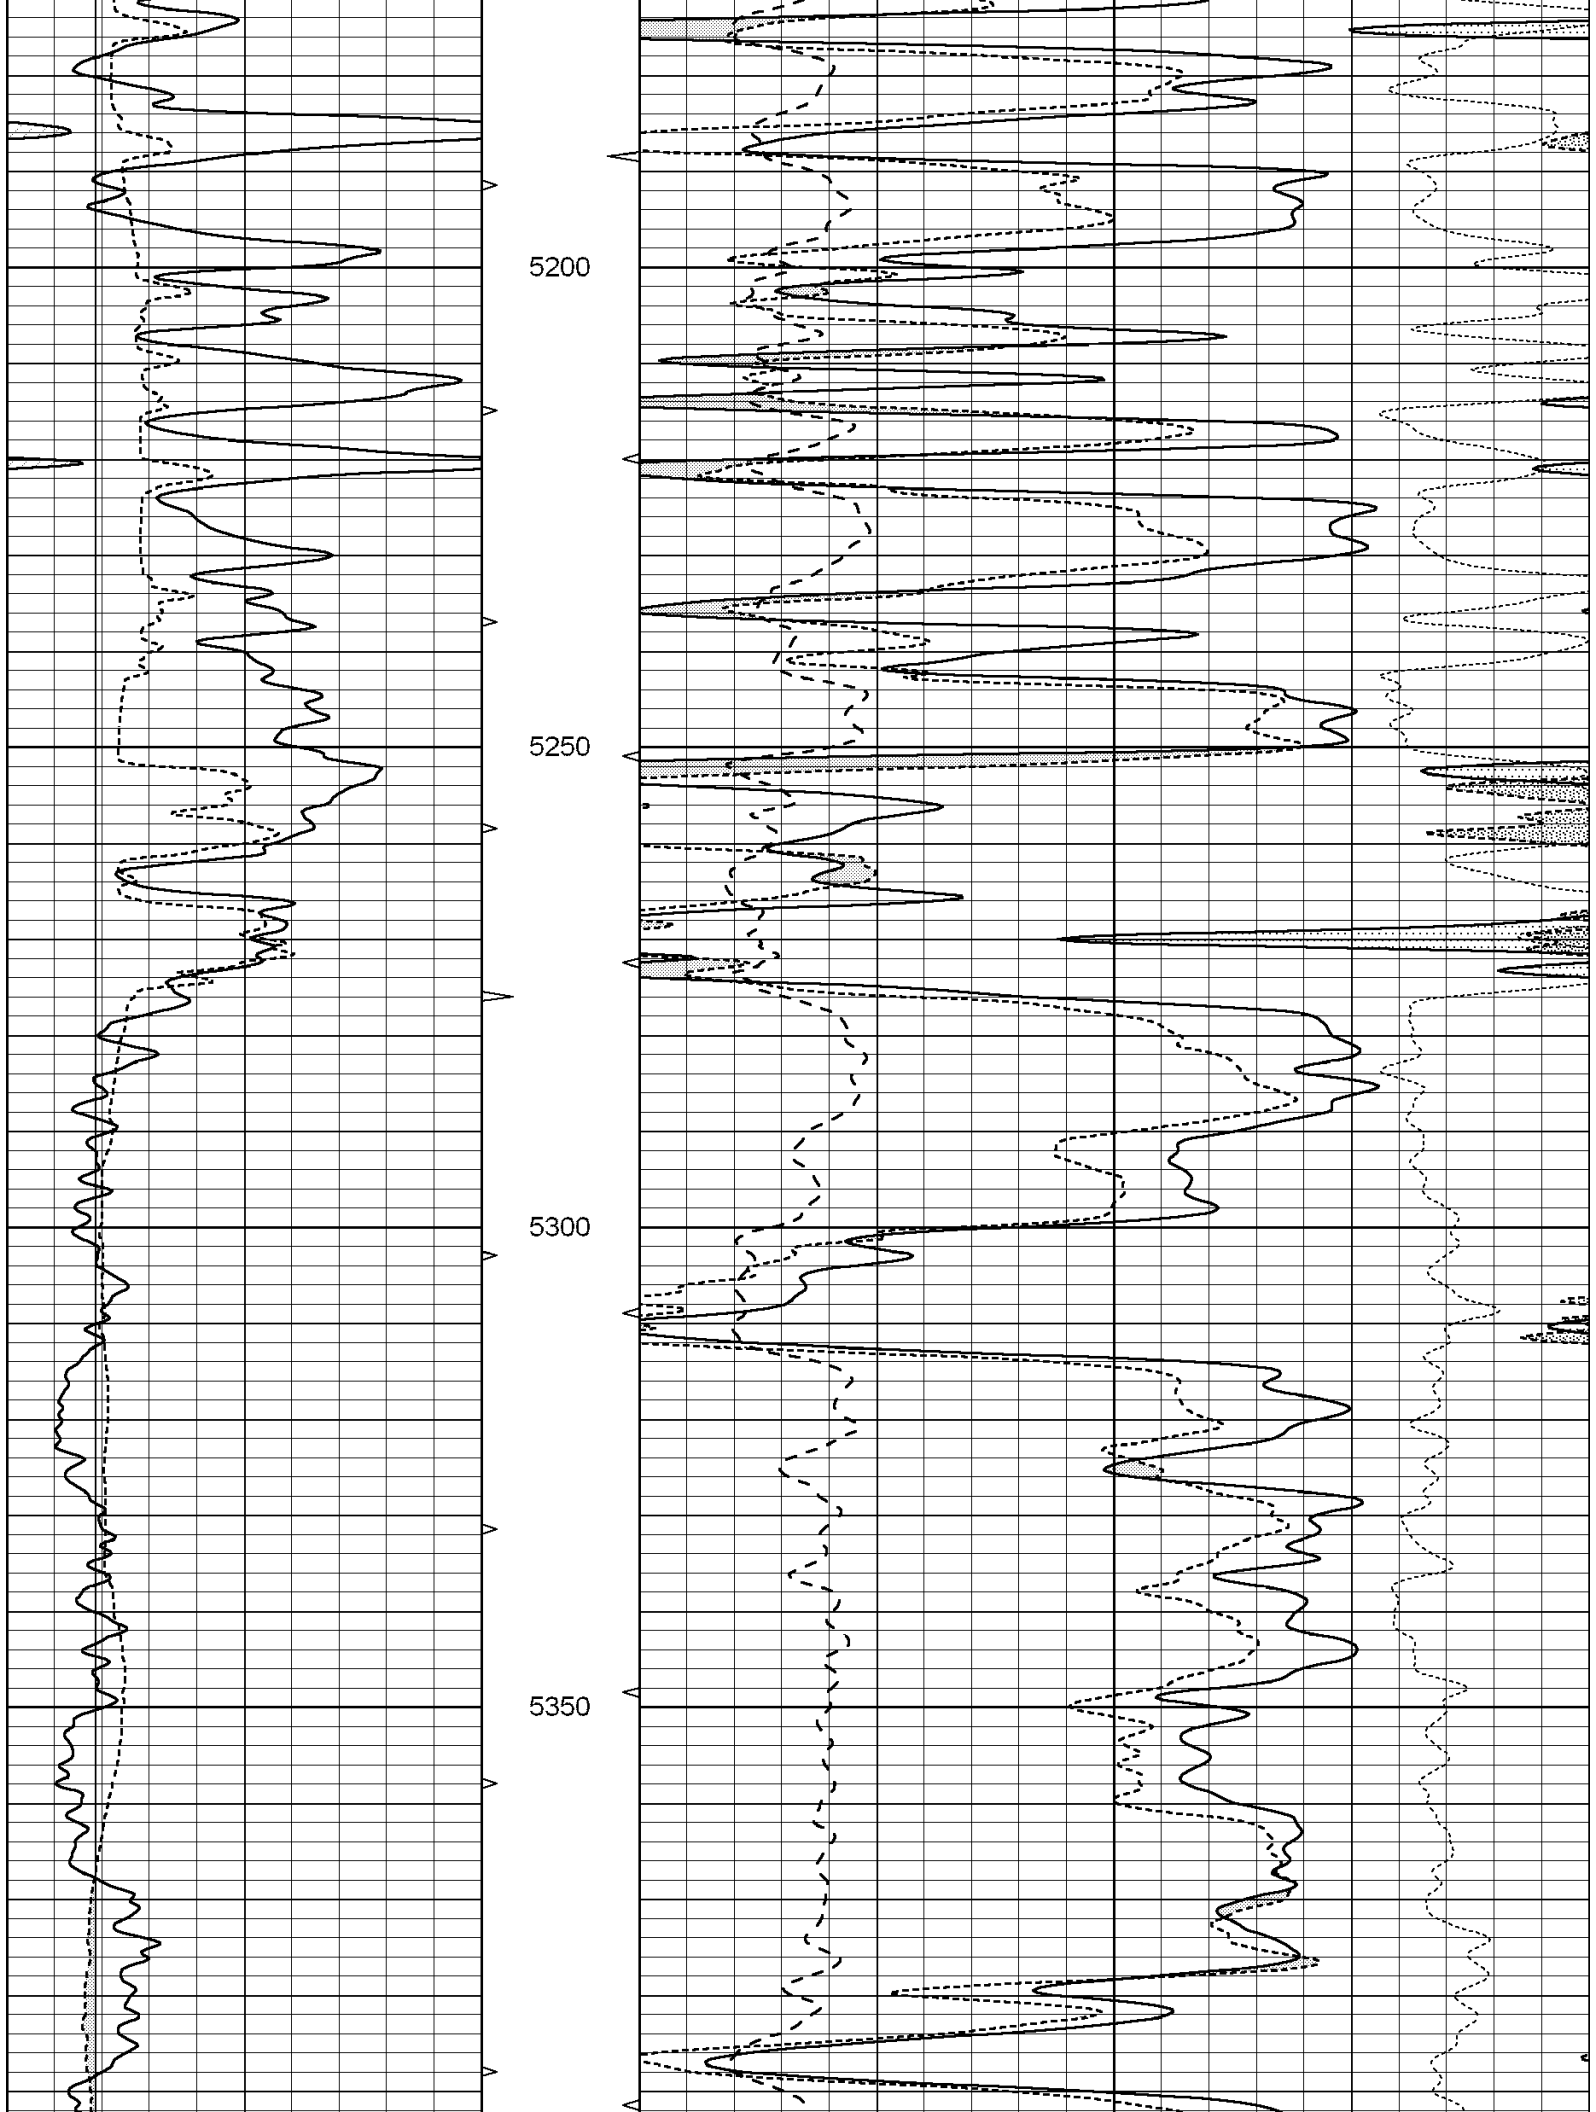

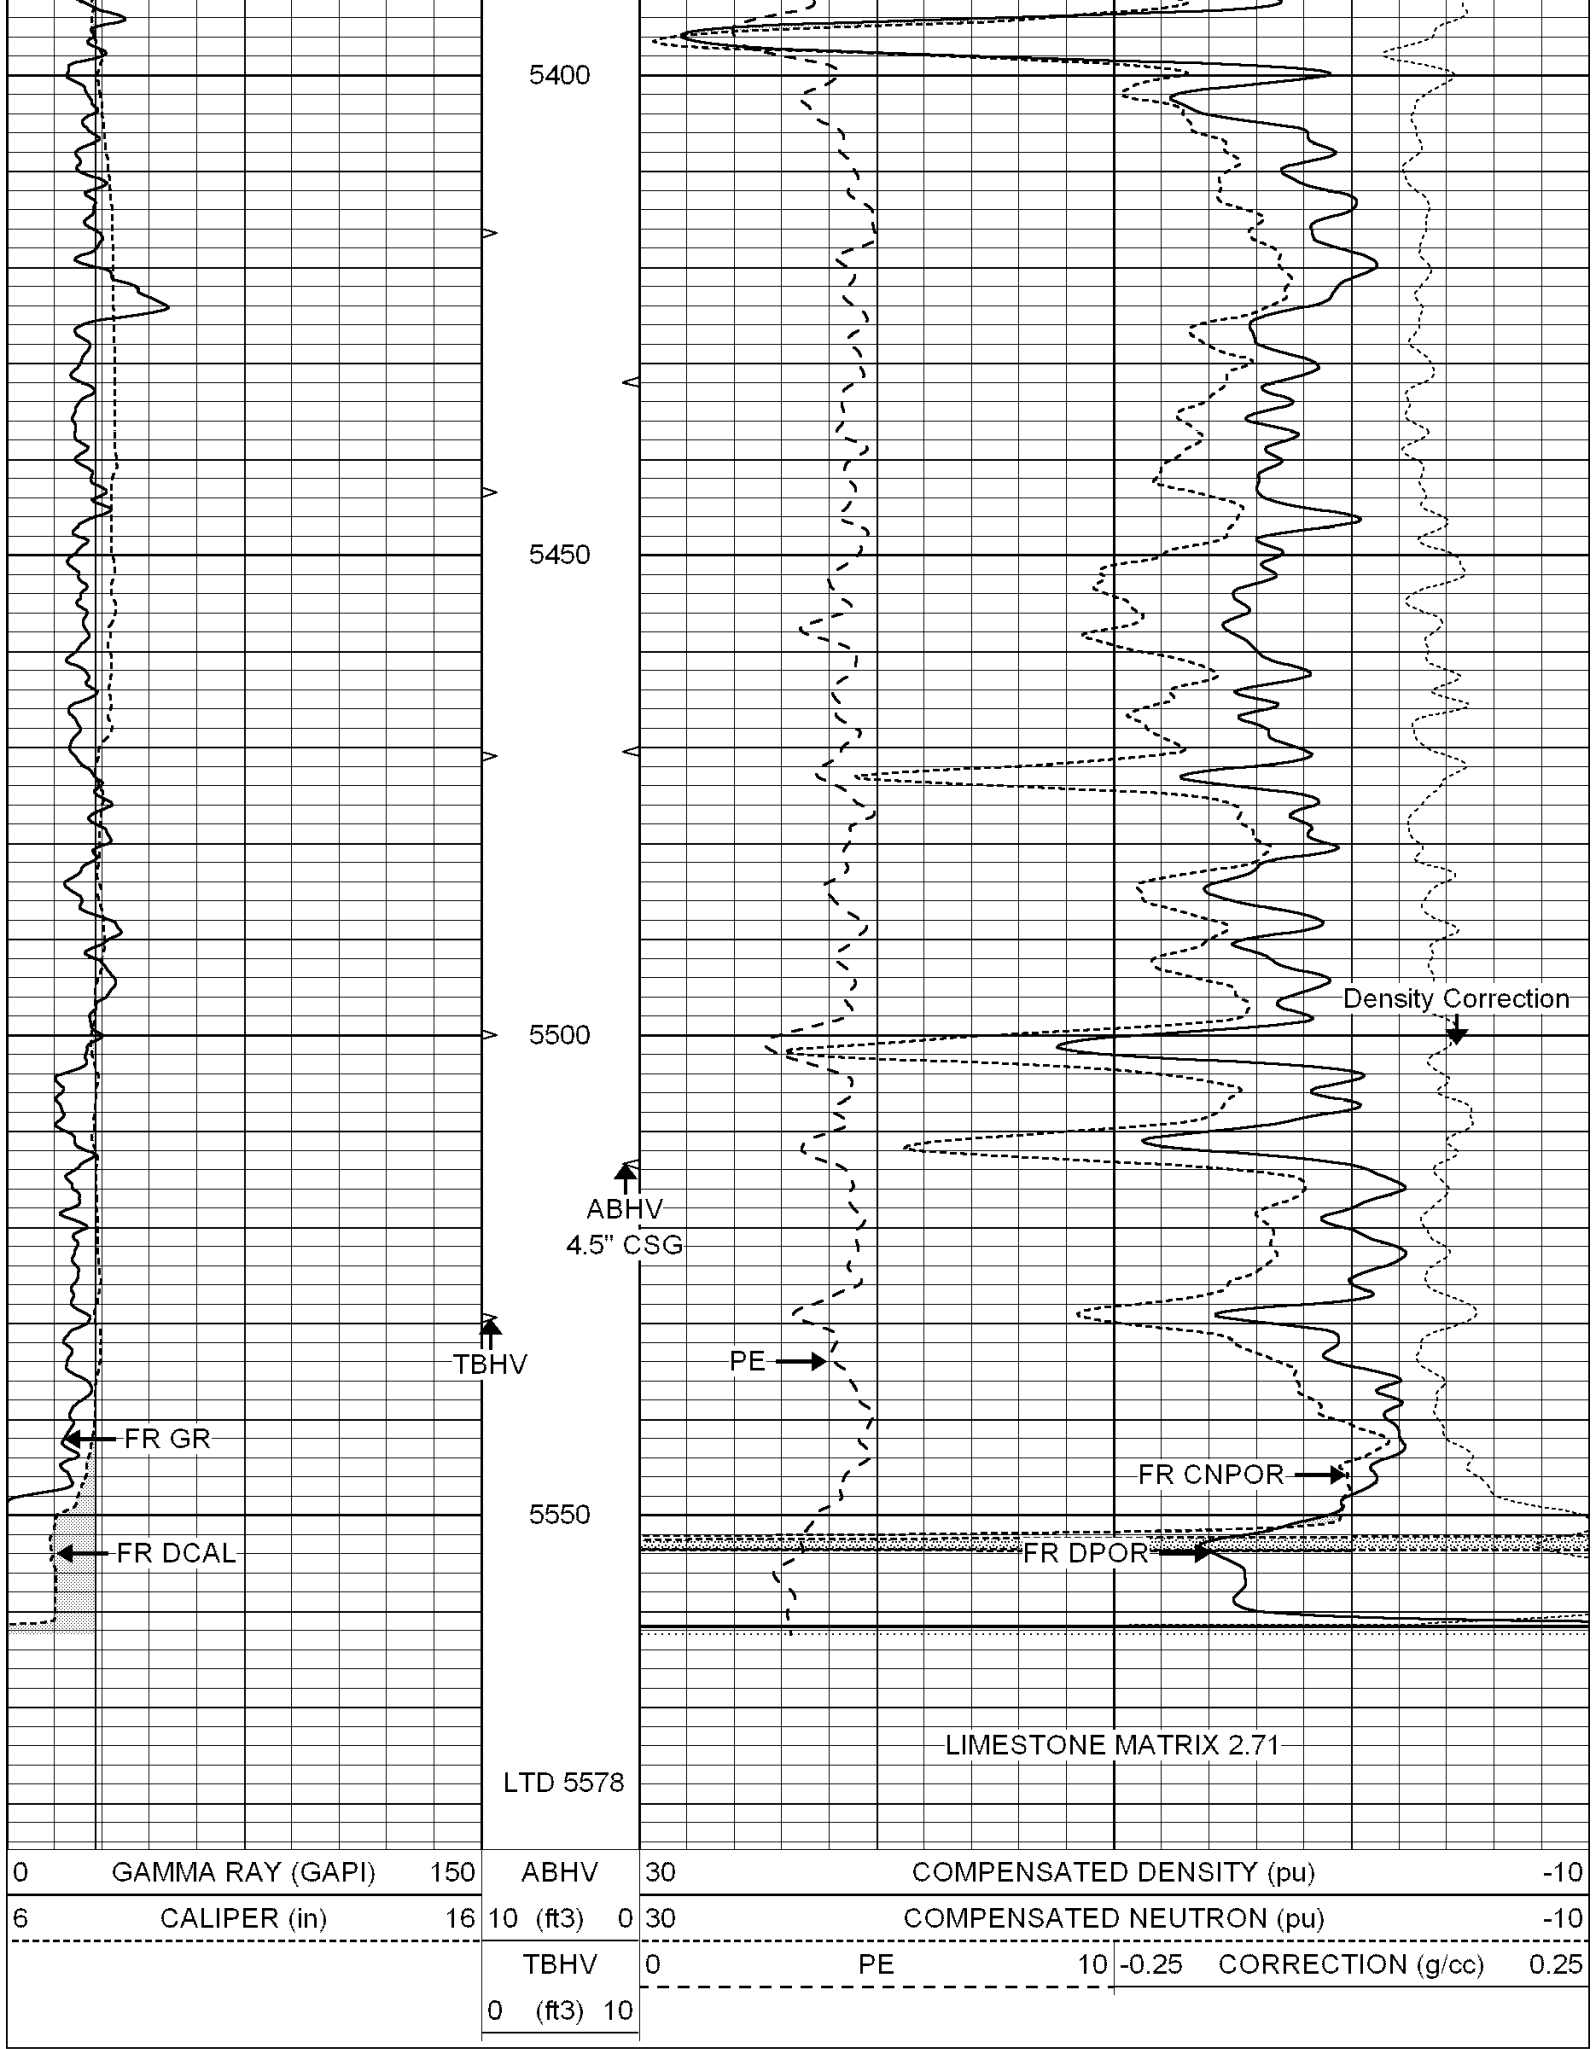




SUPERIOR


Hays,
Kansas

REPEAT SECTION

Database File: 004084pe.db
Dataset Pathname: pass2.2
Presentation Format: _ldt_neu
Dataset Creation: Tue Jul 28 08:39:43 2009 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)	-10
			TBHV	0	PE	10 -0.25 CORRECTION (g/cc) 0.25
			0 (ft3) 10			

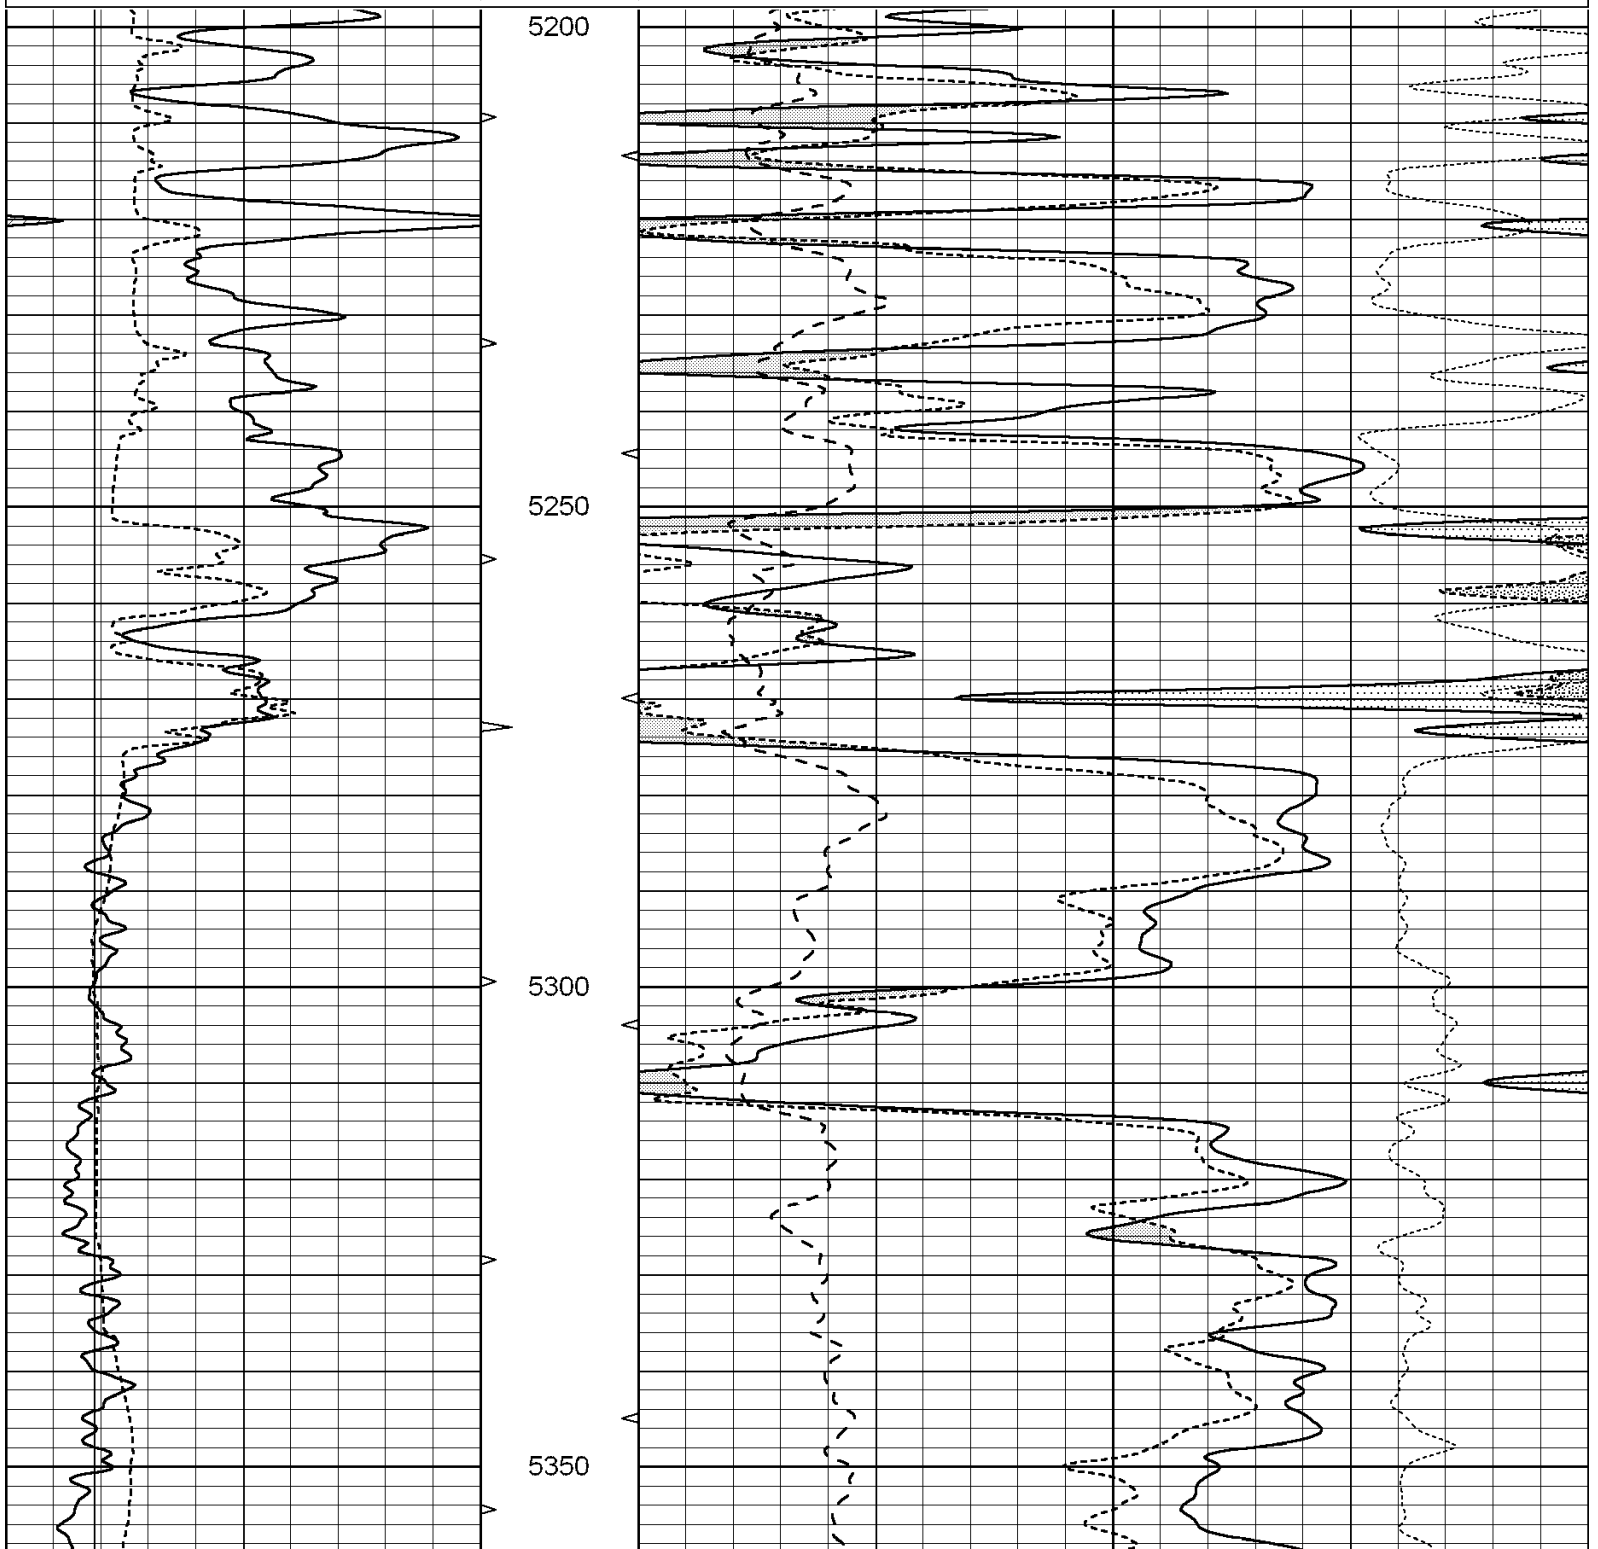

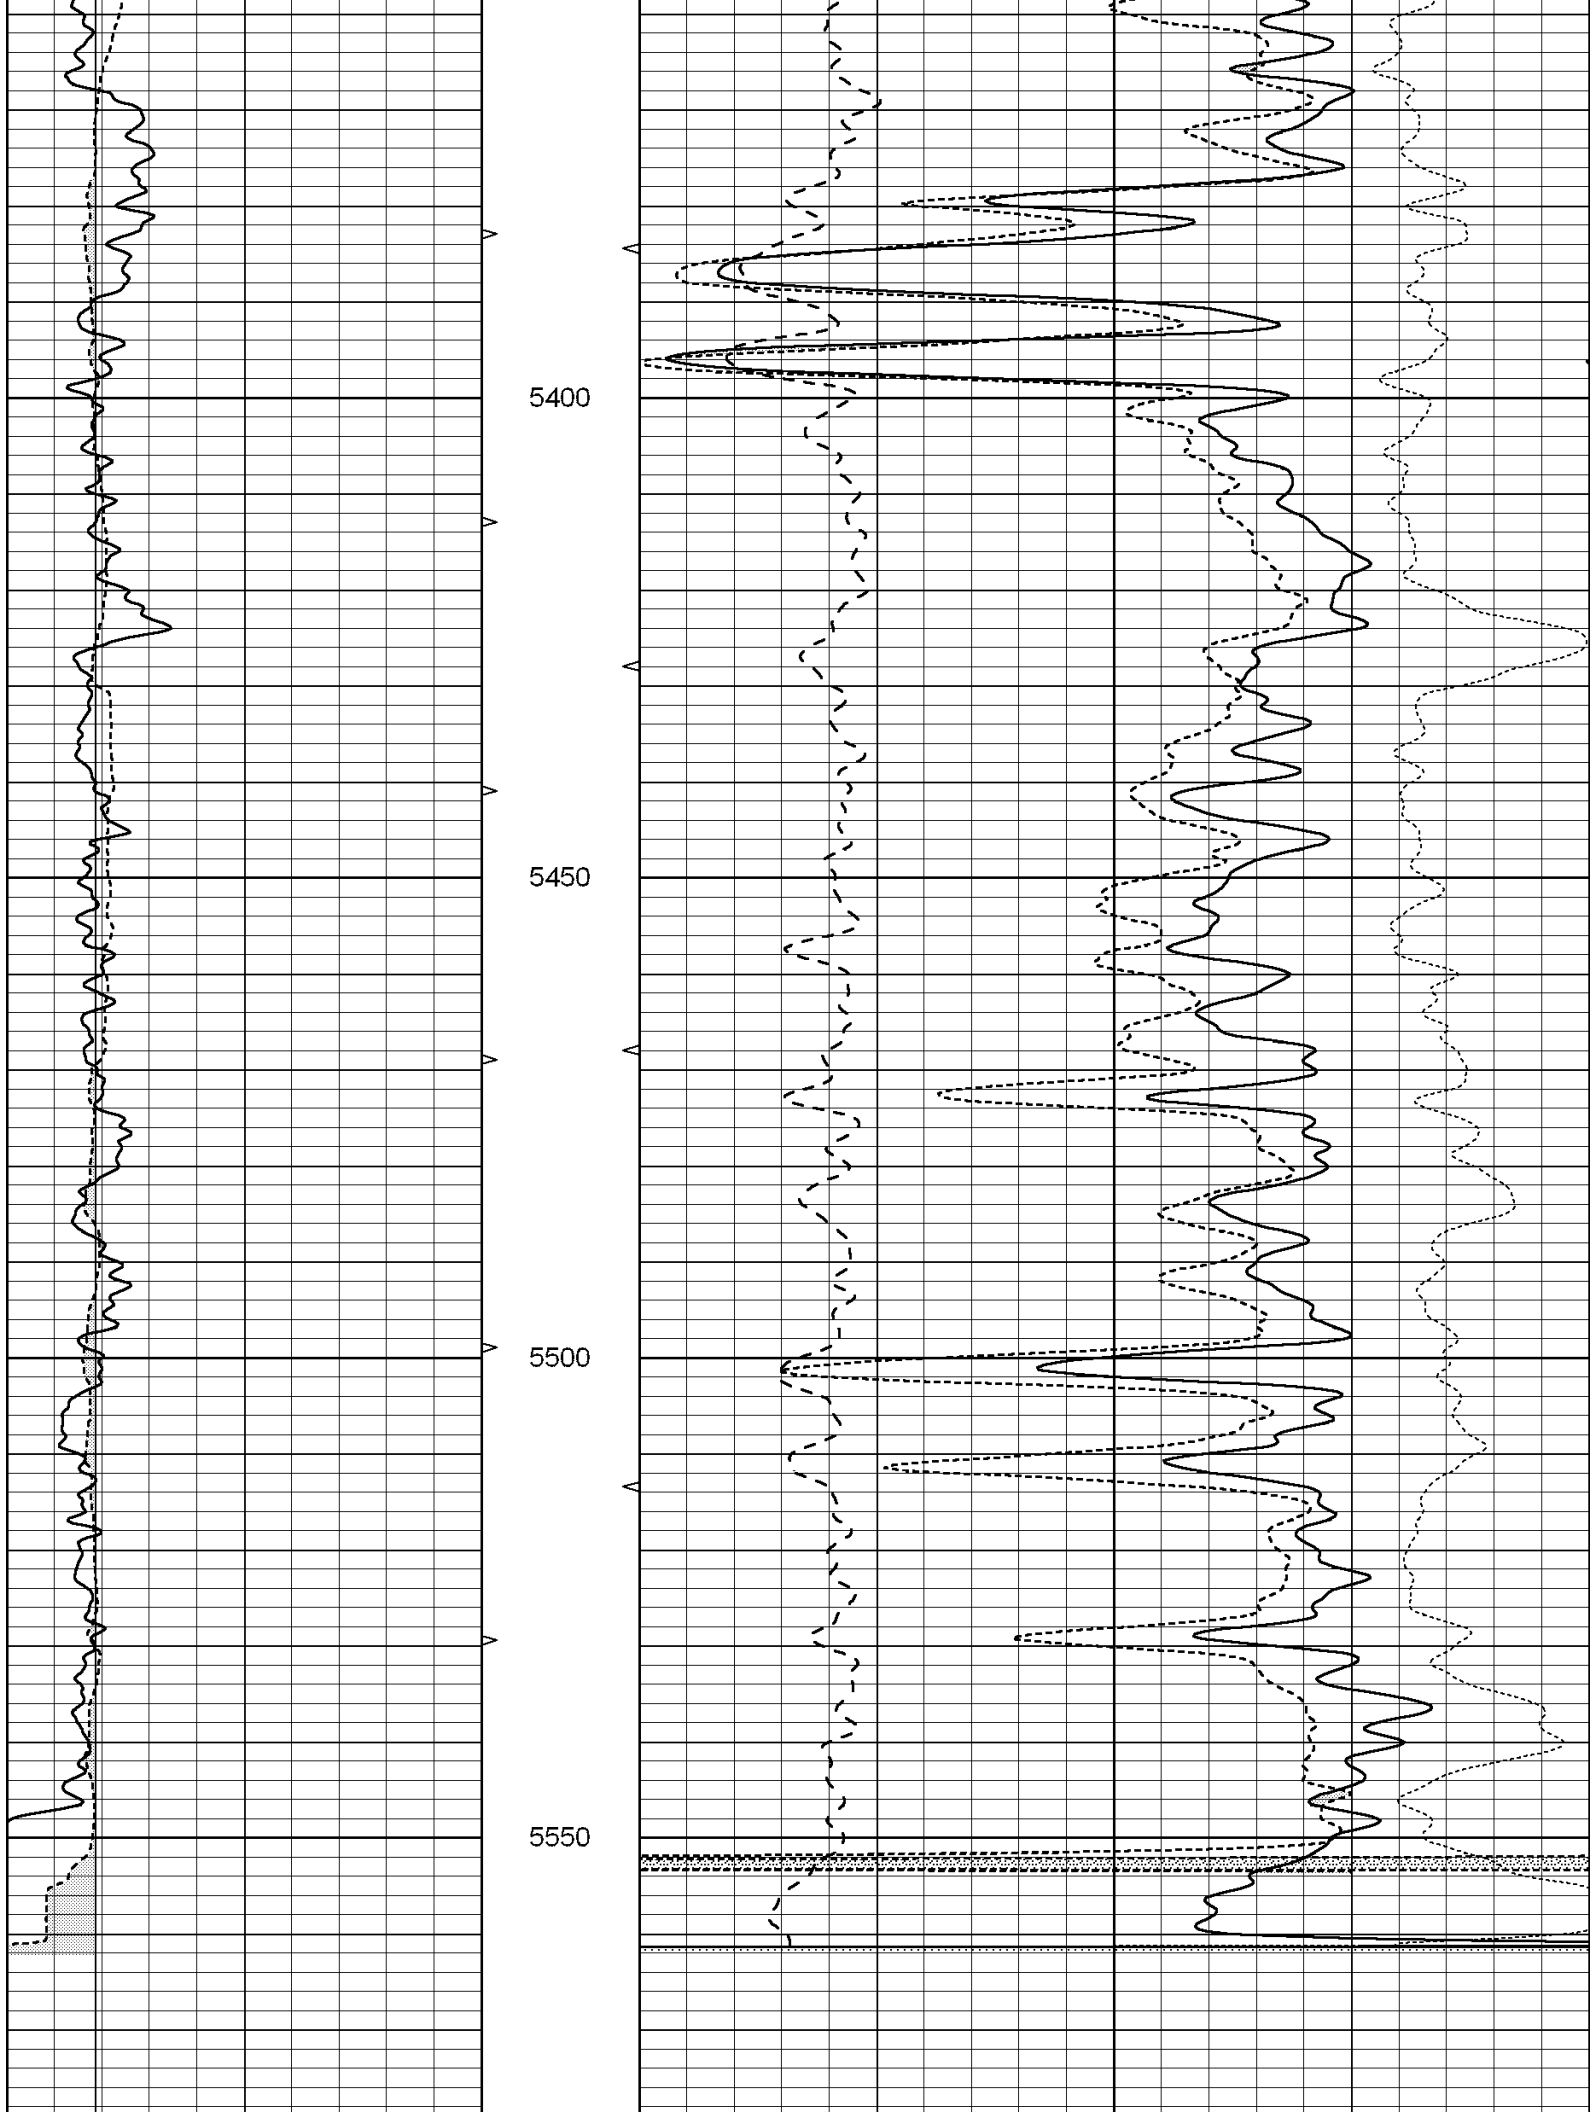

[illegible]

Window 4	231.4	231.6	226.7	230.8	cps
Long Space	0.0	6702.0	1461.7	7595.9	cps
Short Space	1.2	1433.6	959.4	1568.6	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	
Rib Angle	: 45.2	Rib Slope	: 1.008	Density/Spine Ratio	: 0.559
Spine Angle	: 75.2	Spine Slope	: 3.791	Spine Intercept	: -18.7
Caliper	Readings	Reference			
Low Ref	3.1	8.0			
High Ref	5.4	14.0			
	Gain: 2.5		Offset: 0.2		
Compensated Neutron Calibration Report					
		Serial Number:	6I		
		Tool Model:	G		
CALIBRATION					
Detector	Readings	Target	Normalization		
Short Space	1.00 cps	1.00 cps	1.0000		
Long Space	1.00 cps	1.00 cps	1.0000		
Gamma Ray Calibration Report					
Serial Number:	GR6				
Tool Model:	OPEN				
Performed:	Thu Jul 09 09:06:42 2009				
Calibrator Value:	150.0	GAPI			
Background Reading:	0.0	cps			
Calibrator Reading:	276.0	cps			
Sensitivity:	0.6835	GAPI/cps			