



SUPERIOR
Hays,
Kansas

MICRO LOG

Company BRINKER ENTERPRISES, LLC.
Well STICE #12-1
Field WILDCAT
County ROOKS
State KANSAS

Company BRINKER ENTERPRISES, LLC.
Well STICE #12-1
Field WILDCAT
County ROOKS State KANSAS

Location: API #: 15-163-23856
880' FNL & 1325' FEL
SEC 12 TWP 7S RGE 20W
Permanent Datum GROUND LEVEL Elevation 2090'
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services
CDL/CNL
DIL
Elevation
K.B. 2095'
D.F.
G.L. 2090'

Date	3-10-10		
Run Number	TWO		
Depth Driller	3651		
Depth Logger	3652		
Bottom Logged Interval	3650		
Top Log Interval	2400		
Casing Driller	236		
Casing Logger	NA		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.2 / 55		
pH / Fluid Loss	9.5 / 8.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	1.50 @ 76F		
Rinf @ Meas. Temp	1.13 @ 76F		
Rmc @ Meas. Temp	1.80 @ 76F		
Source of Rinf / Rmc	MEASURED		
Rim @ BHT	1.03 @ 111F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	9:00 A.M.		
Maximum Recorded Temperature	111F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	MARK TORR		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: STOCKTON STOP LIGHT, 8W TO RD. #258, 1N, 5W, 2N, 3/4E, S INTO.





SUPERIOR
Hays,
Kansas


MAIN SECTION


Database File: 004610ddn.db
Dataset Pathname: pass5.1
Presentation Format: micro
Dataset Creation: Wed Mar 10 12:04:42 2010 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

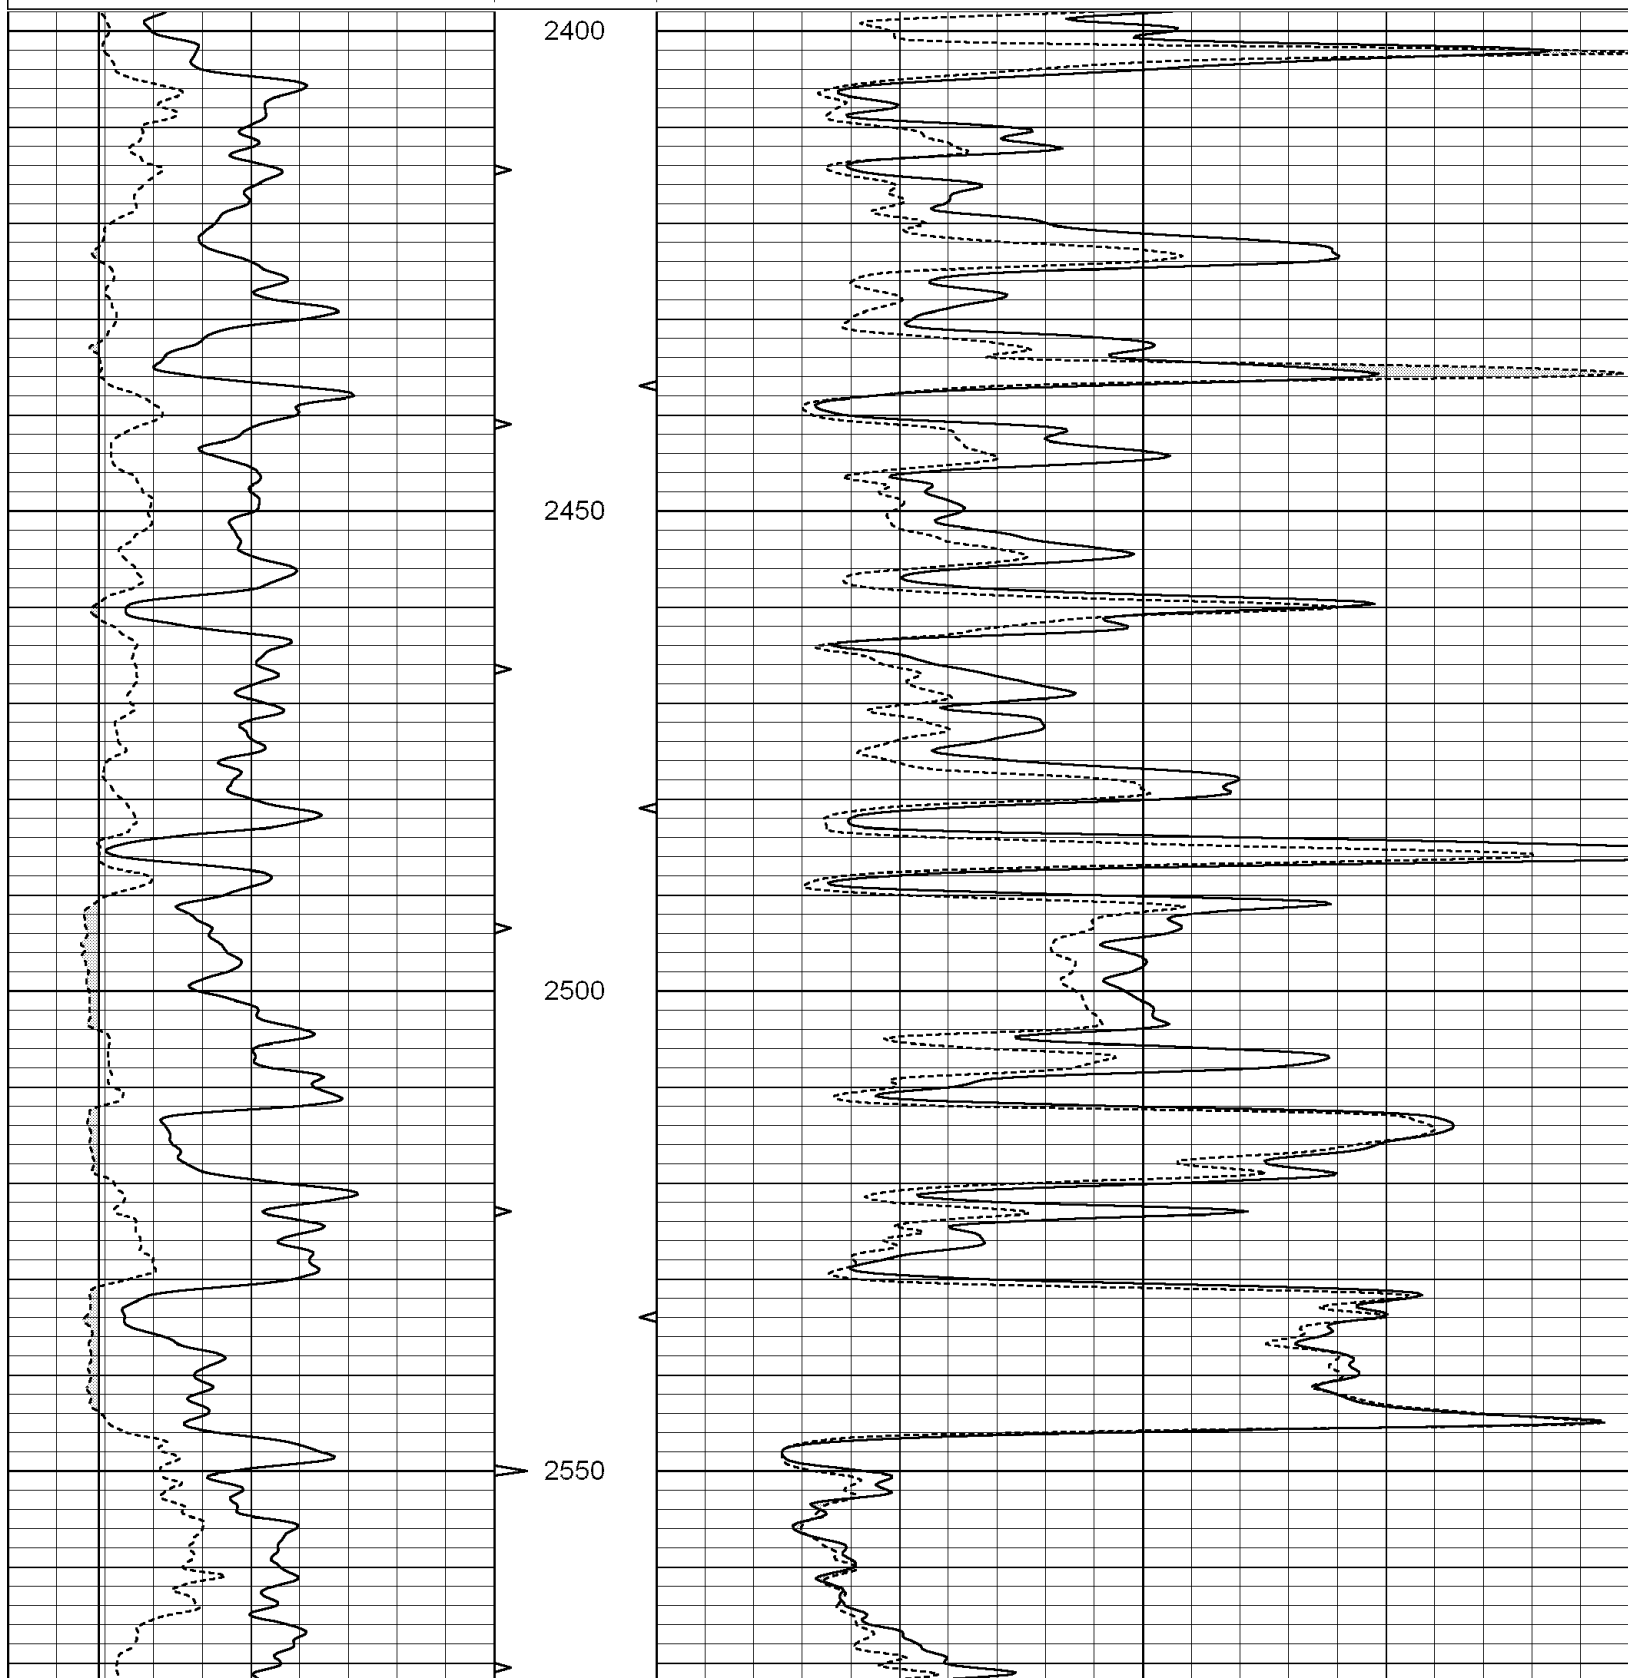

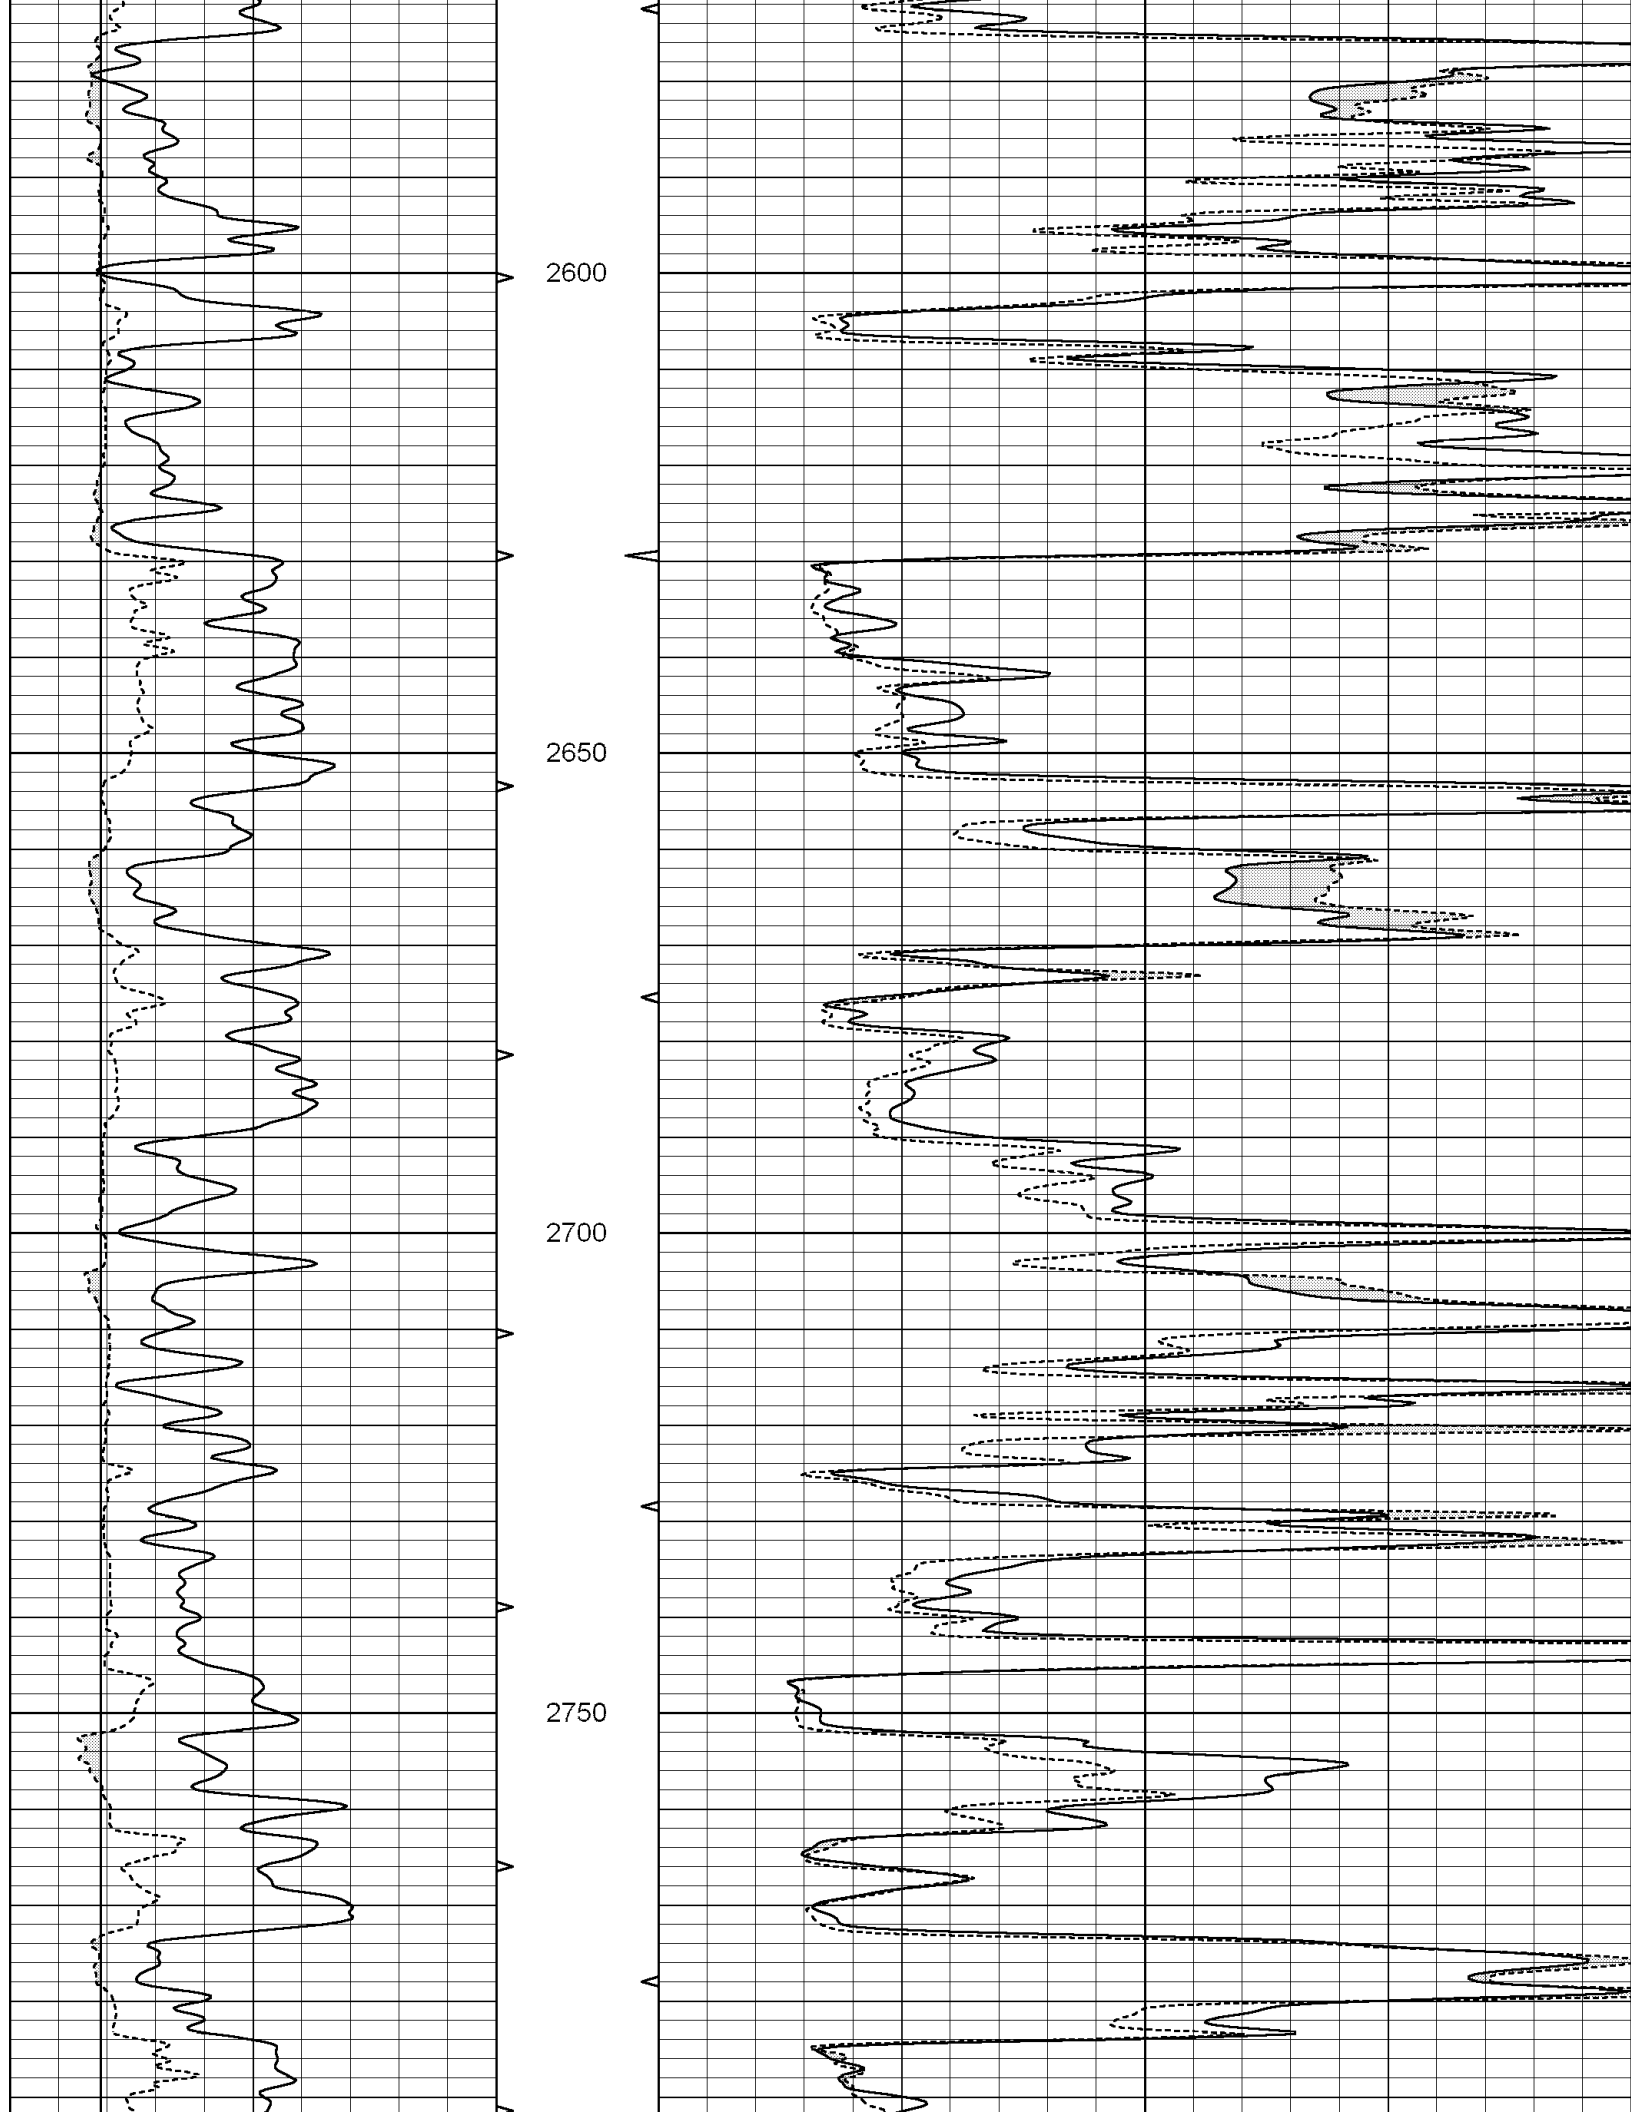

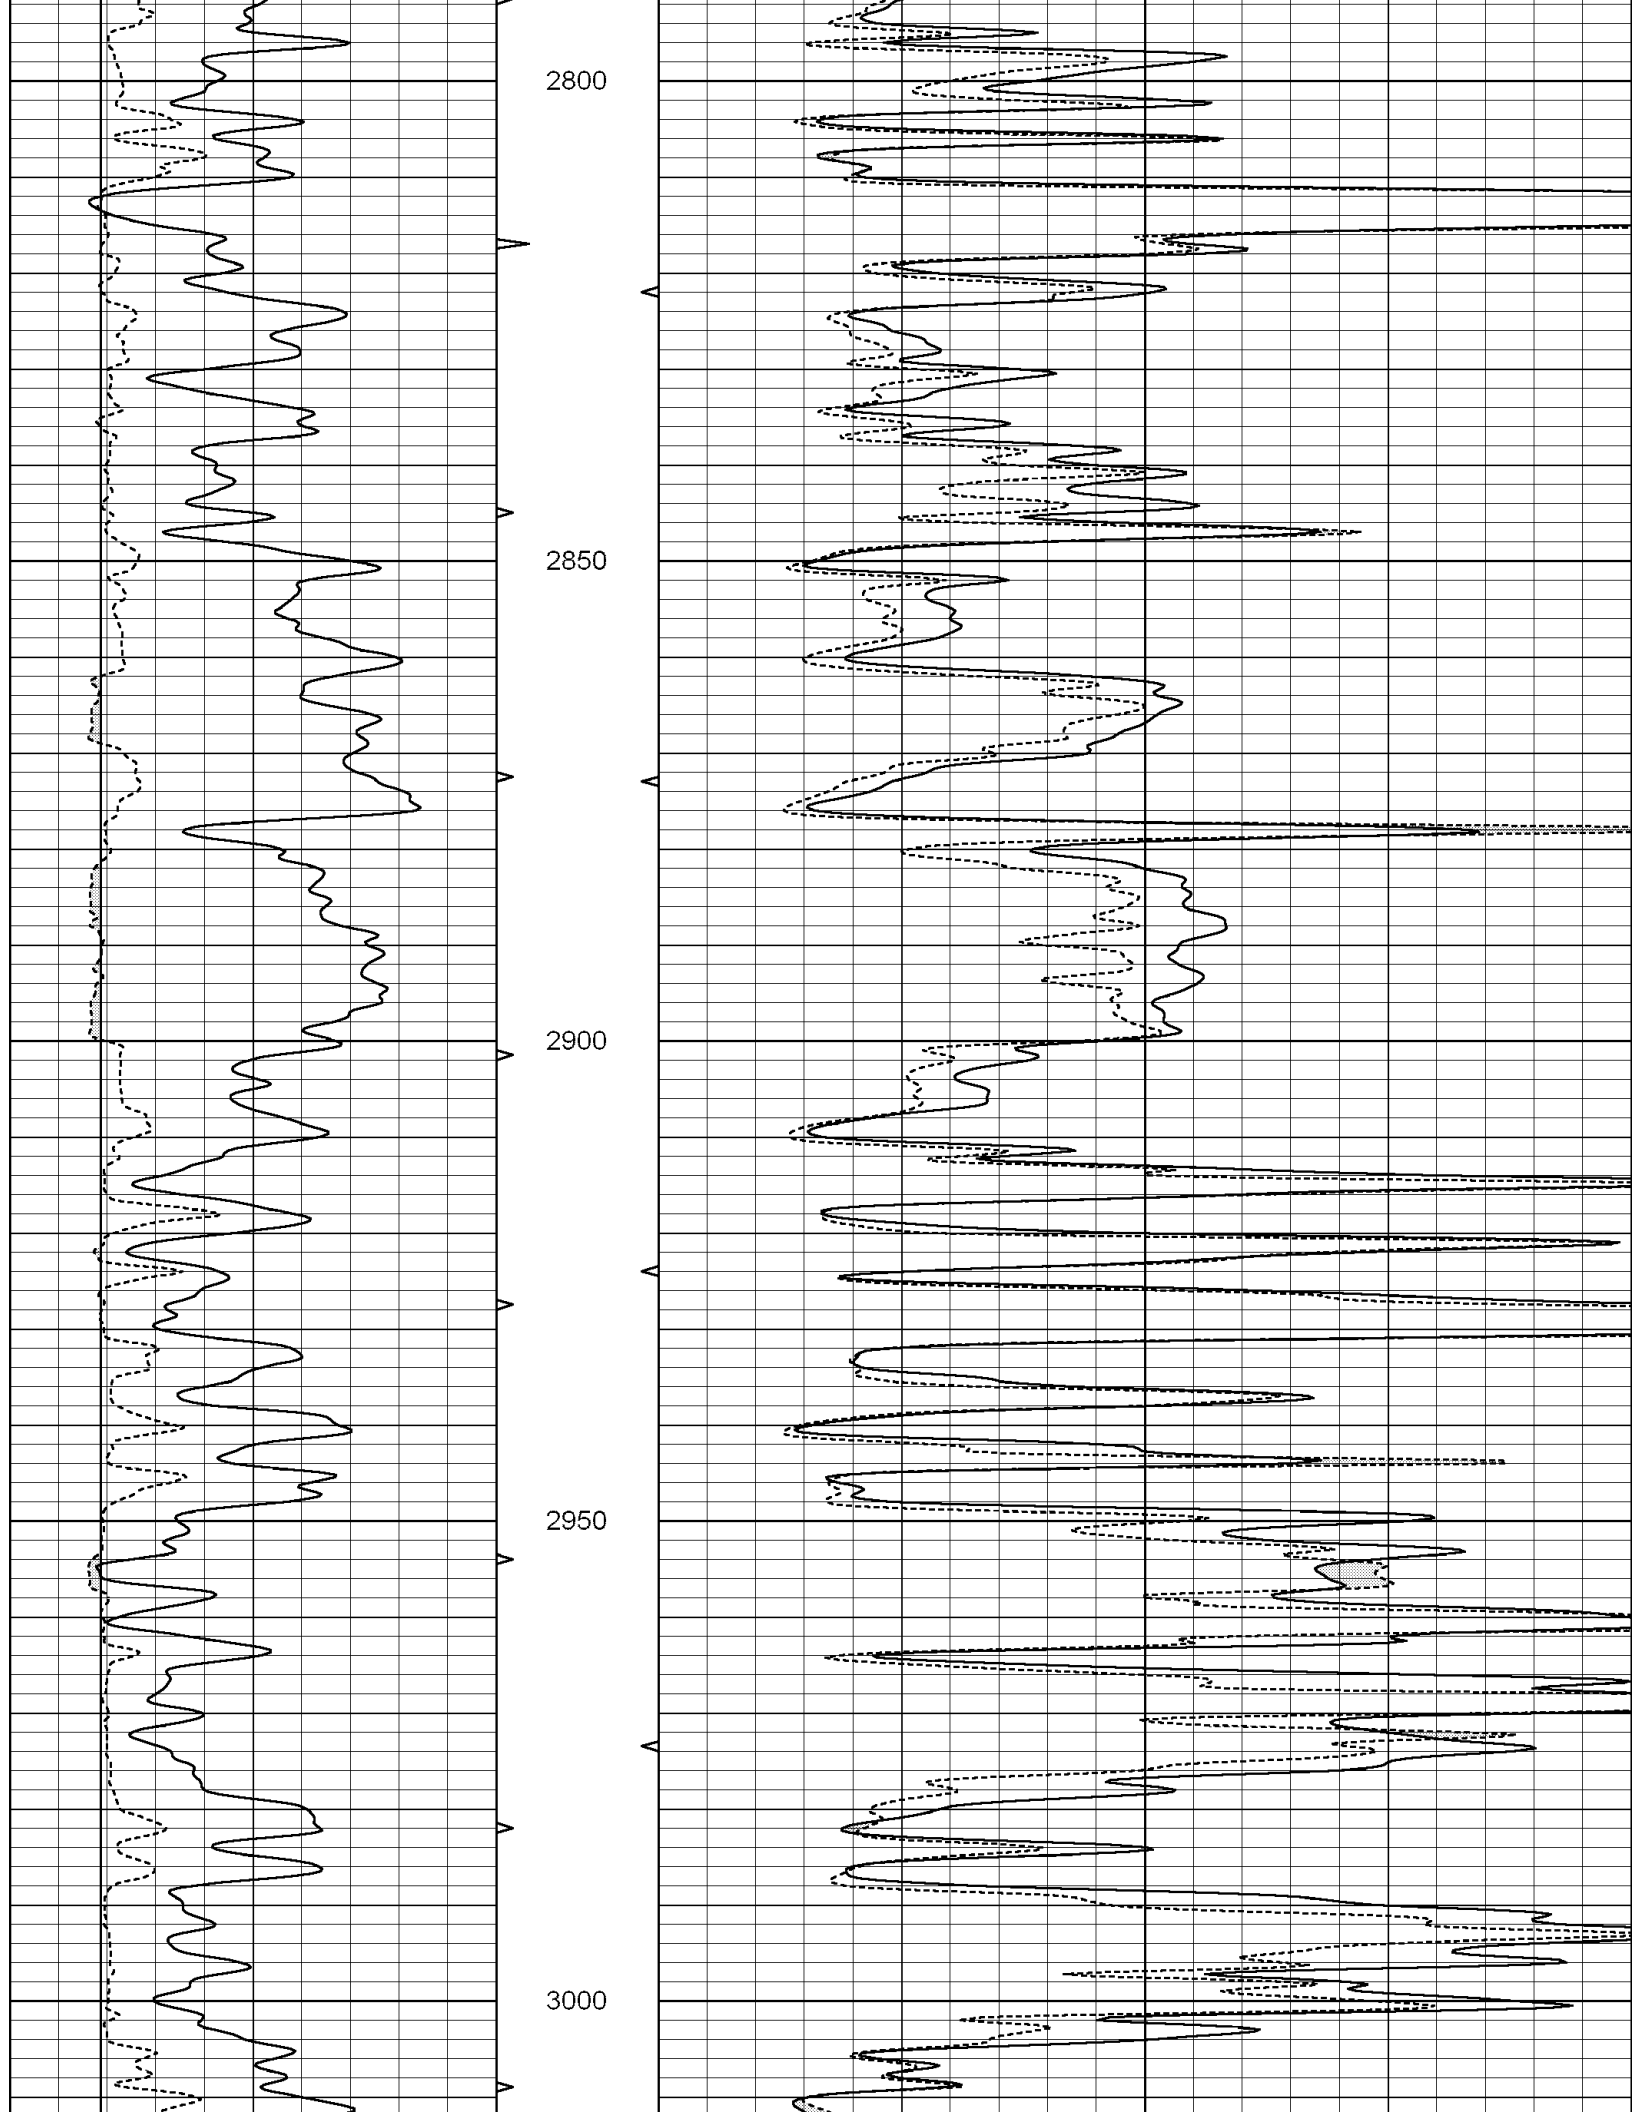

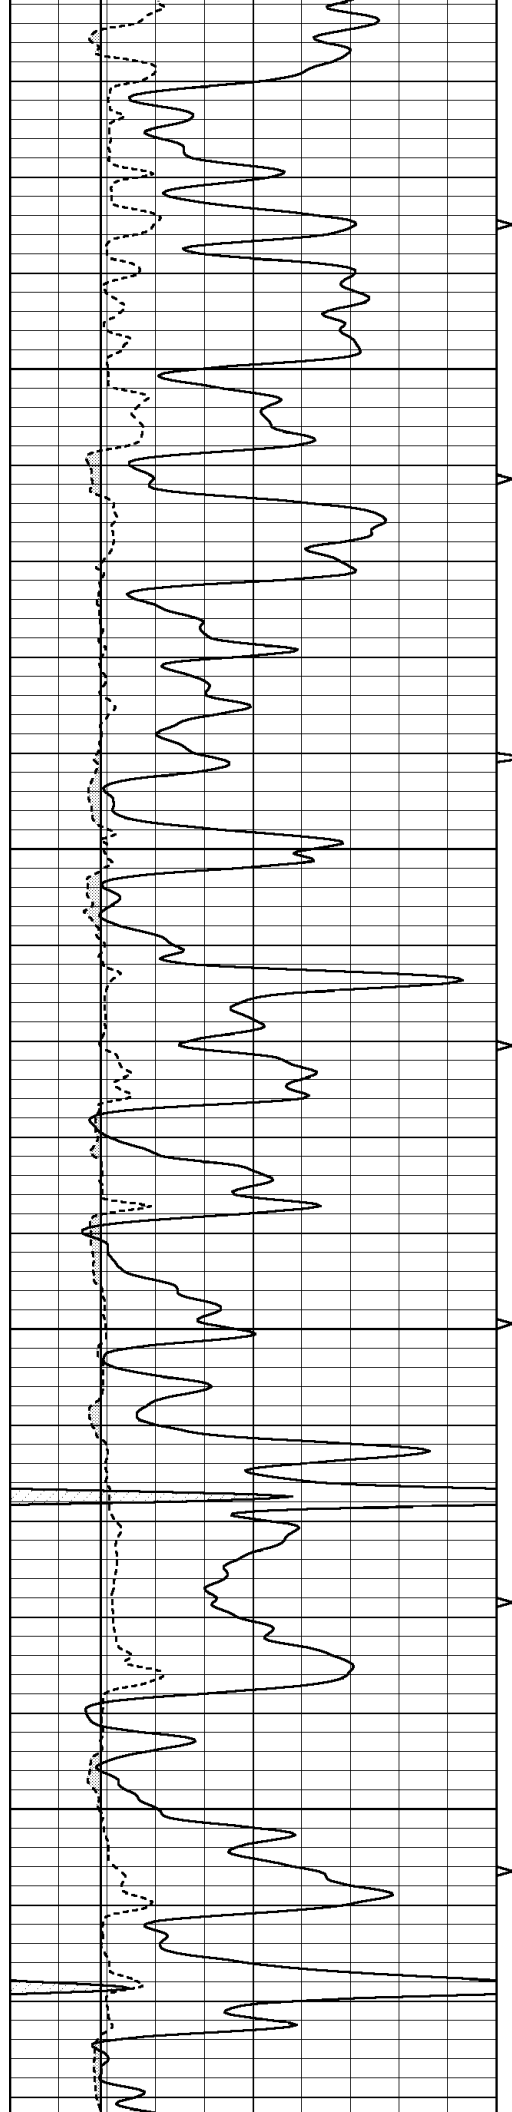




3050


3100

3150

3200

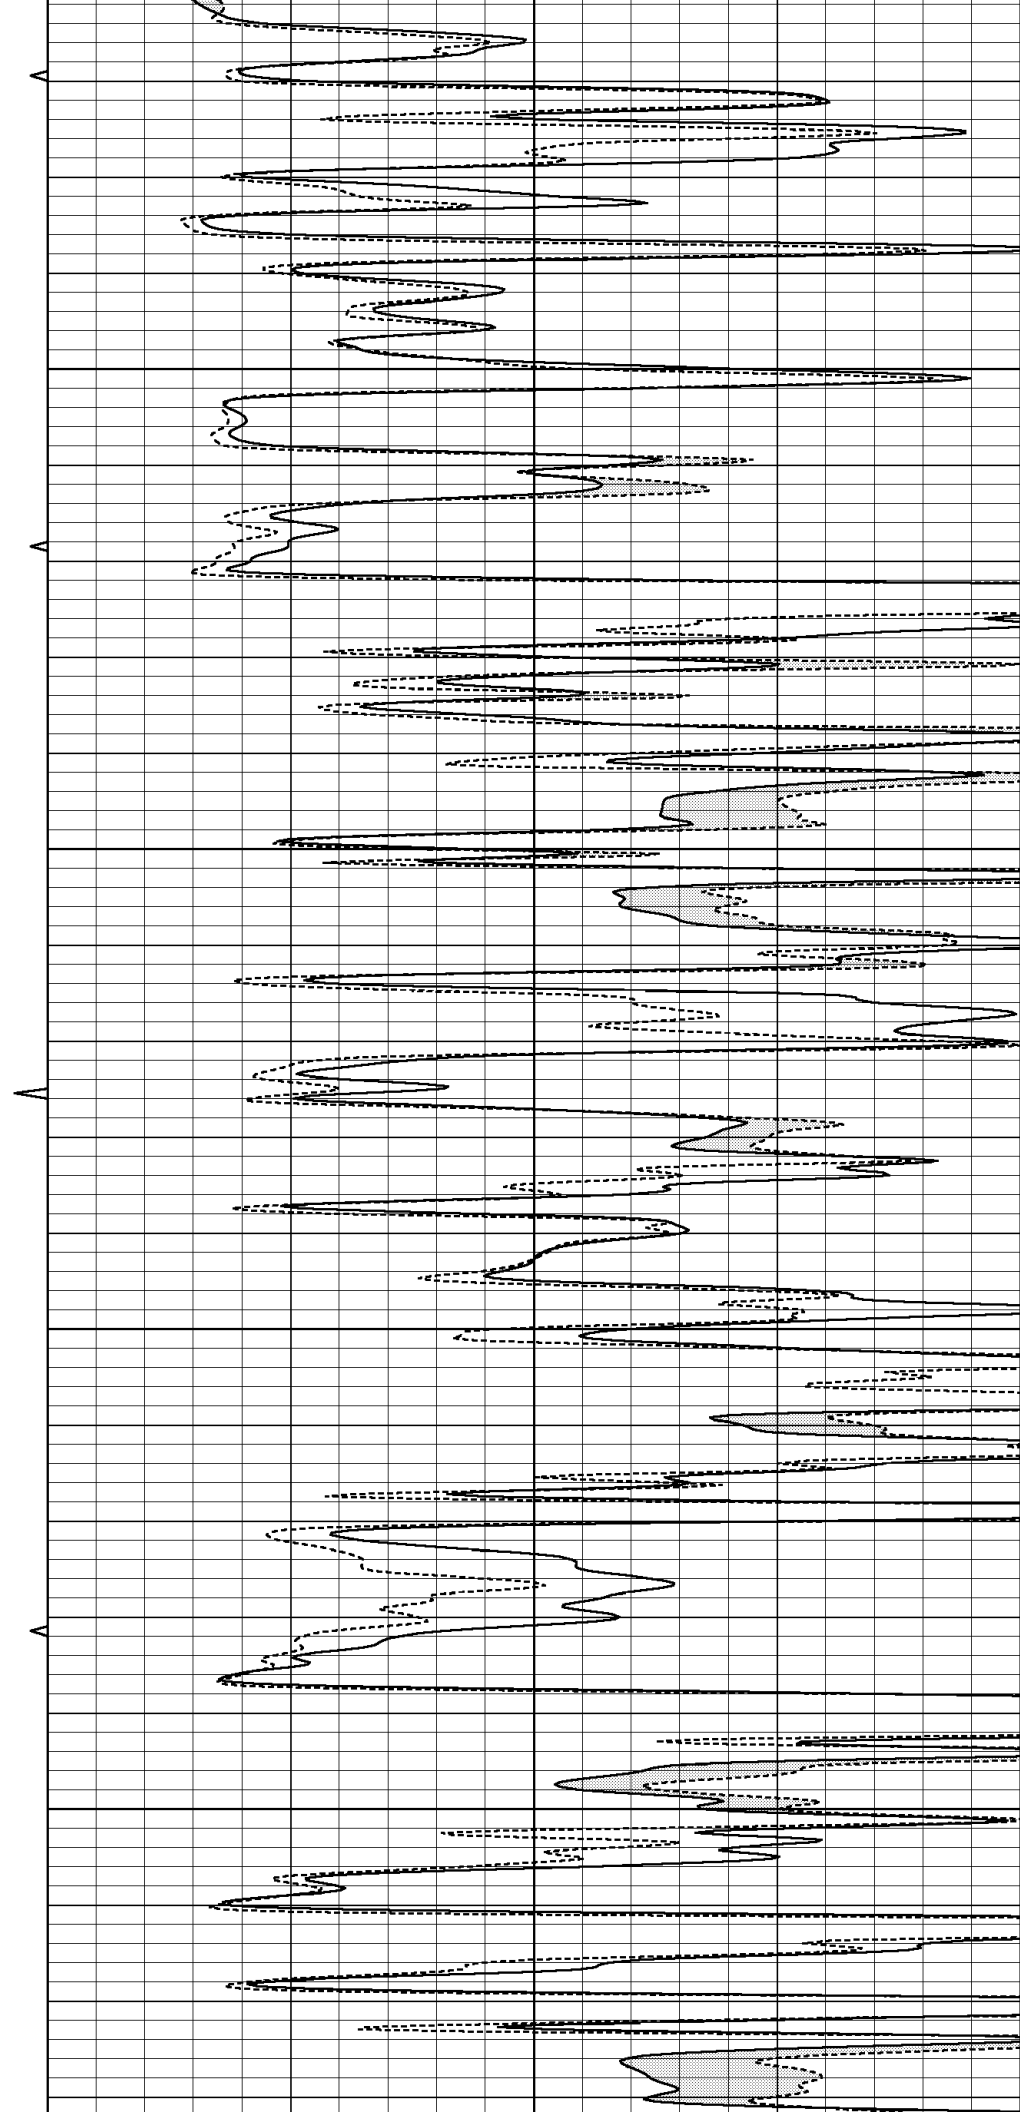

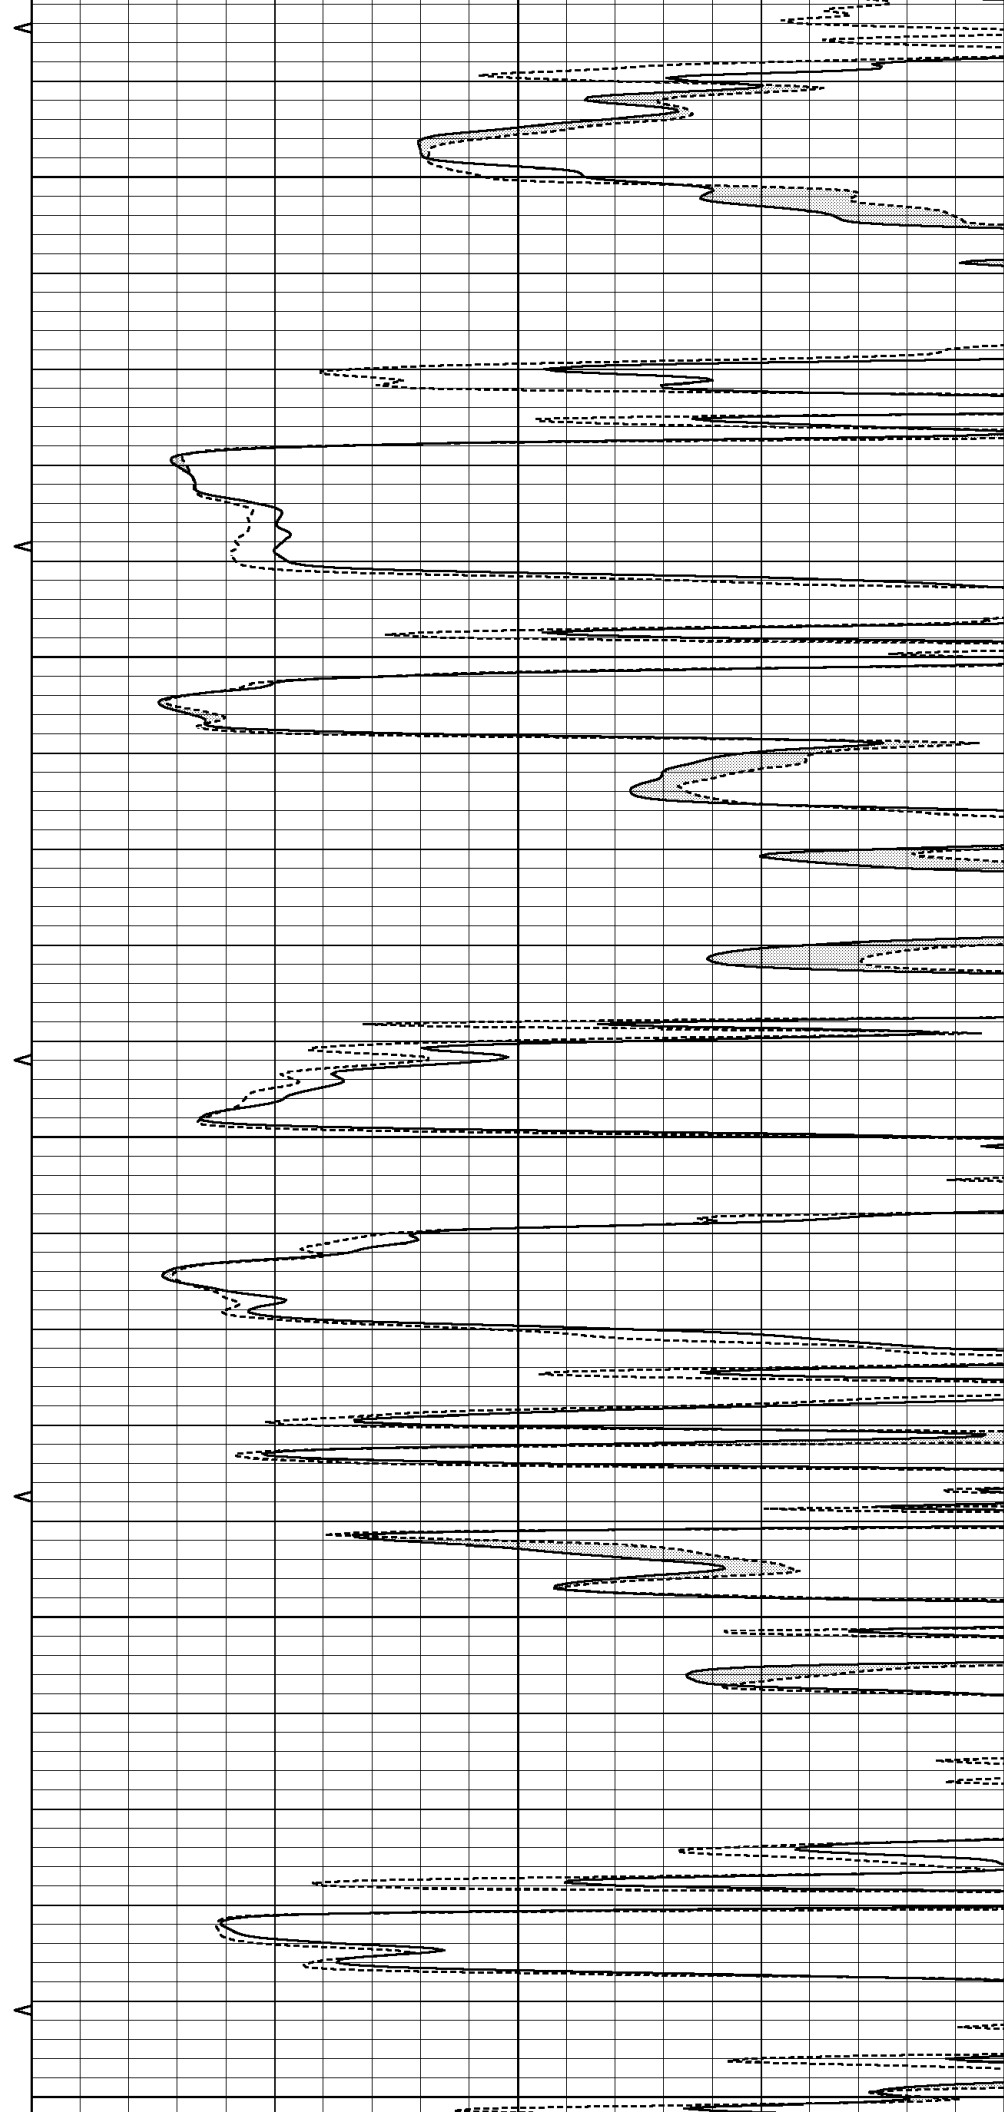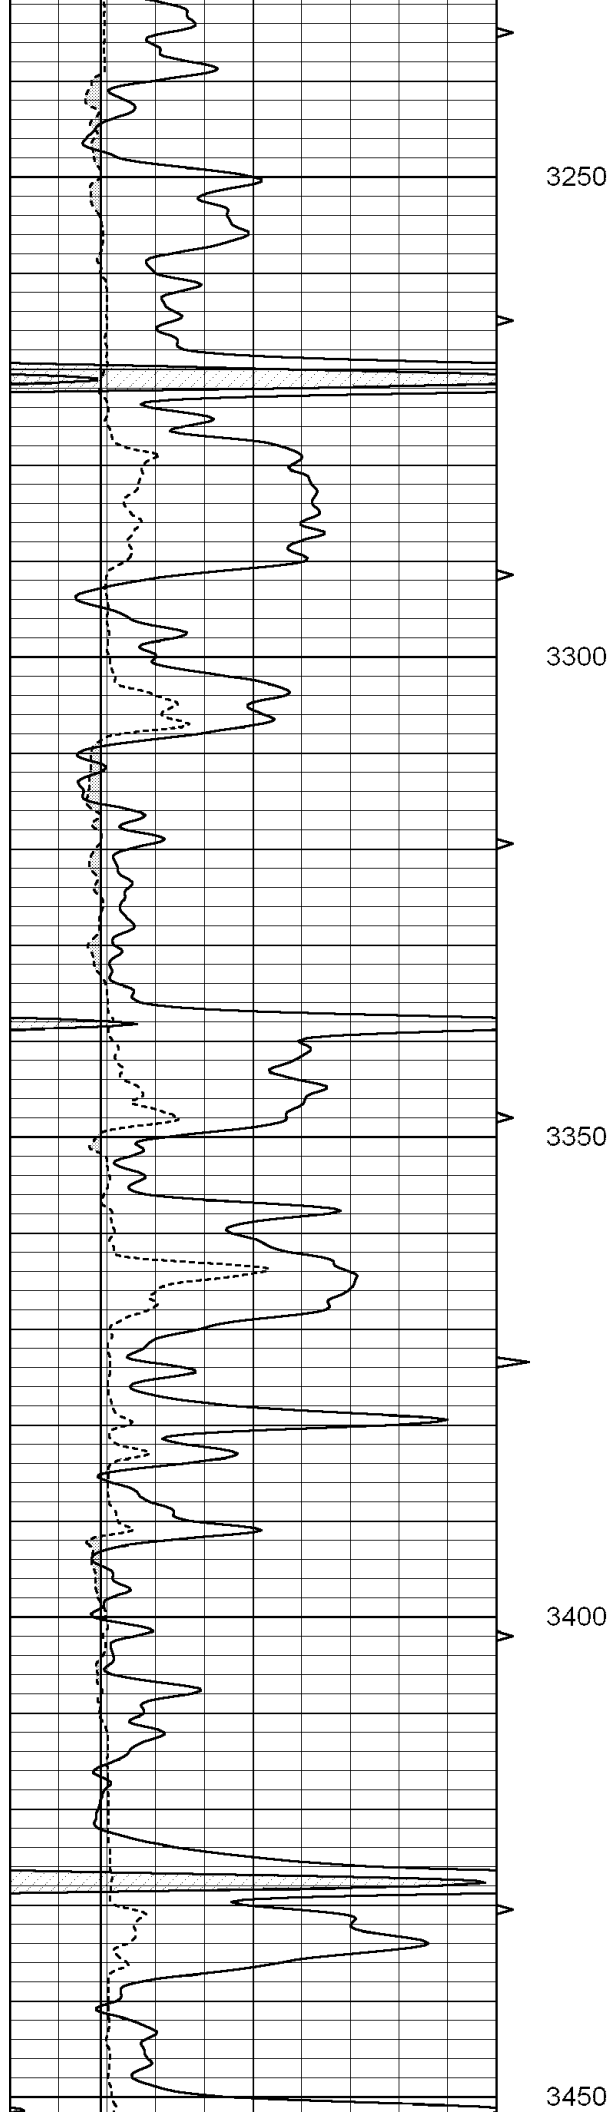

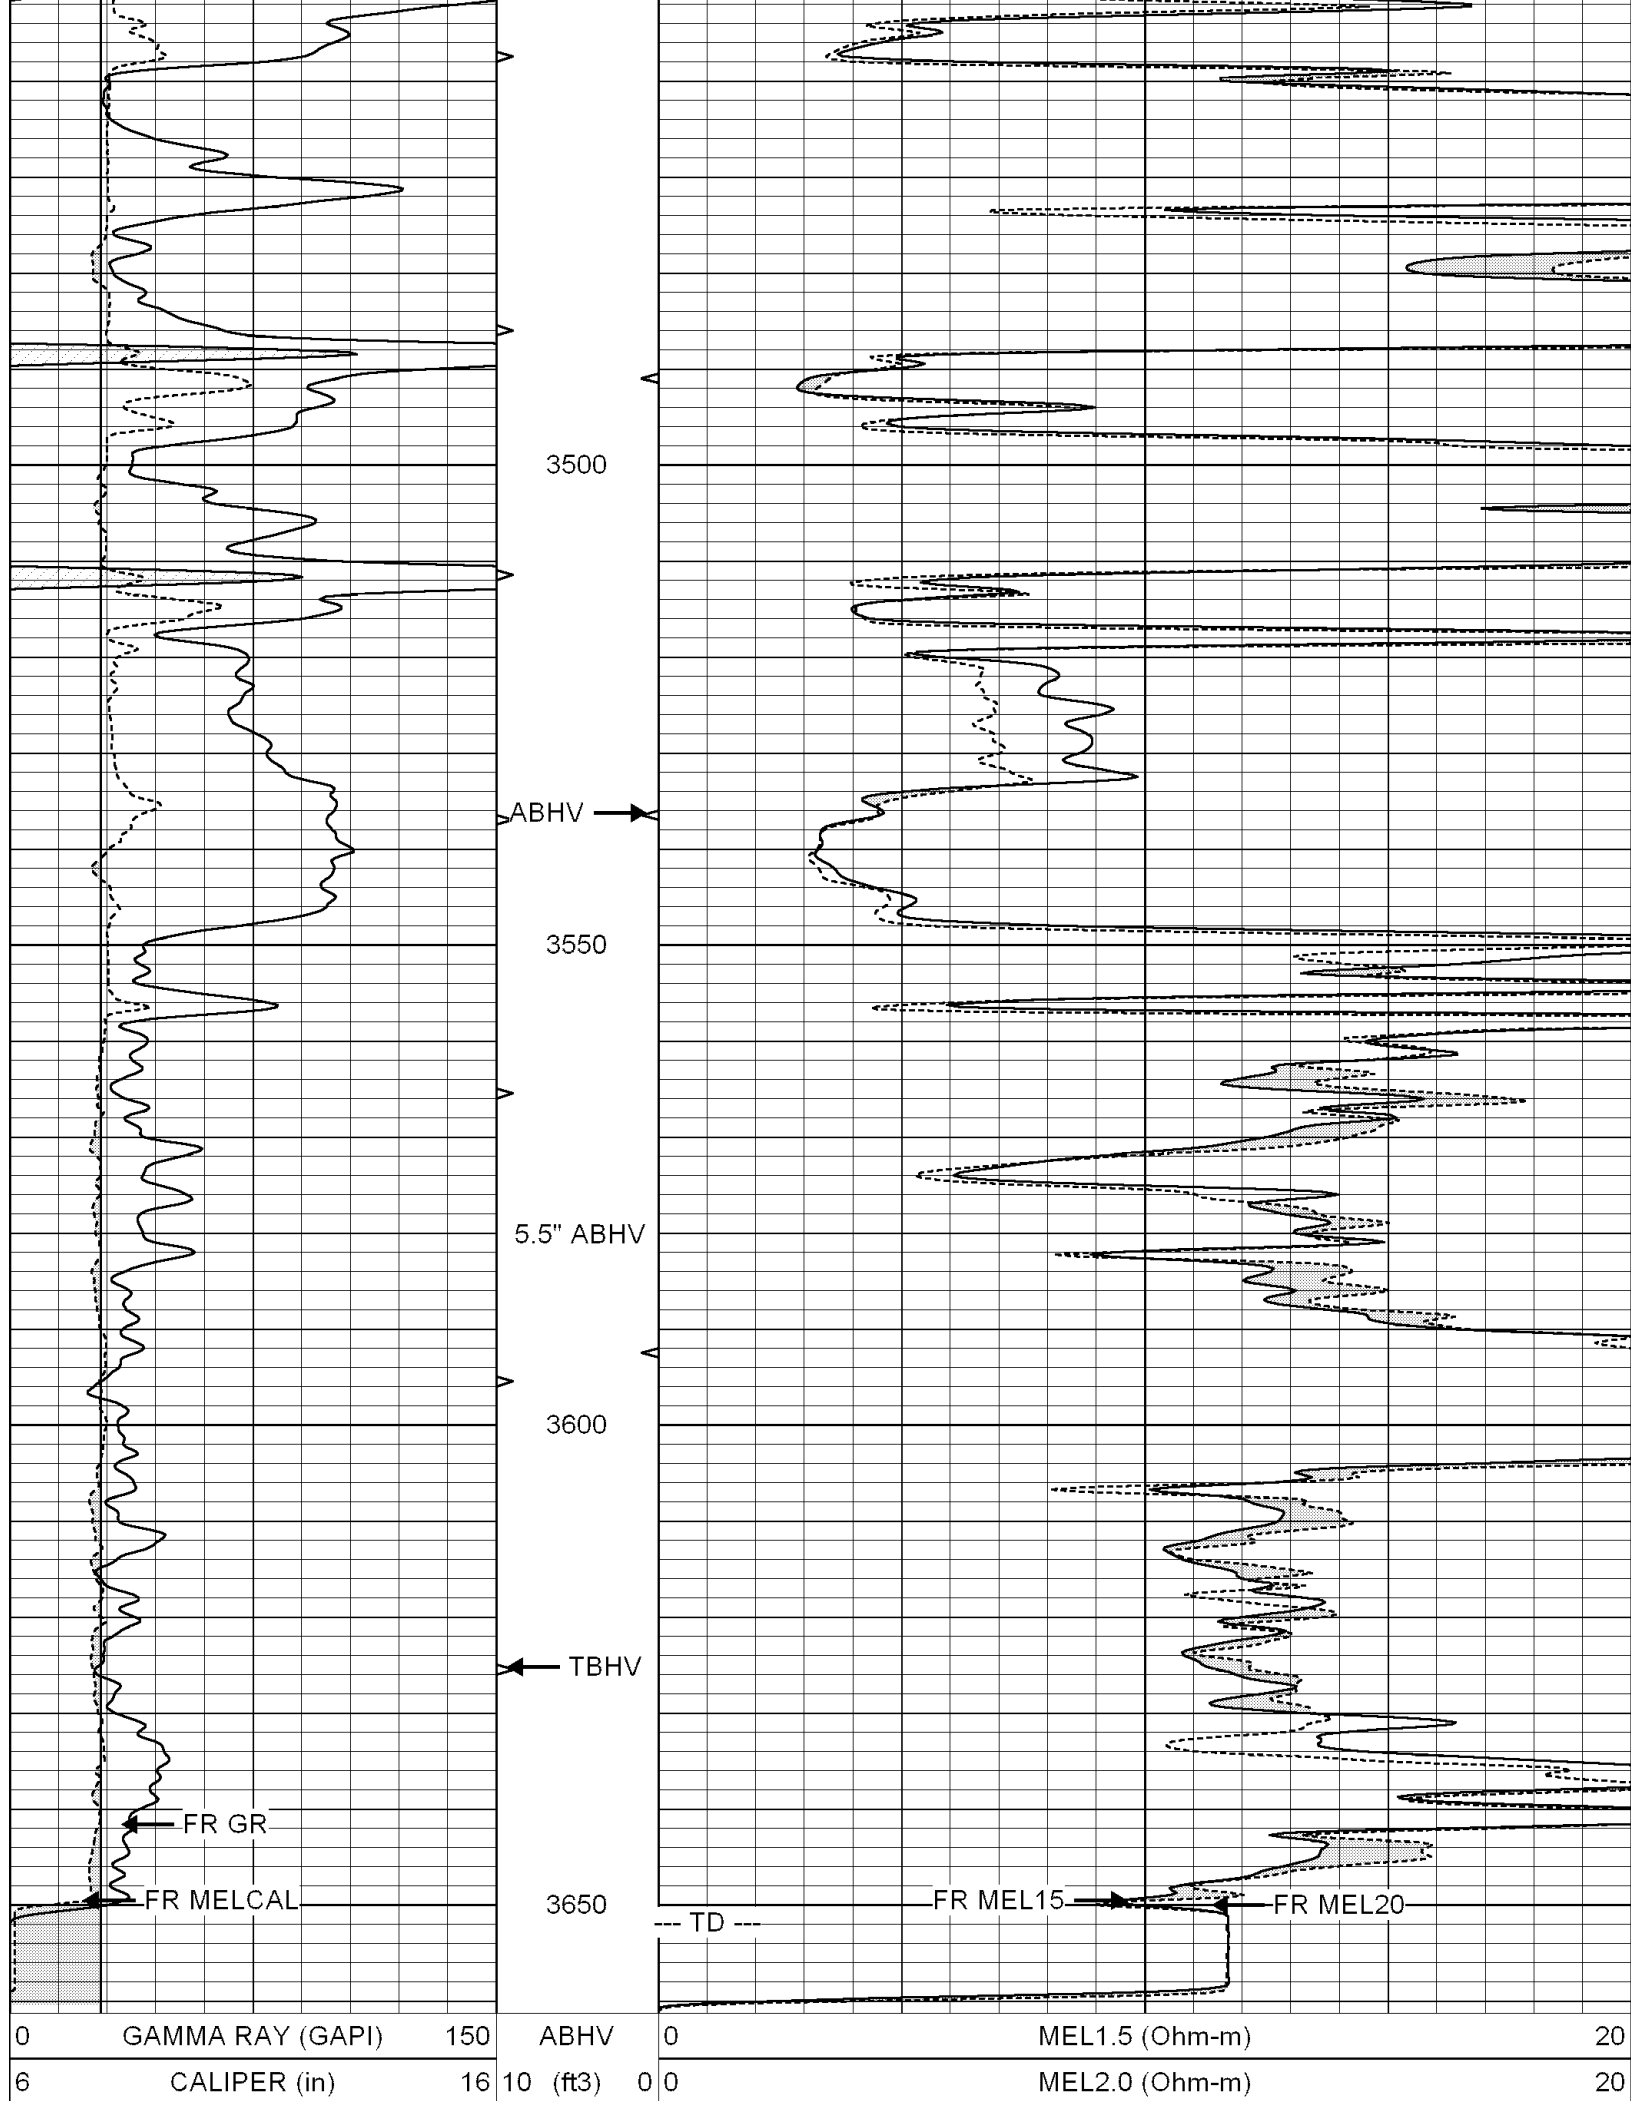

TBHV
0 (ft3) 10





SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 004610ddn.db
Dataset Pathname: pass4.1
Presentation Format: micro
Dataset Creation: Wed Mar 10 11:26:54 2010 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

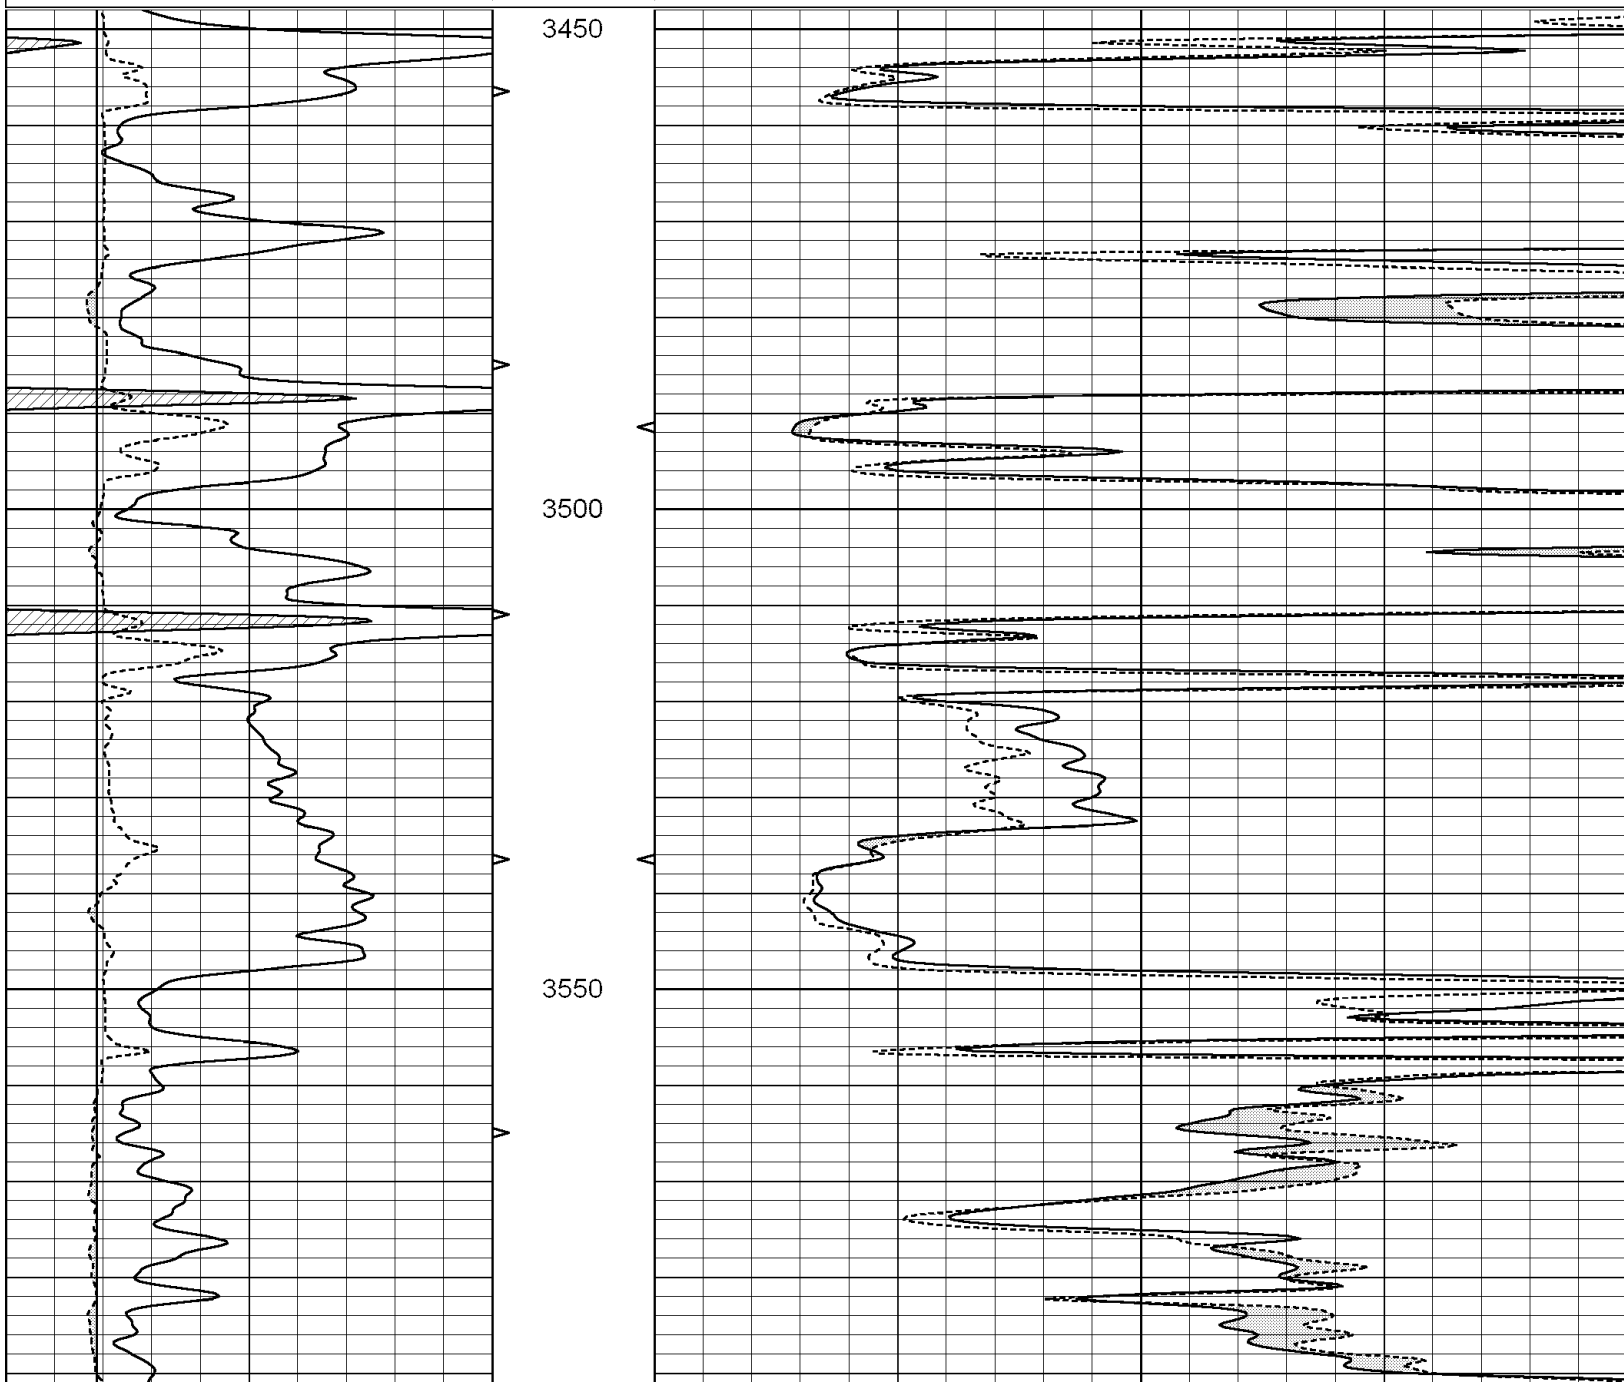

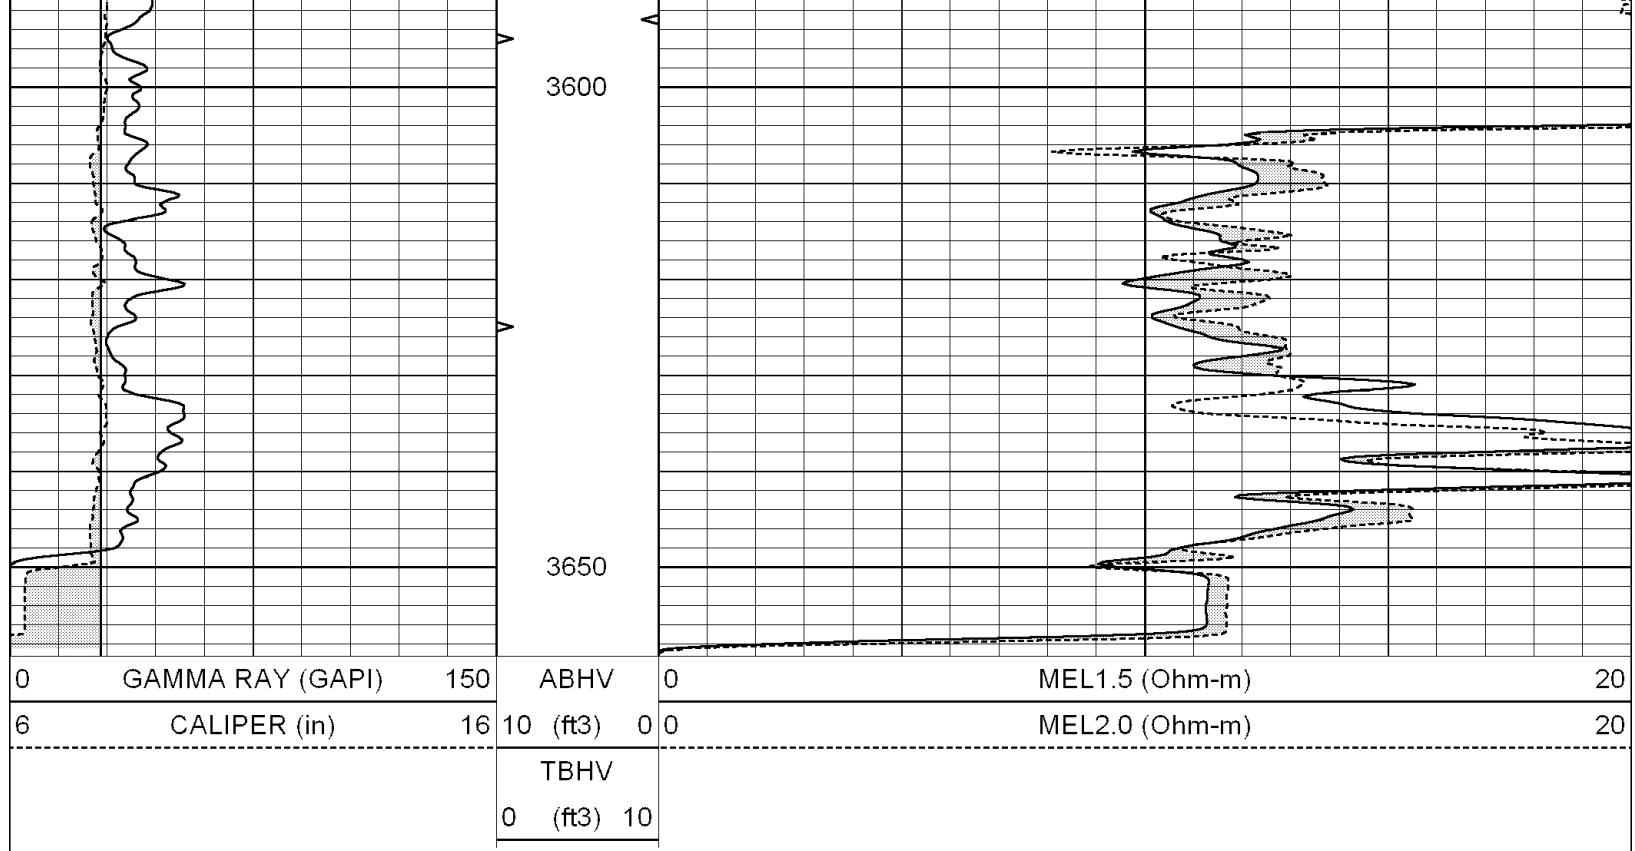

Calibration Report

Database File: 004610ddn.db
 Dataset Pathname: pass5.1
 Dataset Creation: Wed Mar 10 12:04:42 2010 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number:	Micro1	
Tool Model:	ProbeL	
Performed:	Wed Mar 10 11:21:16 2010	
Caliper Calibration:	Gain=3.567	Offset=-2.138
References	Low Cal	High Cal
Readings	7.500	14.000
	2.702	4.525
1.5" Calibration:	Gain=65.000	Offset=-0.200
References	Low Cal	High Cal
Readings	0.000	20.000
	0.007	0.653
2" Calibration:	Gain=42.000	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.021	0.757

Gamma Ray Calibration Report

Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Wed Mar 10 11:43:48 2010	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Calibrator Reading:

1.0

cps

Sensitivity:

0.5700

GAPI/cps