



**SUPERIOR
Hays,
Kansas**

MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	FRINK-REYNOLDS #1-33		
Field			
County	FORD	State	KANSAS
Location:	API # : 15-057-20663-0000		Other Services CDL/CNL/PE DIL/SON
SEC 33 TWP 28S RGE 23W		Elevation	
Permanent Datum	GROUND LEVEL	Elevation	2477
Log Measured From	KELLY BUSHING 12' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	1/27/10		
Run Number	TWO		
Depth Driller	5670		
Depth Logger	5671		
Bottom Logged Interval	5653		
Top Log Interval	4100		
Casing Driller	8 5/8" @ 606		
Casing Logger	602		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 11600 PPM	
Density / Viscosity	9.5/61		
pH / Fluid Loss	10.5/13.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.52 @ 63F		
Rmf @ Meas. Temp	0.39 @ 63F		
Rmc @ Meas. Temp	0.62 @ 63F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	0.25 @ 131F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	131F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JEFF GRONEWEG		
Witnessed By	KEN LEBLANC		


<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
FORD, KS - SOUTH ON RD 125 TO WILBURN RD - 5 MILES WEST TO RD 120
1/2 MILE NORTH - EAST INTO

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

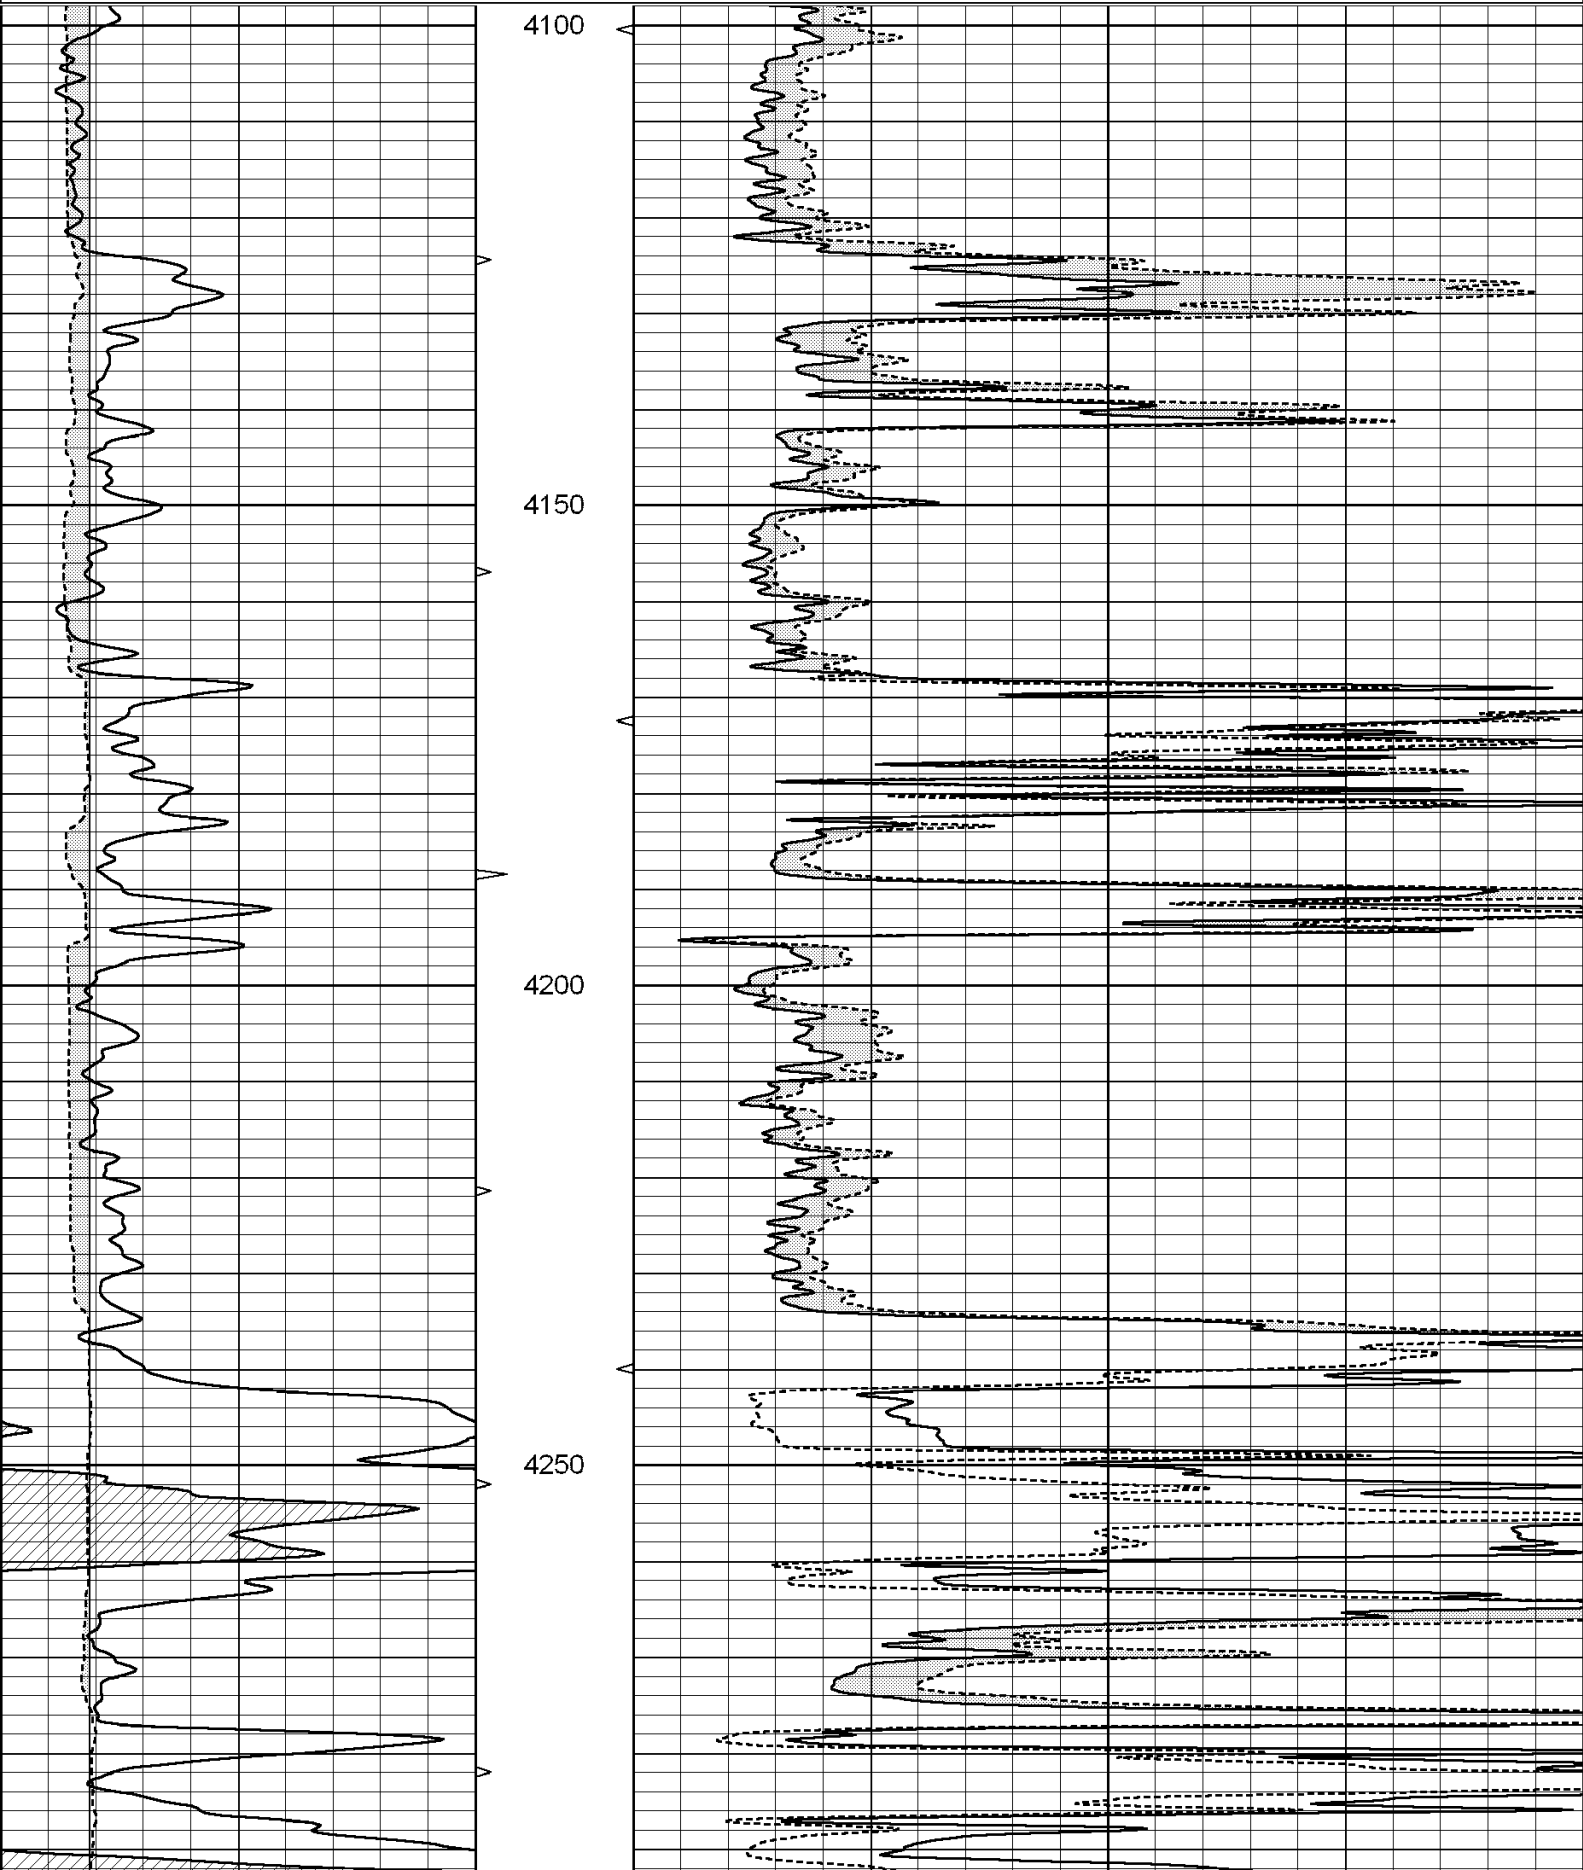

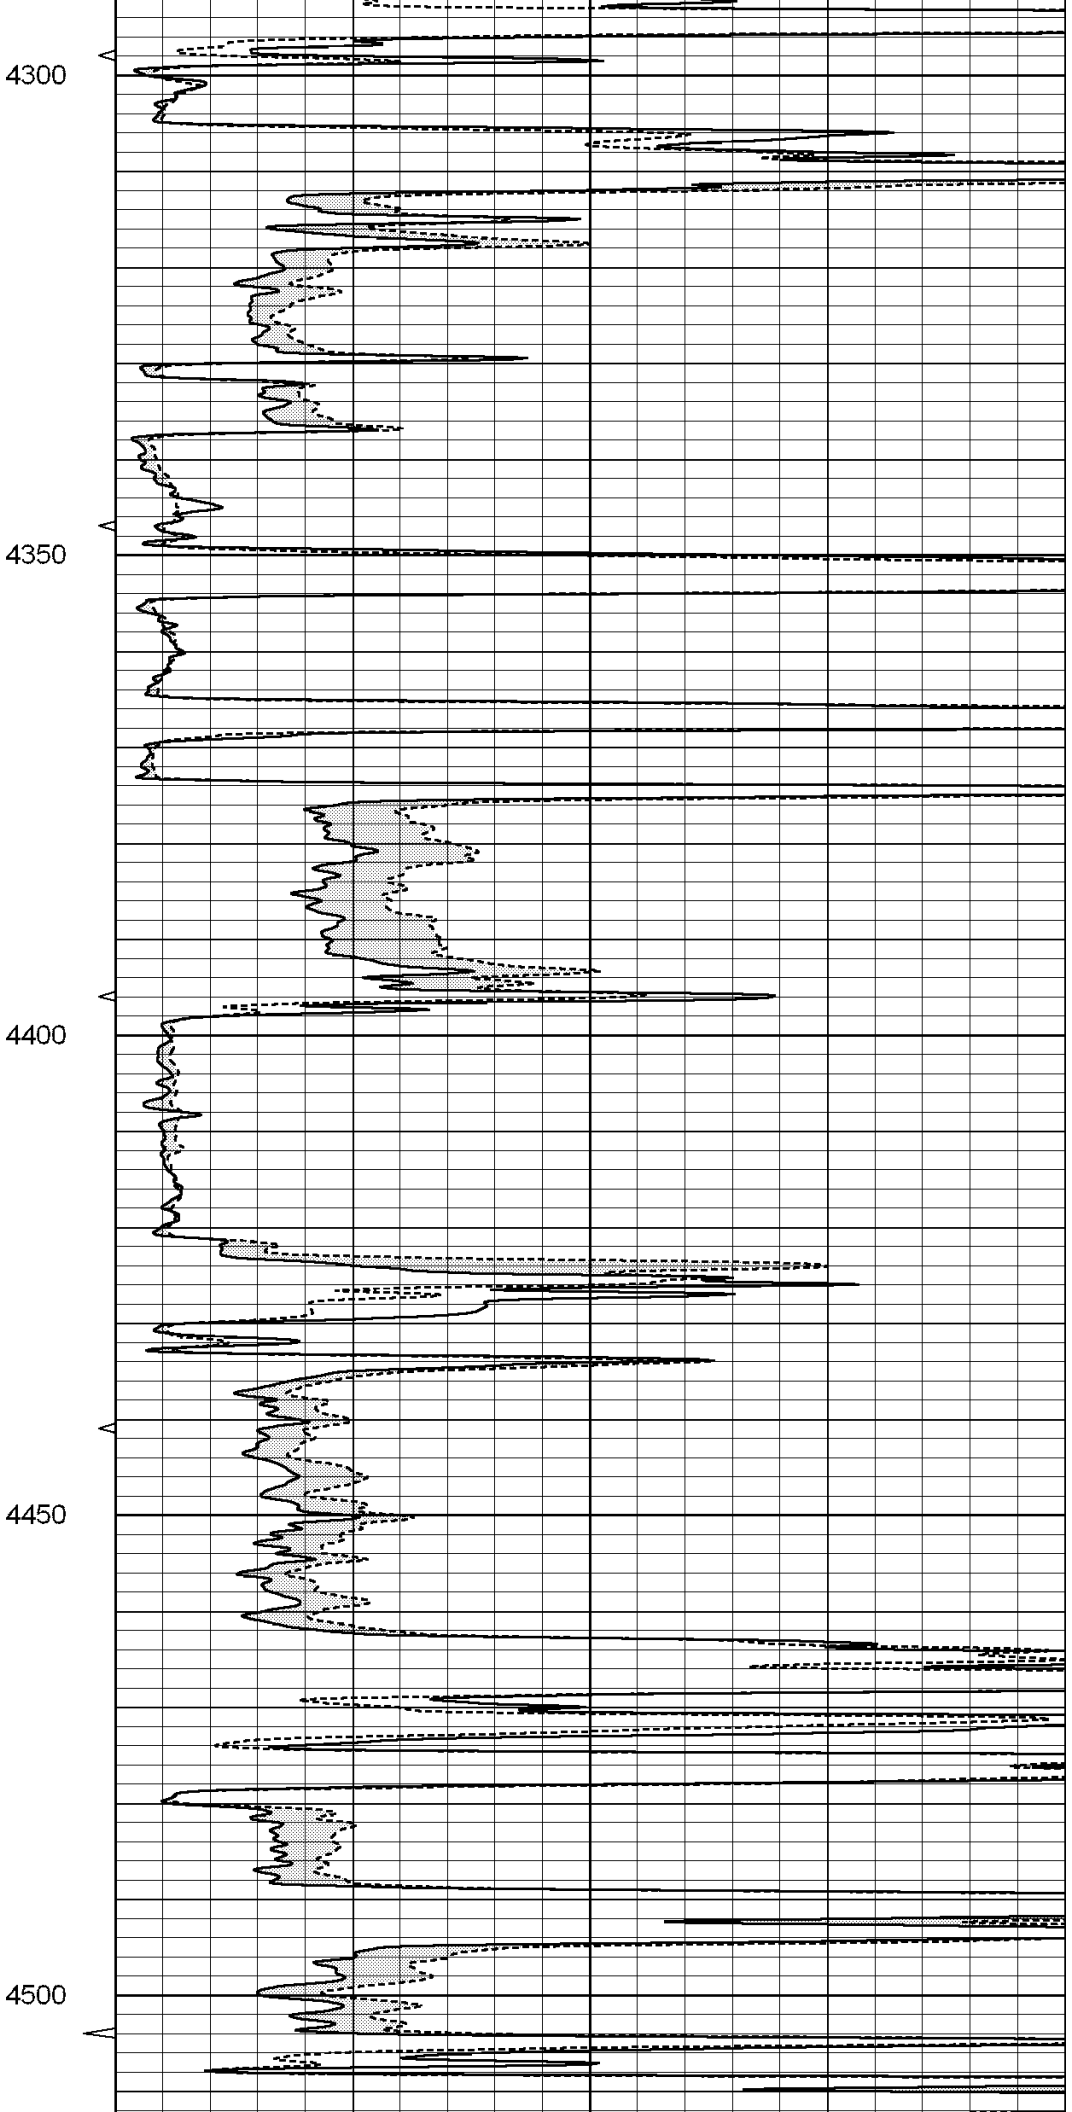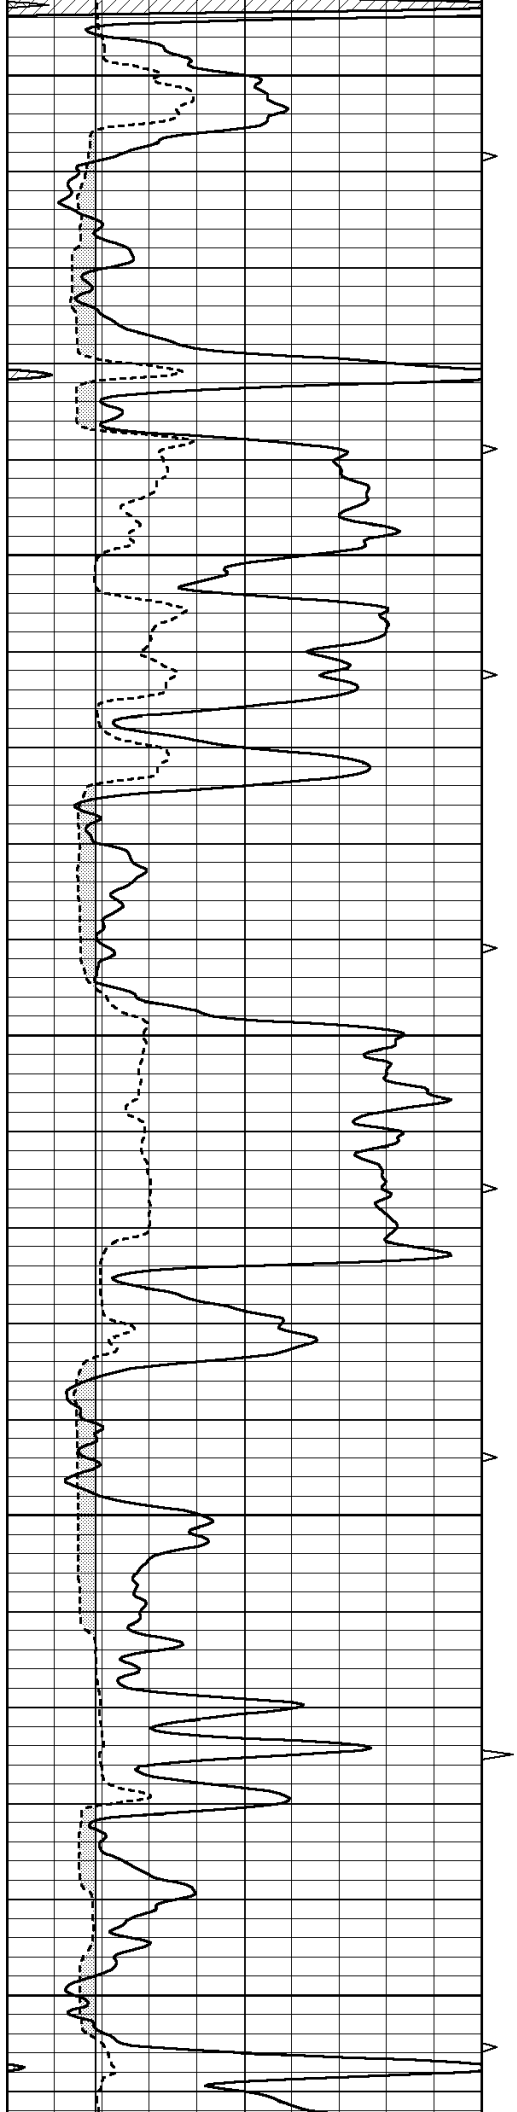

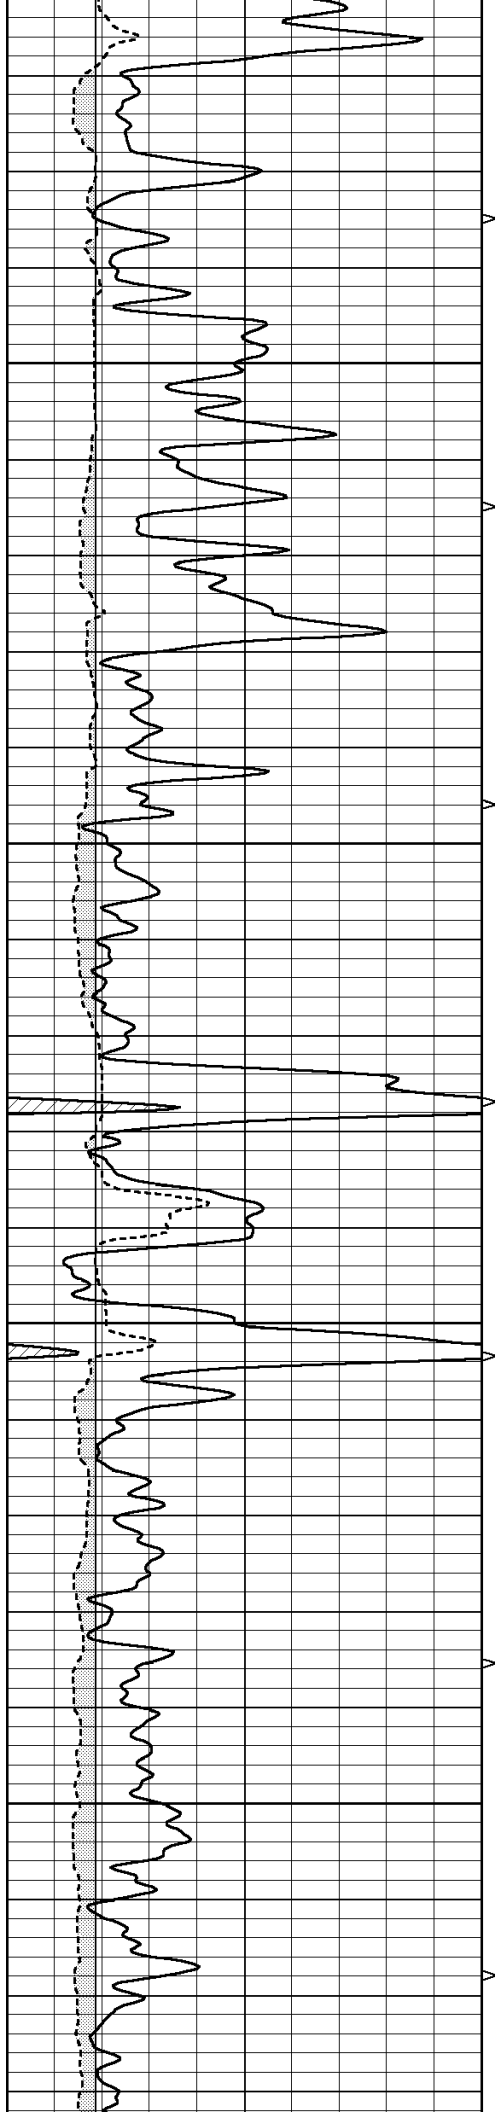



4550


4600

4650

4700

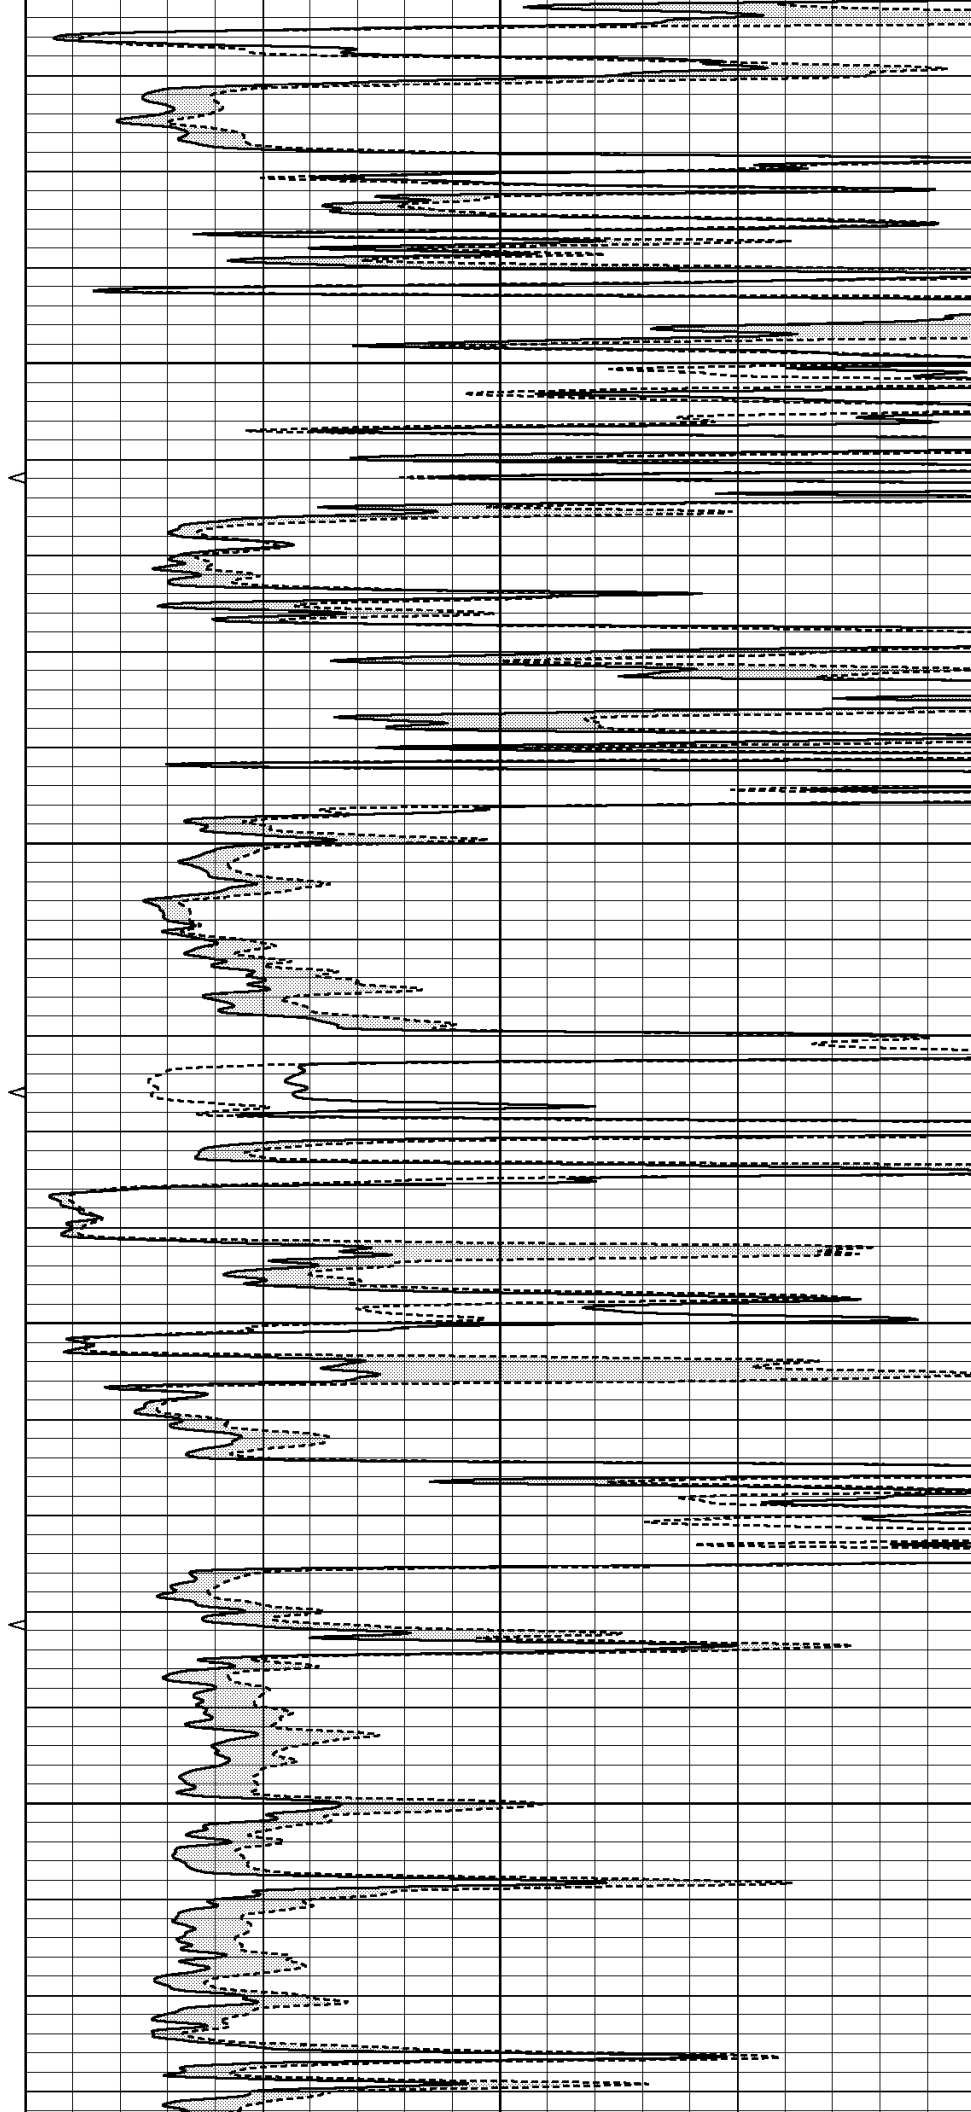

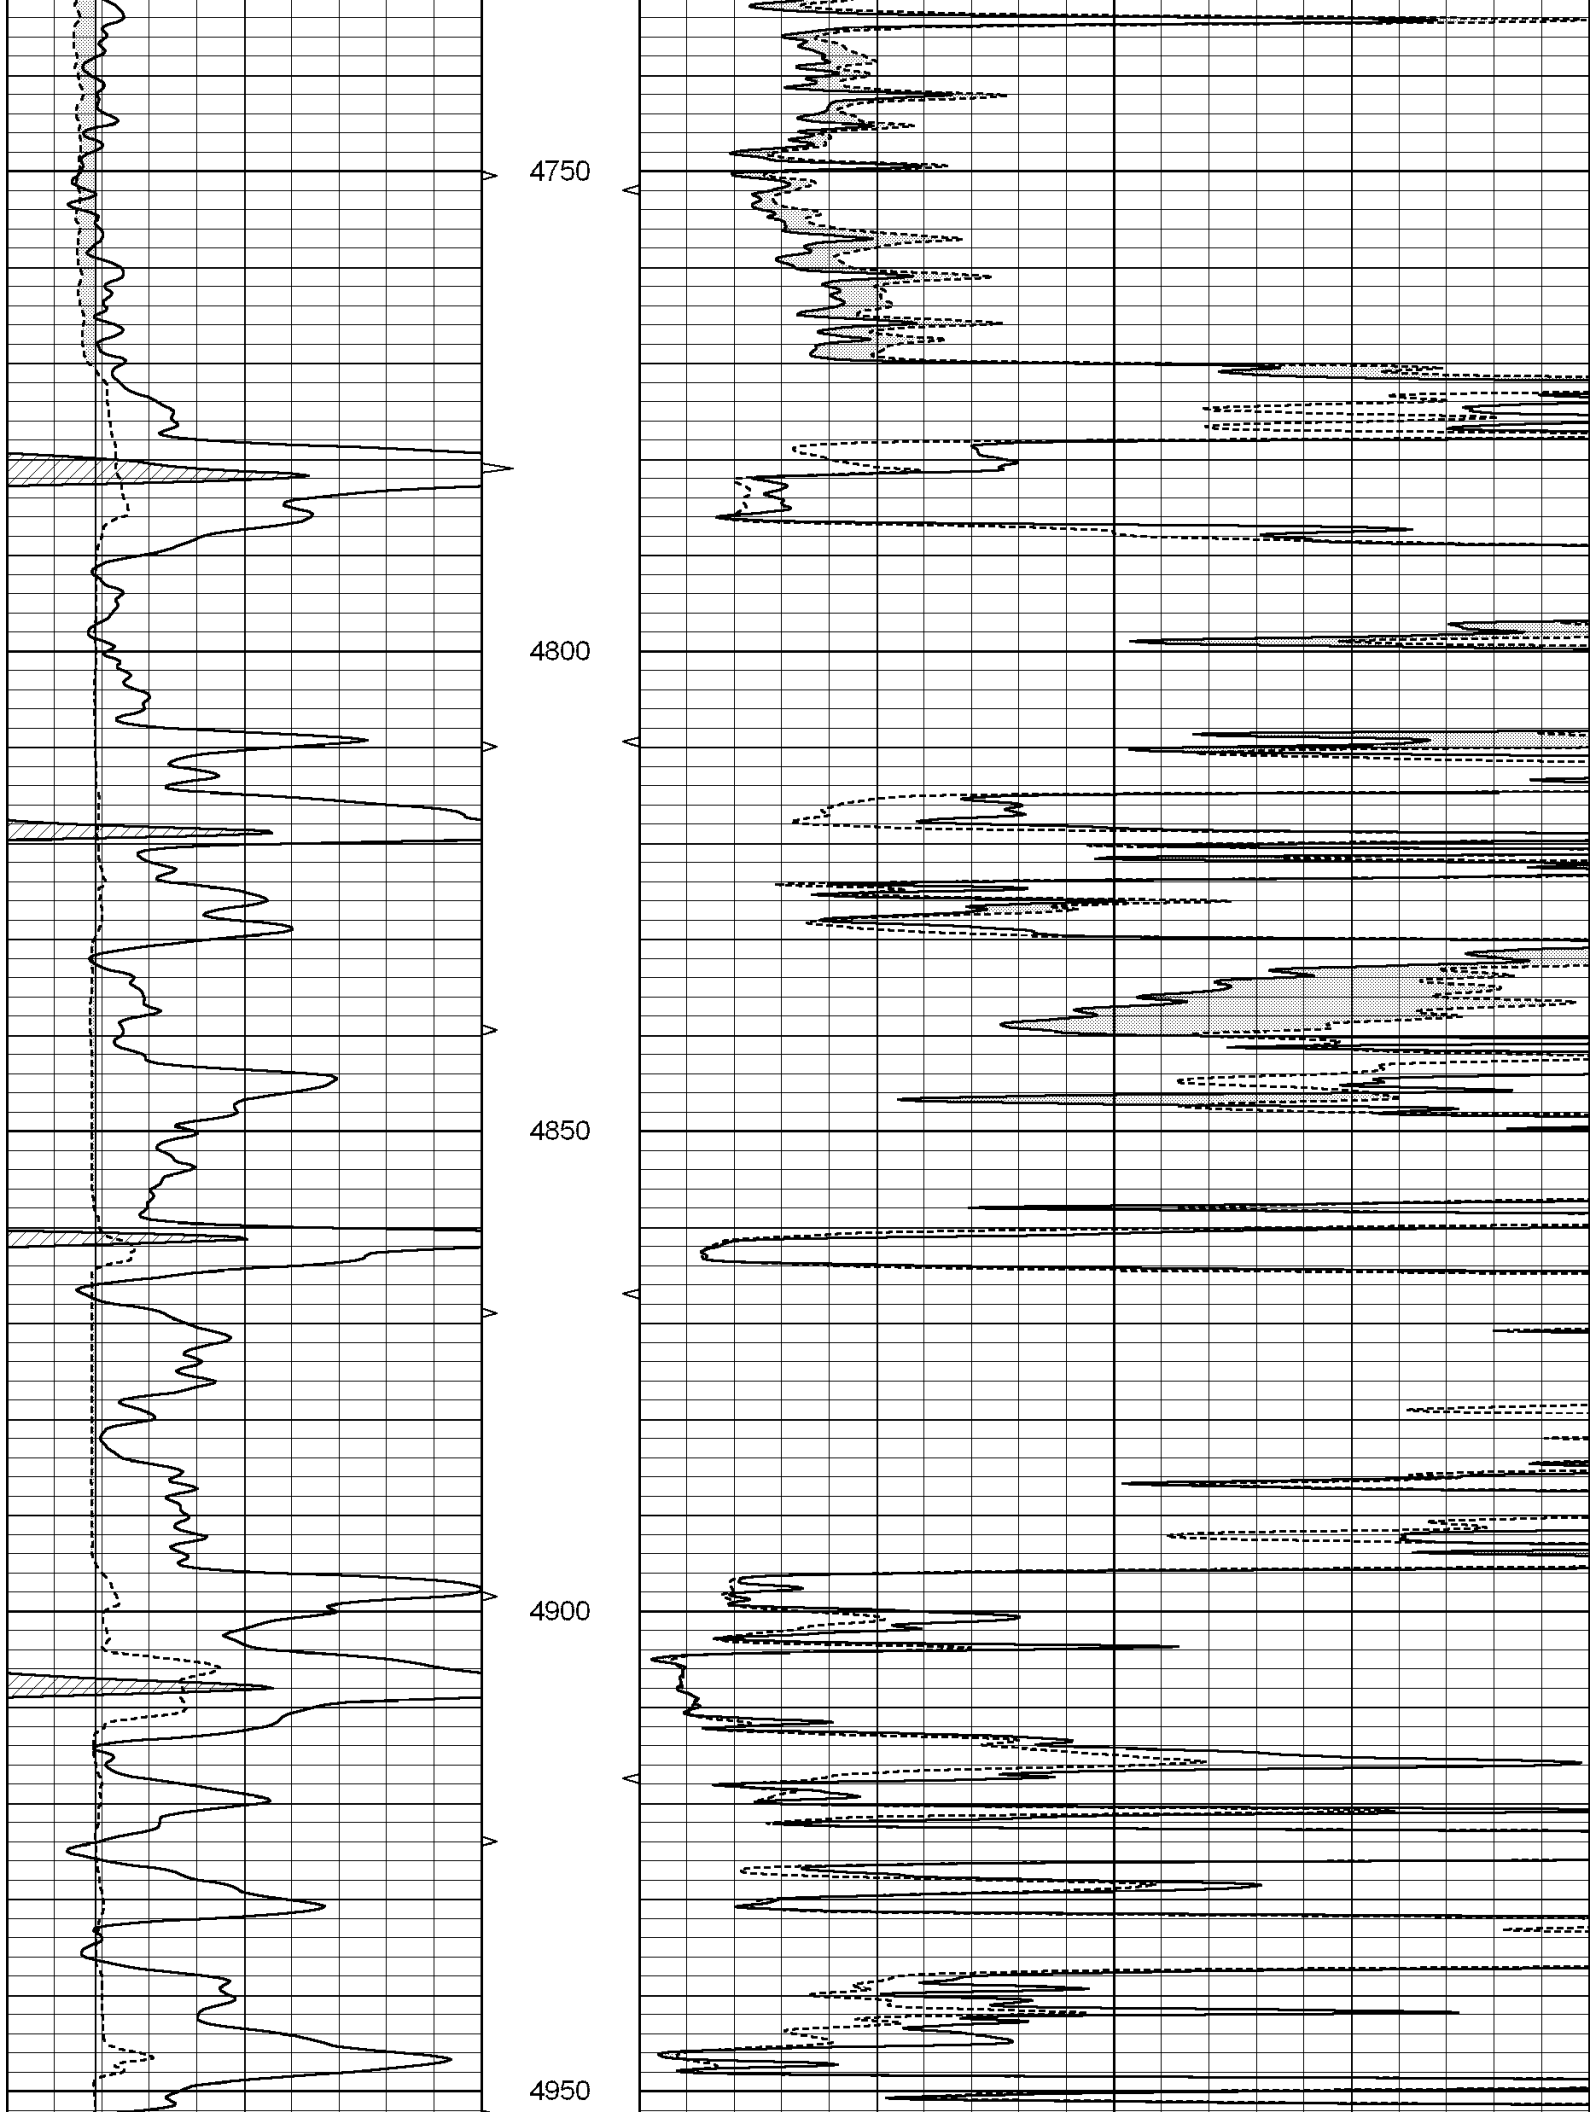

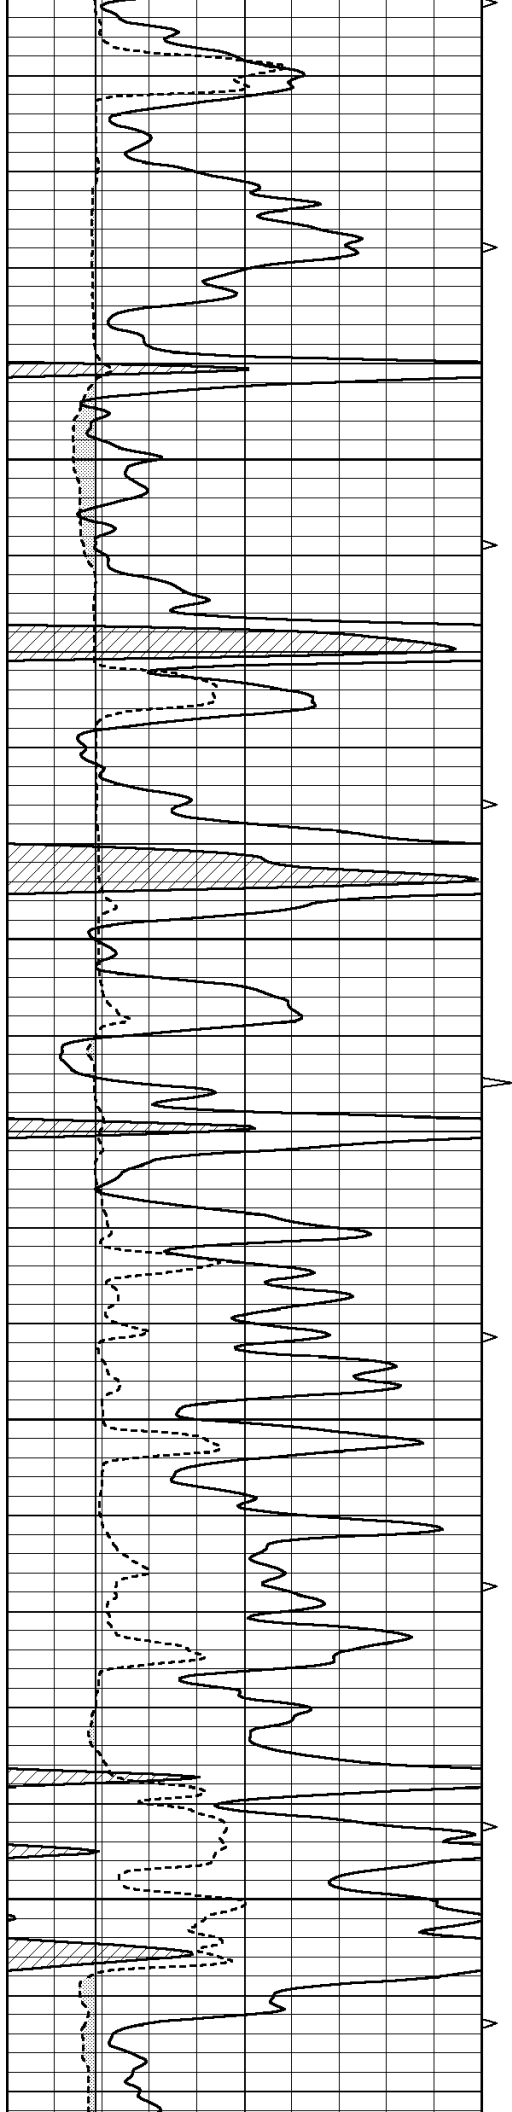



5000


5050


5100

5150

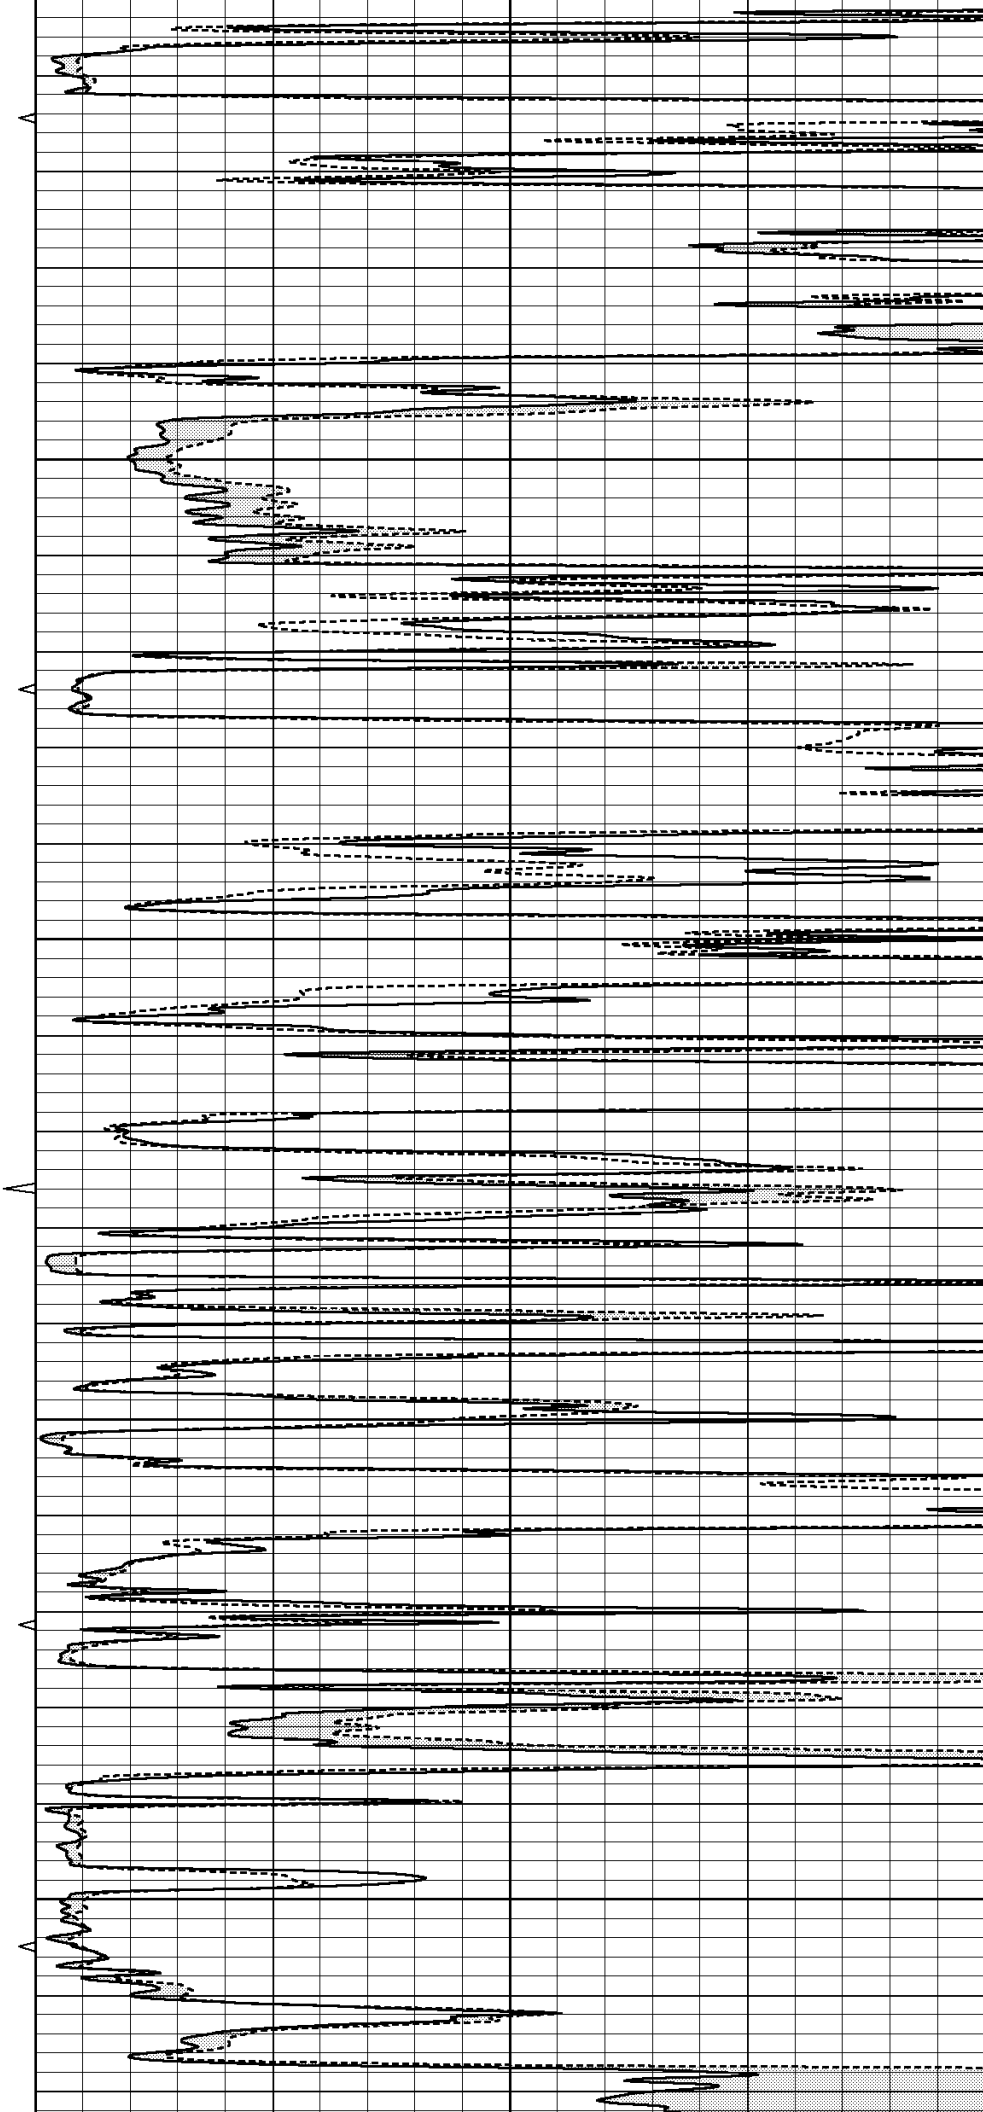

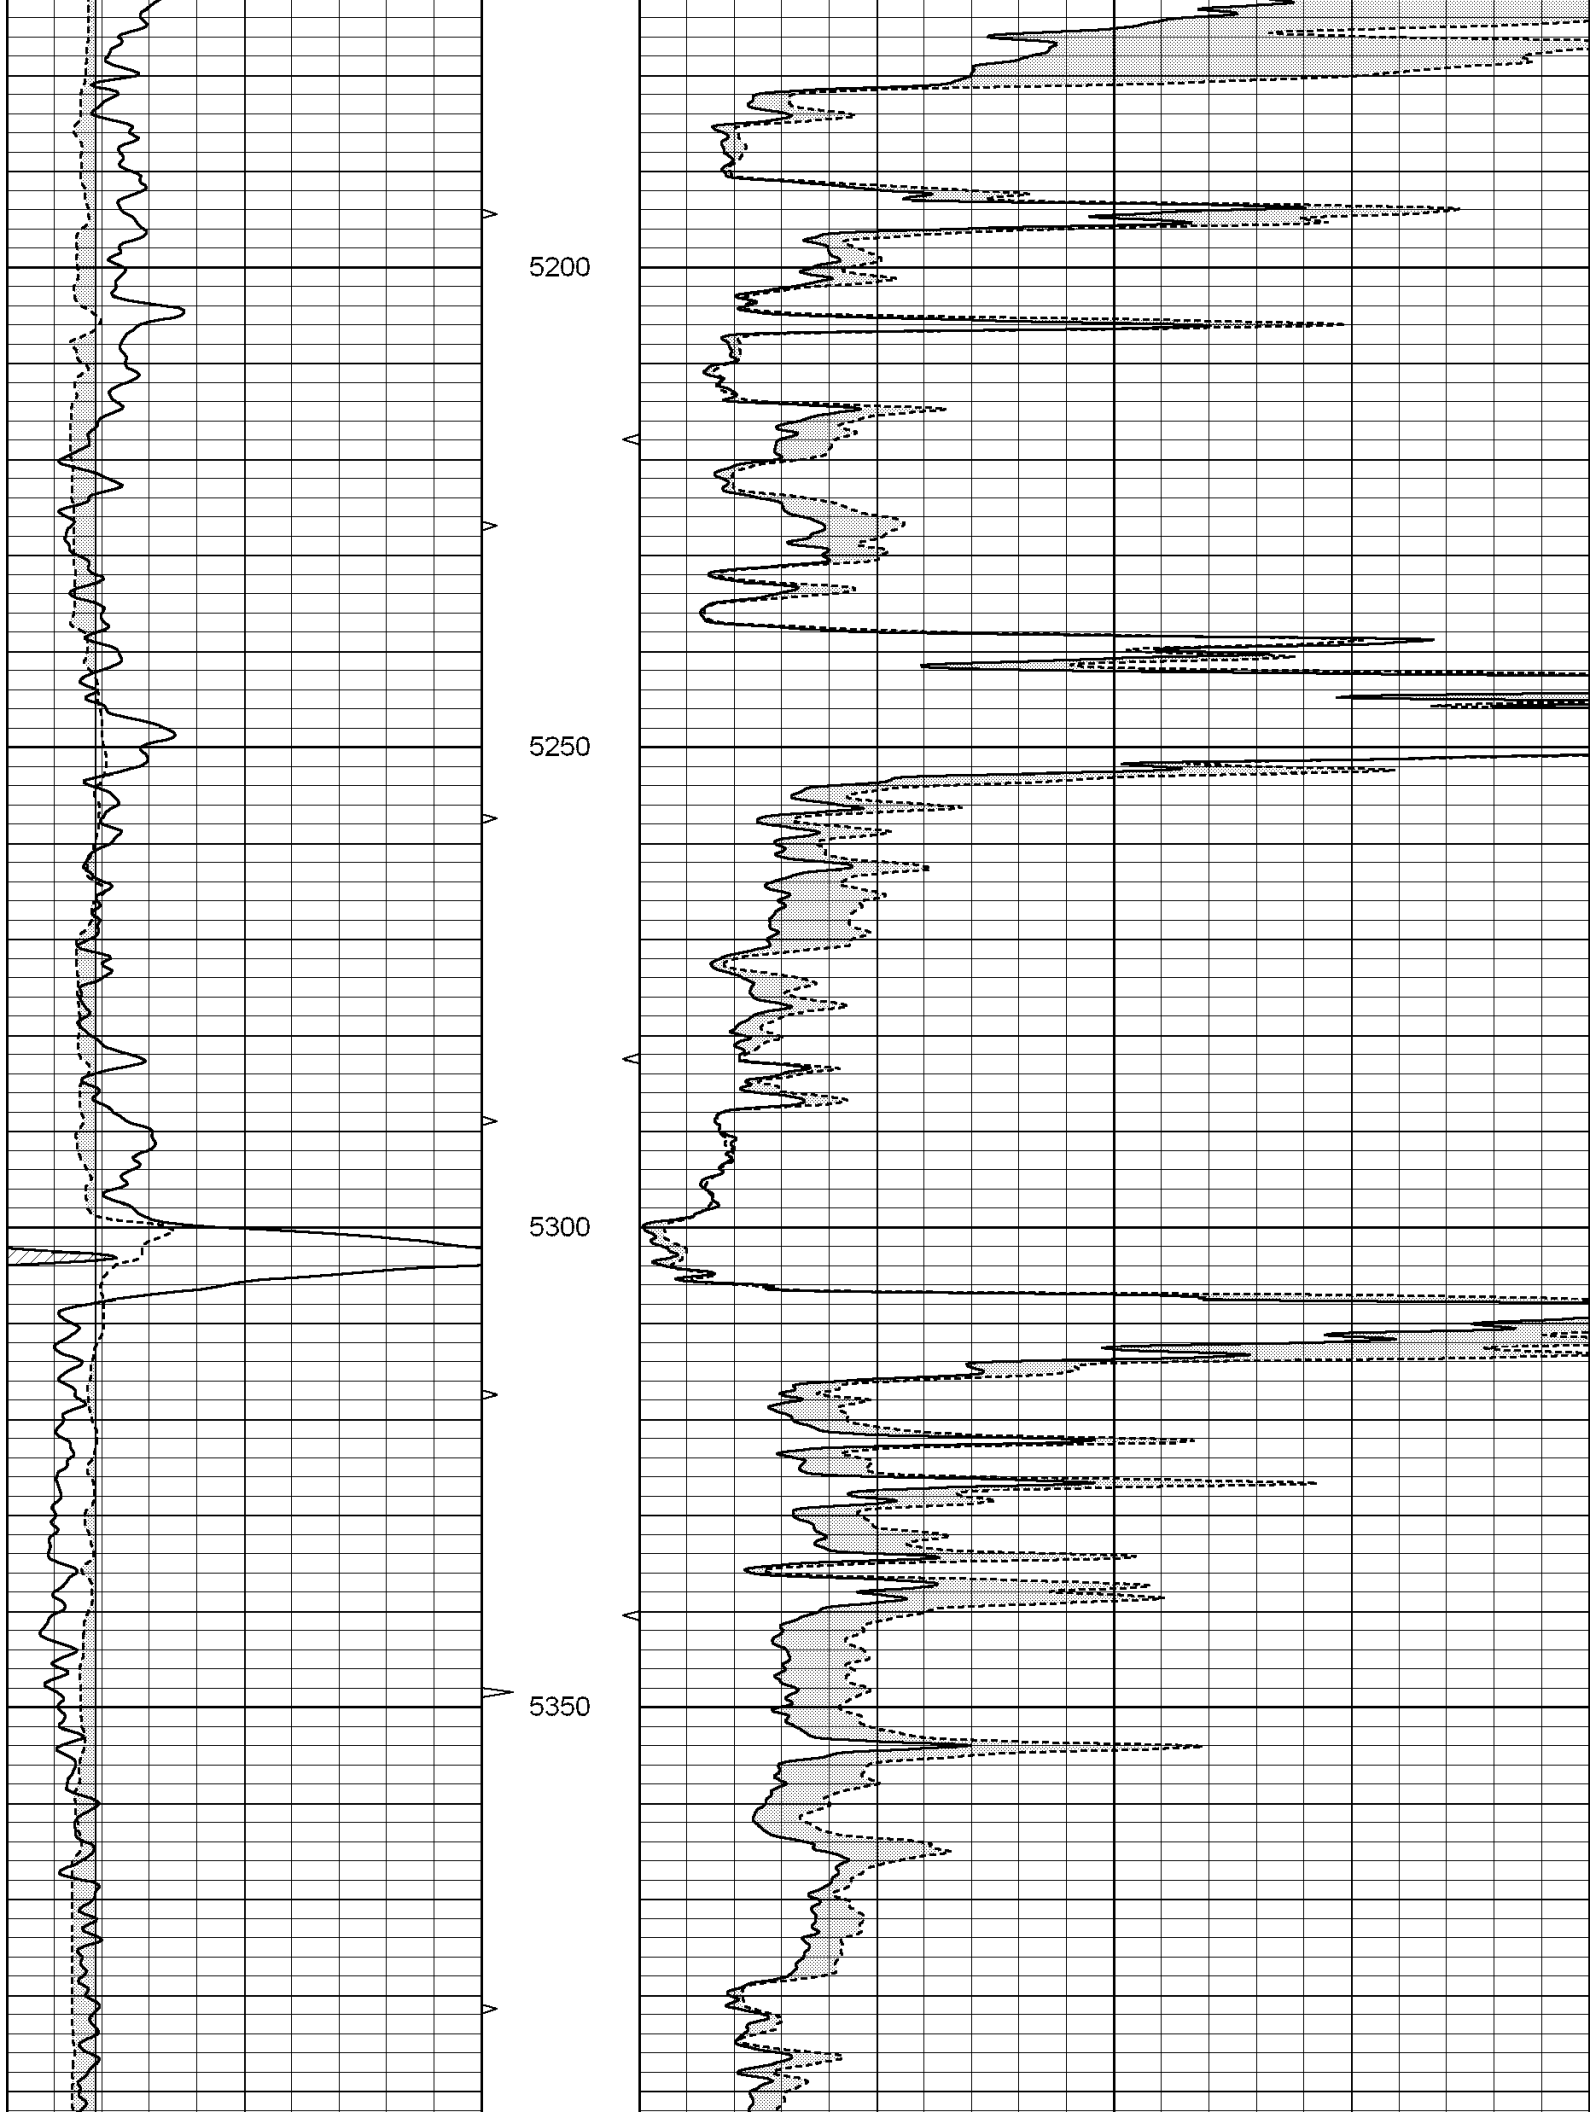


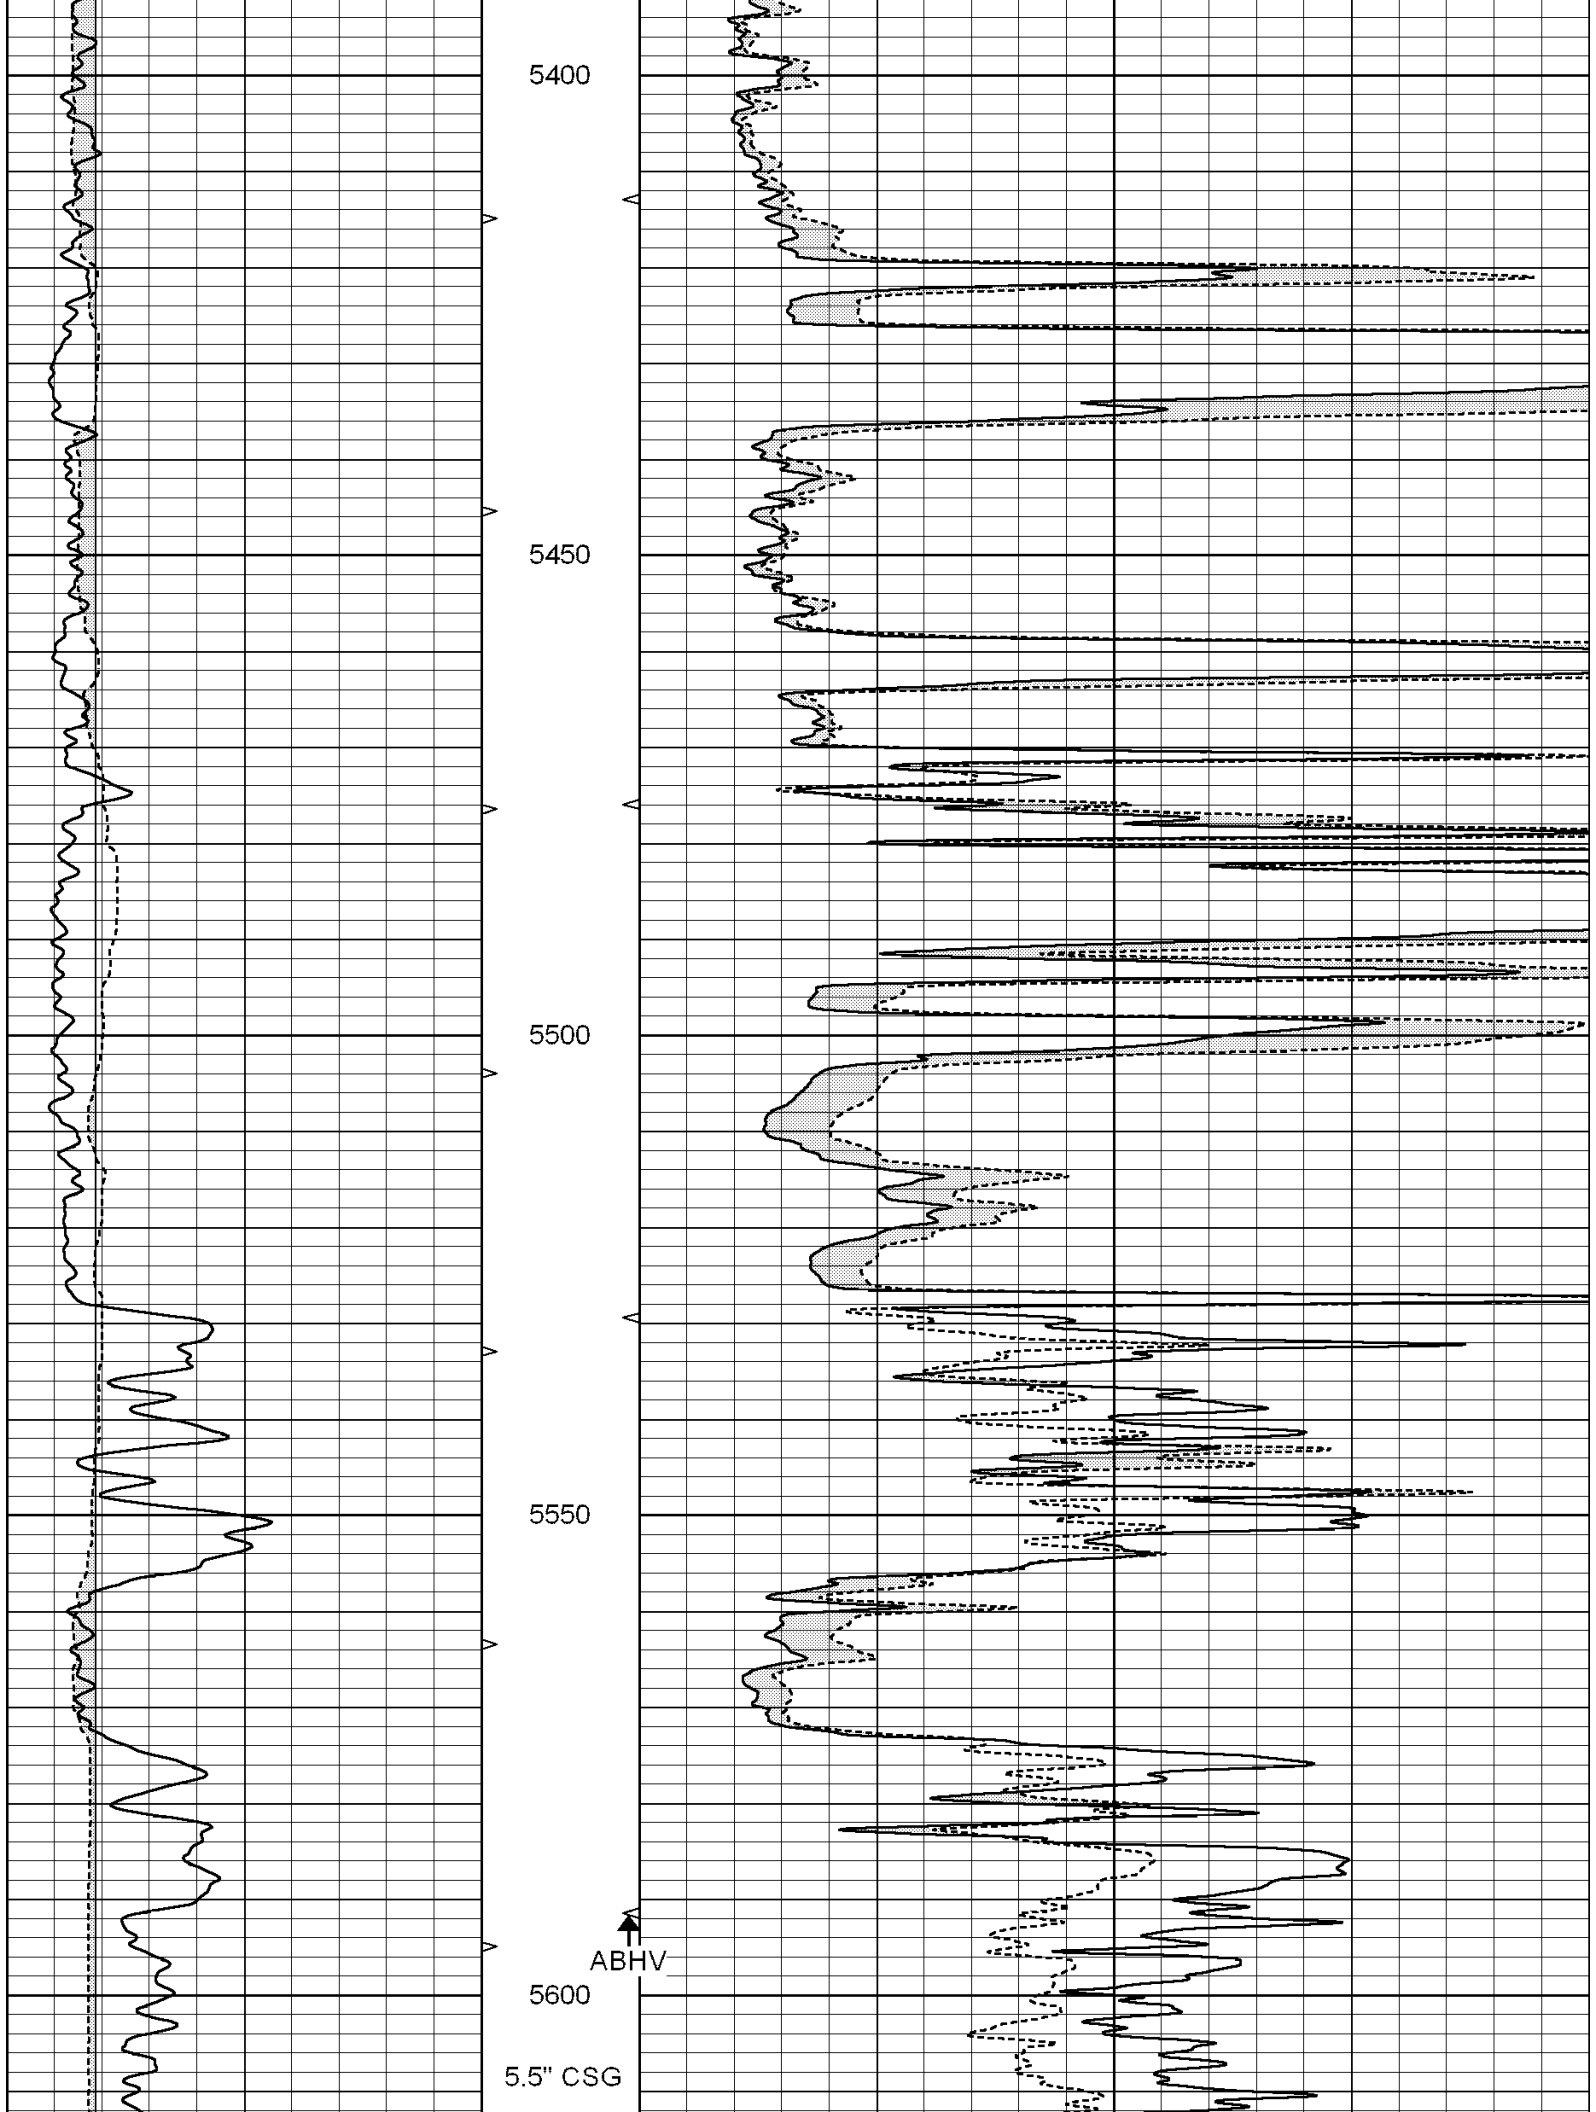


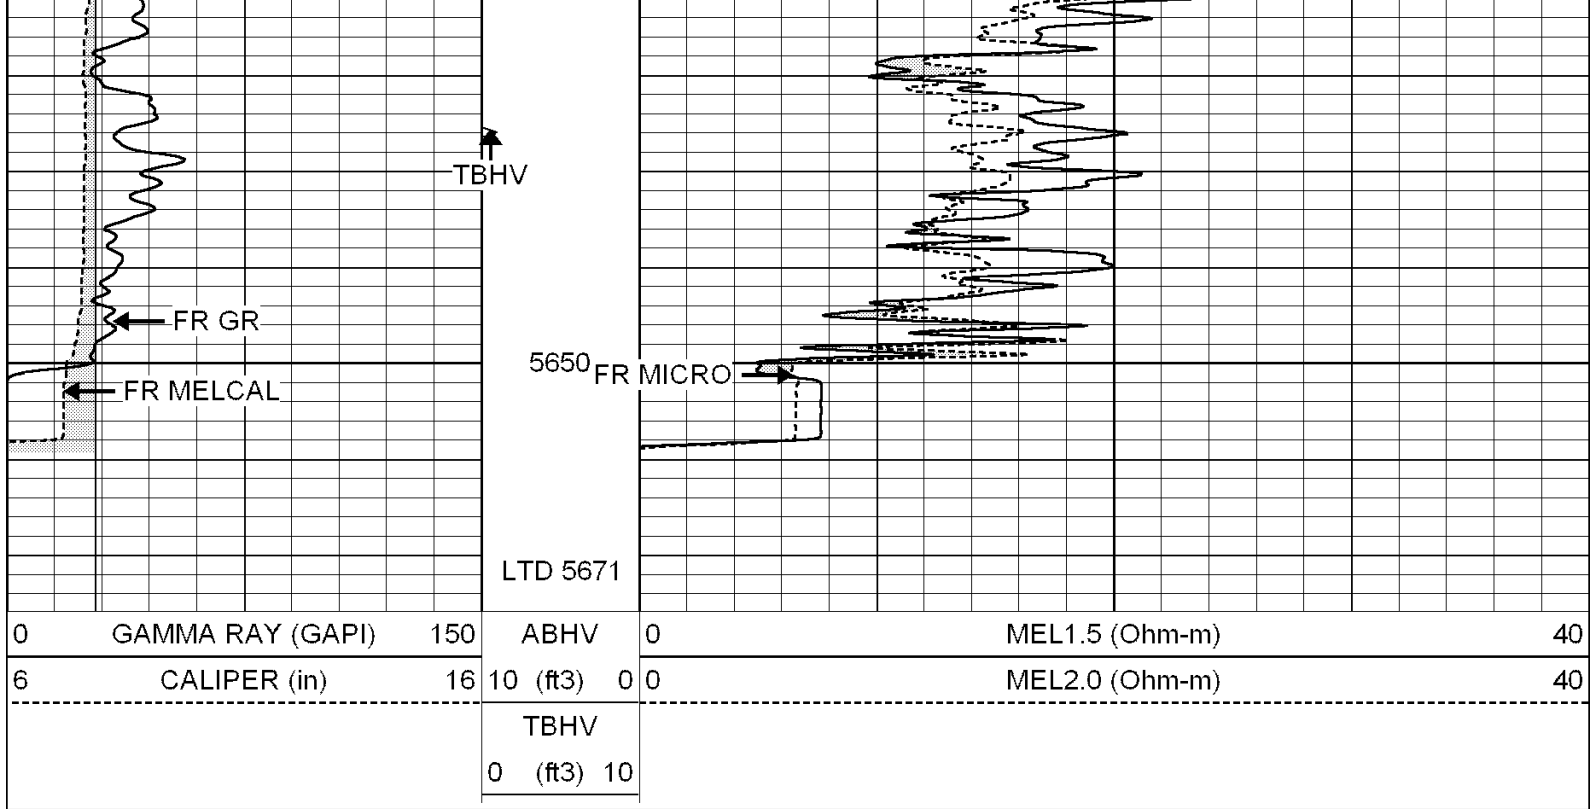


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 004854pe.db
 Dataset Pathname: pass5.2
 Presentation Format: _micro
 Dataset Creation: Wed Jan 27 23:29:23 2010
 Charted by: Depth in Feet scaled 1:240

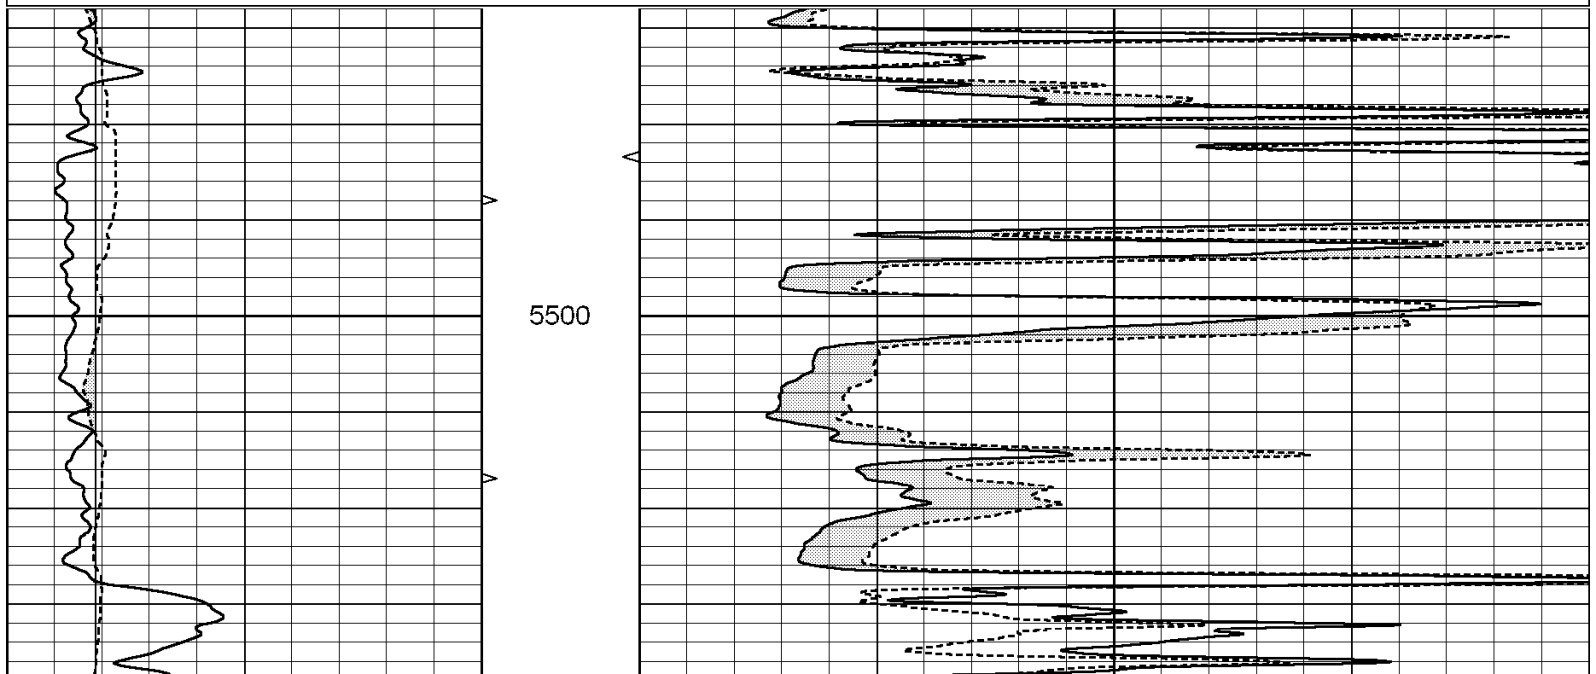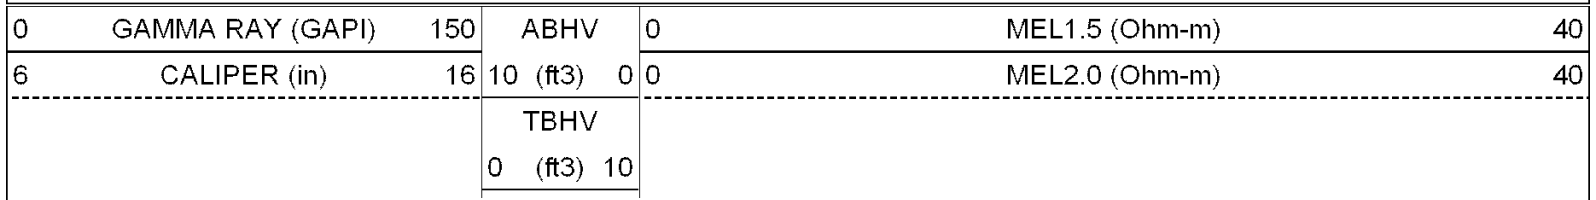

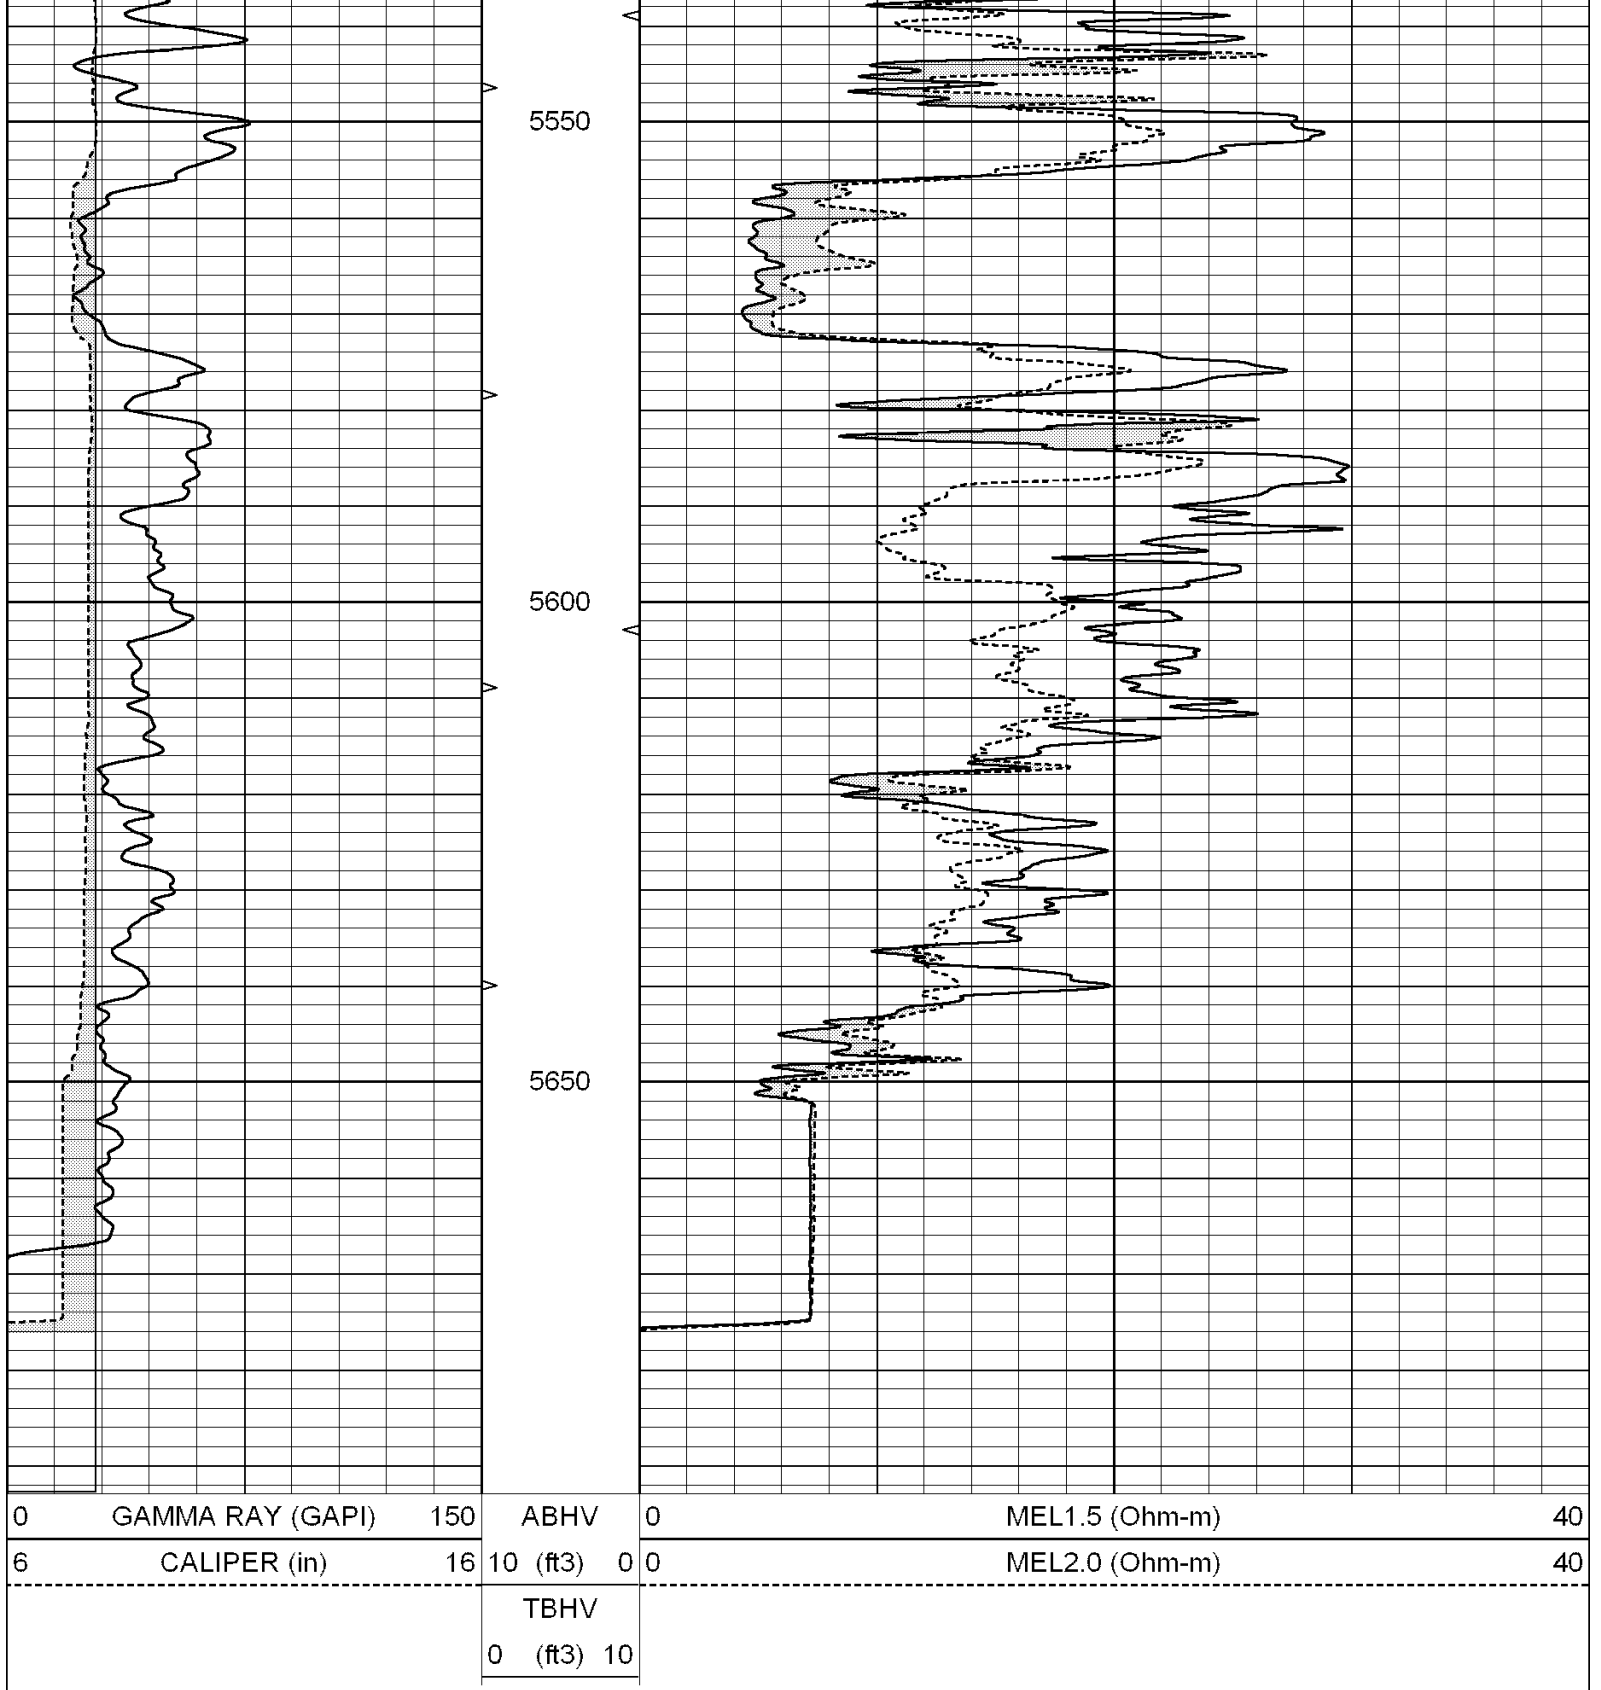

Calibration Report

Database File: 004854pe.db
Dataset Pathname: pass6.2
Dataset Creation: Thu Jan 28 00:01:07 2010 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO6
Tool Model: PROBE
Performed: Wed Jan 27 22:36:07 2010

Caliper Calibration: Gain=5.122 Offset=0.252

Caliper Calibration:	Gain=5.133	Offset=-0.252
References	Low Cal	High Cal
Readings	8.000	14.000
	1.379	2.548
1.5" Calibration:	Gain=40.781	Offset=-0.851
References	Low Cal	High Cal
Readings	0.000	20.000
	0.008	1.200
2" Calibration:	Gain=40.739	Offset=-0.193
References	Low Cal	High Cal
Readings	0.000	20.000
	0.008	0.888
Gamma Ray Calibration Report		
Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Tue Nov 10 08:32:36 2009	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.5235	GAPI/cps