



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	TETON ENERGY CORPORATION		
Well	SPRINGER #42-14		
Field	BOYD CROSSING		
County	BARTON	State	KANSAS
Location:	API # : 15-009-25291-0000		Other Services
	1785'FNL & 630'FEL NE SE NE		CDL/CNL DIL/SONIC
	SEC 14 TWP 18S RGE 14W		
Permanent Datum	GROUND LEVEL	Elevation	1872
Log Measured From	KELLY BUSHING 10' A.G.L.		
Drilling Measured From	KELLY BUSHING	Elevation	K.B. 1882 D.F. 1880 G.L. 1872
Date	14 DEC 08		
Run Number	CNE		
Depth Driller	3480		
Depth Logger	3480		
Bottom Logged Interval	3463		
Top Log Interval	2700		
Casing Driller	8 5/8 @ 823'		
Casing Logger	821'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.3/48	CHLORIDES 7000	
pH / Fluid Loss	9.5/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	0.70 @ 57		
Rmf @ Meas. Temp	0.52 @ 57		
Rmc @ Meas. Temp	0.84 @ 57		
Source of Rmf / Rmc	CAL/CAL		
Rm @ BHT	0.35 @ 111F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	3:30 PM		
Maximum Recorded Temperature	111F		
Equipment Number	680		
Location	HAYS, KS		
Recorded By	JOE CRATHORNE		
Witnessed By	TED PFAU		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



THANK YOU FOR USING SUPERIOR WELL SERVICES
HAYS, KS. 785-628-6395


DIRECTIONS: HIGHWAY 4 AND 281; SOUTH ON BOYD ROAD TO KEYSTONE BLACKTOP (APP. 1 MILE SOUTH OF RAIL ROAD TRACKS), EAST 1 MILE, 1 1/2 MILES SOUTH, WEST INTO

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	20
10000	LTEN (lb)	0	TBHV			
			0 (ft3) 10			

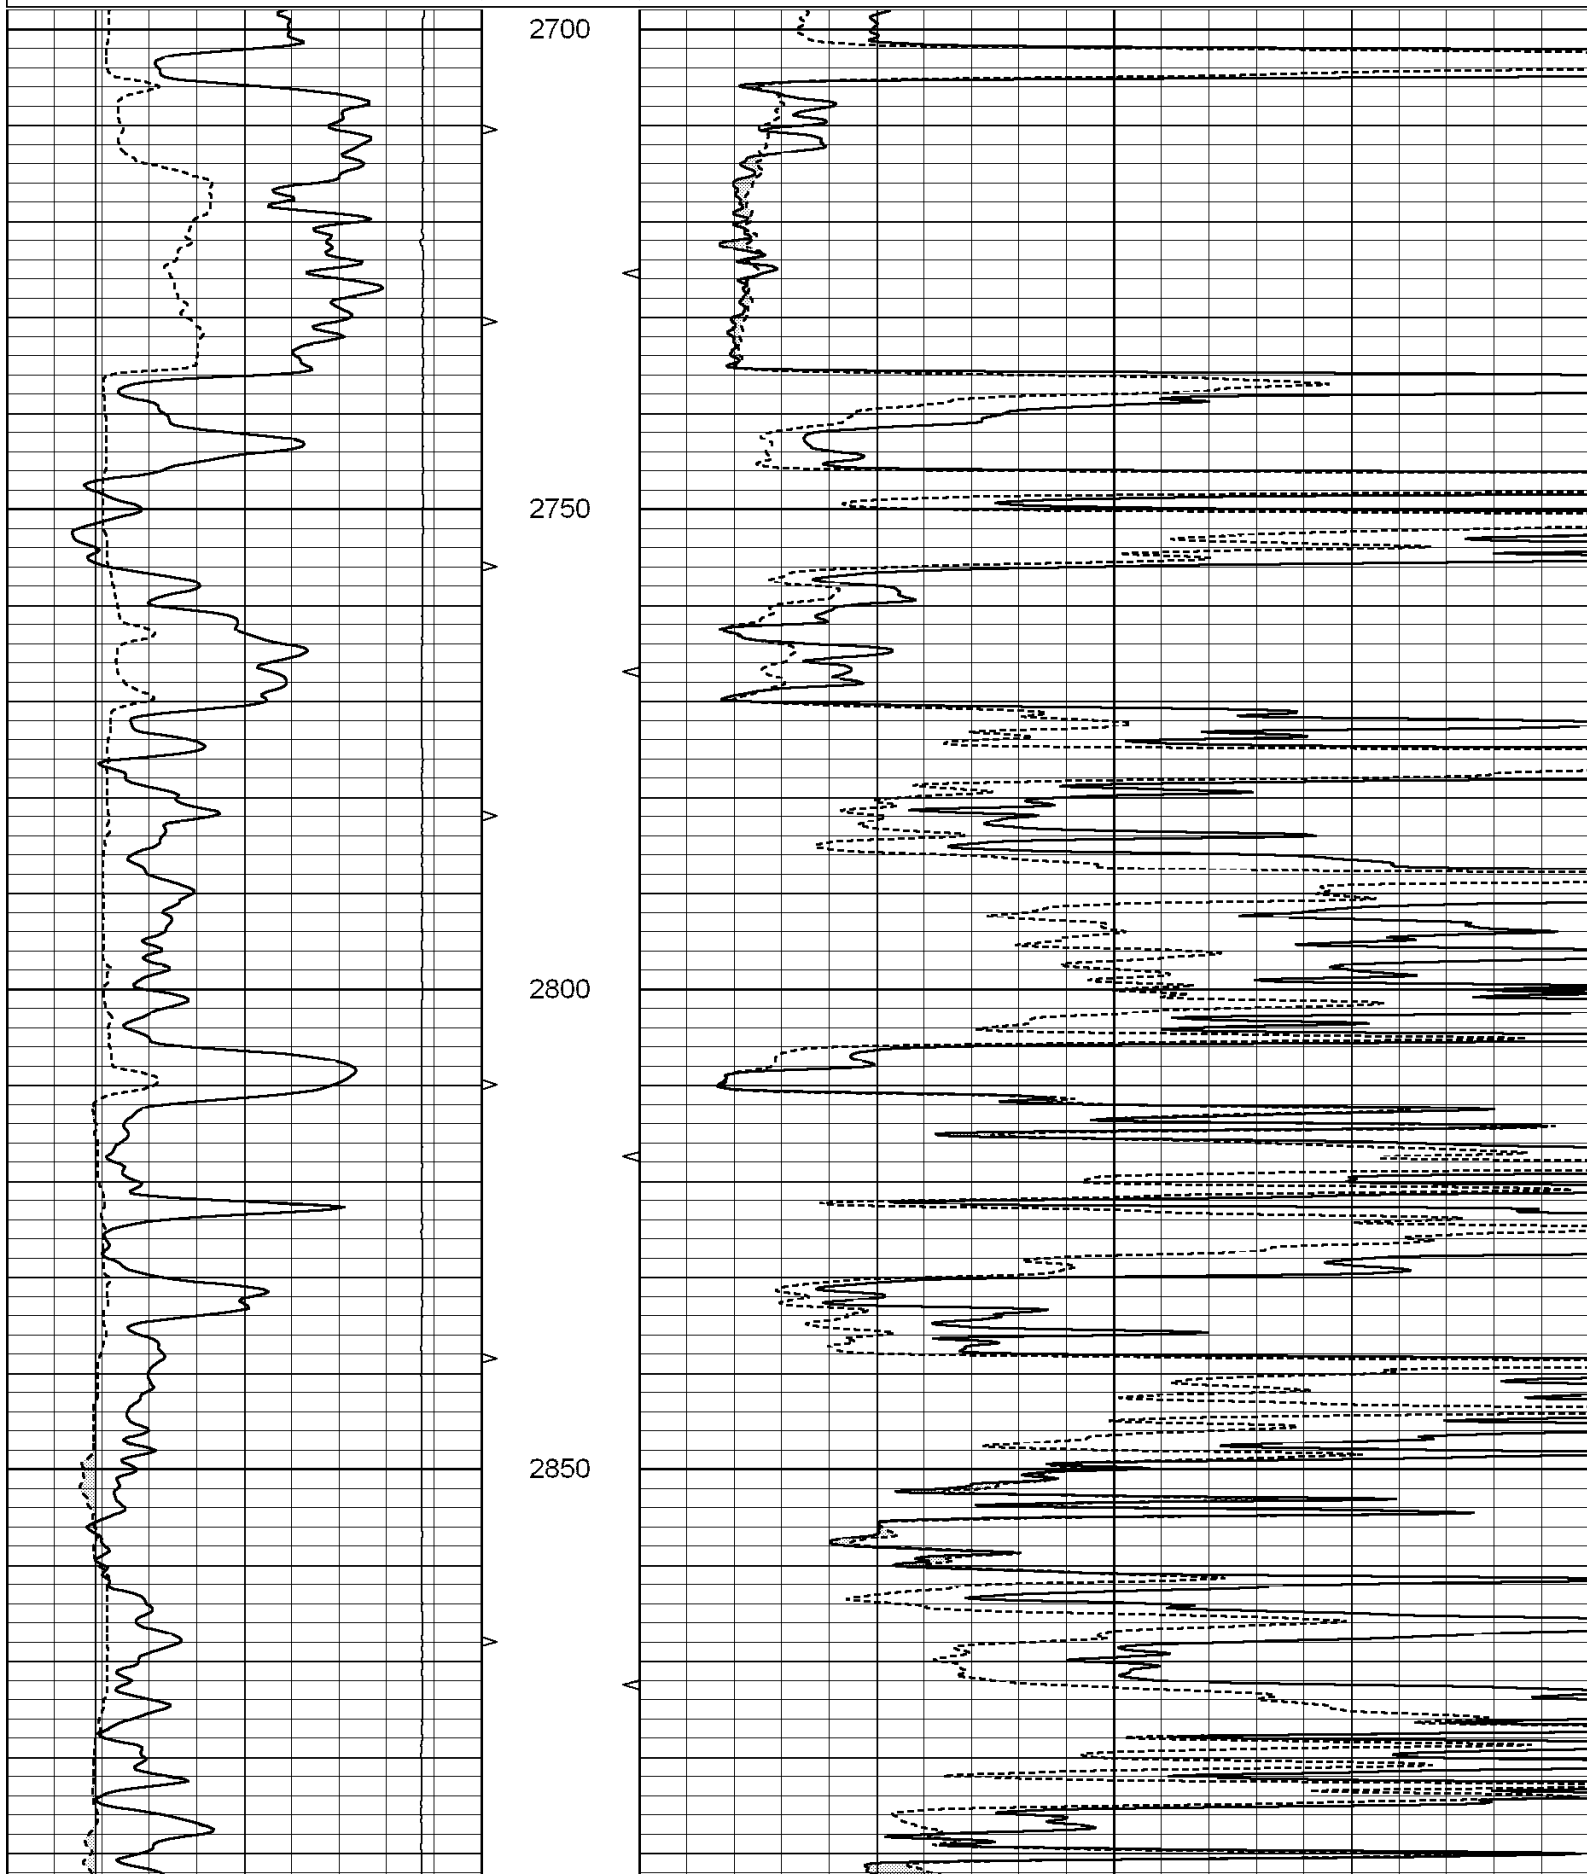

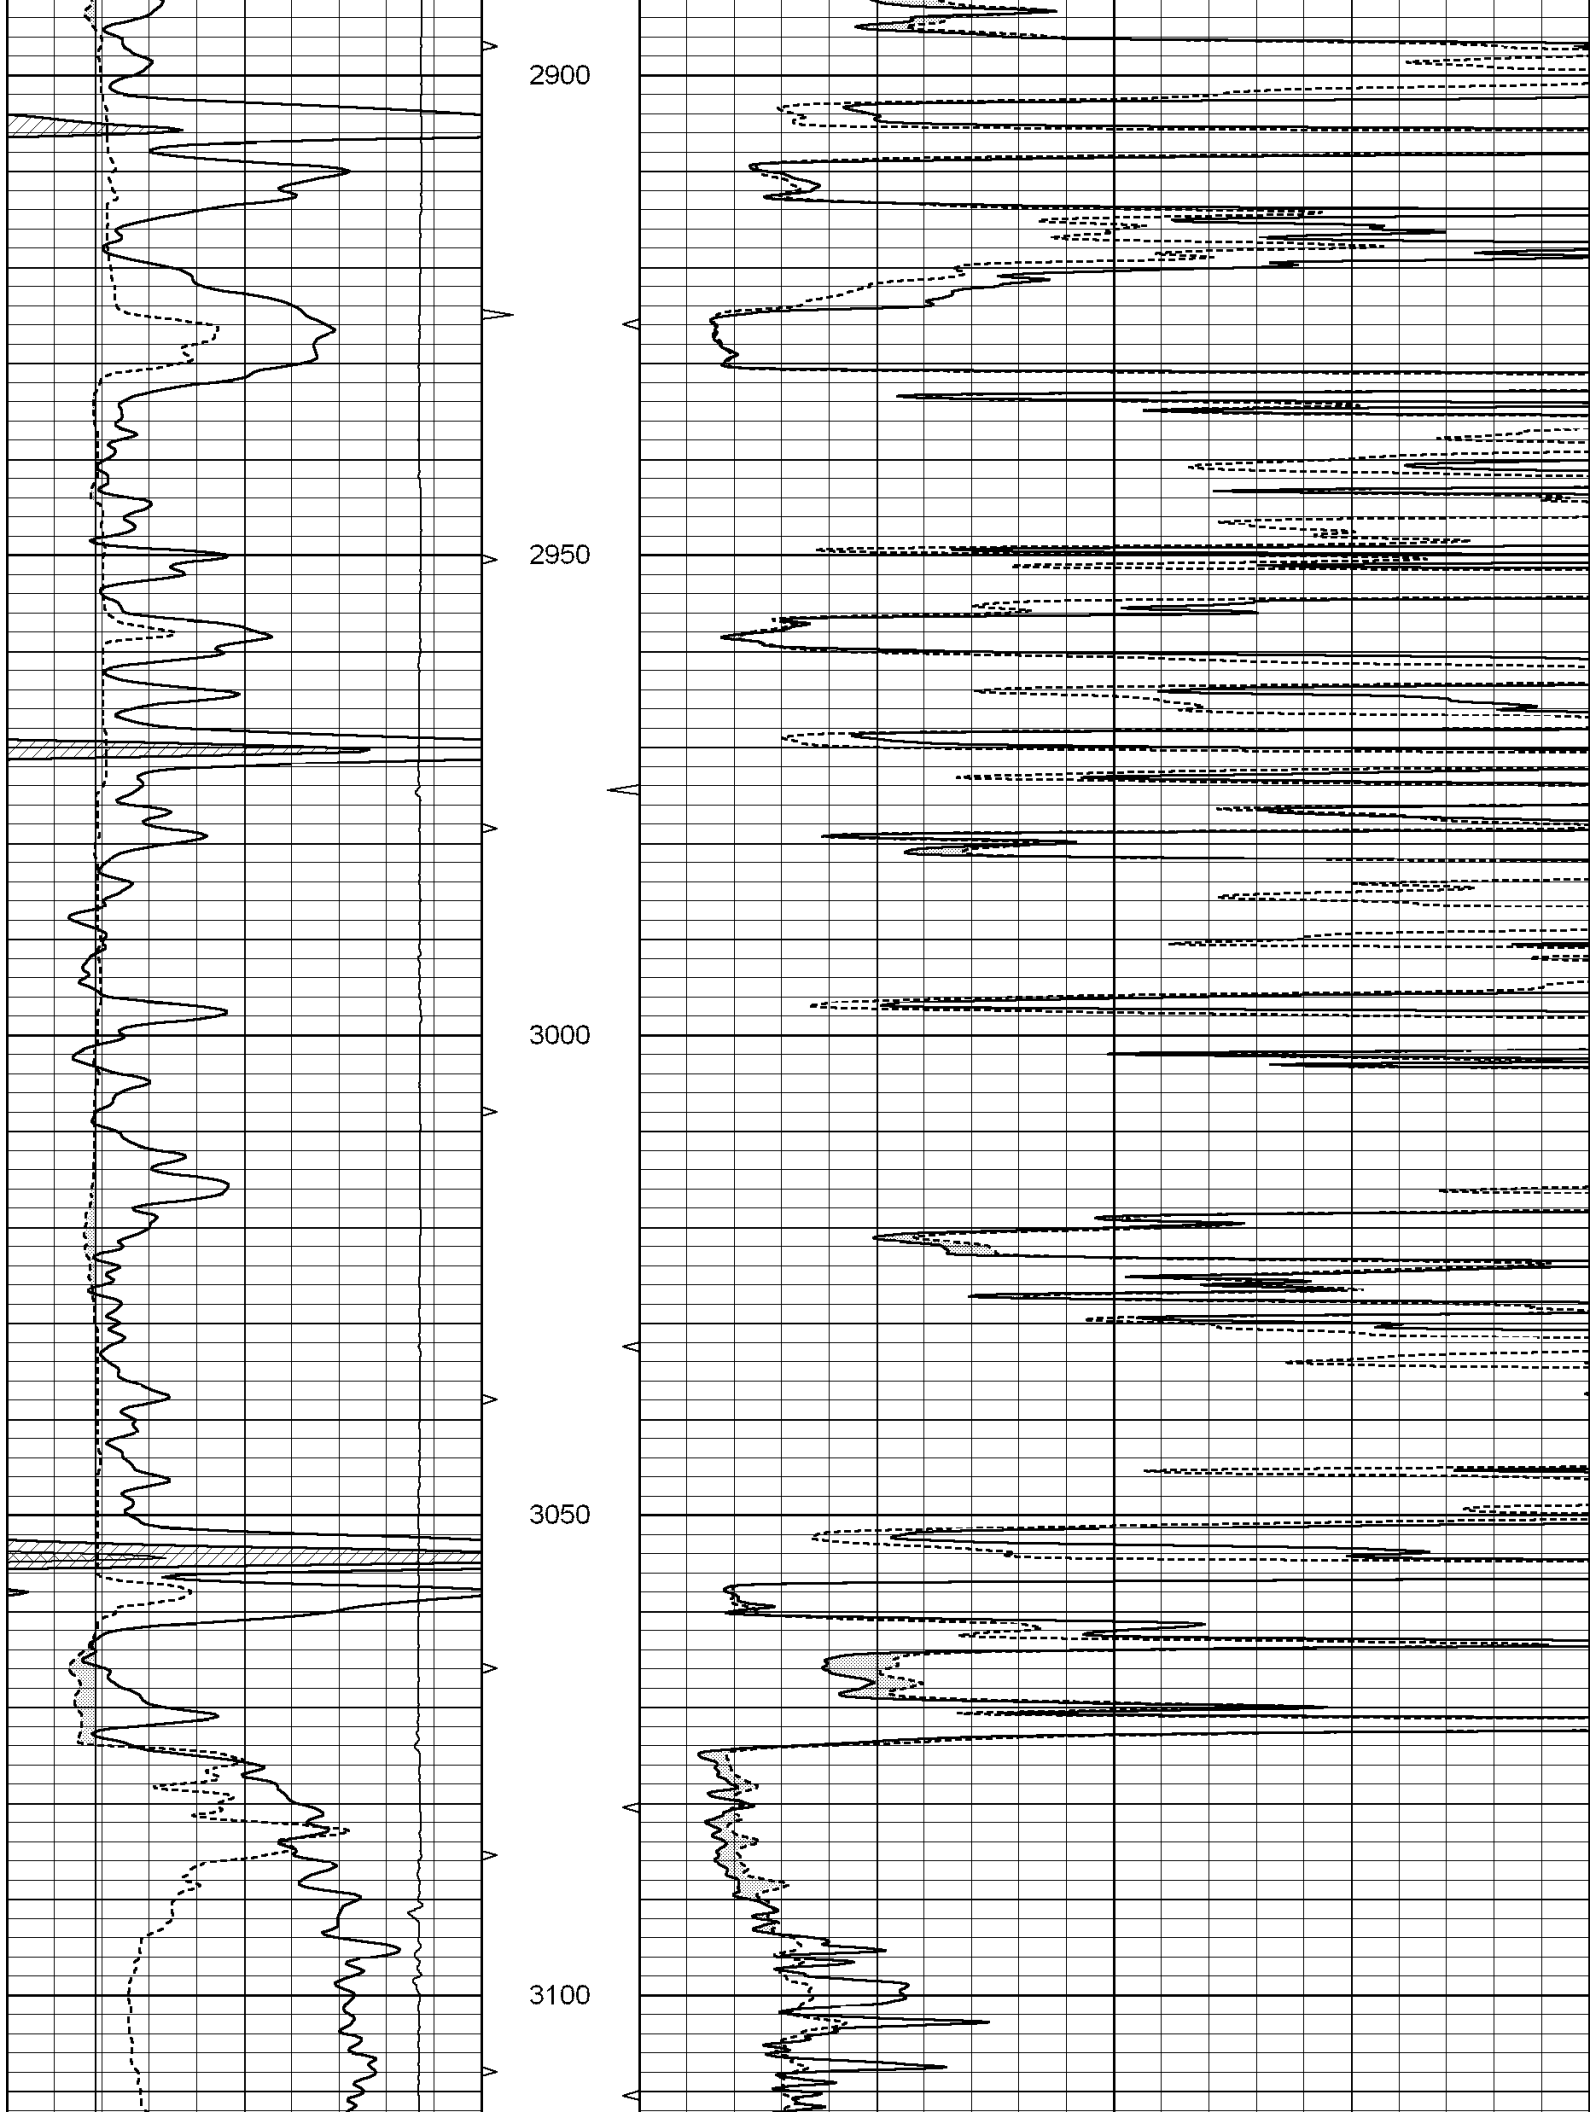

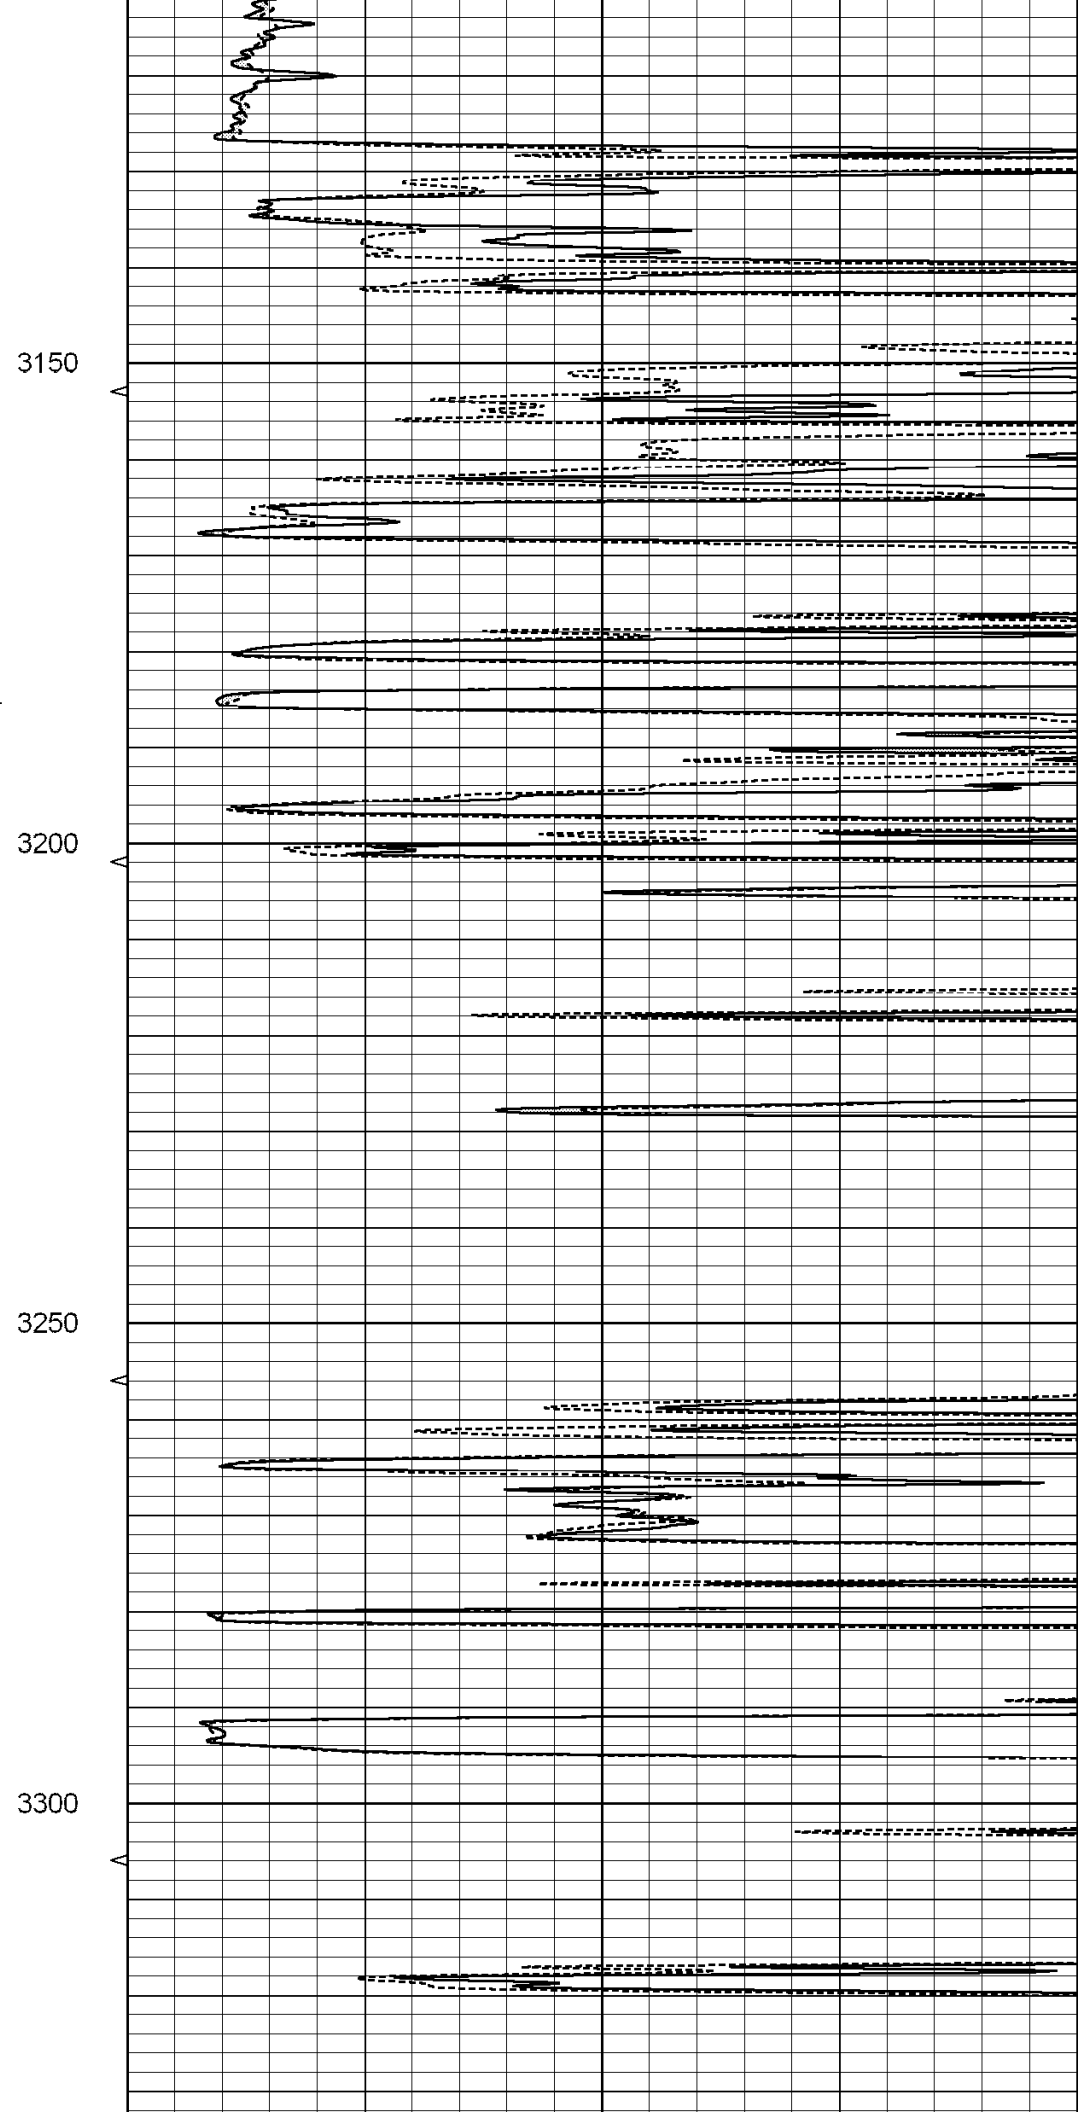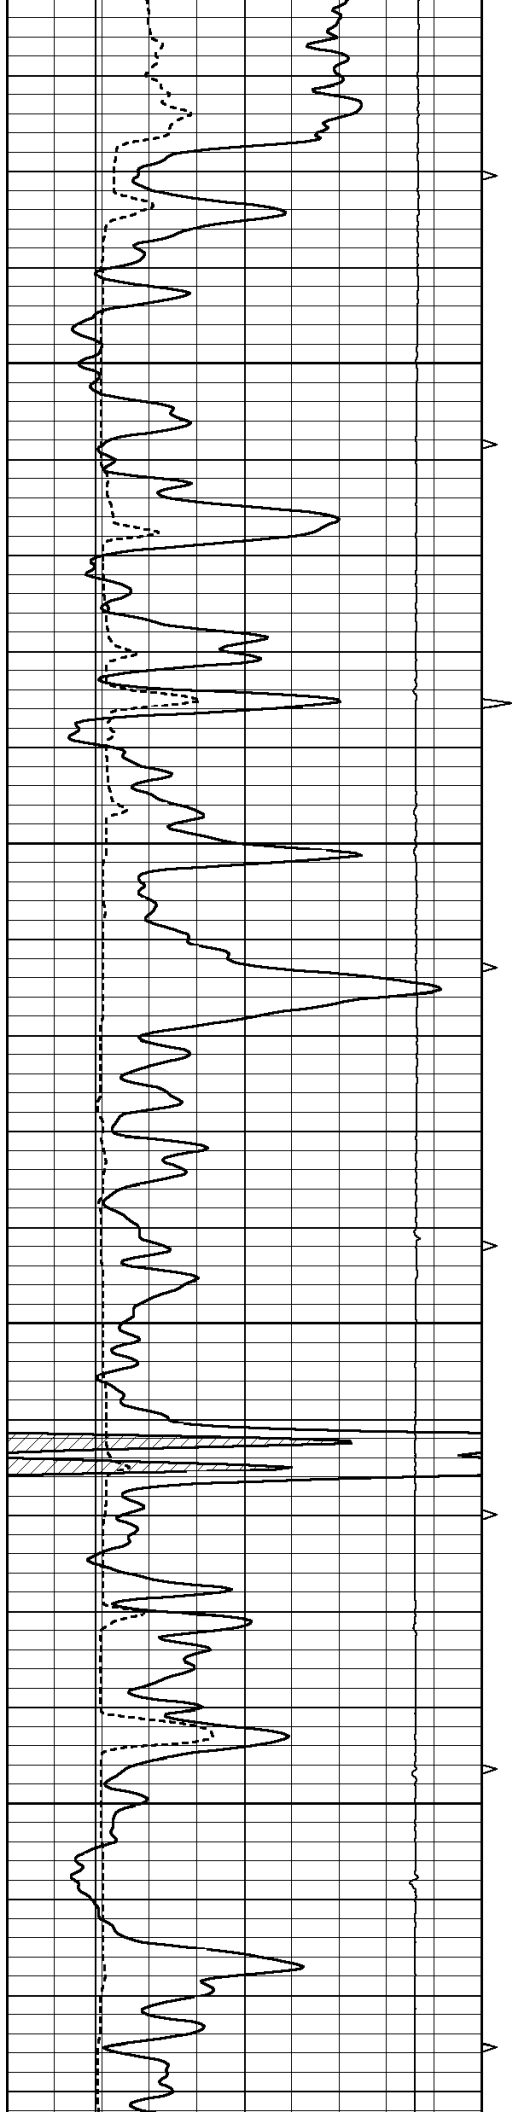

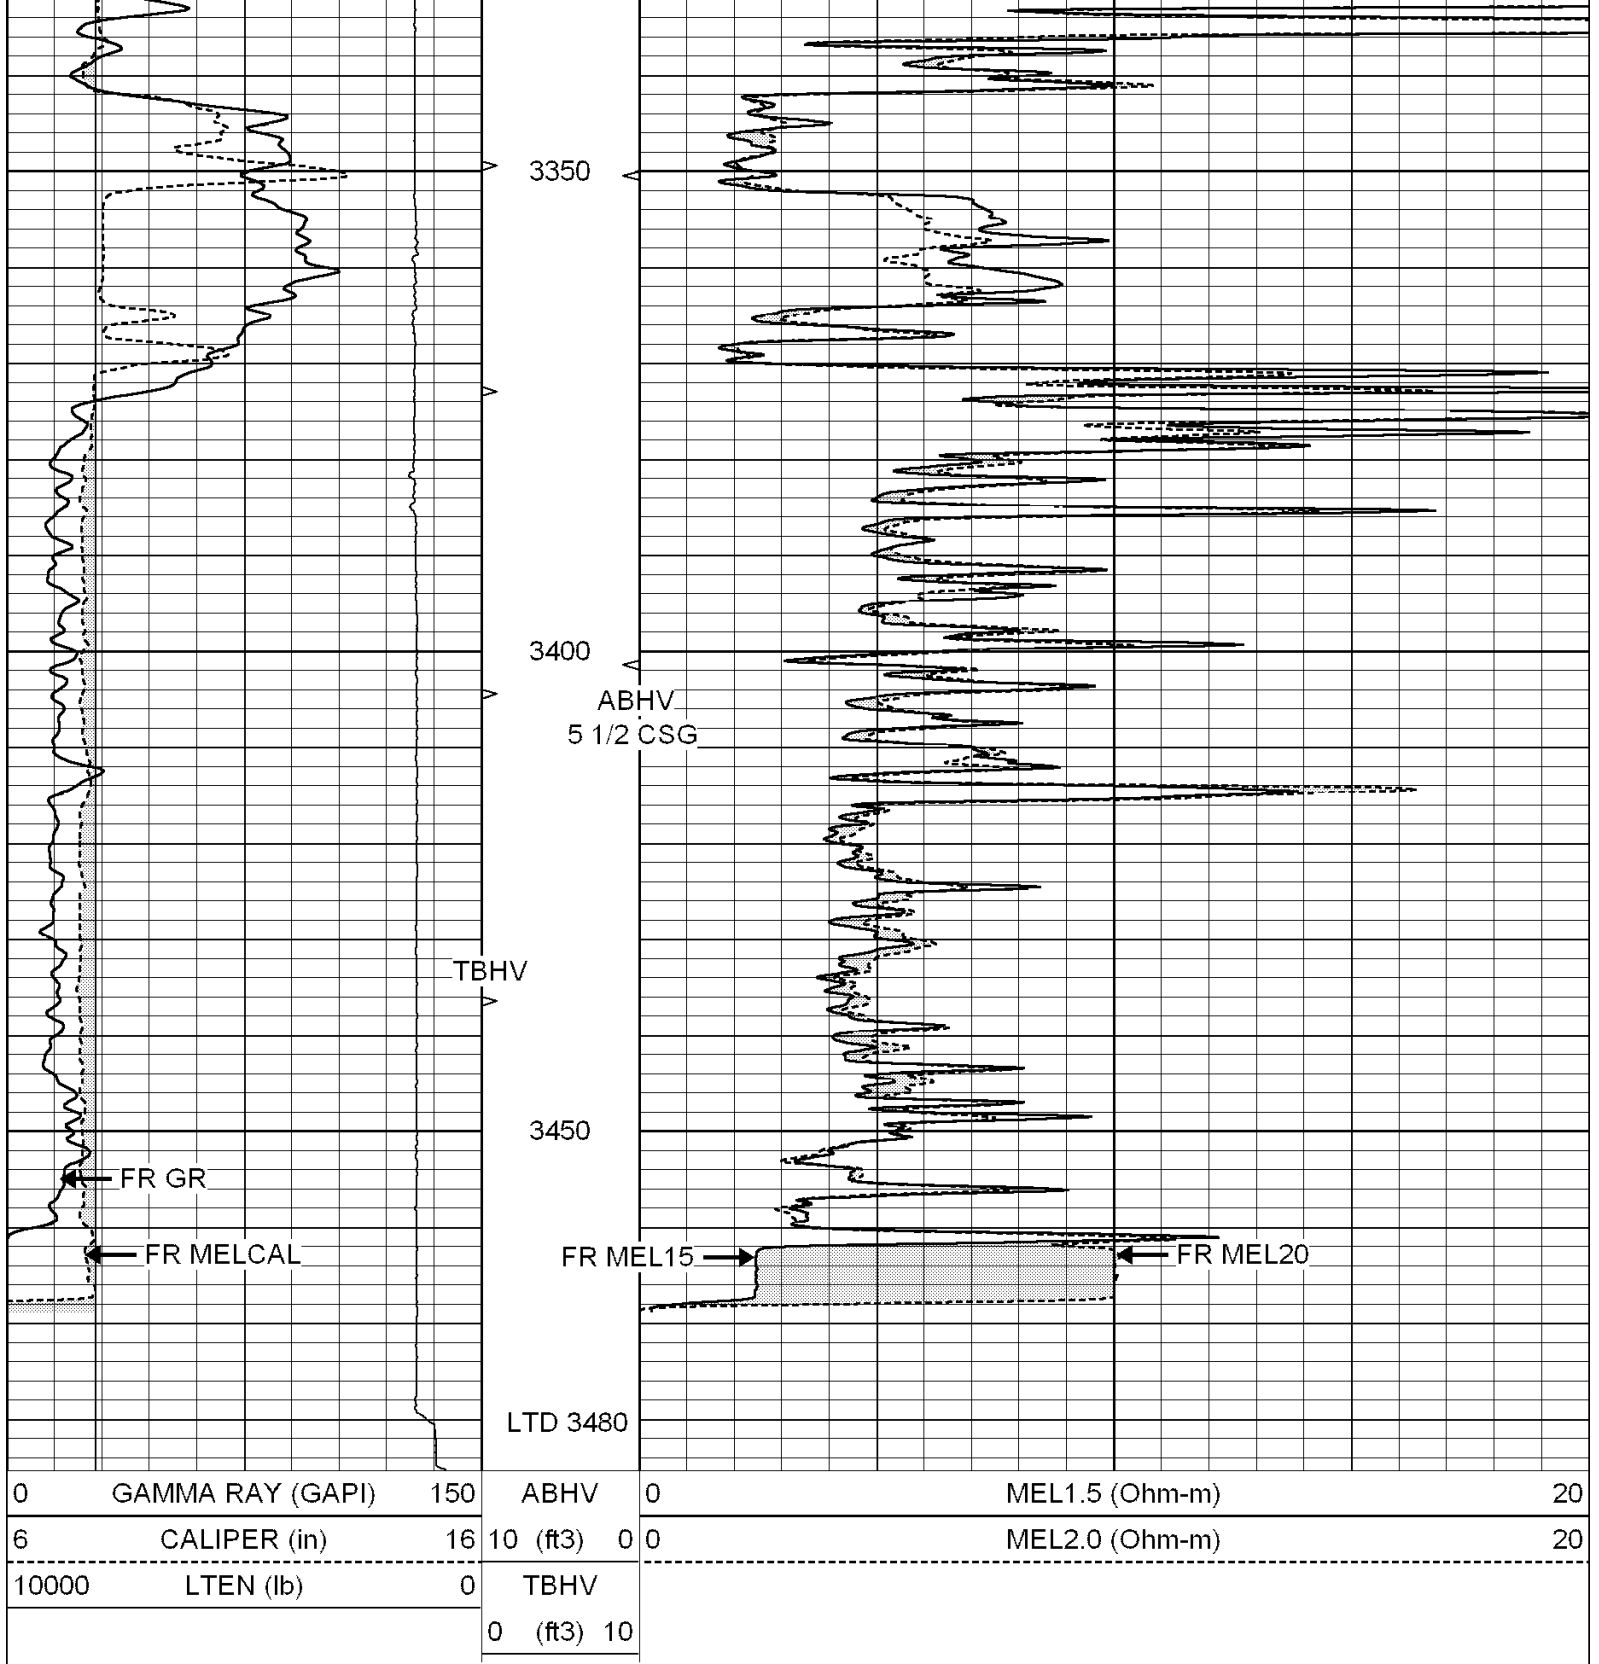



SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 3070teton.db
 Dataset Pathname: pass4.4
 Presentation Format: _micro
 Dataset Creation: Sun Dec 14 18:42:38 2008 by Calc Open-Cased 070814
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	20
10000	LTEN (lb)	0	TBHV			
			0 (ft3)	10		

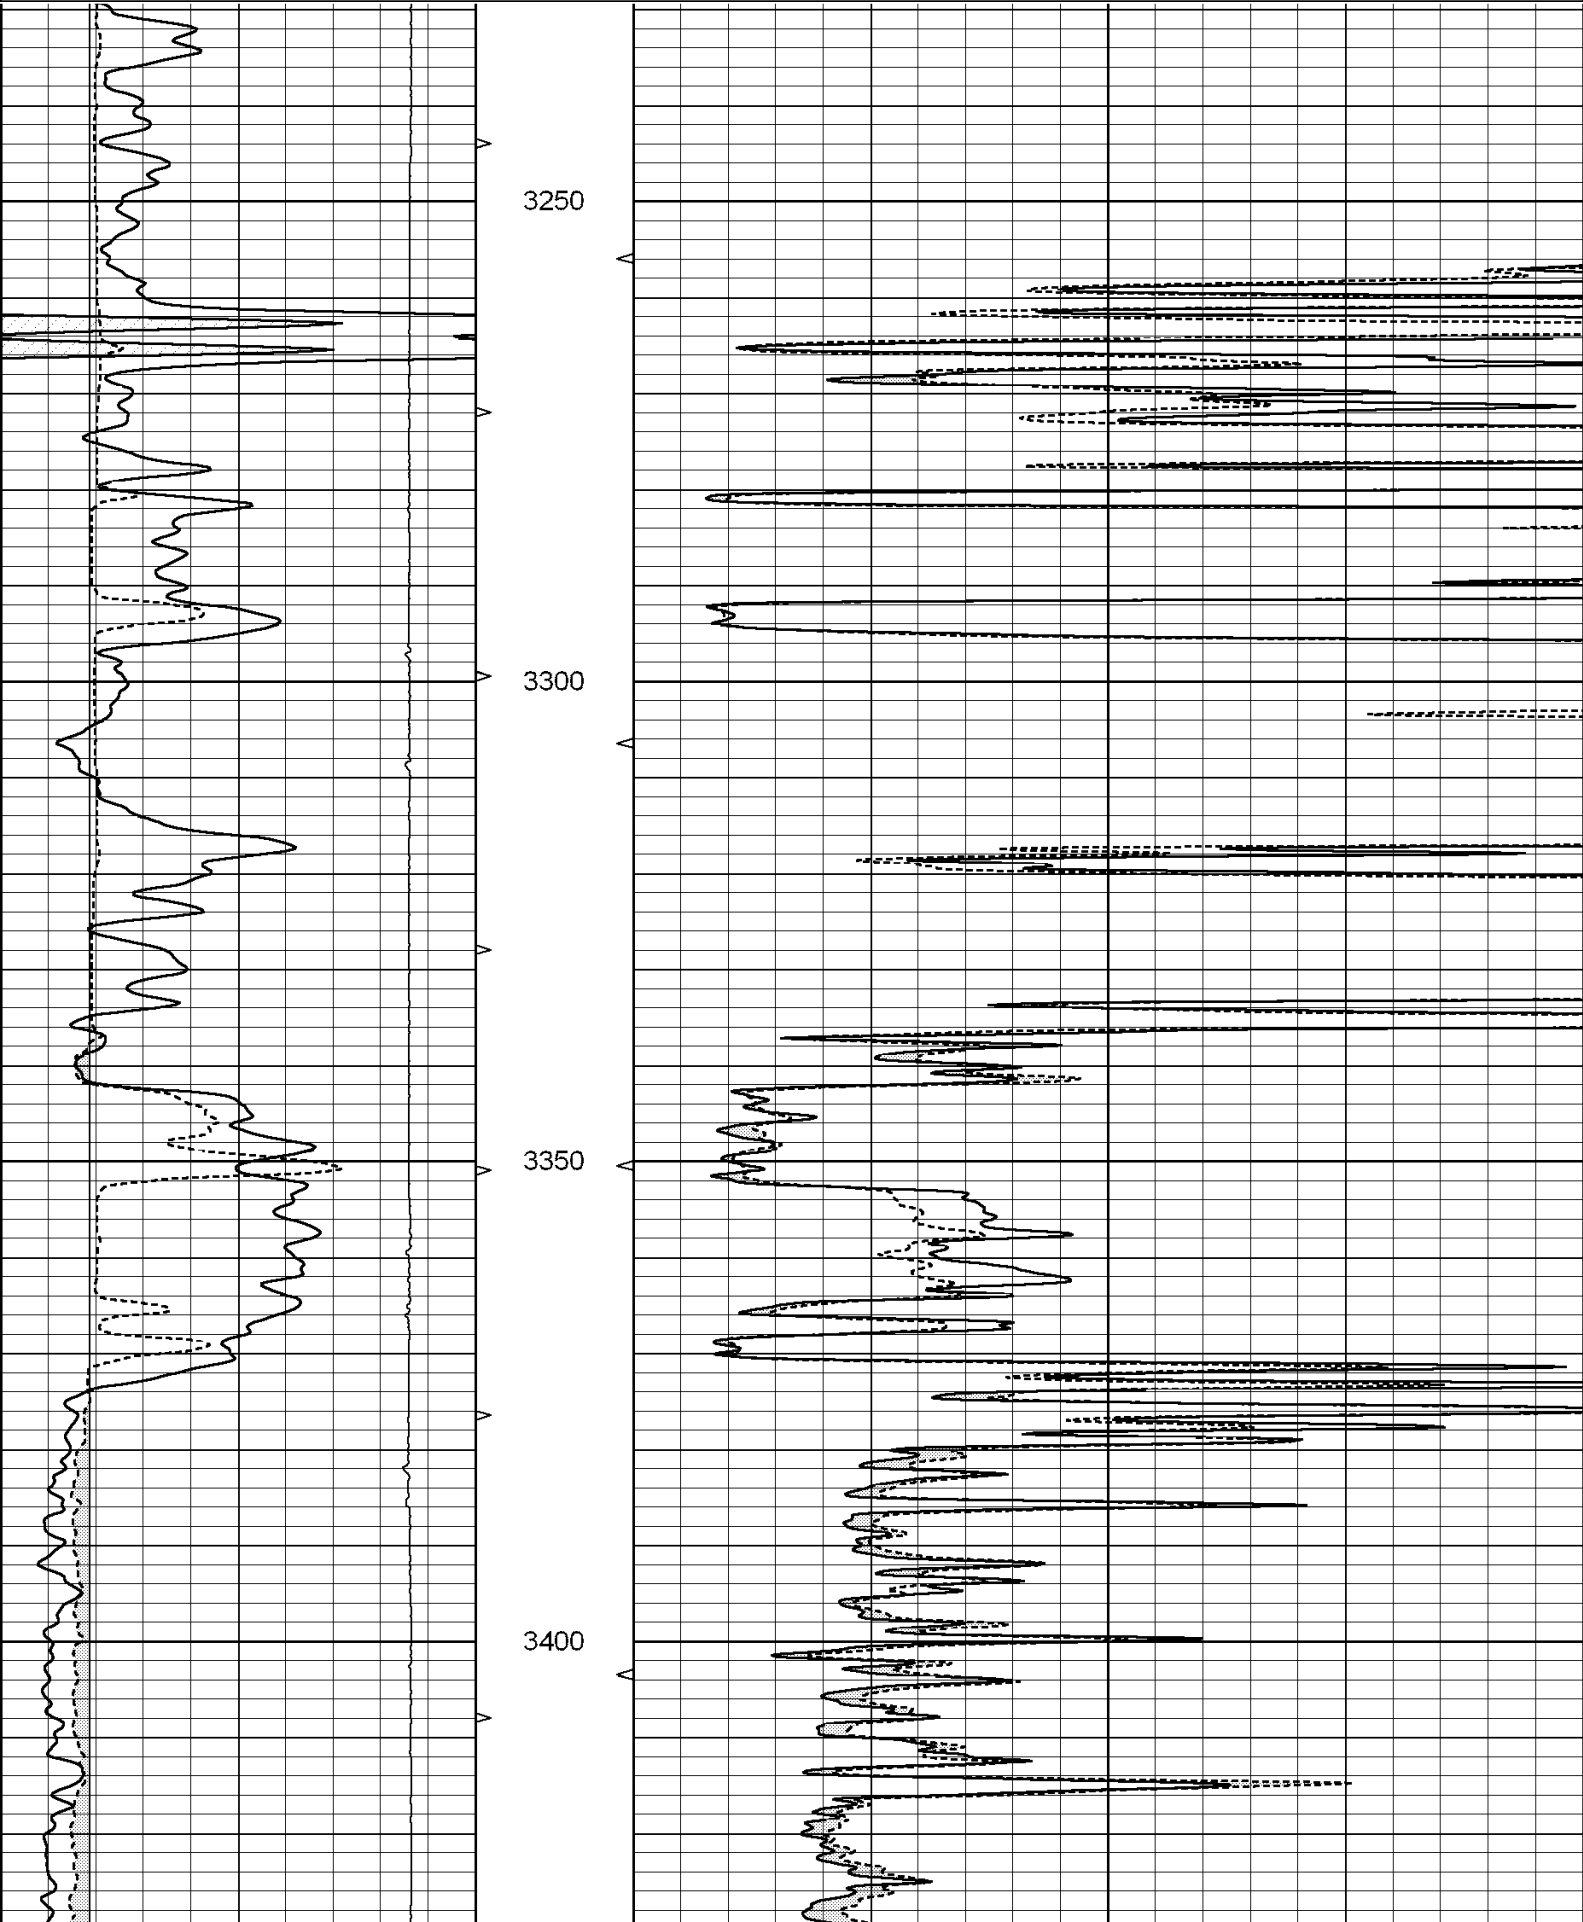

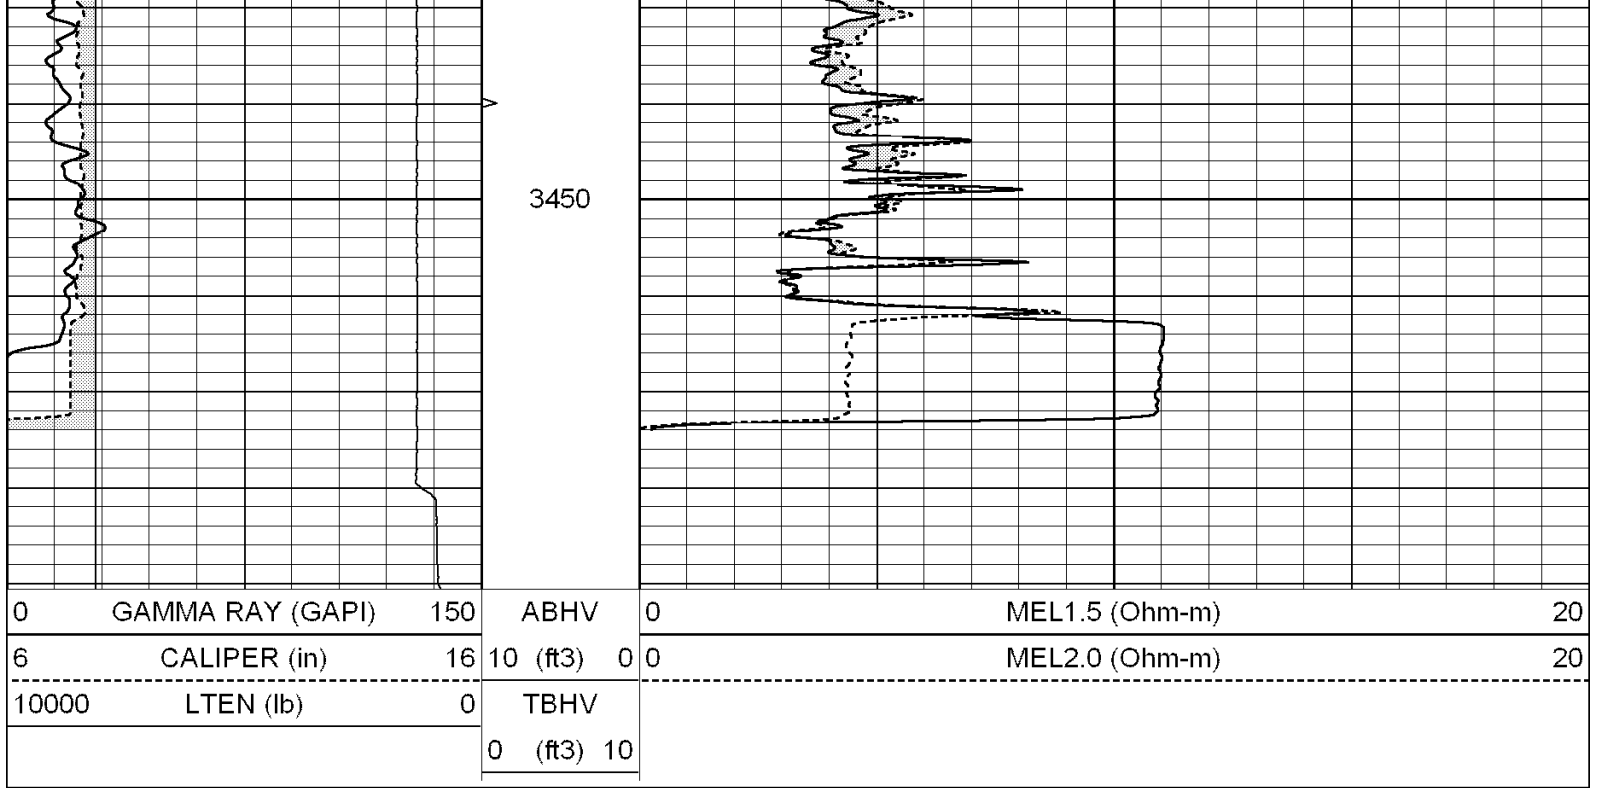

Calibration Report

Database File: 3070teton.db
Dataset Pathname: pass4.4
Dataset Creation: Sun Dec 14 18:42:38 2008 by Calc Open-Cased 070814

MICRO Calibration Report

Serial Number:	MICRO3	
Tool Model:	PROBE	
Performed:	Thu Dec 11 12:07:36 2008	
Caliper Calibration:	Gain=3.007	Offset=-3.415
References	Low Cal	High Cal
Readings	7.400	14.250
	3.613	5.366
1.5" Calibration:	Gain=100.503	Offset=0.255
References	Low Cal	High Cal
Readings	0.000	20.000
	-0.009	0.190
2" Calibration:	Gain=116.007	Offset=0.000
References	Low Cal	High Cal
Readings	0.000	20.000
	0.000	0.172

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Thu Jan 24 17:24:37 2008	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	350.0	cps
Sensitivity:	0.5586	GAPI/cps

