



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	RINEHART #1-17		
Field	WILDCAT		
County	FORD	State	KANSAS
Location:	API # : 15-057-20692	Other Services CDL/CNL/PE DIL/SONIC	
SEC 17 TWP 28S RGE 23W		Elevation	
Permanent Datum	GROUND LEVEL	Elevation	2521
Log Measured From	KELLY BUSHING 10' A.G.L.	D.F.	
Drilling Measured From	KELLY BUSHING	G.L.	2521
Date	9-11-10		
Run Number	TWO		
Depth Driller	5380		
Depth Logger	5384		
Bottom Logged Interval	5367		
Top Log Interval	4100		
Casing Driller	606		
Casing Logger	606		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.25 / 56		
pH / Fluid Loss	9.5 / 17.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.30 @ 95F		
Rmf @ Meas. Temp	0.25 @ 95F		
Rmc @ Meas. Temp	0.36 @ 95F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.220 @ 128F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	3:30 P.M.		
Maximum Recorded Temperature	128F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	JIM HALL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: FORD, 1N TO SADDLE RD., 6W TO RD. #120, 2S, 1/2W, S INTO.




SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File:
Dataset Pathname:
Presentation Format:
Dataset Creation:
Charted by:

005684pdn.db
pass5.1A
micro
Sat Sep 11 19:22:02 2010
Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

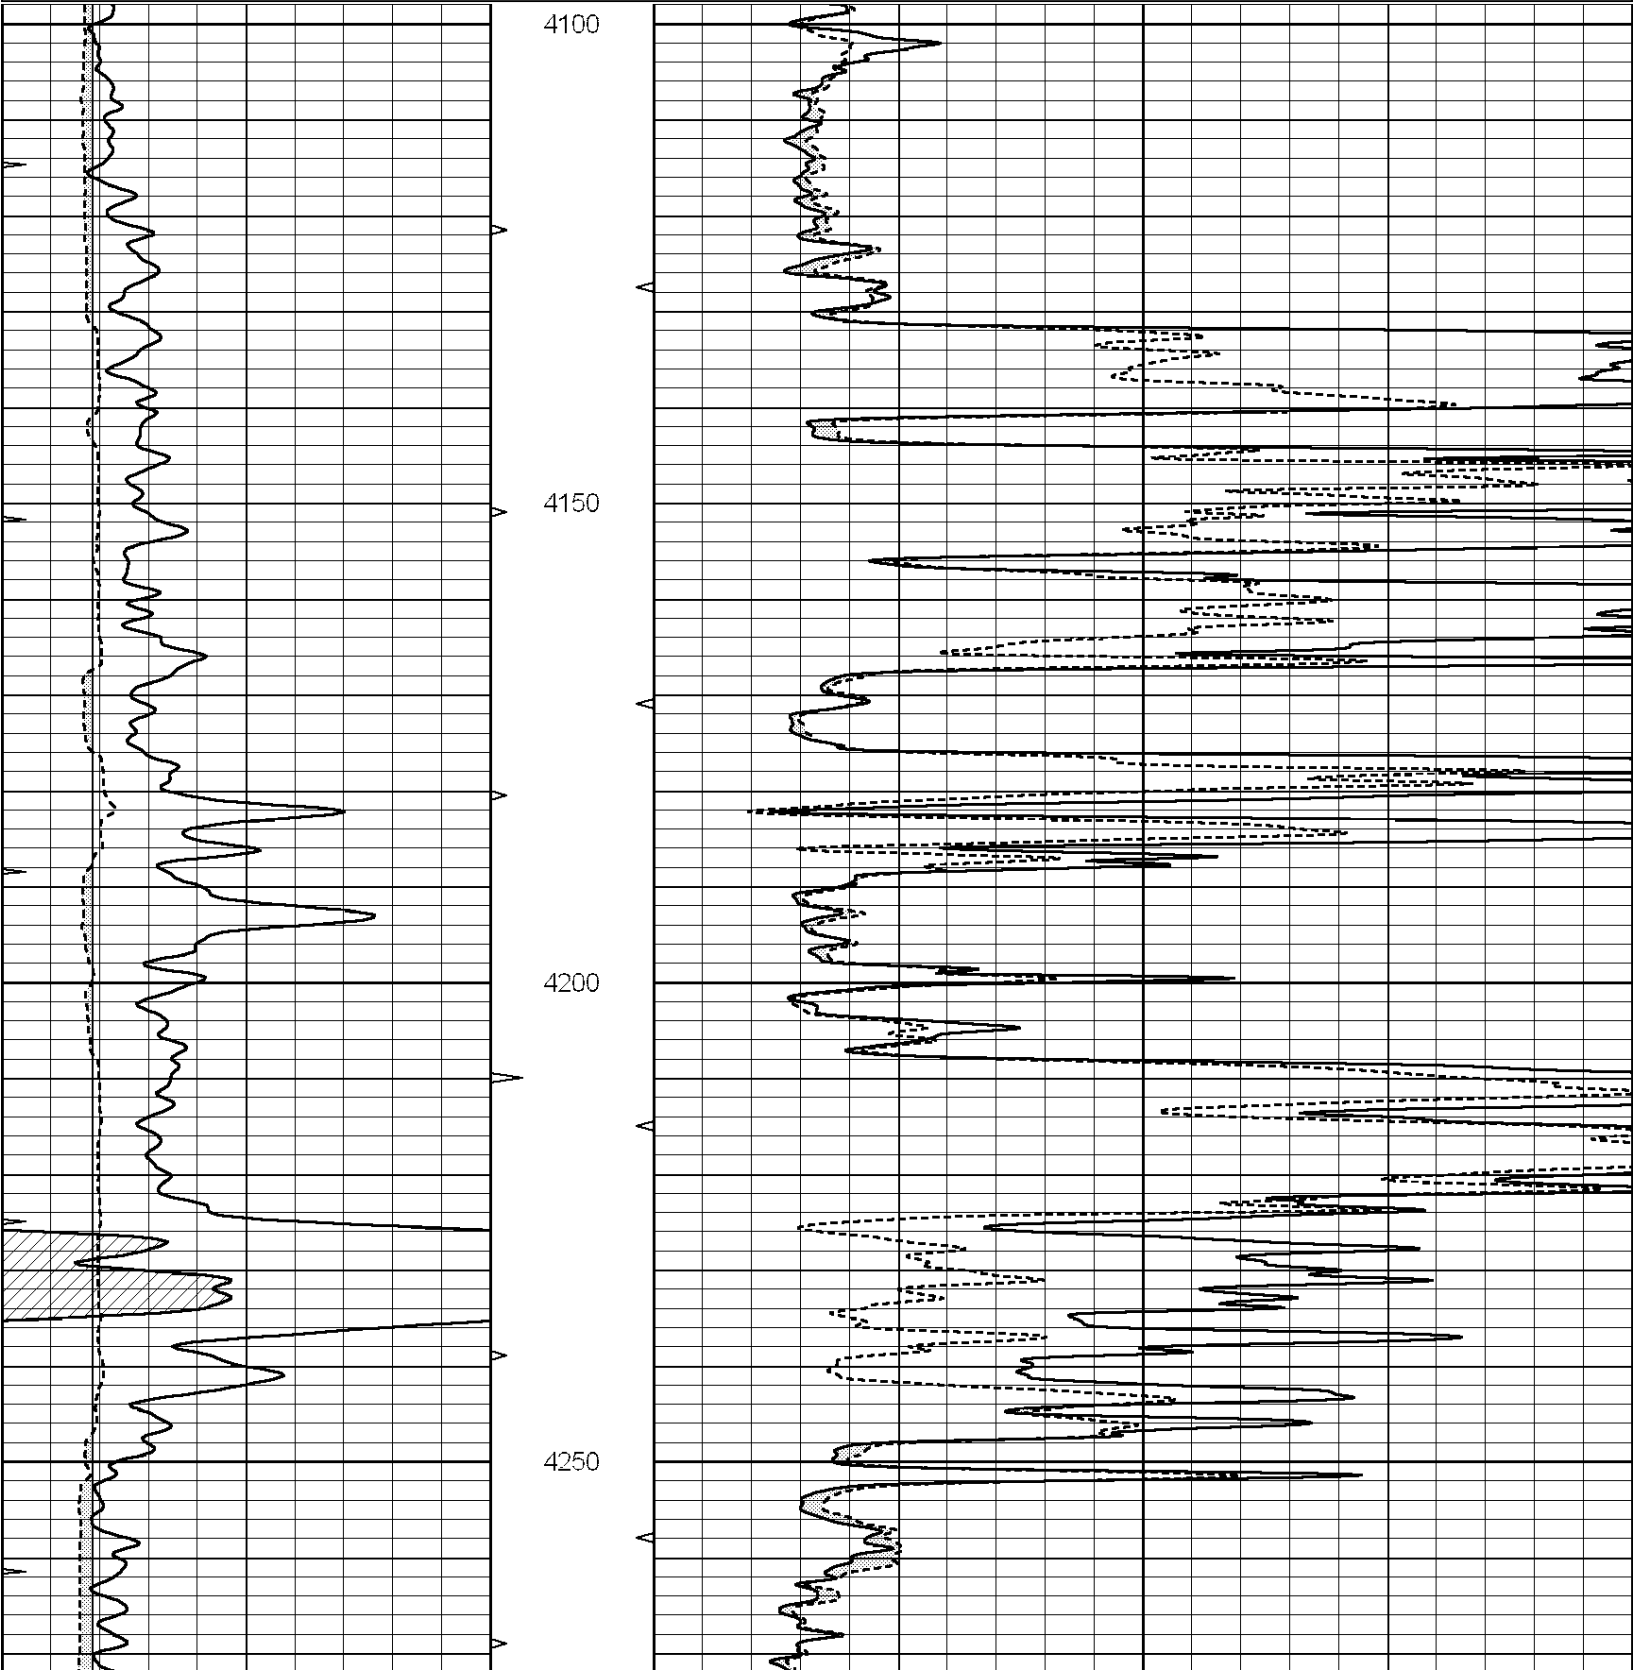

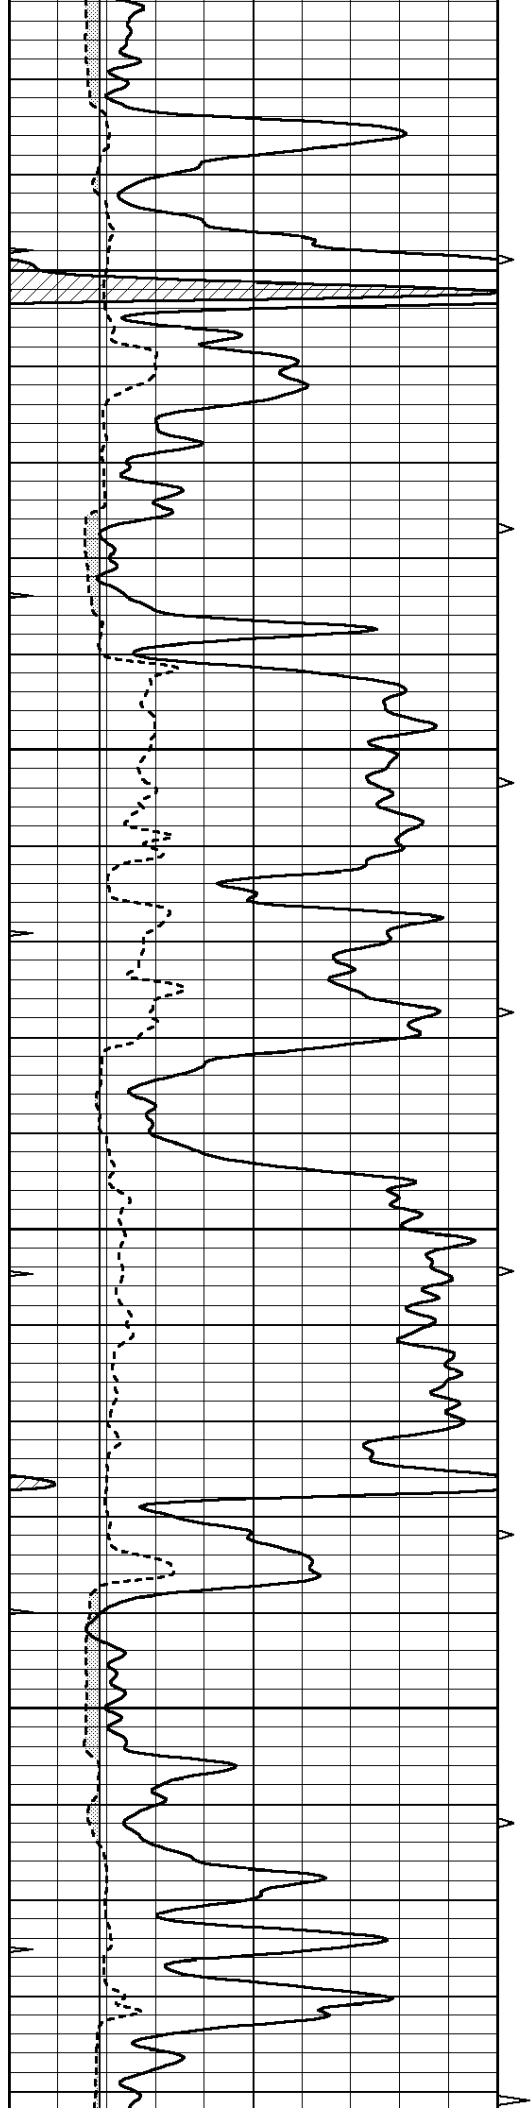



4300

4350

4400

4450

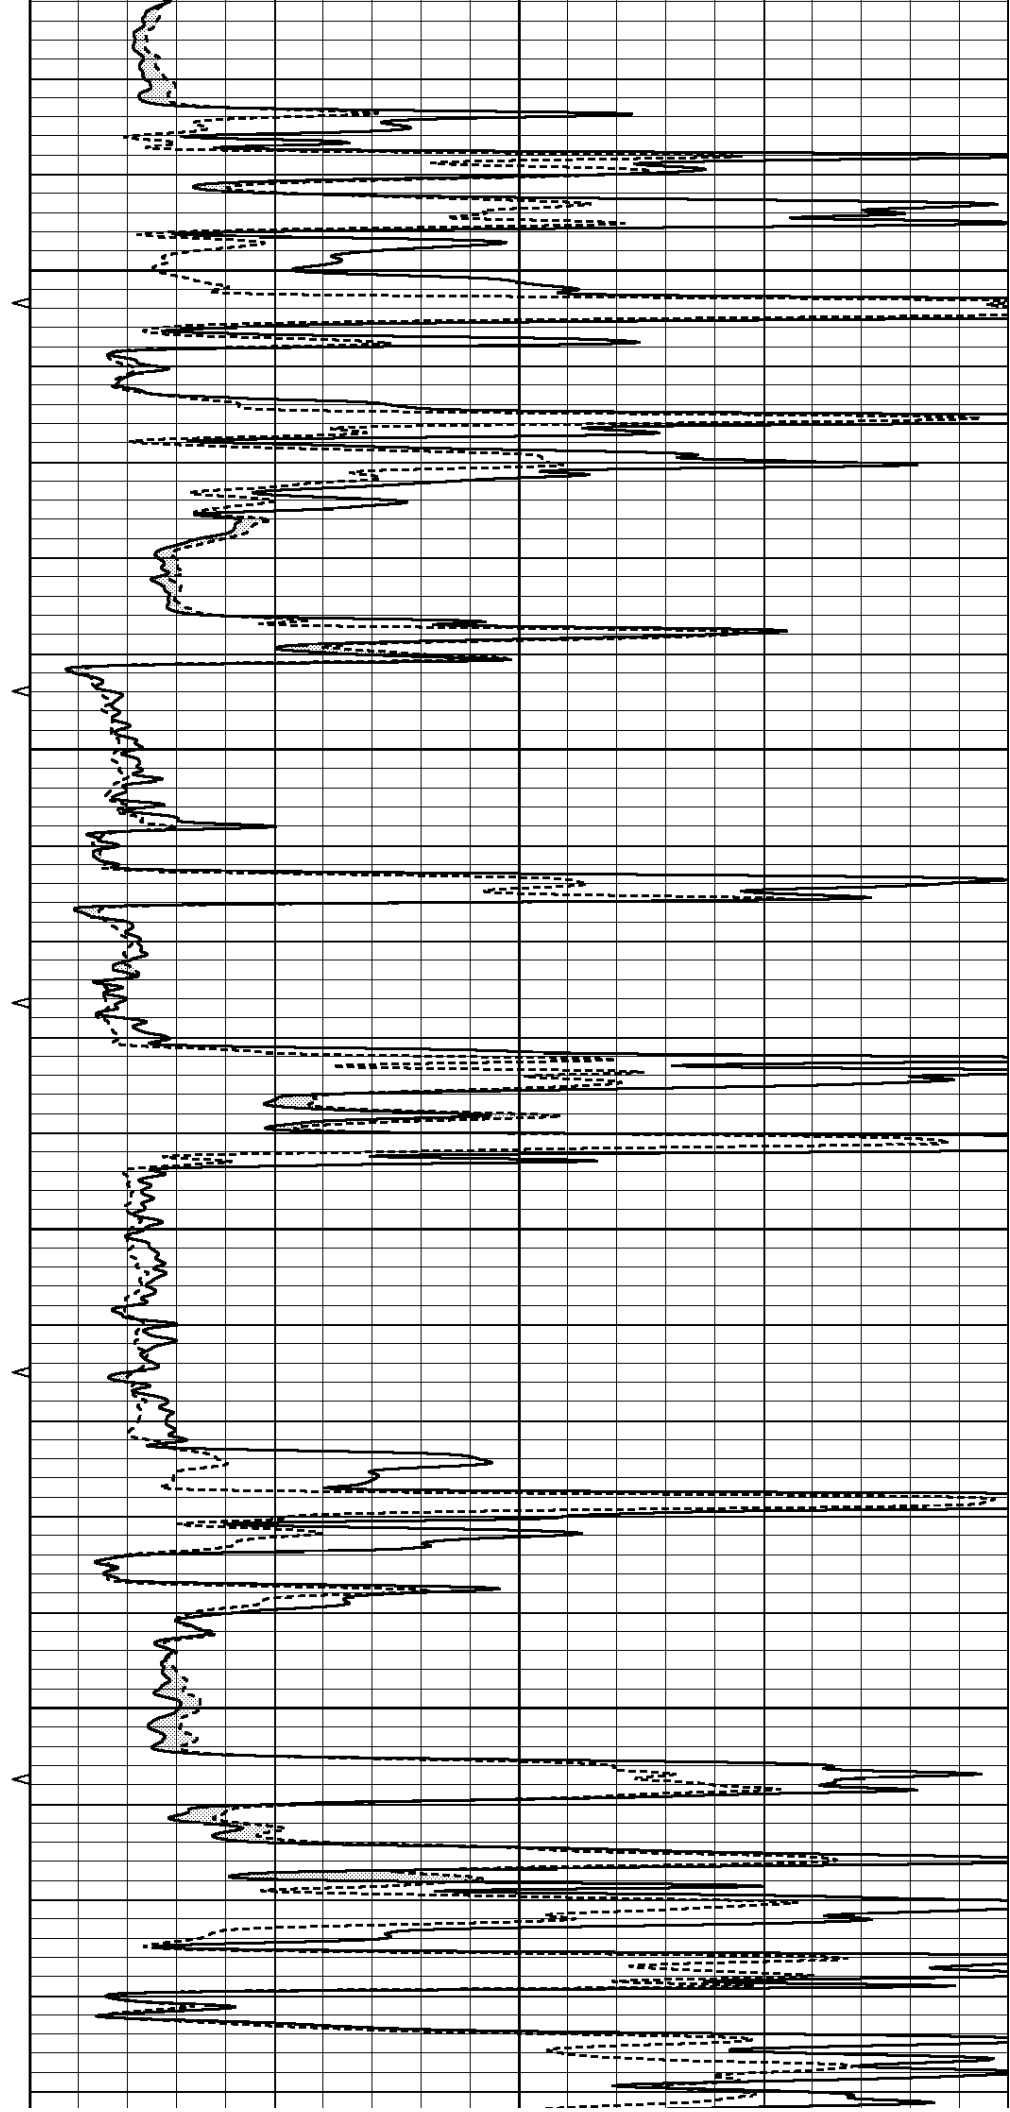

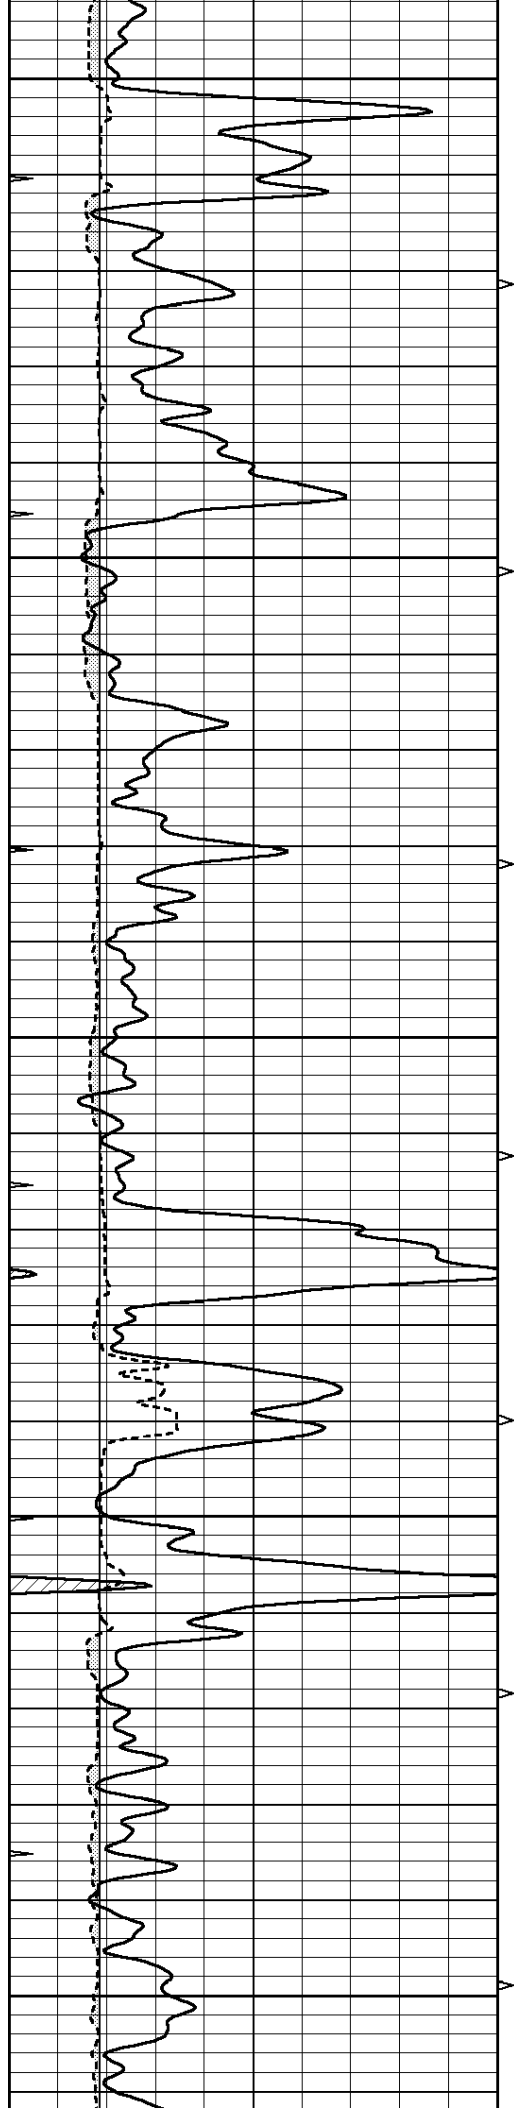


4500


4550

4600

4650

4700

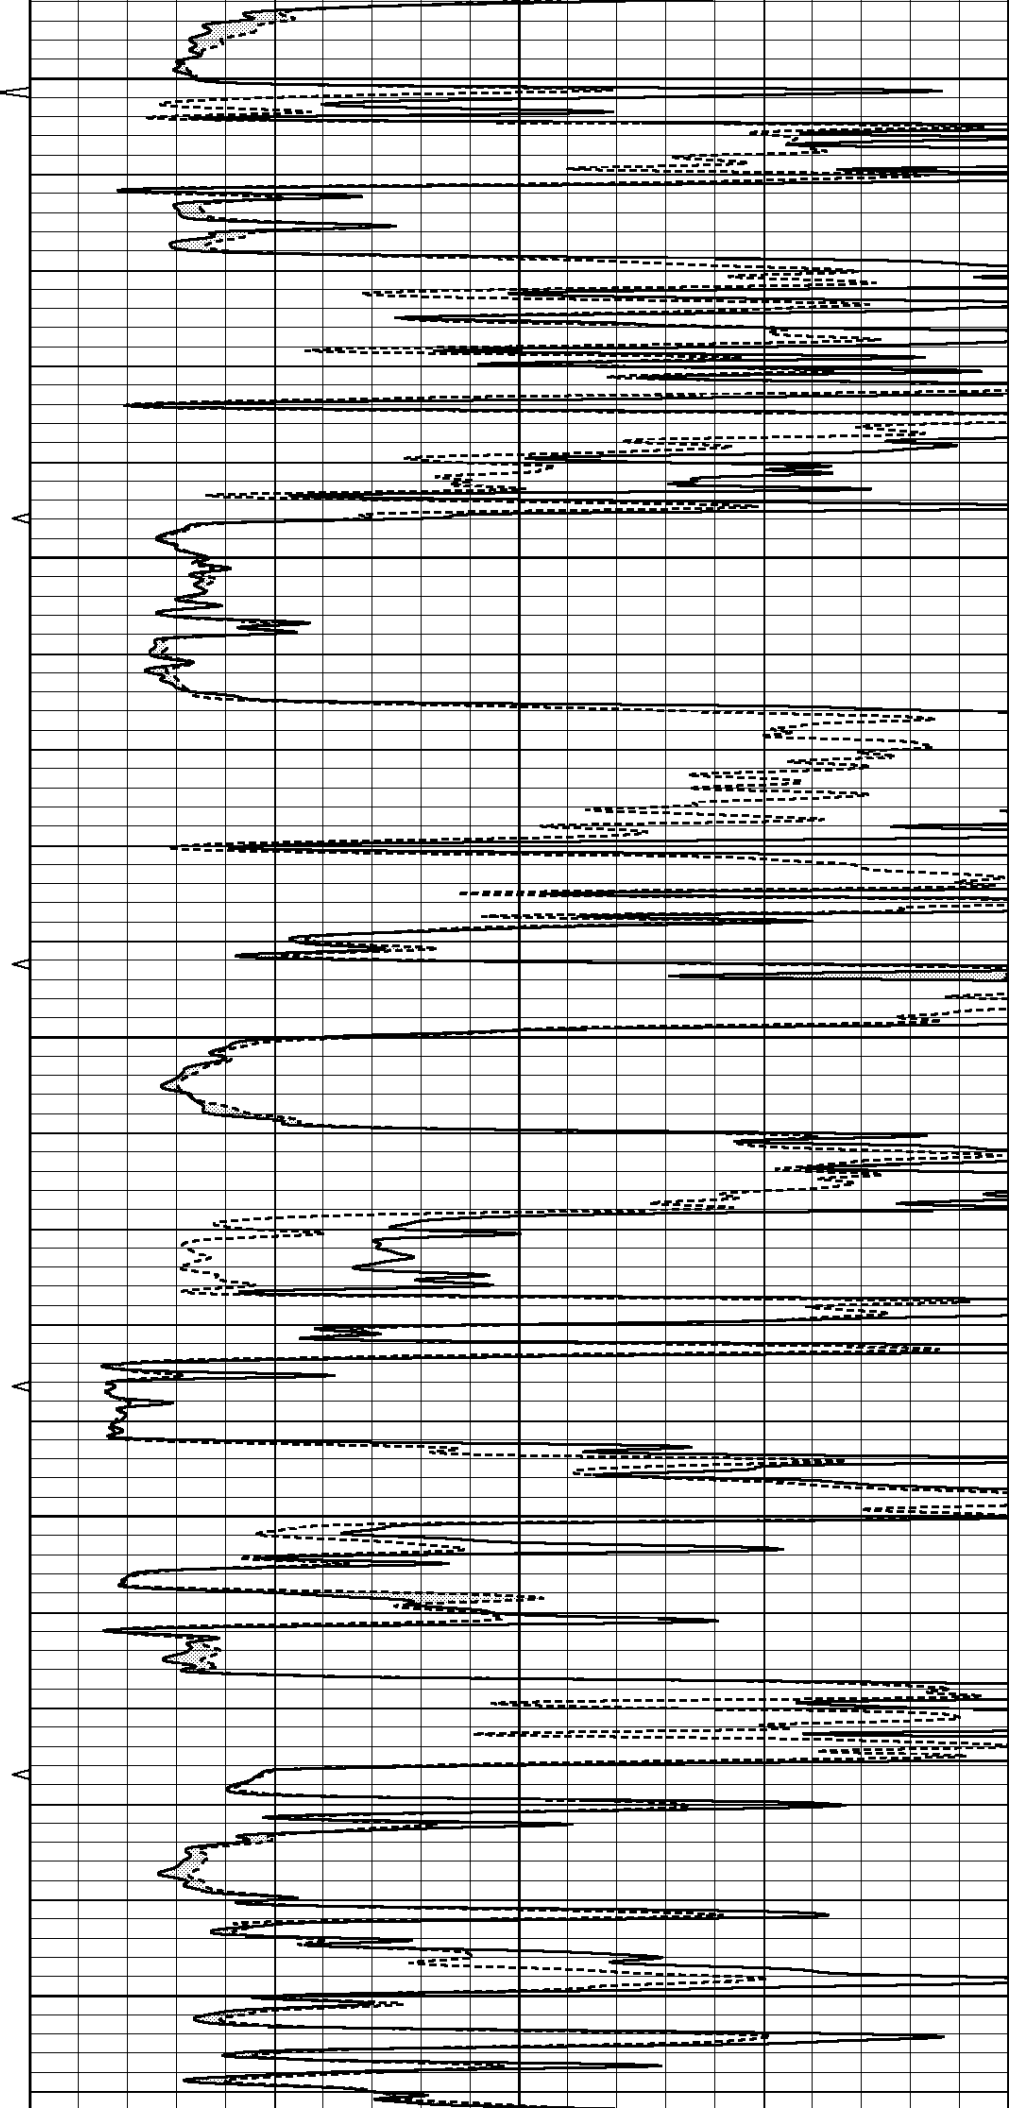

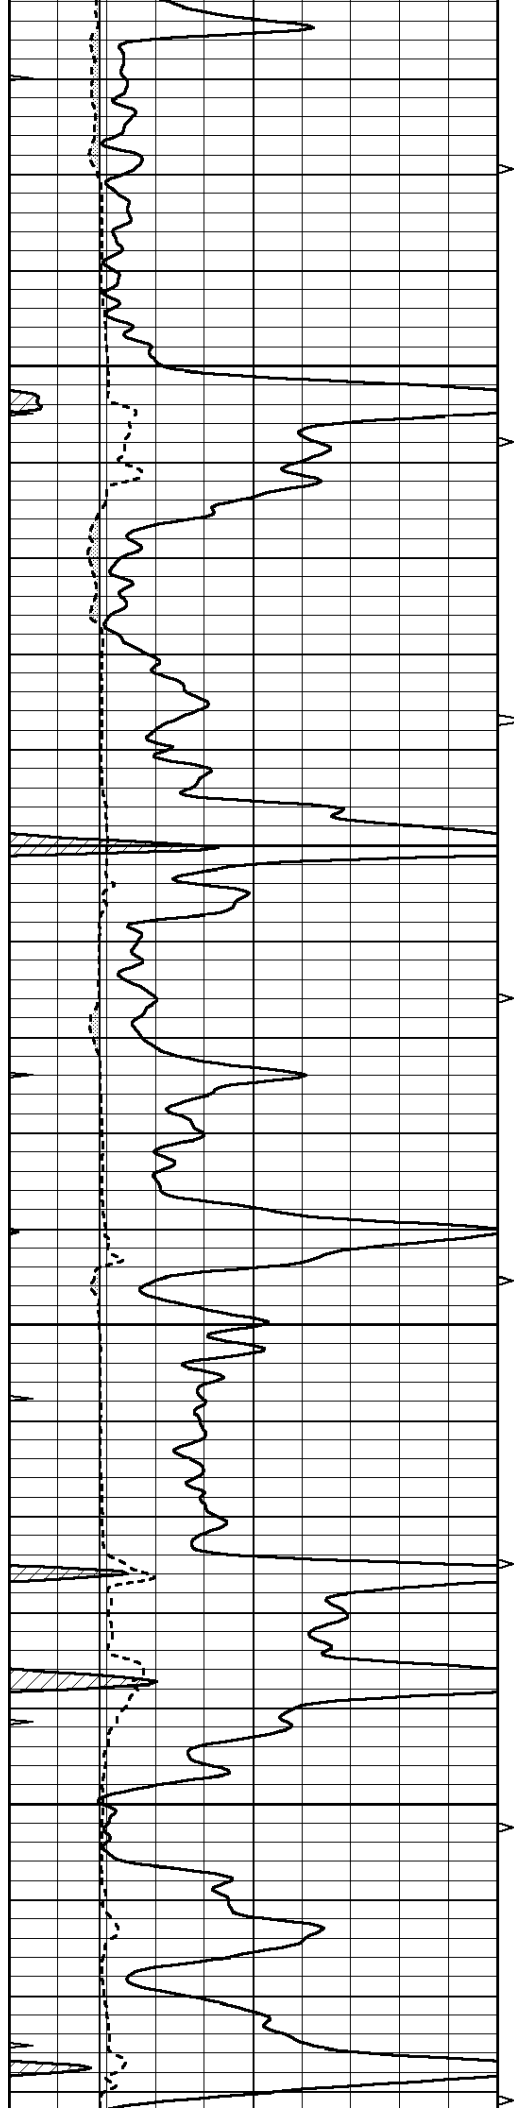




4750


4800

4850

4900

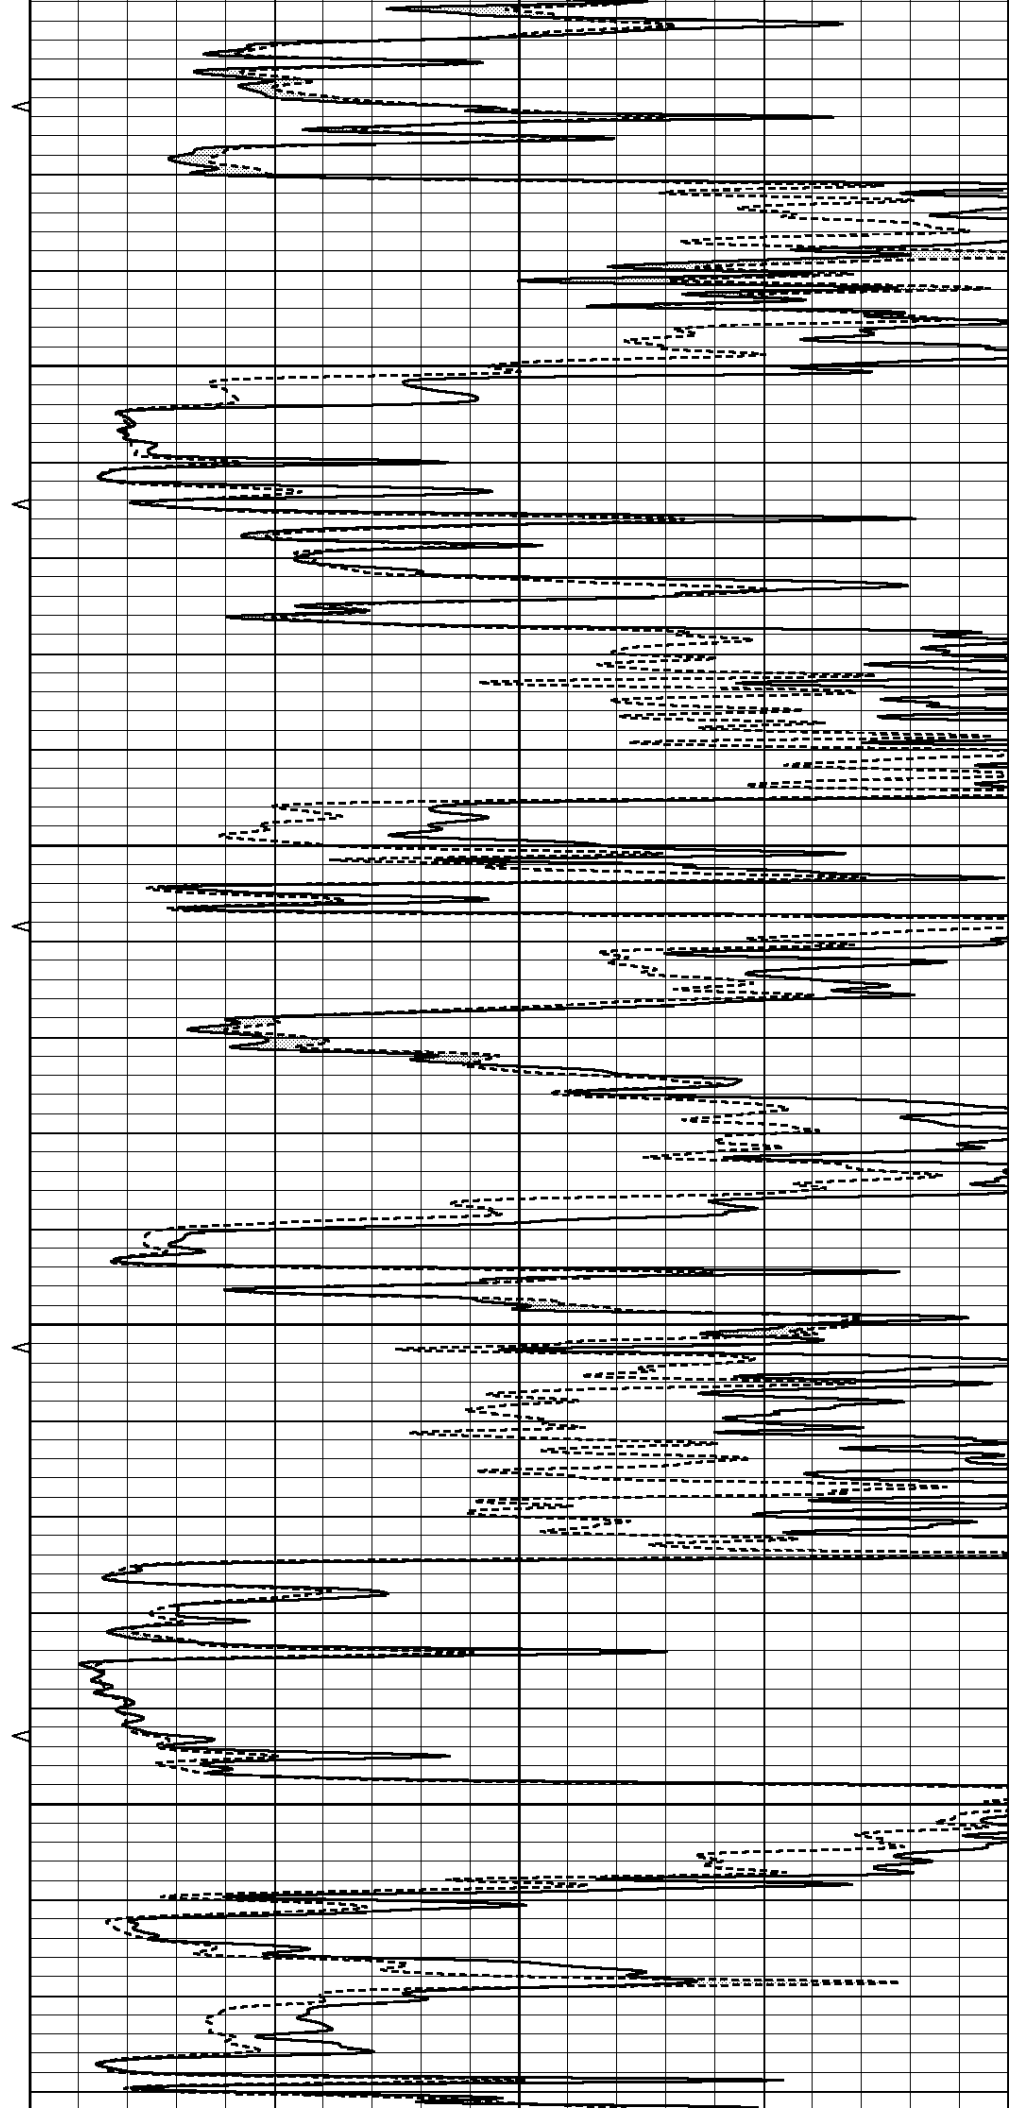

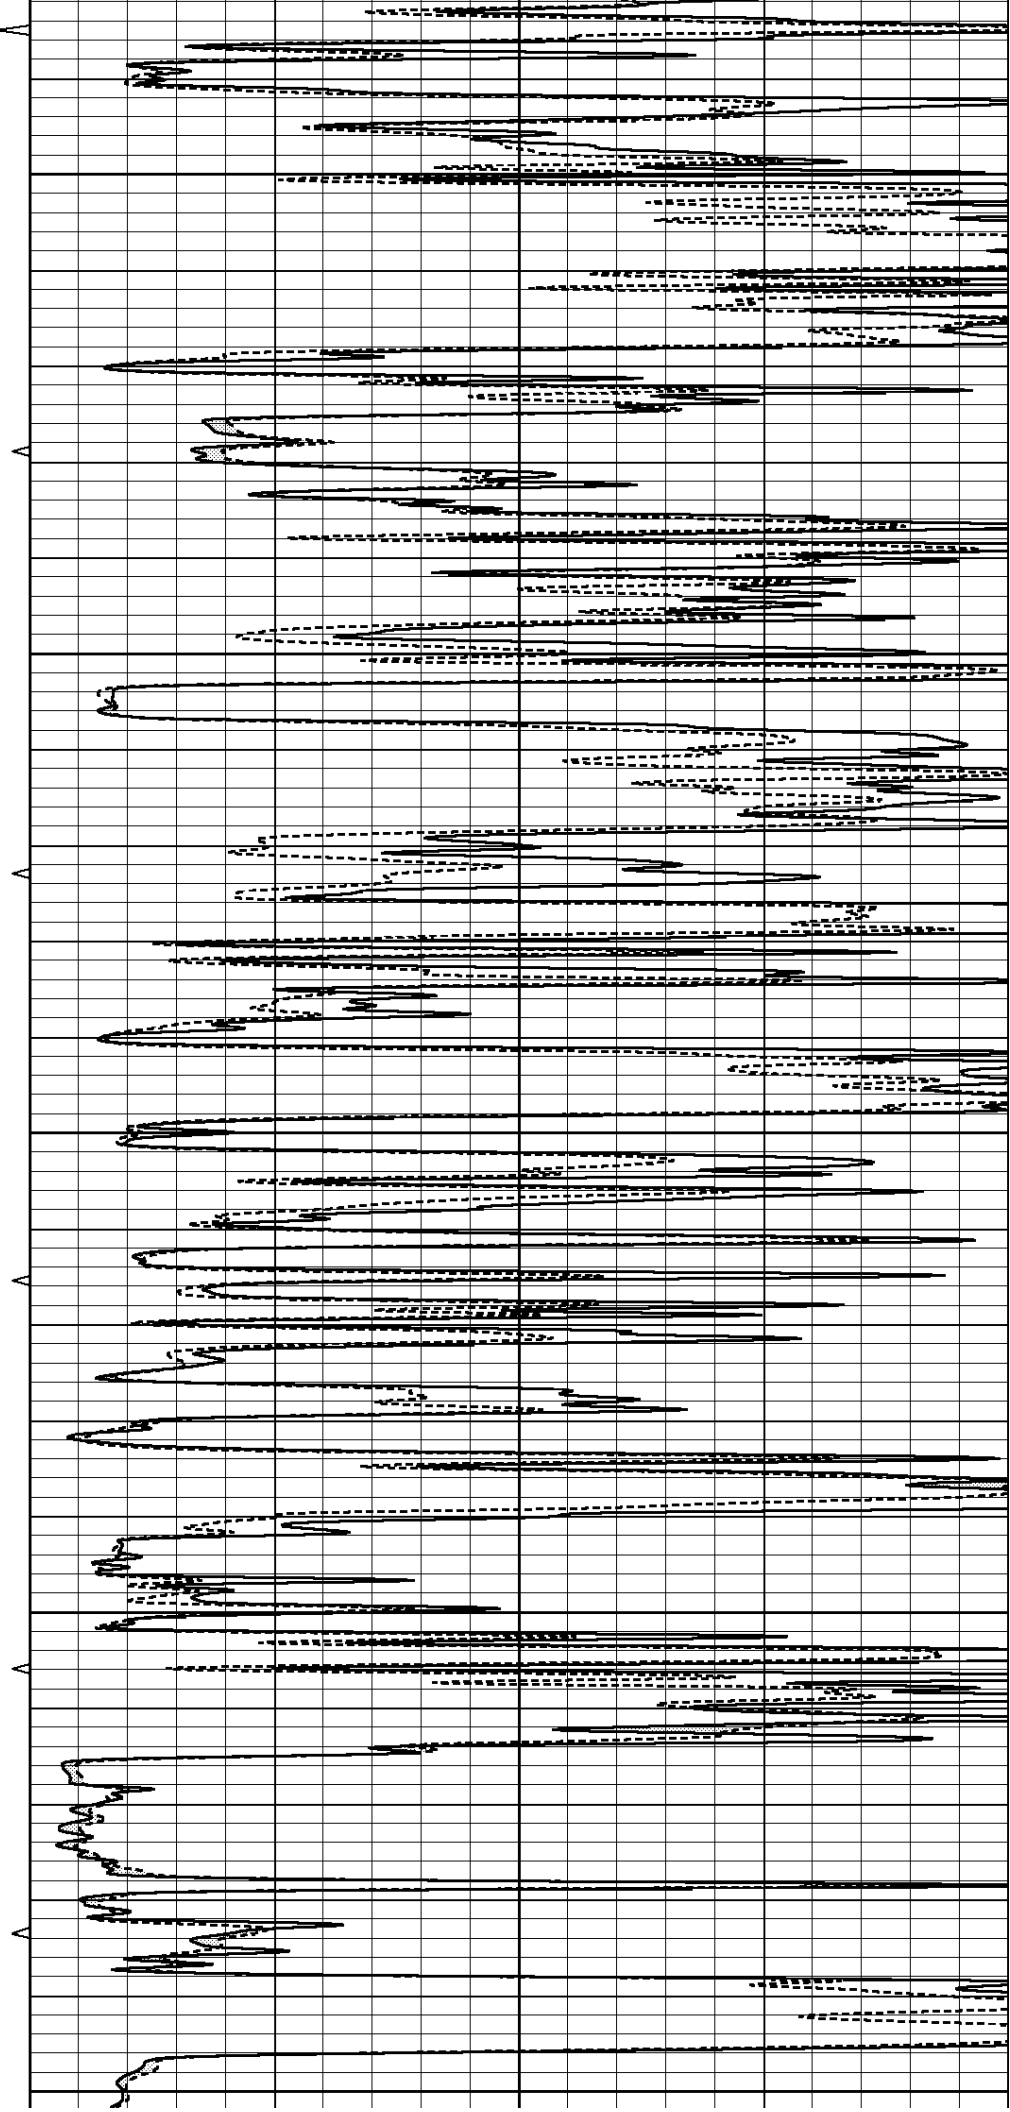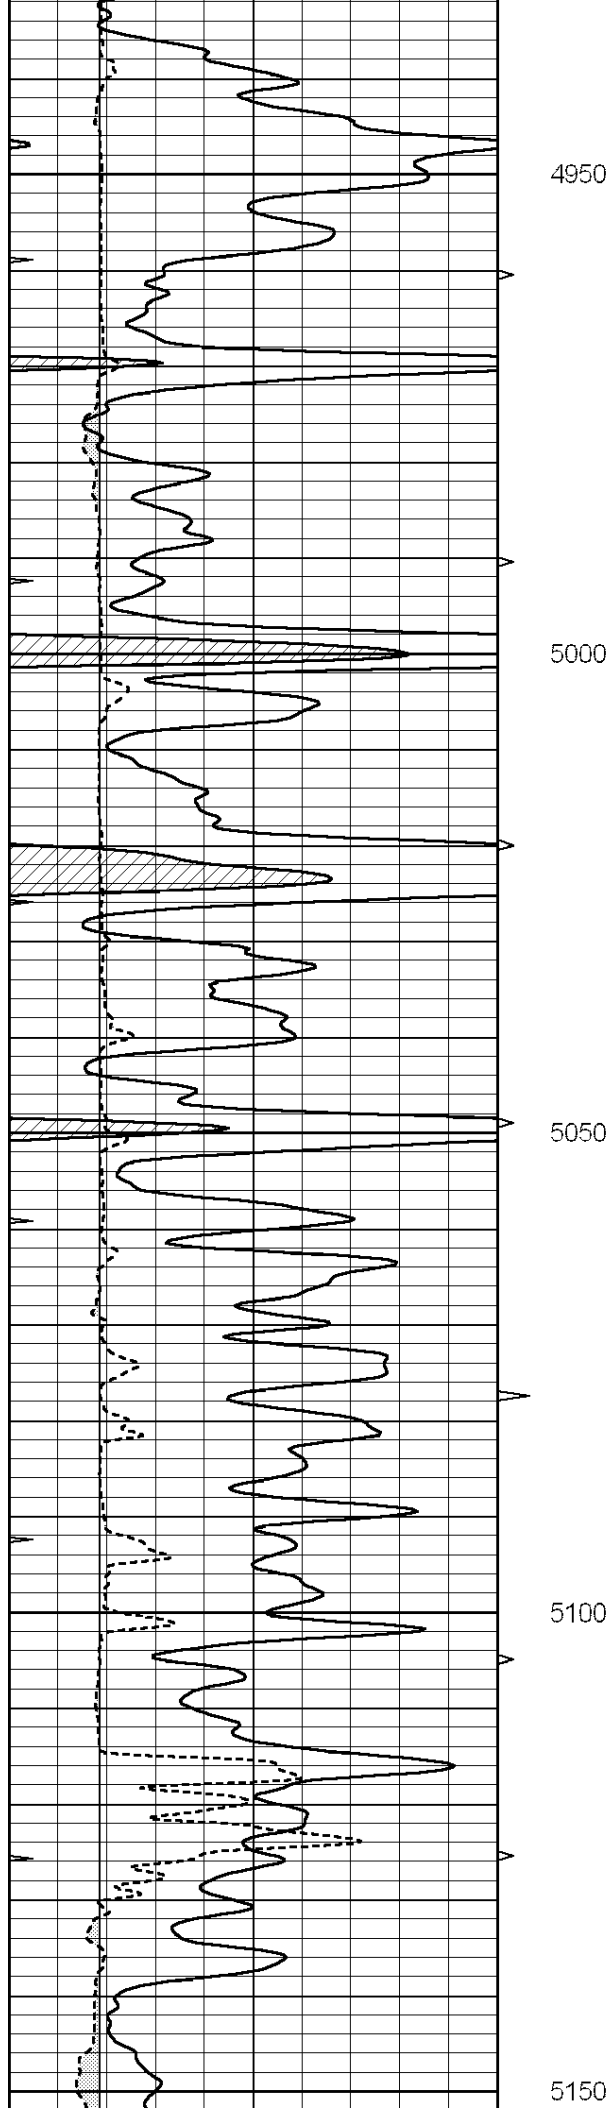

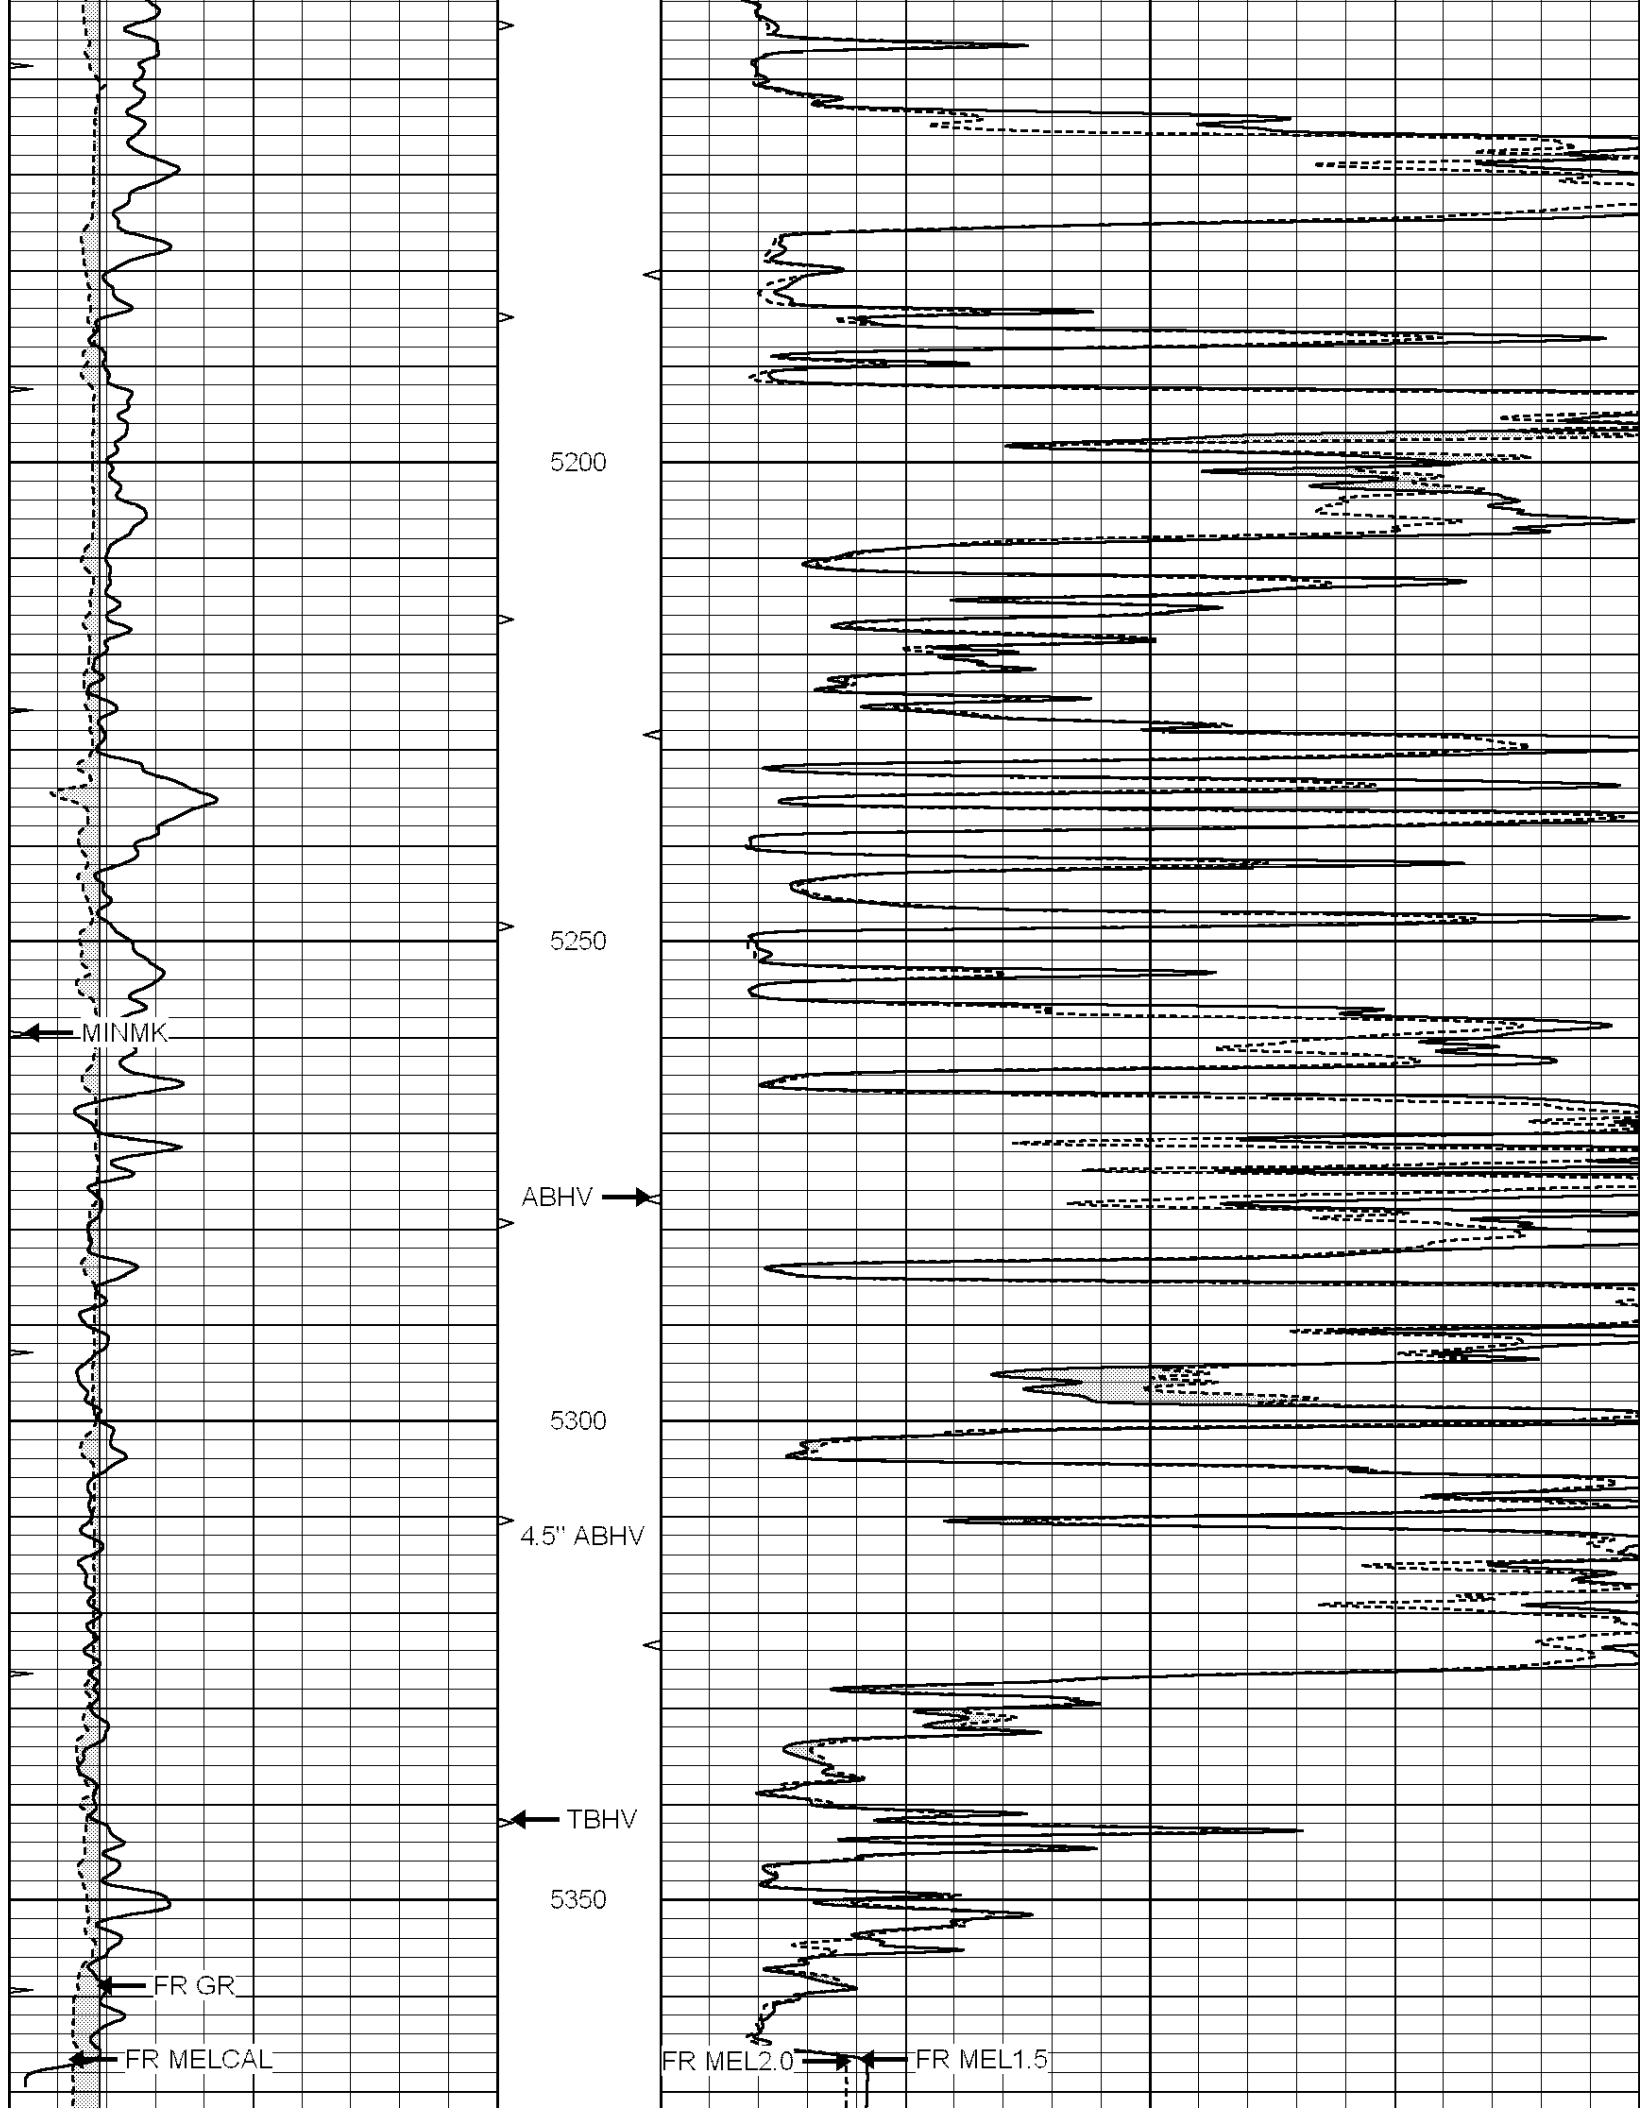

			--- TD ---					
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)			40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)			40
-----			-----					
0	MINMK	20	TBHV					
			0 (ft3)	10				





SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 005684pdm.db
Dataset Pathname: pass4.3
Presentation Format: micro
Dataset Creation: Sat Sep 11 19:48:38 2010
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

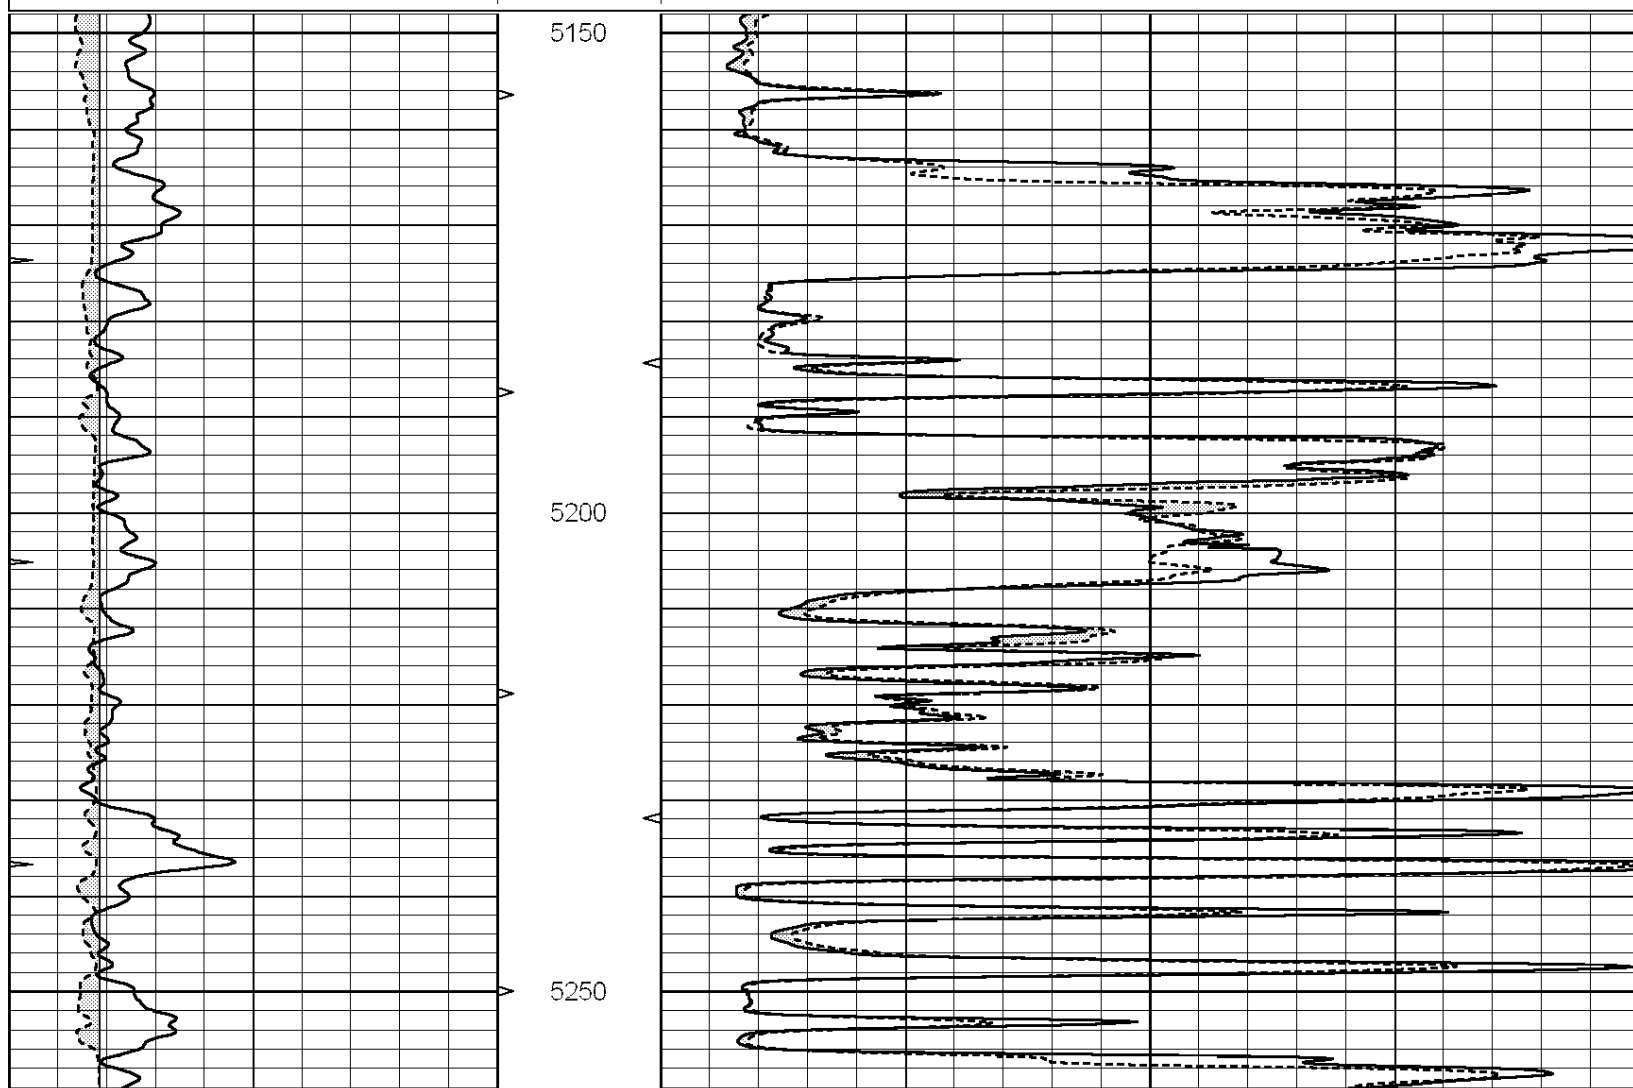

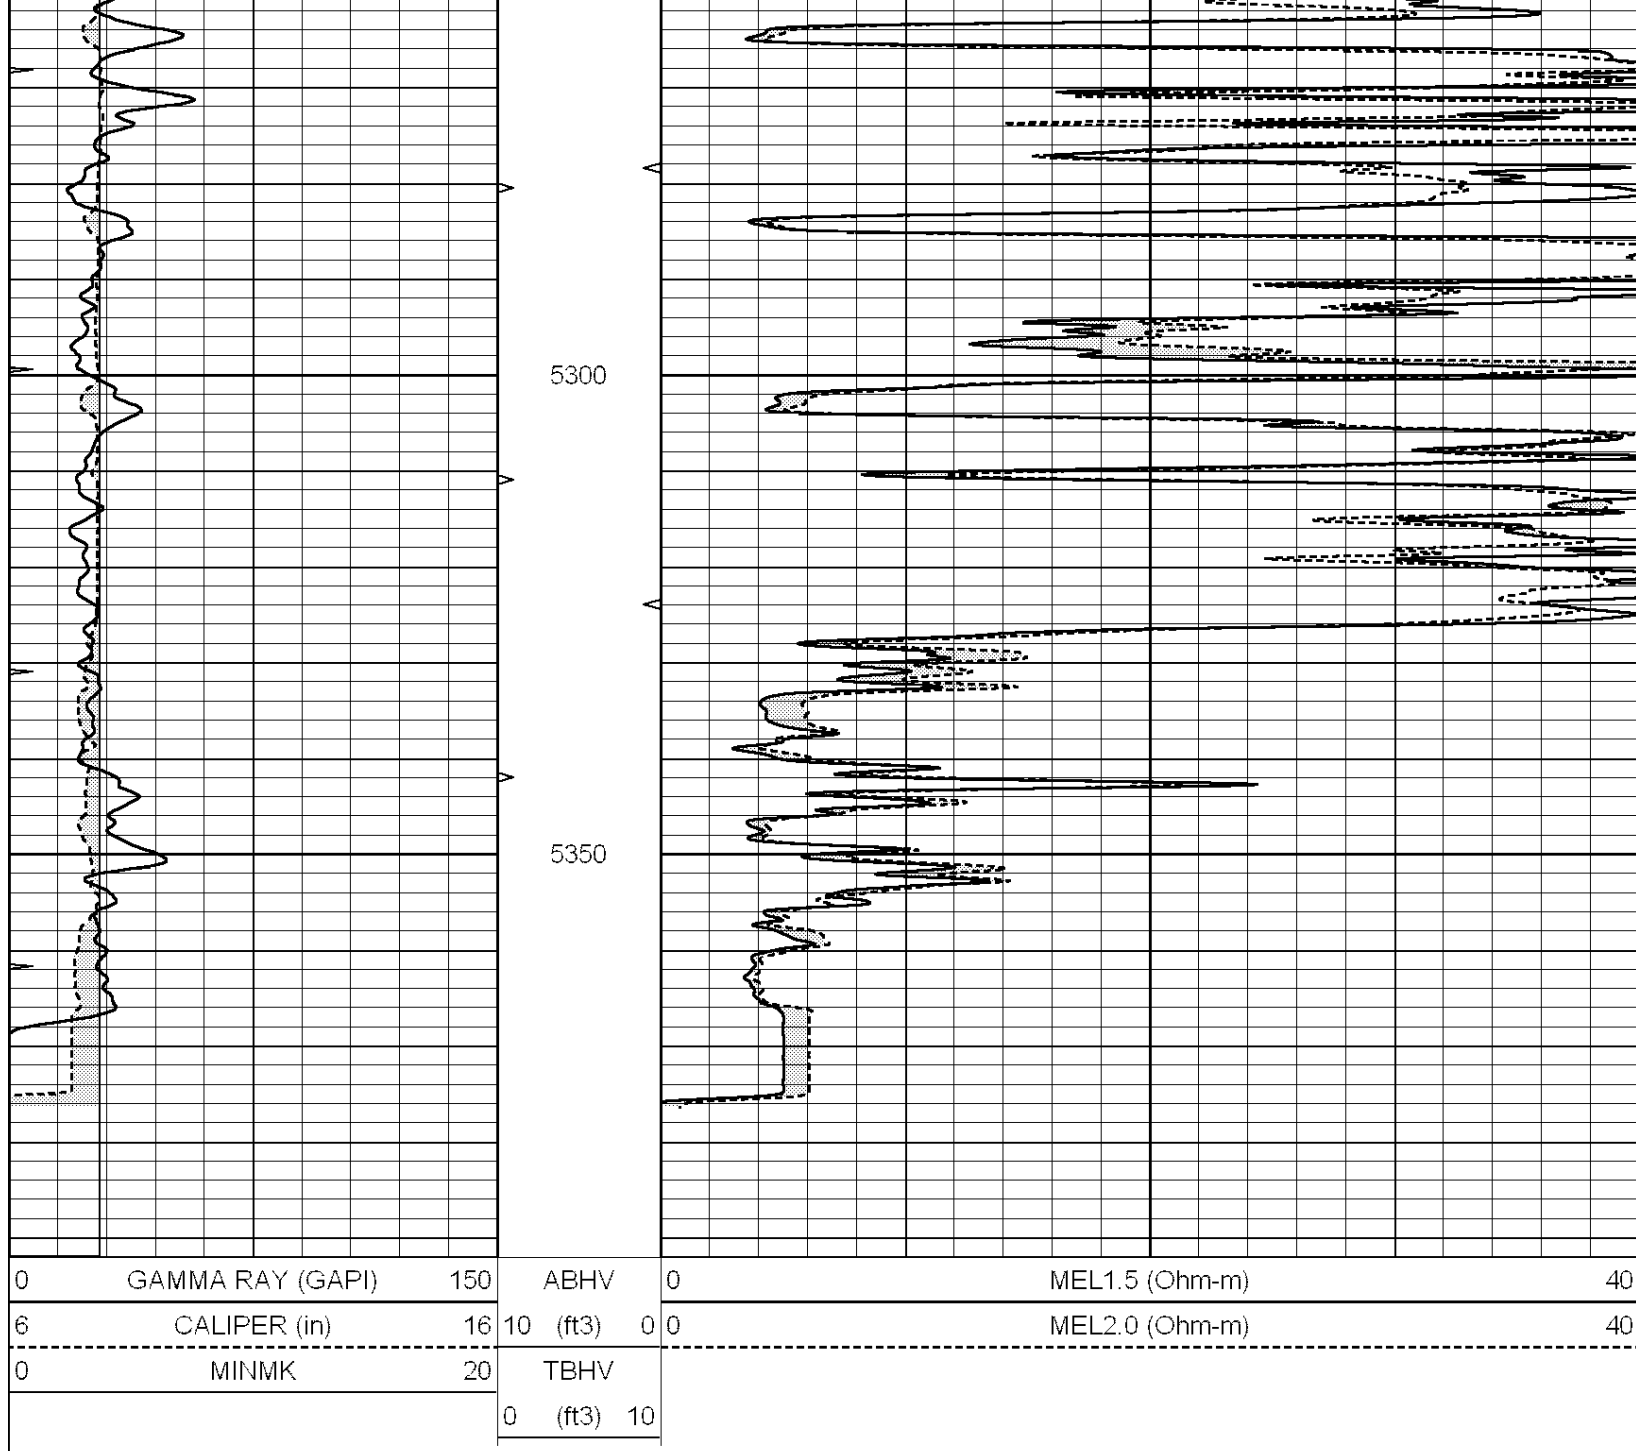

Calibration Report

Database File: 005684pdm.db
 Dataset Pathname: pass5.1A
 Dataset Creation: Sat Sep 11 19:22:02 2010

MICRO Calibration Report

Serial Number: MICRO4
 Tool Model: PROBE
 Performed: Thu Sep 02 19:16:15 2010

Caliper Calibration: Gain=1.700 Offset=-1.963

References	Low Cal	High Cal
Readings	7.300	12.000
	5.449	8.214

1.5" Calibration: Gain=48.000 Offset=-0.400

References	Low Cal	High Cal
Readings	0.000	20.000
	0.009	1.541
2" Calibration:		
	Gain=36.000	Offset=0.800
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.198
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Sat Sep 11 15:48:17 2010	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6500	GAPI/cps