



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	IMEL #2-5		
Field			
County	FORD	State	KANSAS
Location:	API # : 15-057-20694		Other Services CDL/CNL/PE DIL/MEL
2310' FSL & 500' FWL			
SEC 5 TWP 29S RGE 22W			
Permanent Datum	GROUND LEVEL	Elevation	2513
Log Measured From	KELLY BUSHING 12' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Elevation			
K.B. 2525			
D.F.			
G.L. 2513			
Date	8-31-10		
Run Number	ONE		
Depth Driller	5450		
Depth Logger	5456		
Bottom Logged Interval	5439		
Top Log Interval	4250		
Casing Driller	607		
Casing Logger	605		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 14.000 ppm	
Density / Viscosity	9.5 / 59		
pH / Fluid Loss	9.0 / 13.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.30 @ 91F		
Rmf @ Meas. Temp	0.23 @ 91F		
Rmc @ Meas. Temp	0.36 @ 91F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.210 @ 129F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	9:00 A.M.		
Maximum Recorded Temperature	129F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	KEN LeBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: KINGSDOWN, 2N ON BLACKTOP, 1/4E INTO.





SUPERIOR
Hays,
Kansas

MAIN SECTION

Database File: 005652pdn.db
 Dataset Pathname: pass6.A
 Presentation Format: micro
 Dataset Creation: Tue Aug 31 14:34:22 2010
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

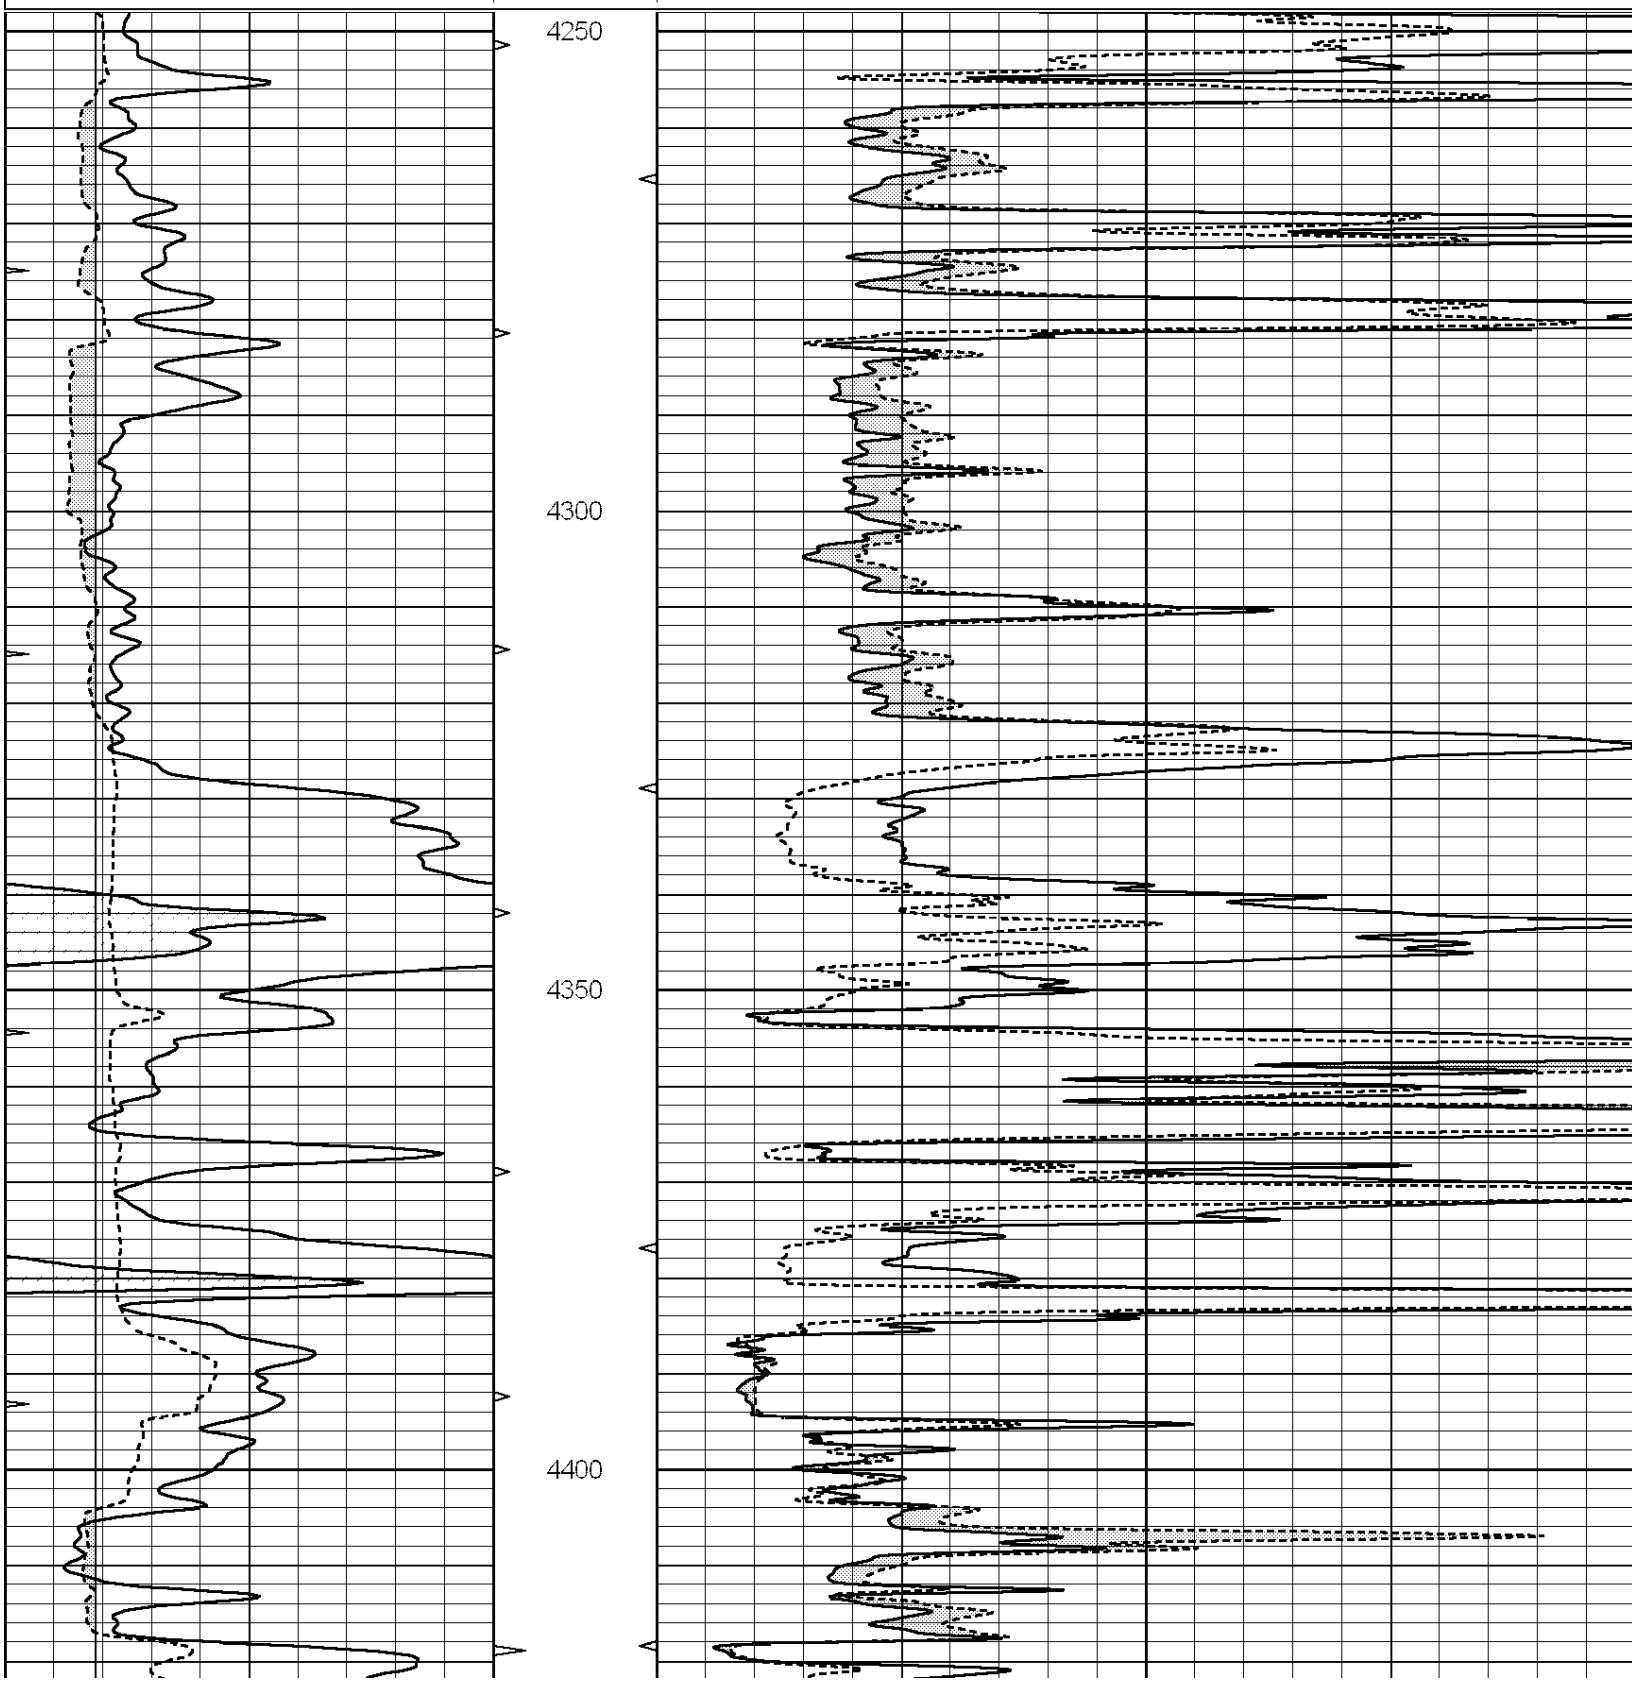

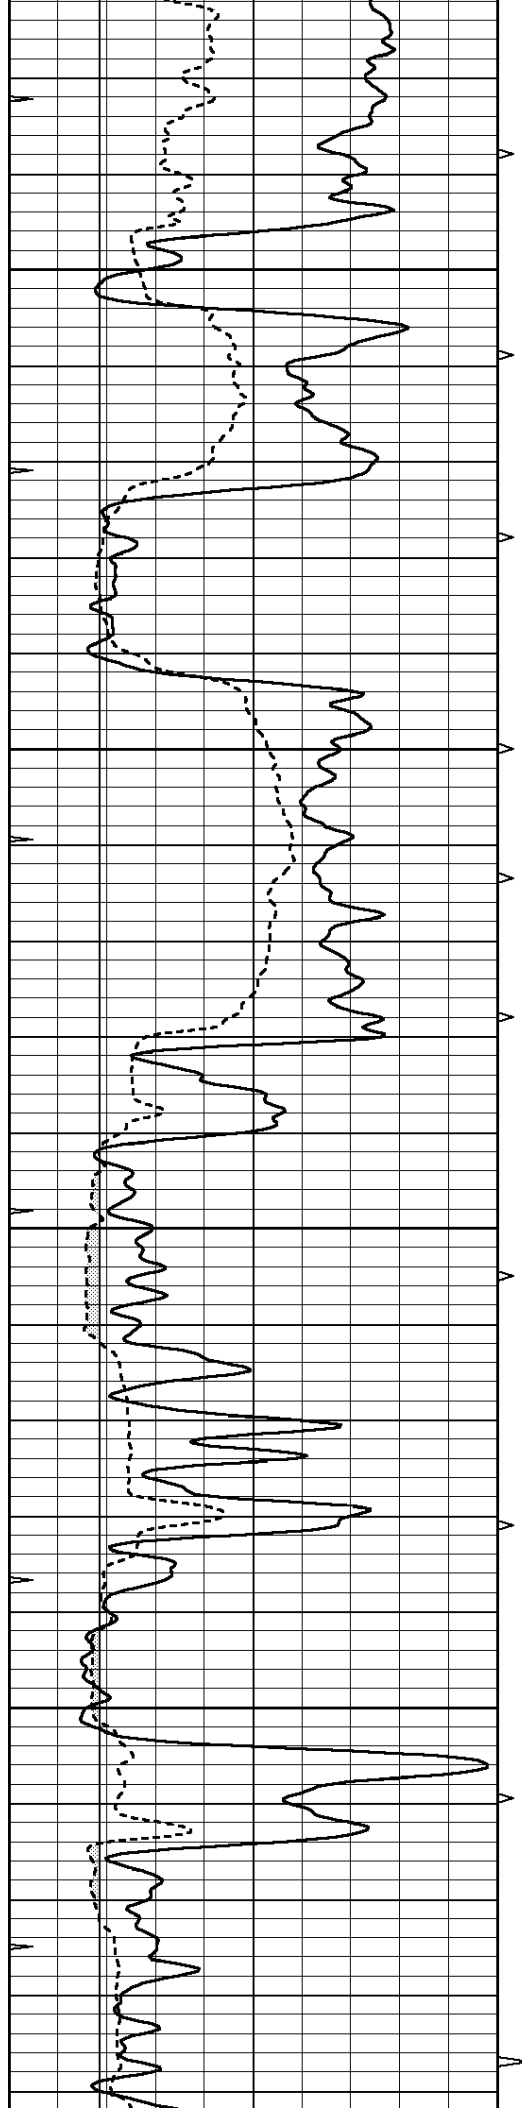



4450

4500

4550

4600

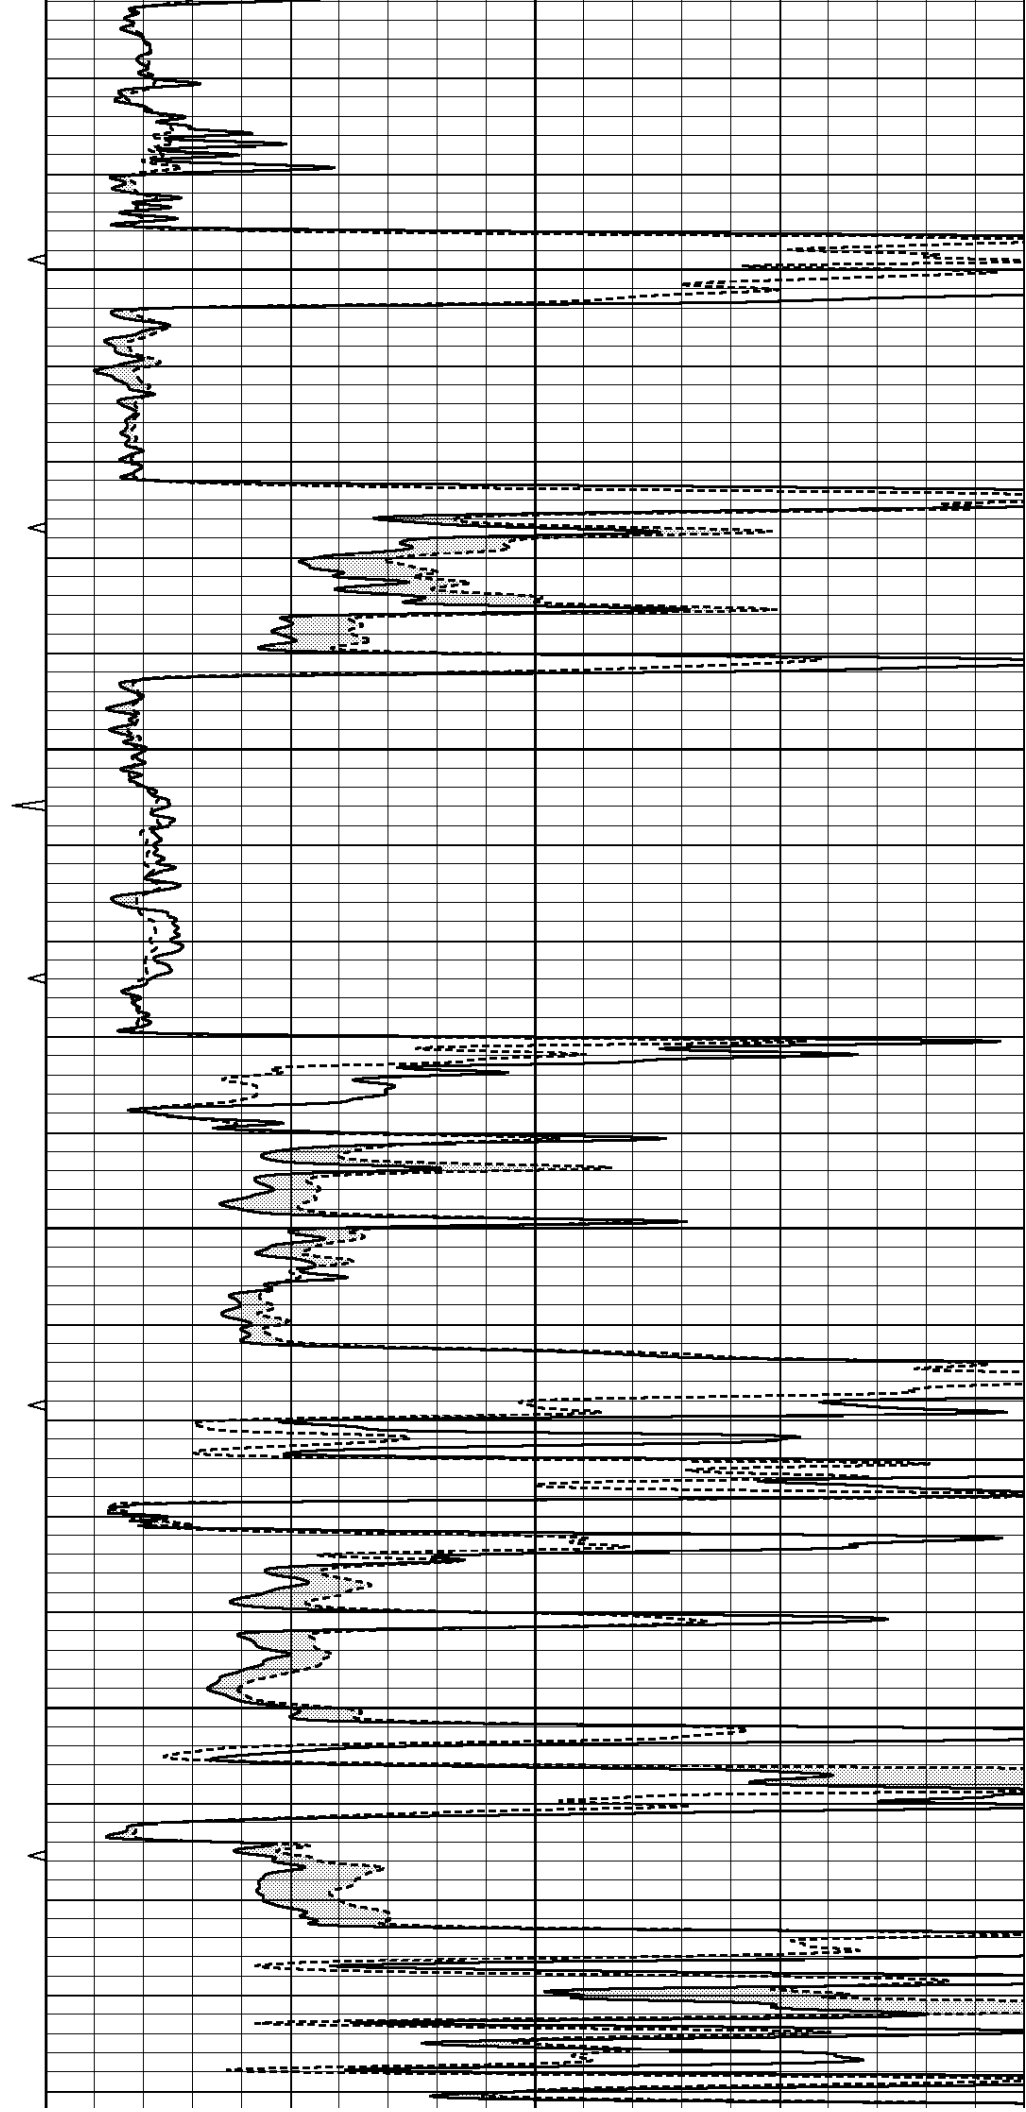

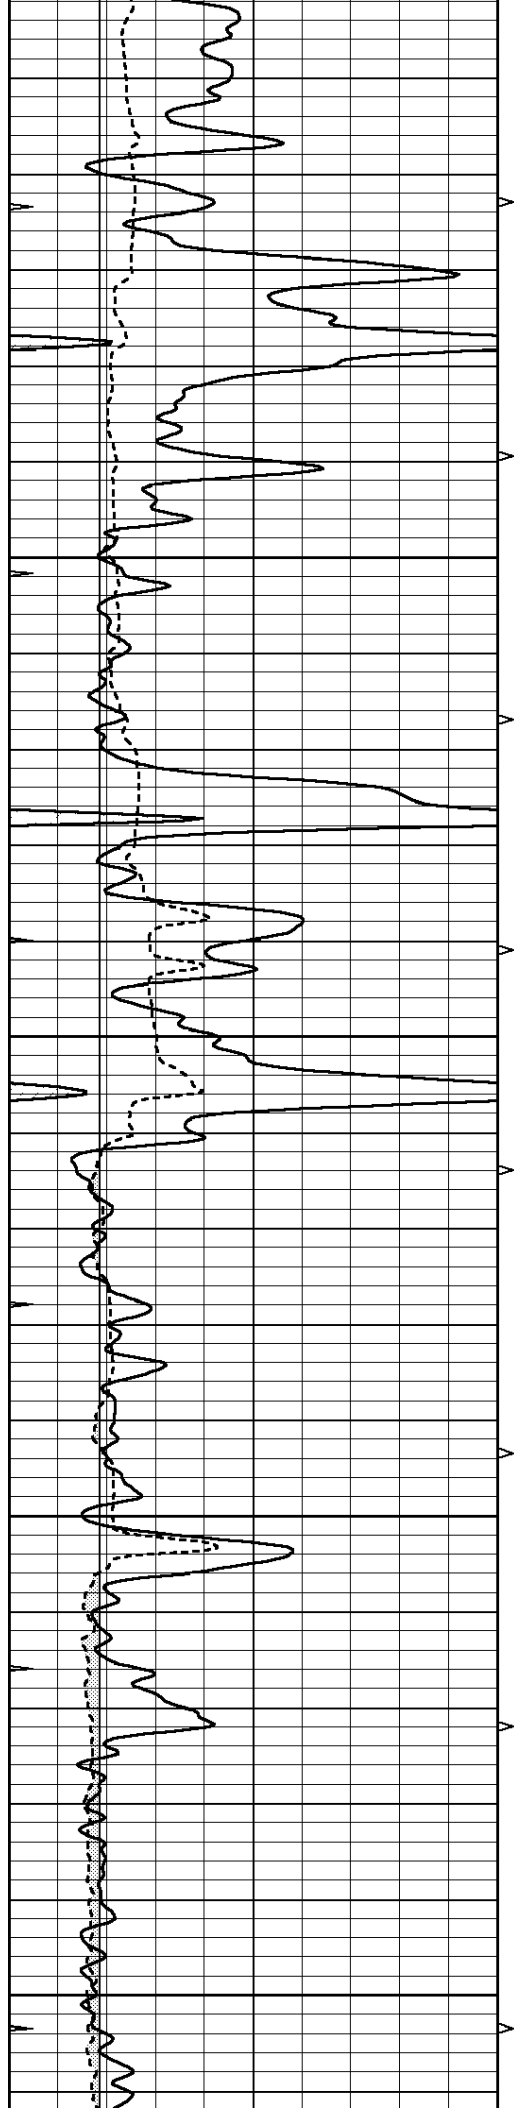


4650


4700

4750

4800

4850

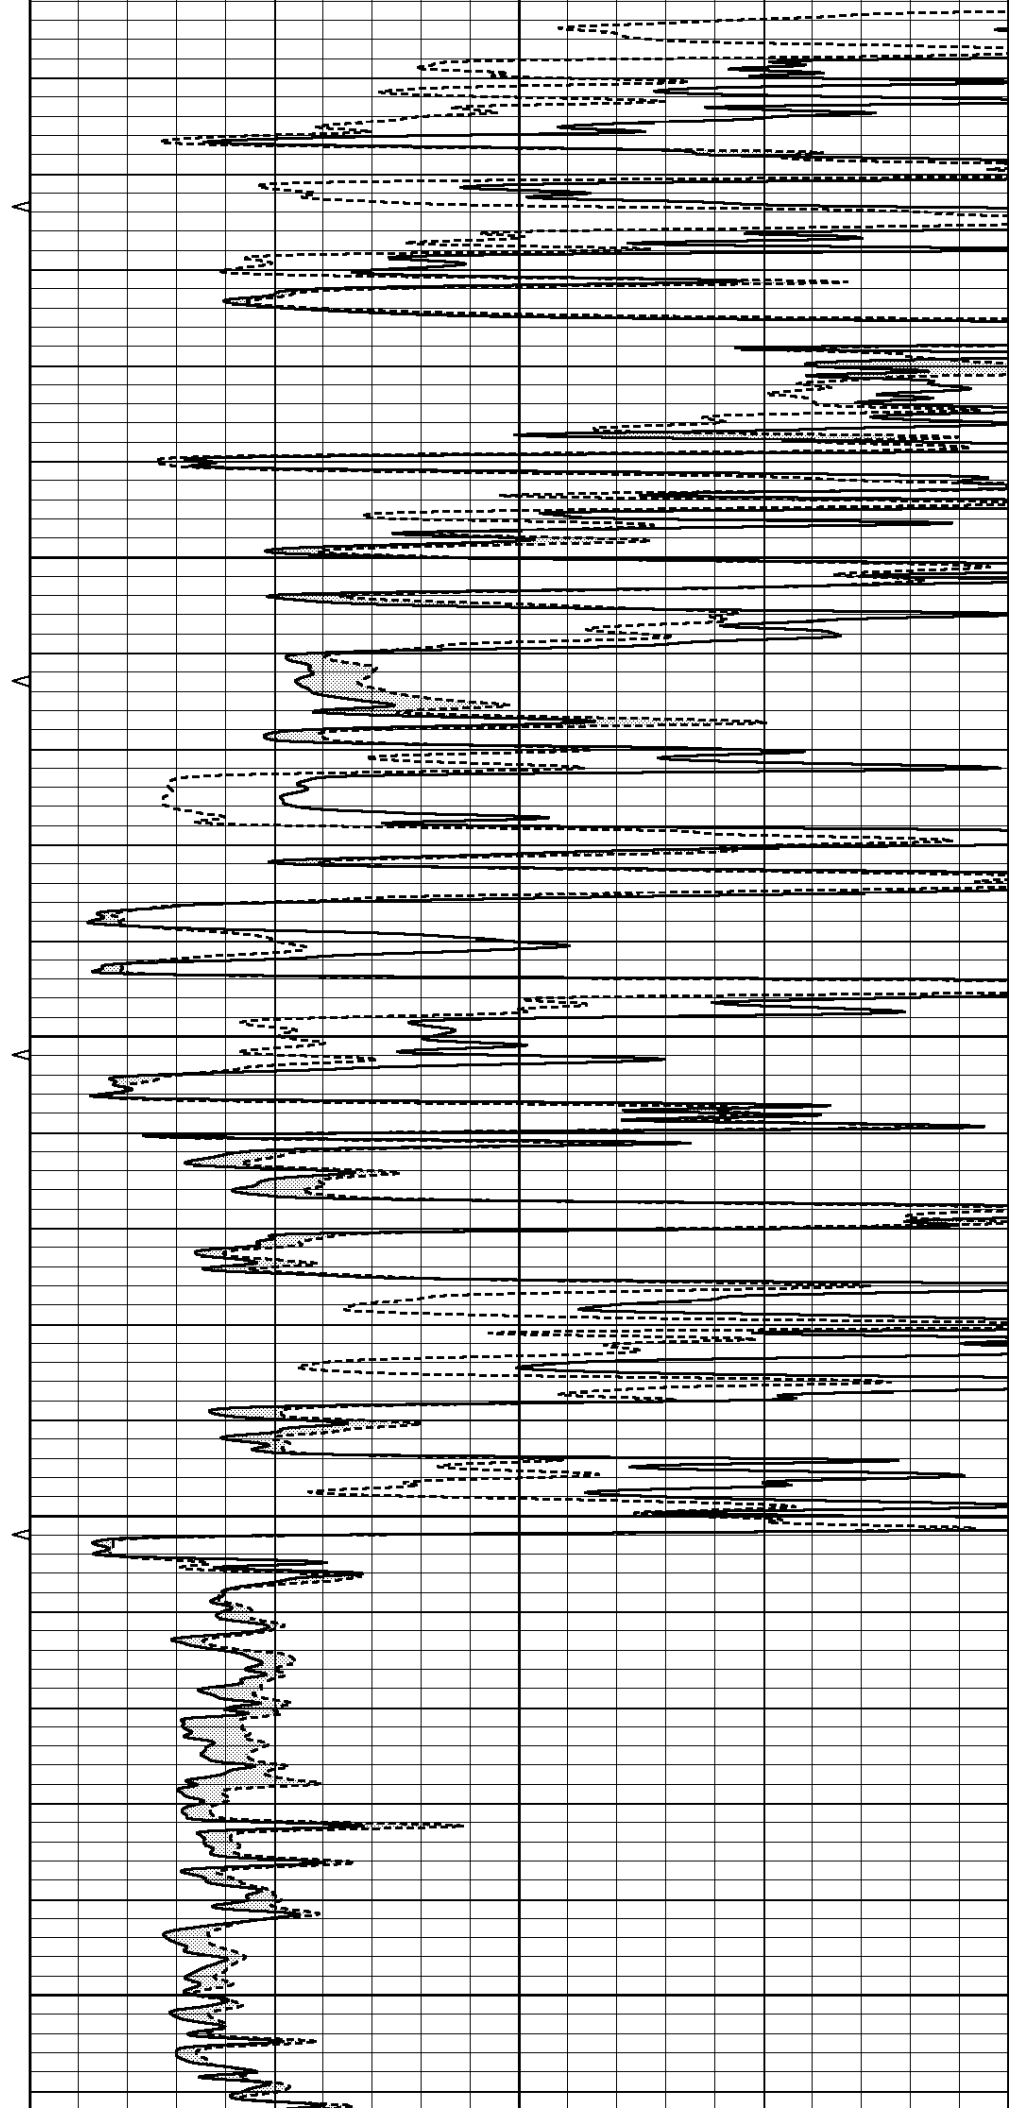

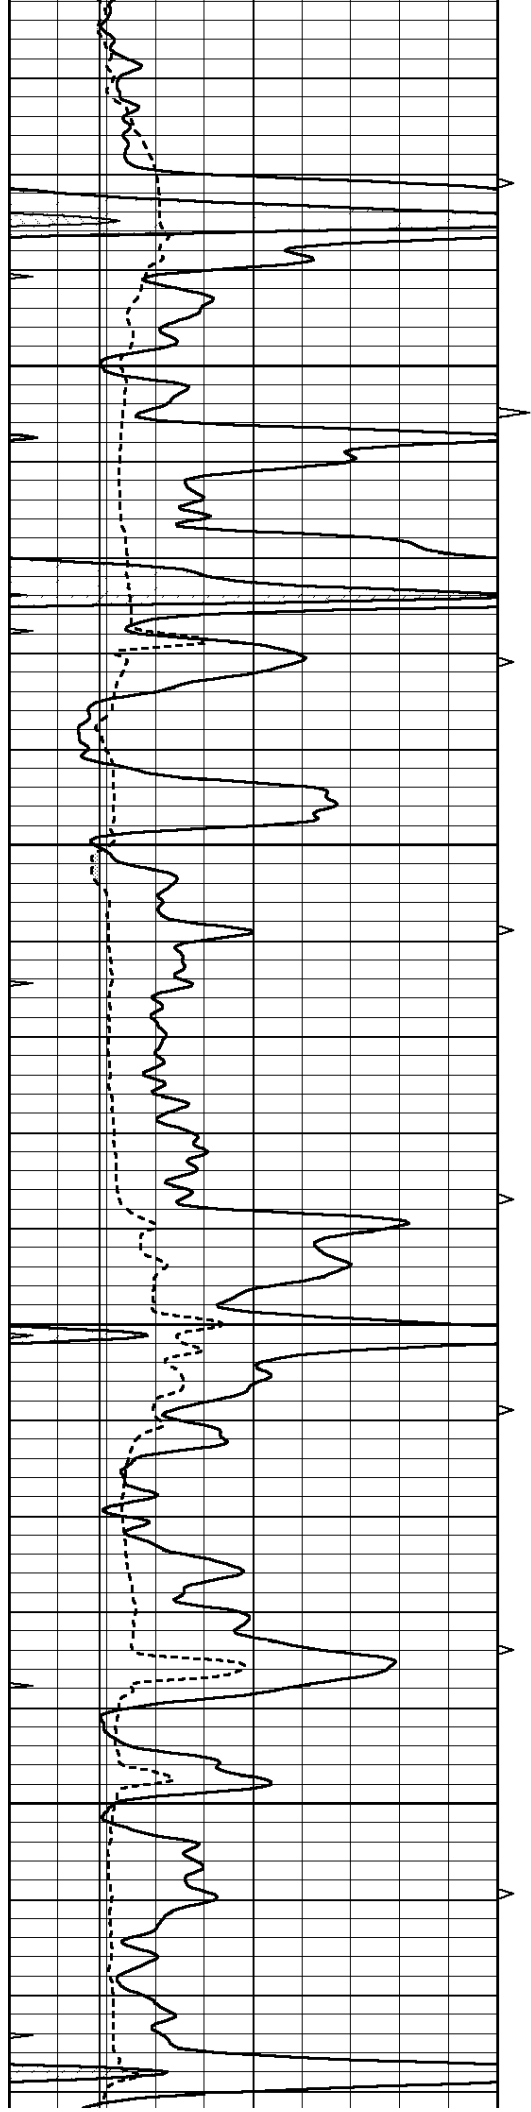




4900


4950

5000

5050

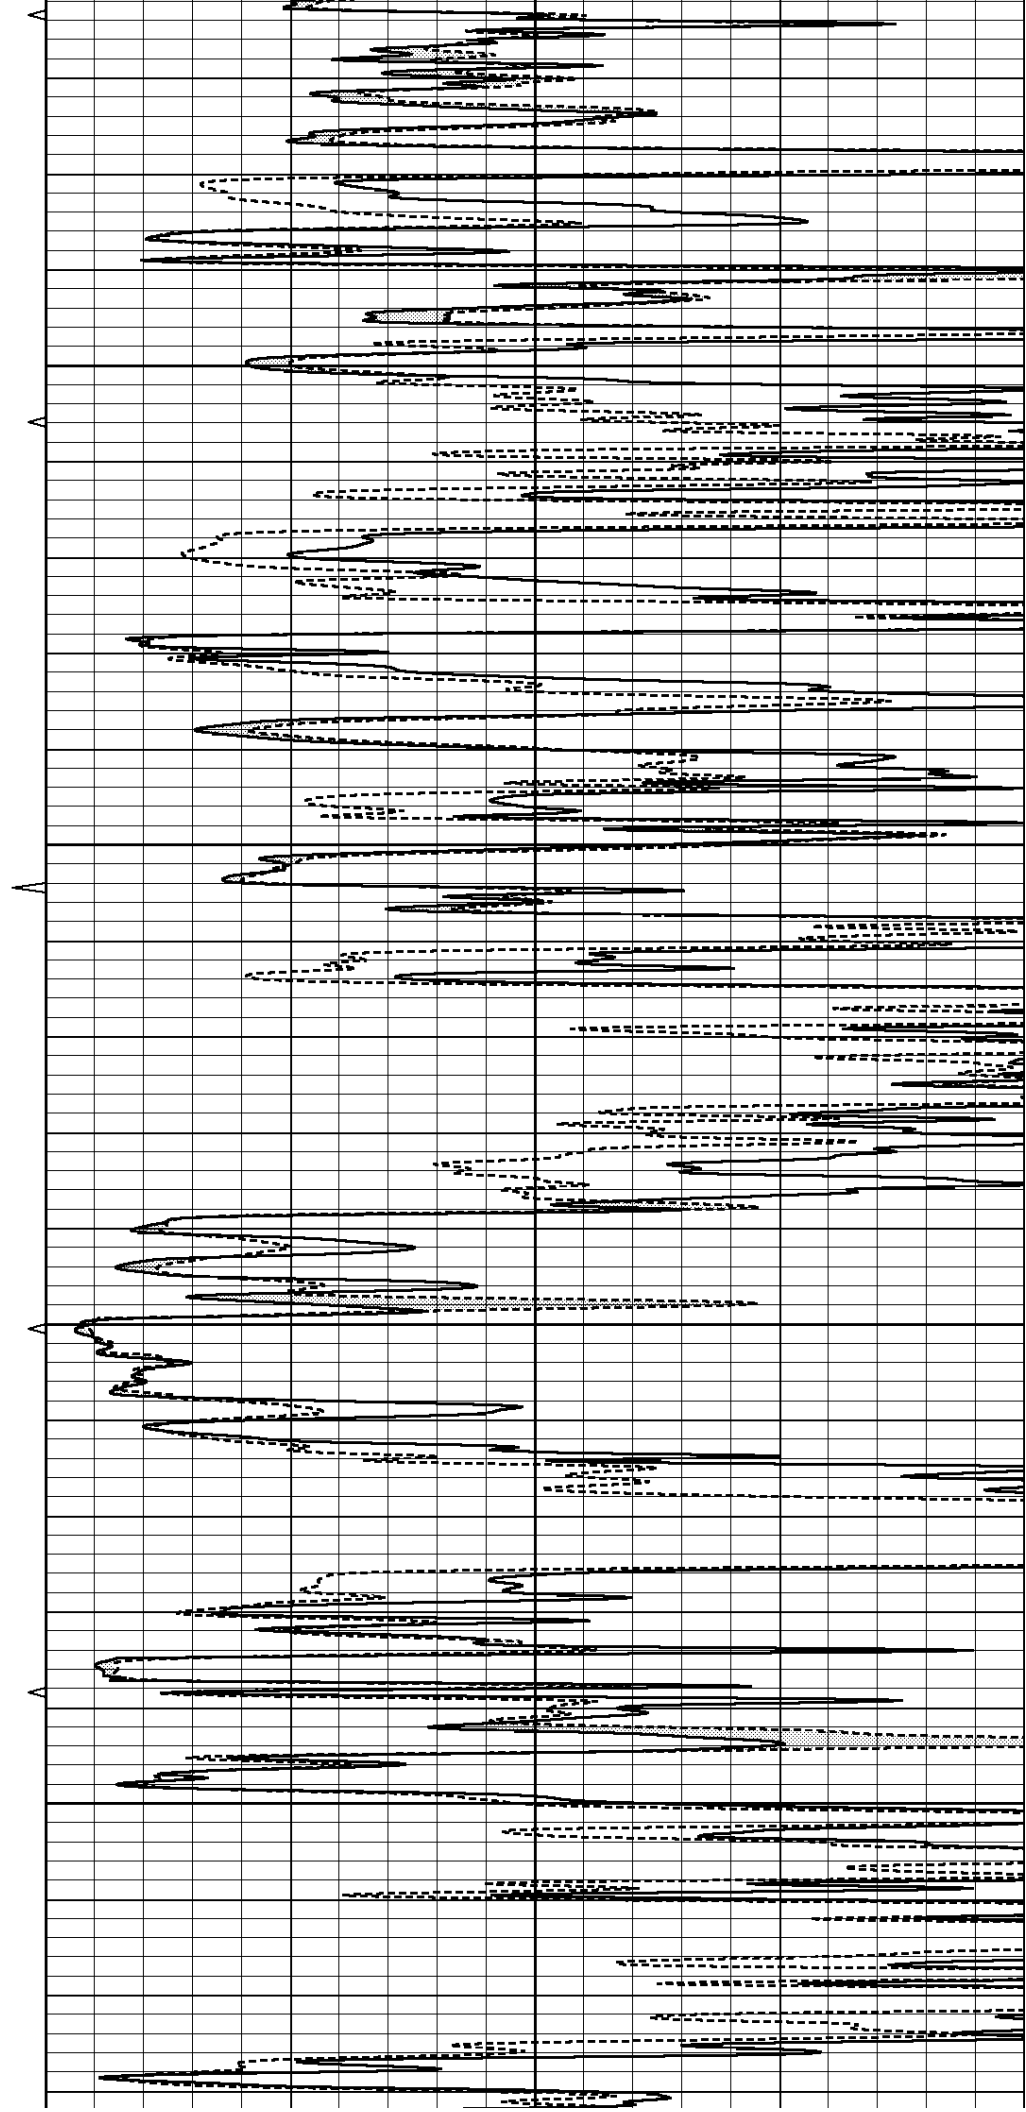

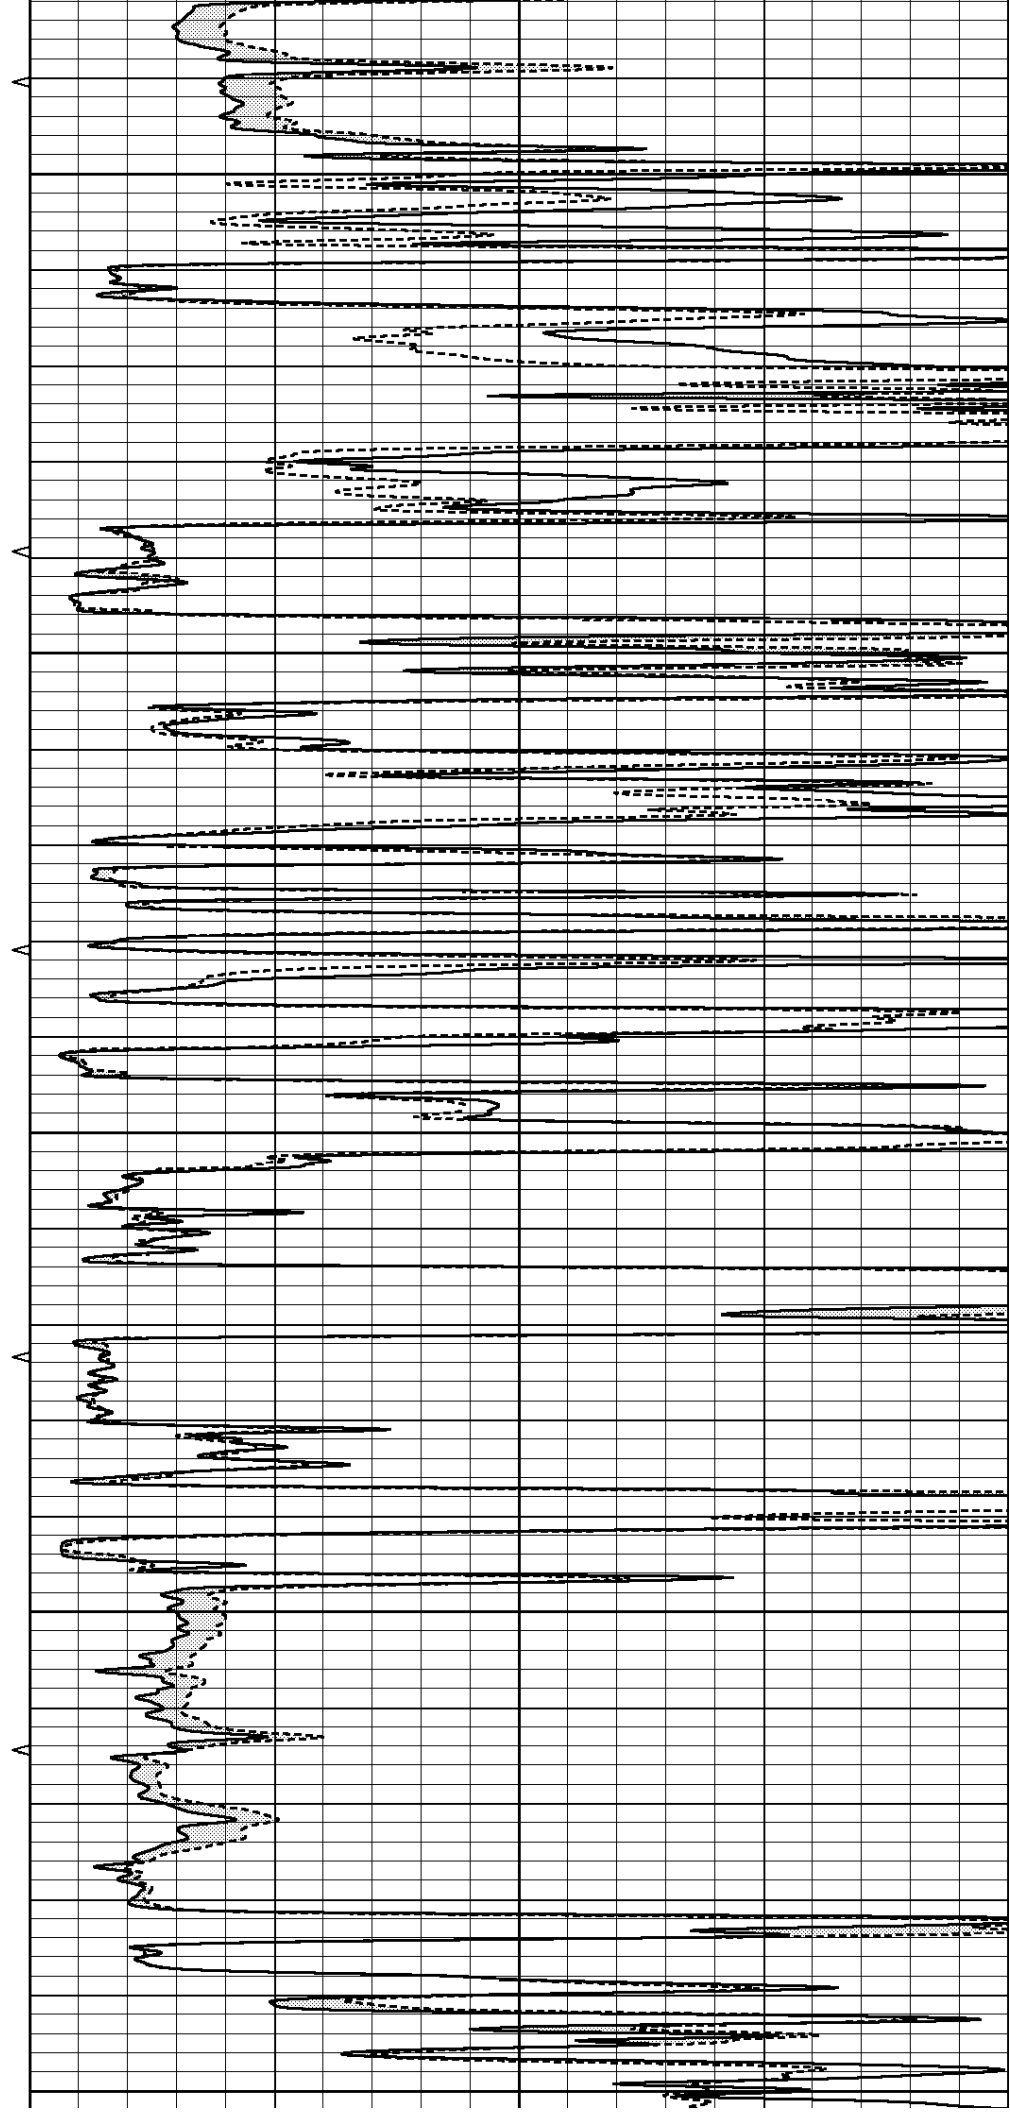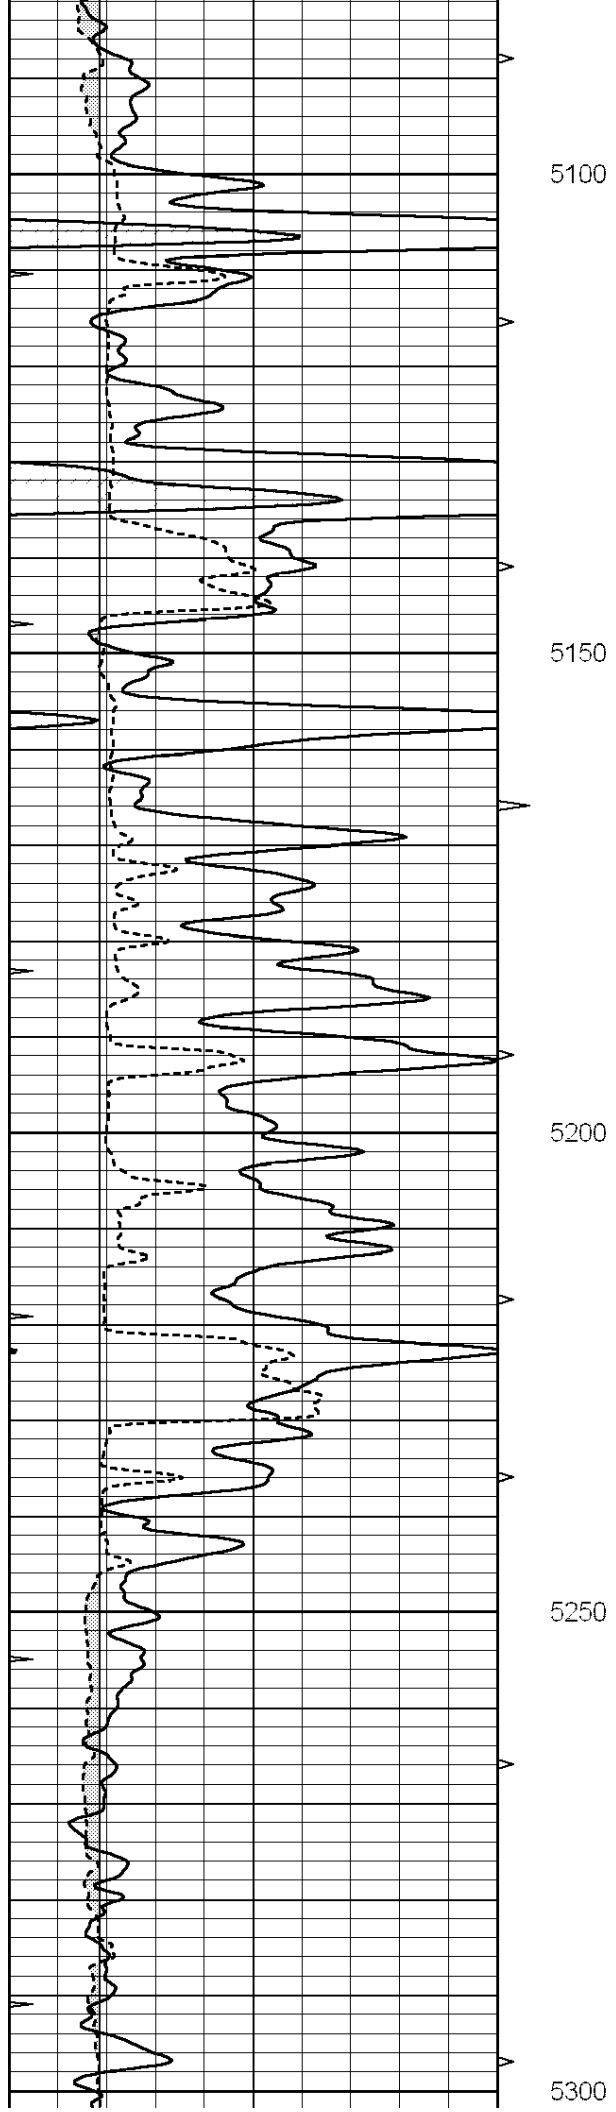

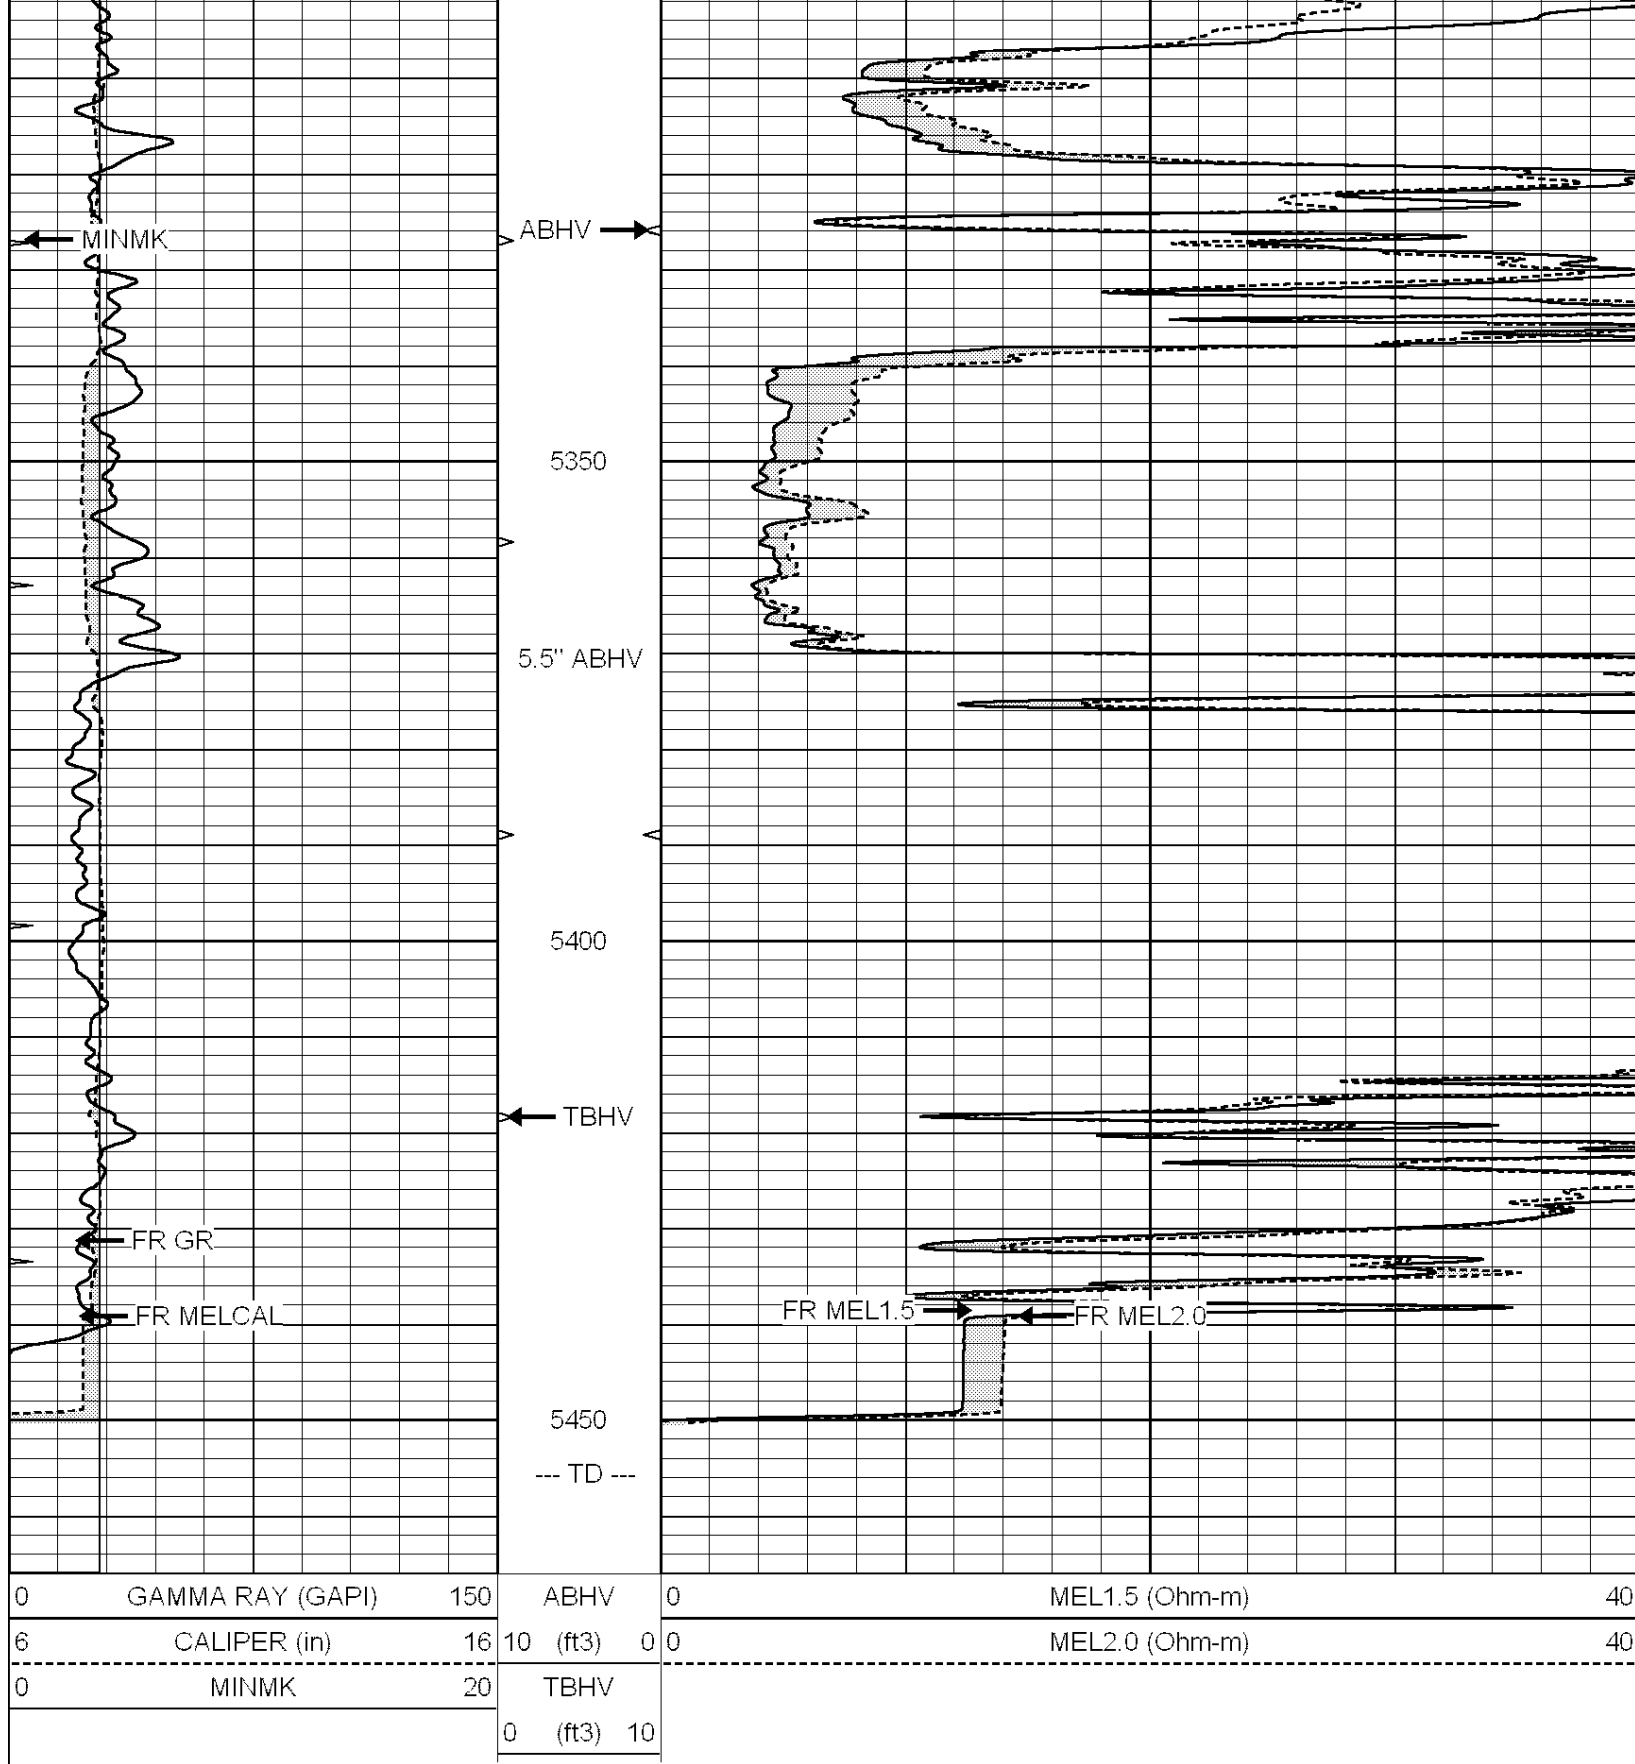

SUPERIOR
Hays,
Kansas


REPEAT SECTION


Database File: 005652pdr.db

Dataset Pathname: pass5.2A

Presentation Format: mips

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

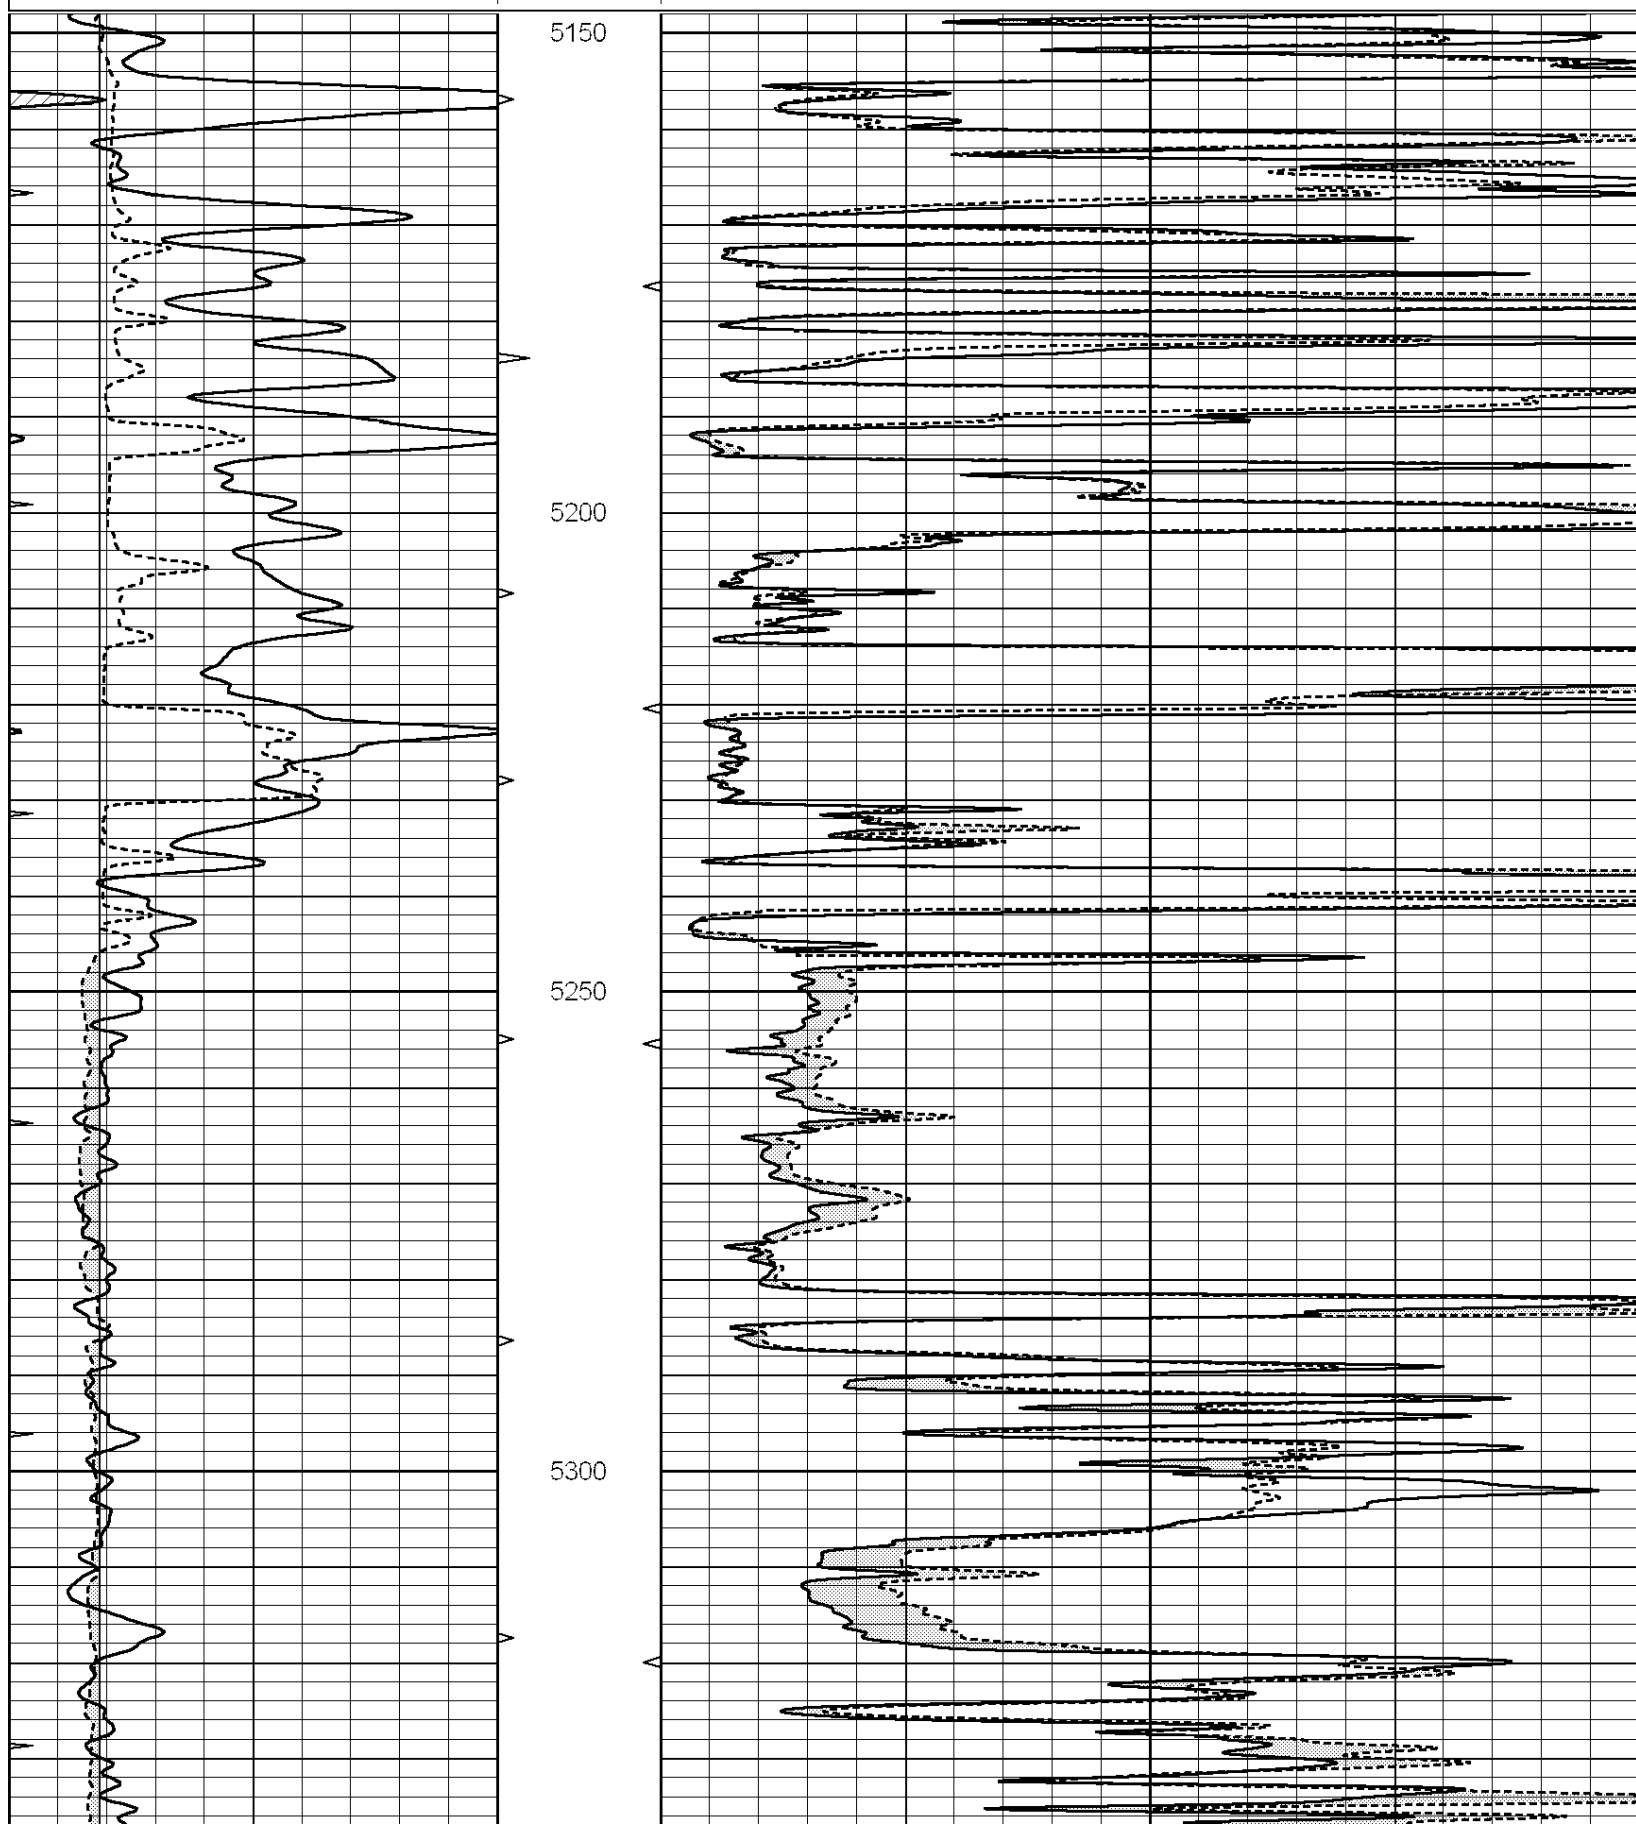

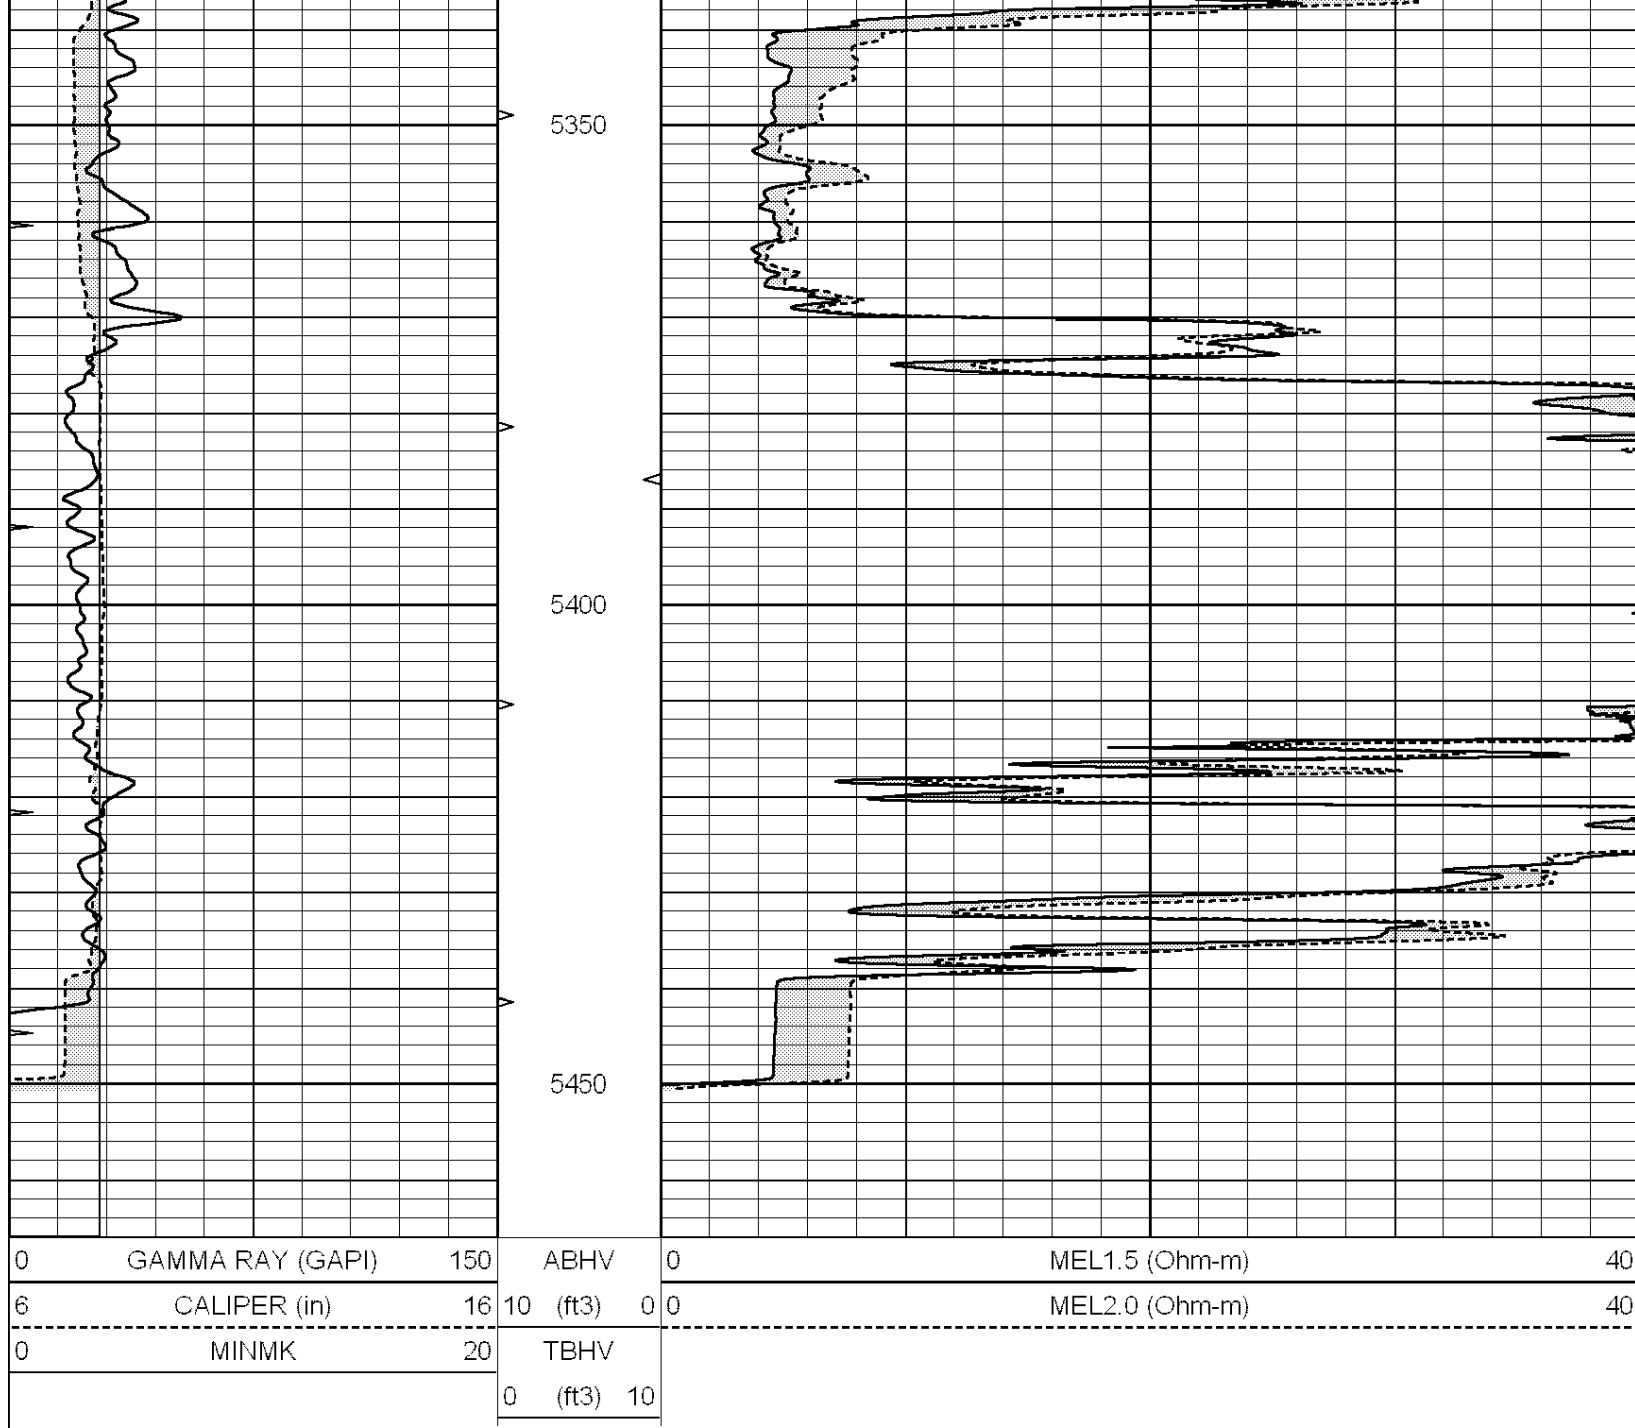

Calibration Report

Database File: 005652pdn.db
 Dataset Pathname: pass6.A
 Dataset Creation: Tue Aug 31 14:34:22 2010

MICRO Calibration Report

Serial Number: MICRO4
 Tool Model: PROBE
 Performed: Wed Aug 25 16:58:10 2010

Caliper Calibration:	Gain=1.664	Offset=-1.665
References	Low Cal 7.400	High Cal 12.000
Readings	5.449	8.214

1.5" Calibration:	Gain=42.000	Offset=-0.400
	Low Cal	High Cal

References	0.000	20.000
Readings	0.009	1.541
2" Calibration:	Gain=36.000	Offset=1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.198
Gamma Ray Calibration Report		
Serial Number:	GR5	
Tool Model:	OPEN	
Performed:	Tue Aug 31 13:16:34 2010	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.6500	GAPI/cps