



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No.	Company Reif Oil & Gas Company LLC		
	Well Keta No. 1		
	Field Marquis South		
	County Barton	State	Kansas
15-009-25,479-00-00	Location	E2 SW SW NE 2,310' FNL & 2,152' FEL	
	Sec: 9	Twp: 17S	Rge: 14W
	Permanent Datum	Ground Level	Elevation 1959
	Log Measured From	Kelly Bushing	7 Ft. Above Perm. Datum
	Drilling Measured From	Kelly Bushing	K.B. 1966 D.F. 1959 G.L. 1959
Date	10/12/2010		
Run Number	Two		
Depth Driller	3550		
Depth Logger	3549		
Bottom Logged Interval	3548		
Top Log Interval	2800		
Casing Driller	8.625 @ 458		
Casing Logger	457		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	10000		
Density / Viscosity	9.15 72		
pH / Fluid Loss	9.0 12.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	.28 @ 68		
Rmf @ Meas. Temp	.21 @ 68		
Rmc @ Meas. Temp	.38 @ 68		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.17 @ 112		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	112		
Equipment Number	10		
Location	Hays		
Recorded By	J. Long		
Witnessed By	Josh Austin		

<<< Fold Here >>>



All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Highway 281 & Highway 4 Intersection, 4 North, 1 1/2 West, South Into

Database File: c:\warrior\data\reif_keta no. 1\reif_keta_1hd.db
Dataset Pathname: dil/reifstck
Presentation Format: micro
Dataset Creation: Tue Oct 12 10:25:11 2010
Charted by: Depth in Feet scaled 1:240

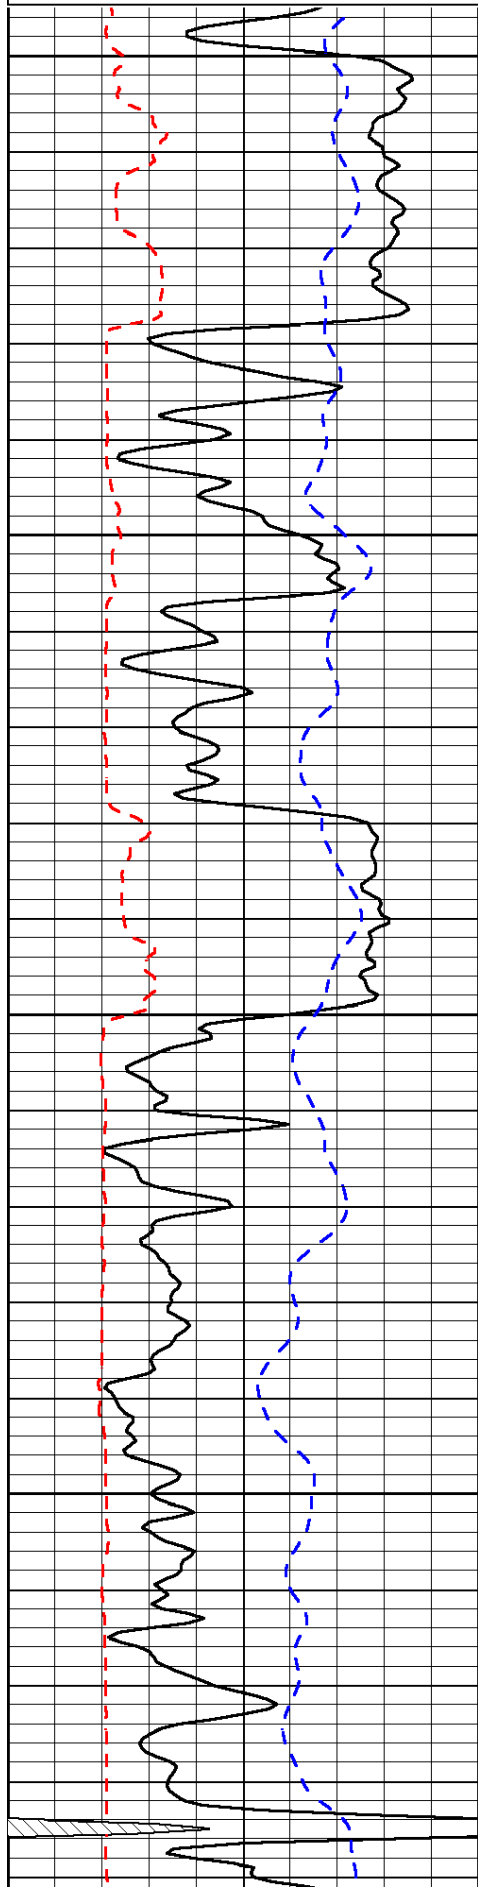
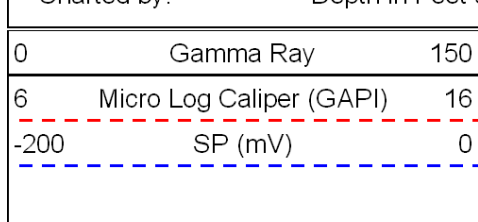


2800

2850

2900

2950

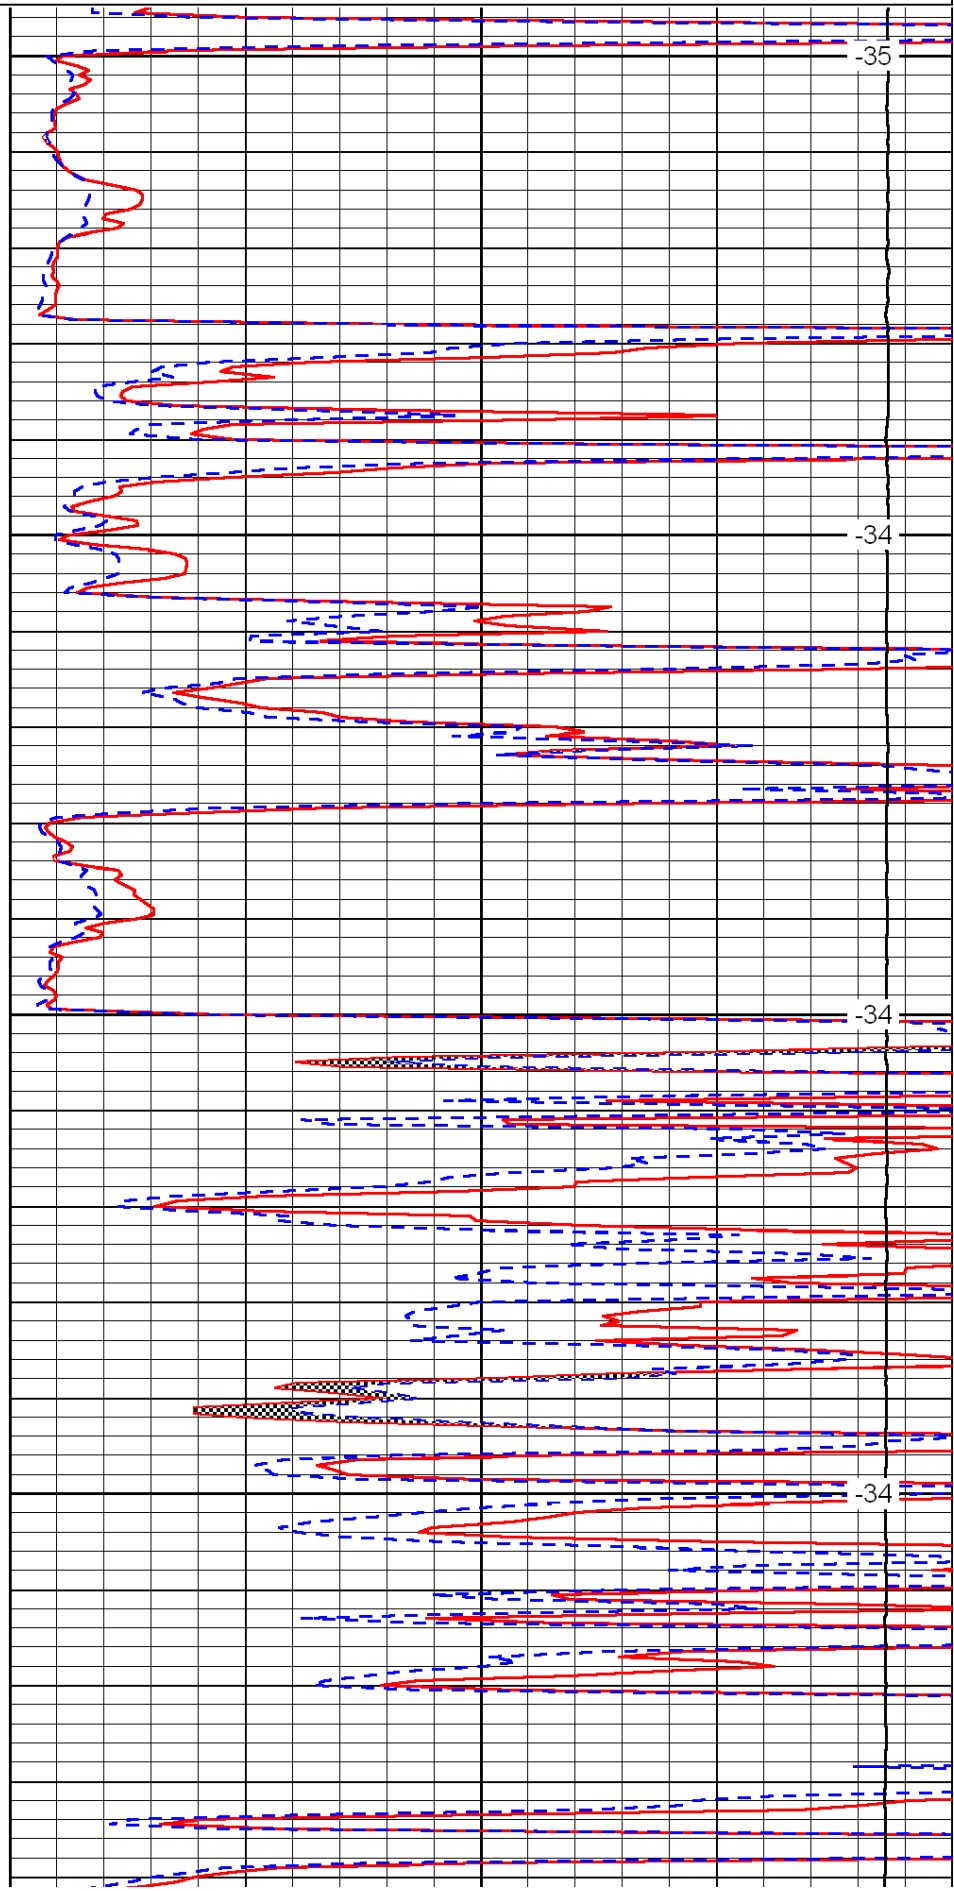
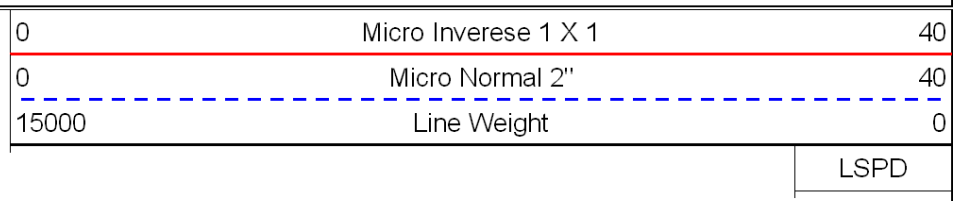



-35

-34

-34

-34

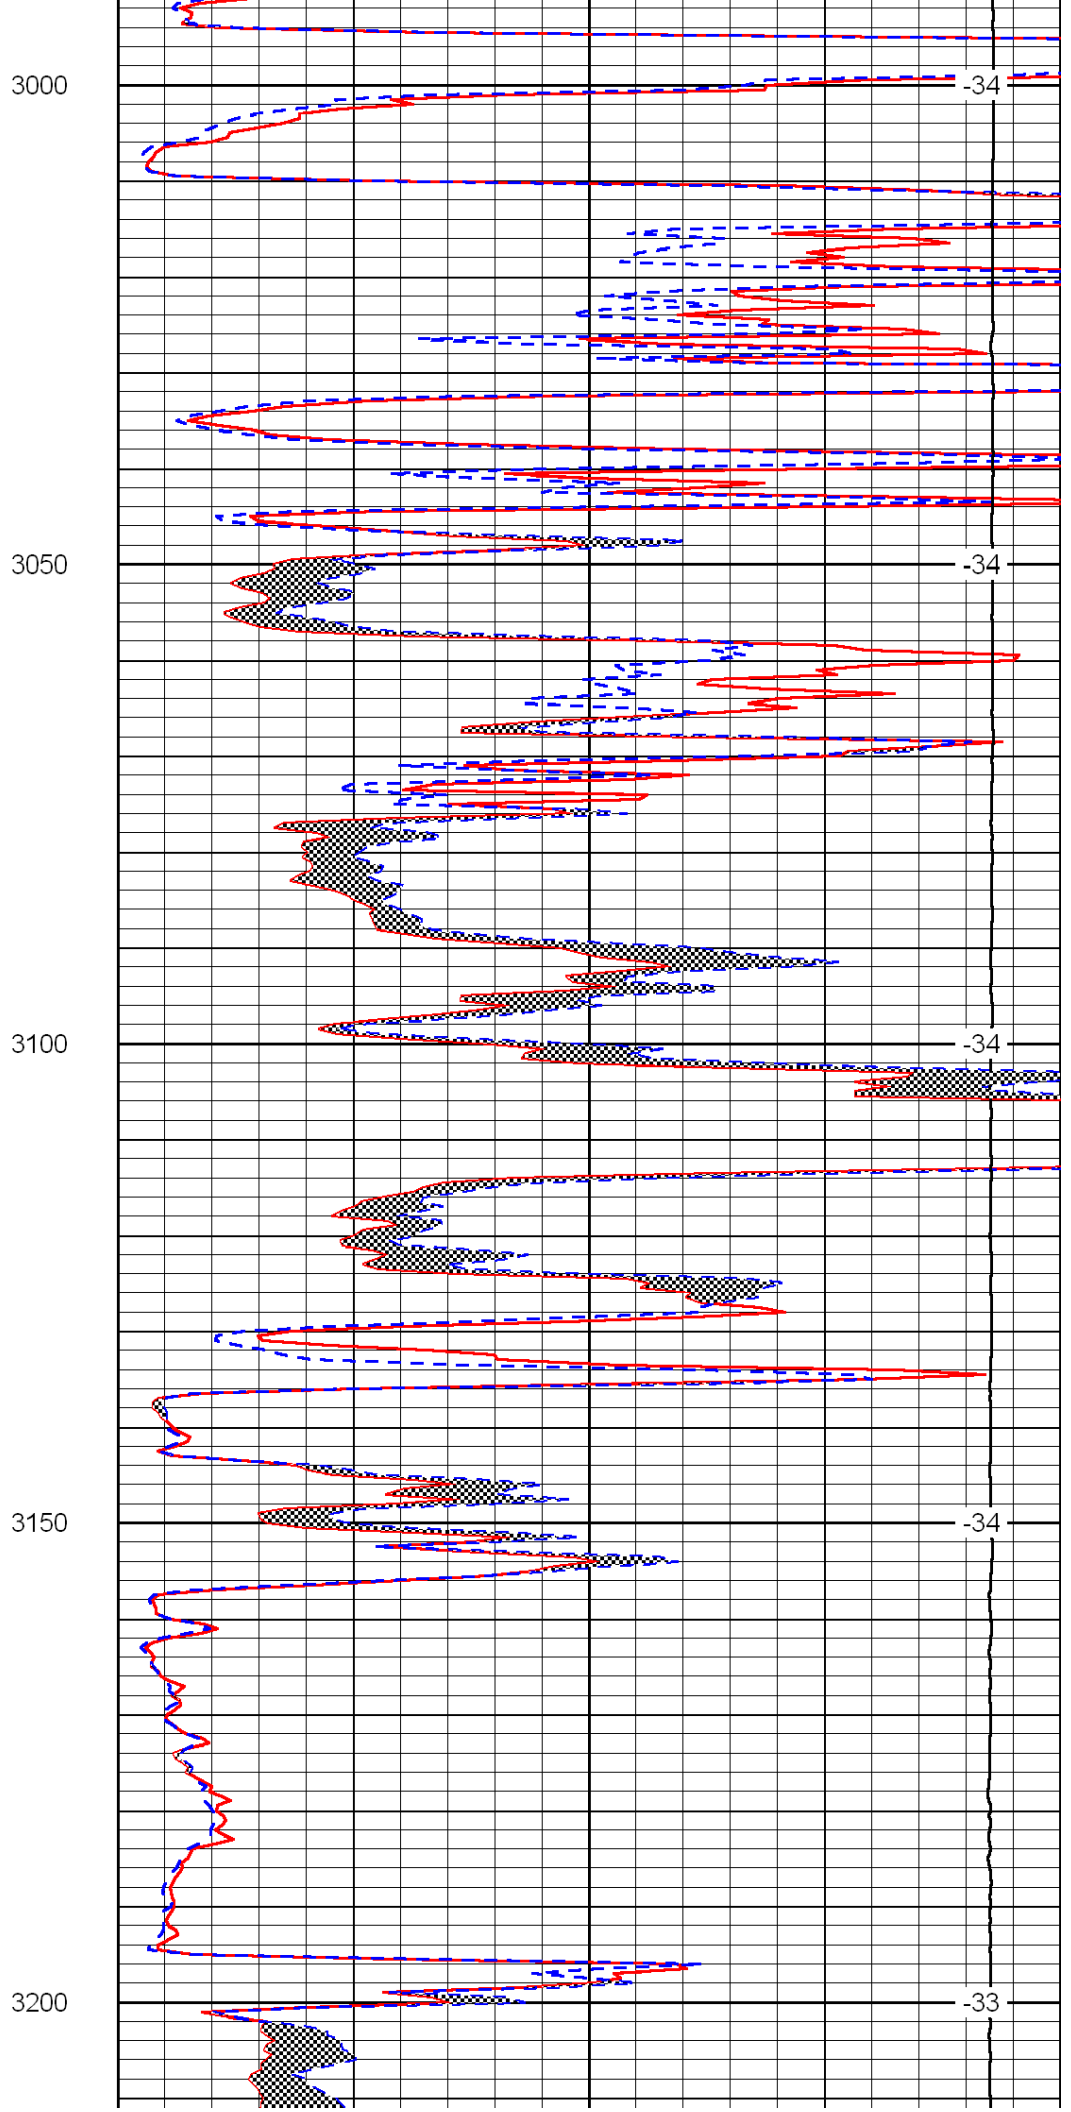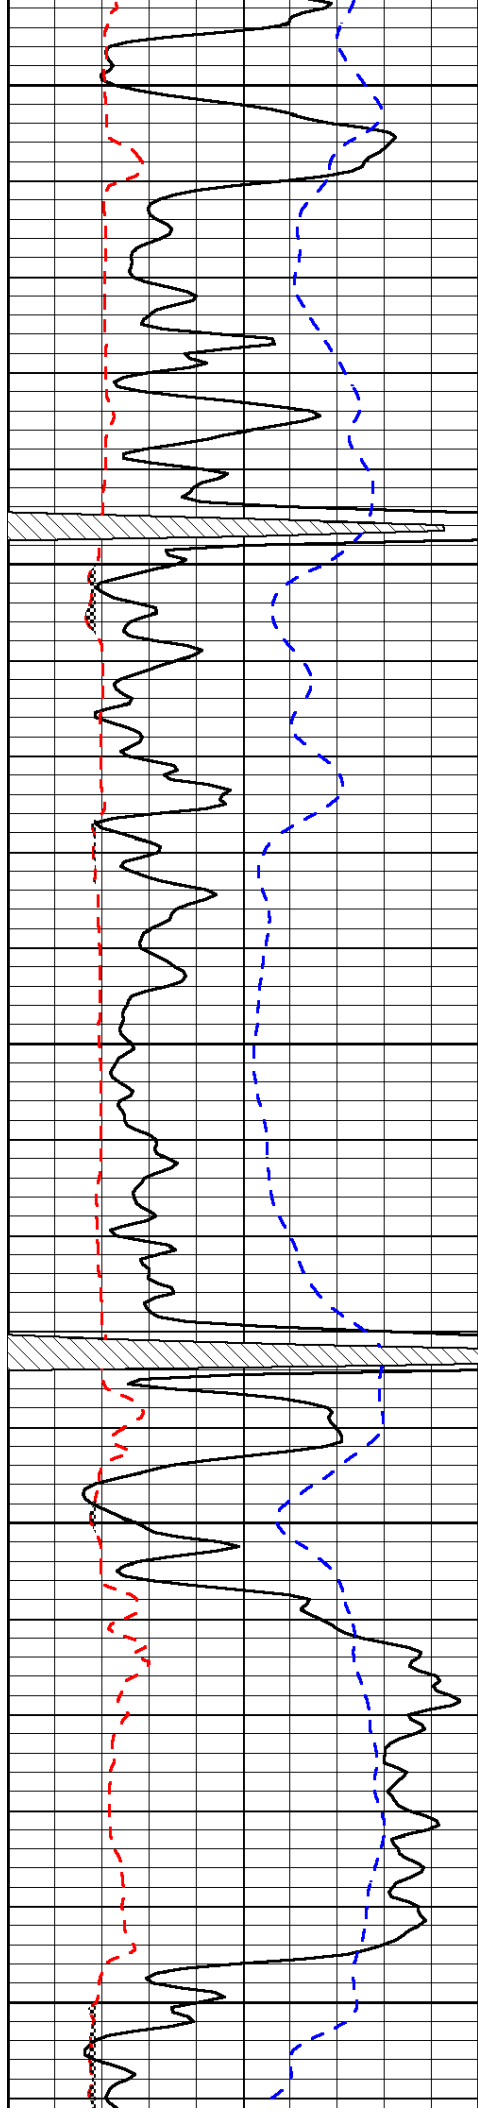

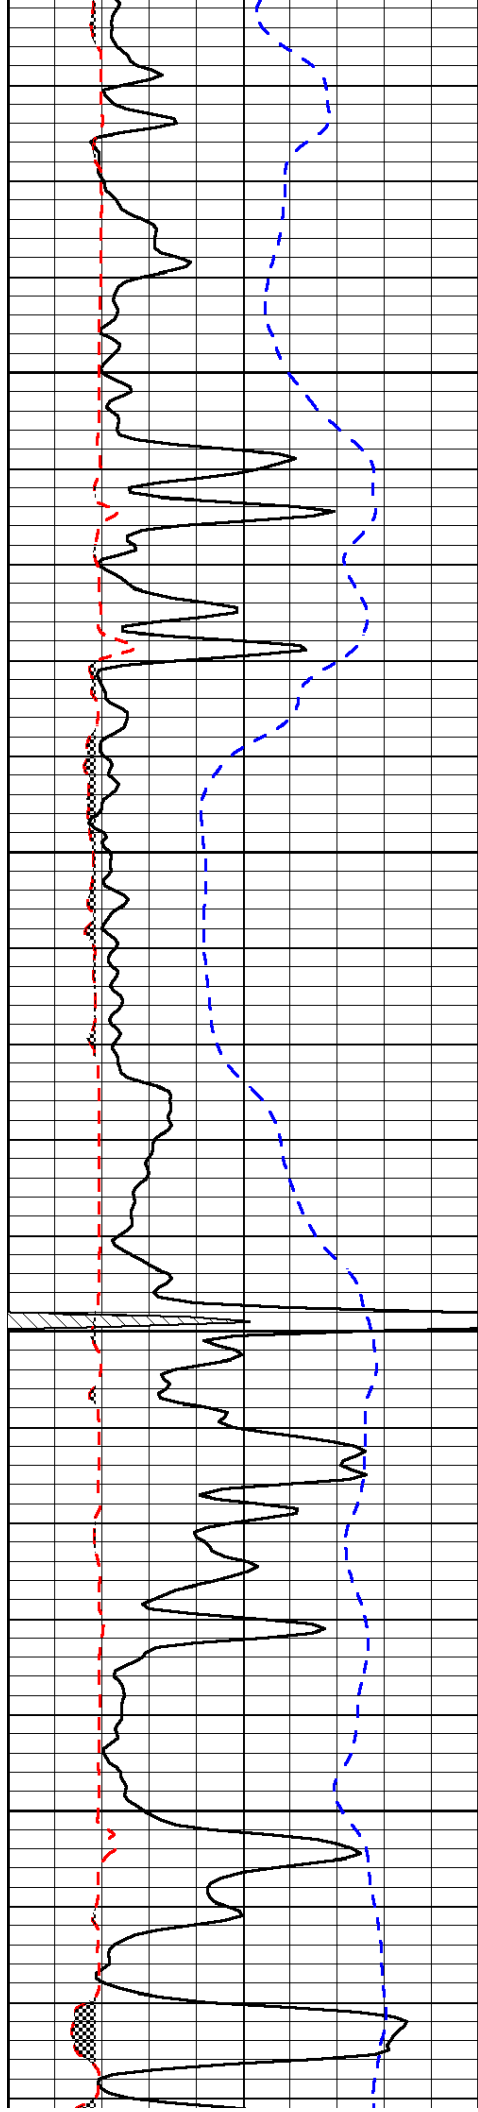




3250

3300

3350

3400

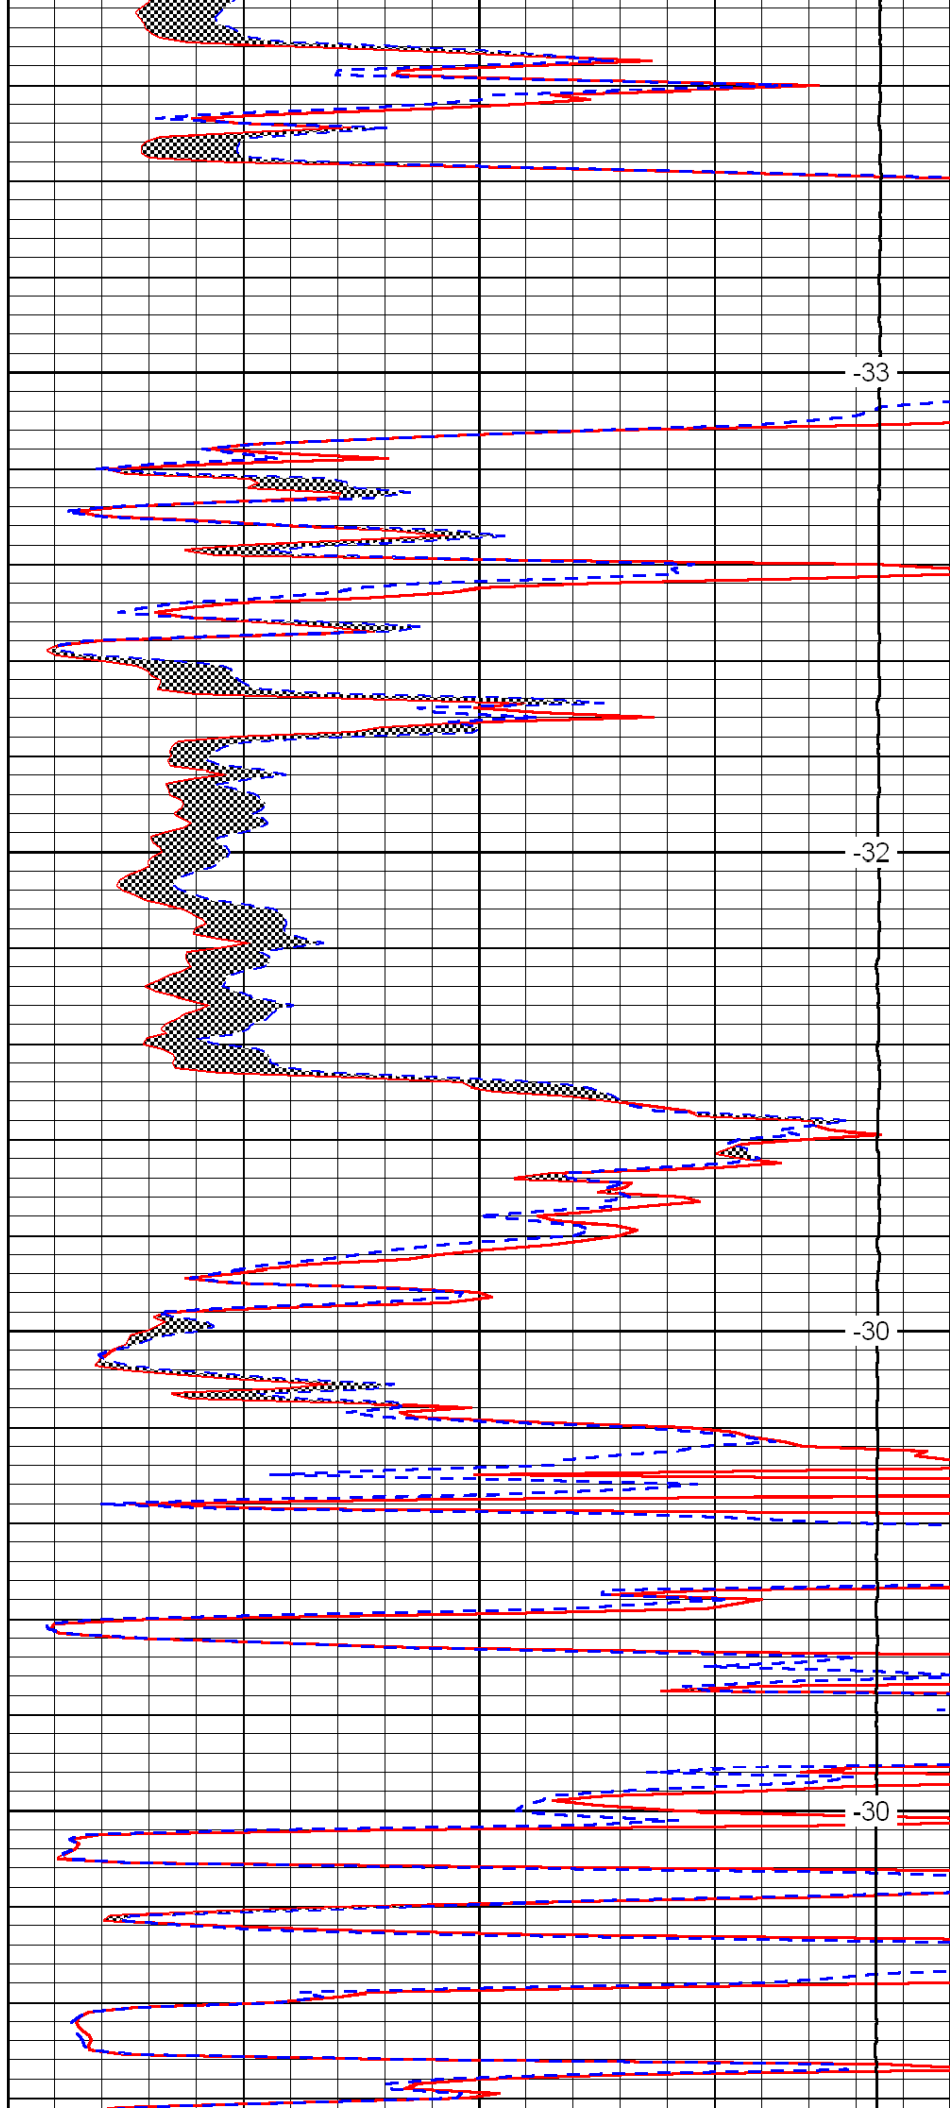

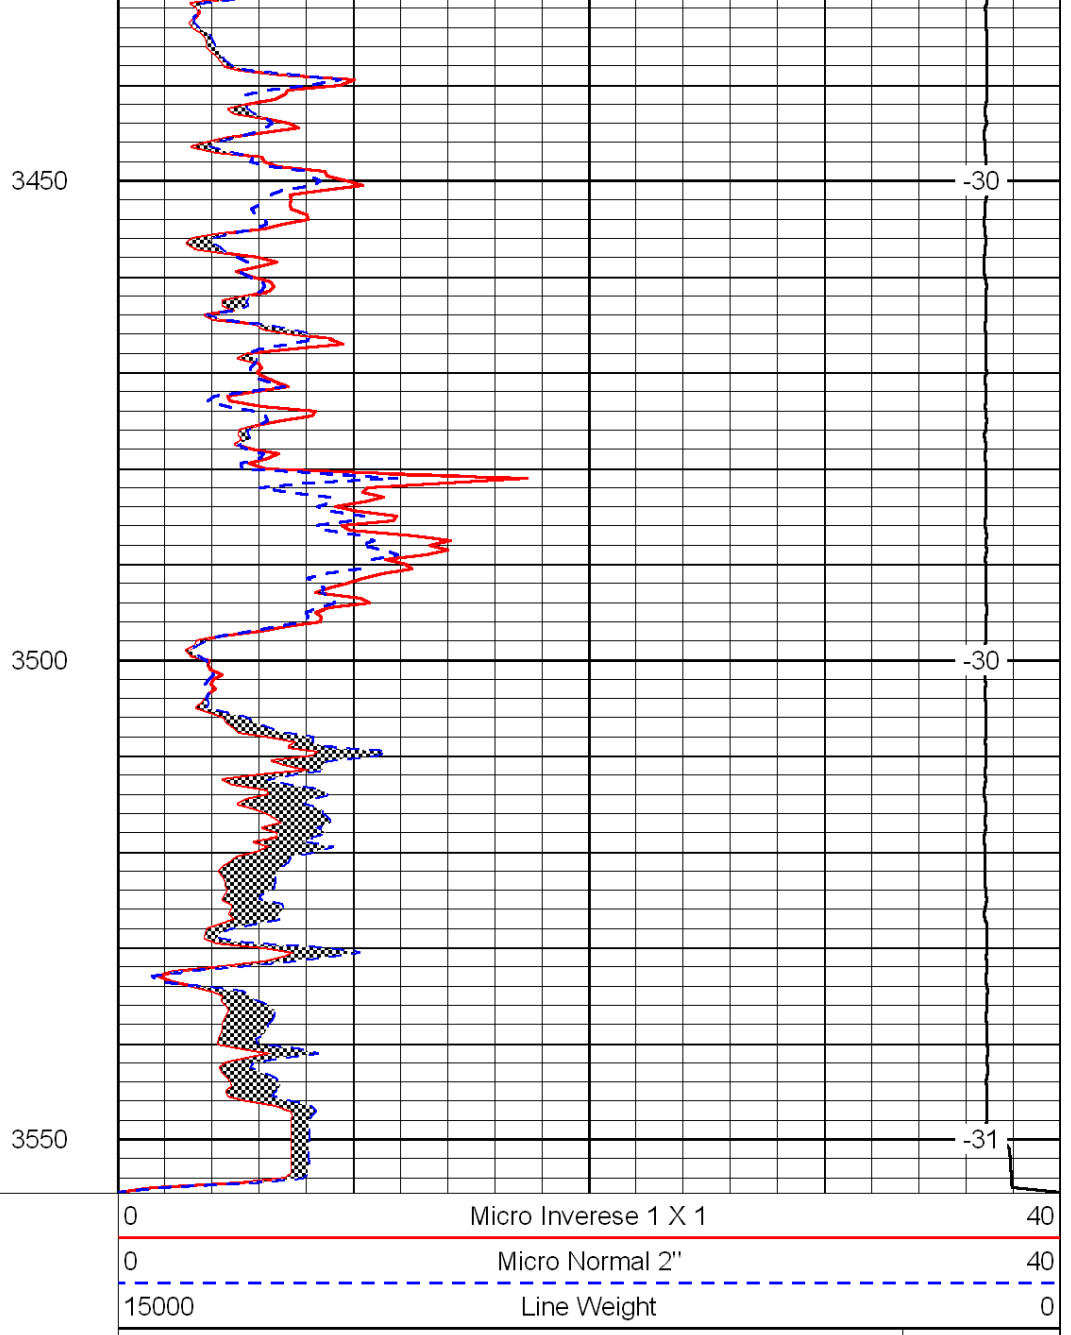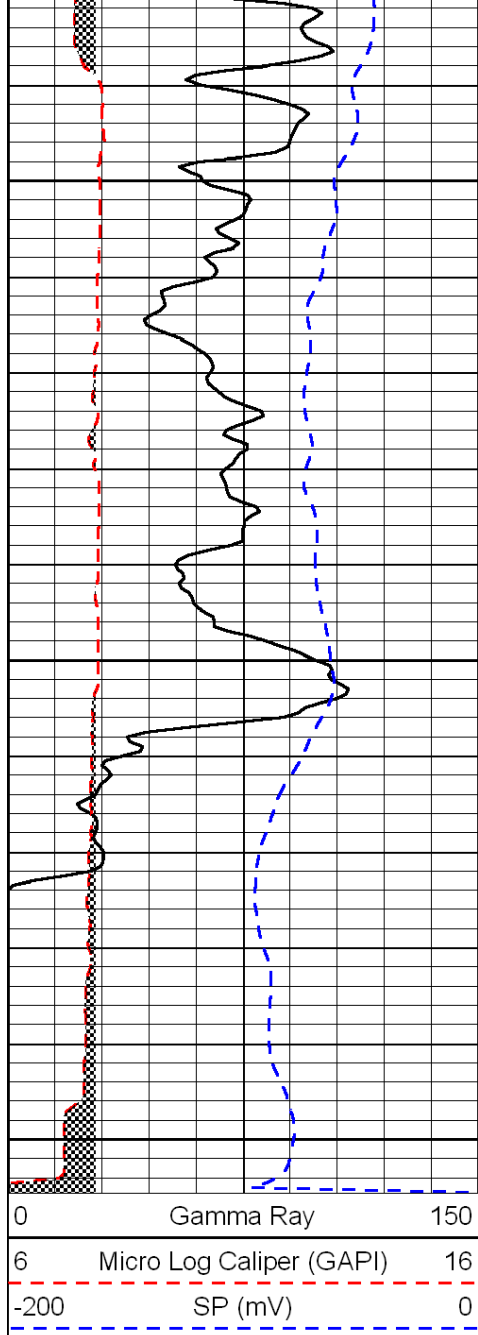

LSPD