SUPERIOR WELL SERVICES

SUPERIOR
Hays,
Kansas

COMPENSATED DENSITY / NEUTRON PE LOG

Company OIL PRODUCERS, INC. OF KANSAS

Well LAURITA #1

Field SCHMEIDLER

County ELLIS State KANSAS

Location: API # : 15-051-26076-0000

2160' FSL & 620' FEL
SW - NE - NE - SE

SEC 30 TWP 12S RGE 17W

Other Services

DIL

Elevation

Permanent Datum GROUND LEVEL Elevation 2097
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

K.B. 2102
D.F. 2100
G.L. 2097

Company OIL PRODUCERS, INC. OF KS.
Well LAURITA #1
Field SCHMEIDLER
County ELLIS
State KANSAS

Date	1/17/11		
Run Number	ONE		
Depth Driller	3760		
Depth Logger	3758		
Bottom Logged Interval	3734		
Top Log Interval	2900		
Casing Driller	8 5/8"@256'		
Casing Logger	258		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,800 PPM	
Density / Viscosity	9.3/59		
pH / Fluid Loss	10.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.850@60F		
Rmf @ Meas. Temp	.638@60F		
Rmc @ Meas. Temp	1.02@60F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.447@114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	1:30 P.M.		
Maximum Recorded Temperature	114F		
Equipment Number	0836		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JON CHRISTENSEN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395

DIRECTIONS

CATHERINE, KS. 2W. TO CURVE, 3 1/2N., W. INTO


MAIN SECTION


SUPERIOR WELL SERVICES


SUPERIOR
Hays,
Kansas


Database File:	006270pe.db
Dataset Pathname:	pass3.5
Presentation Format:	ldt_neu
Dataset Creation:	Mon Jan 17 14:42:36 2011 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)		-10
6	CALIPER (in)	16	10 (ft3) 0	30	COMPENSATED NEUTRON (pu)		-10
0	MINMK	20	TBHV	0	PE 10	-0.25 CORRECTION (g/cc)	0.25
			0 (ft3) 10				

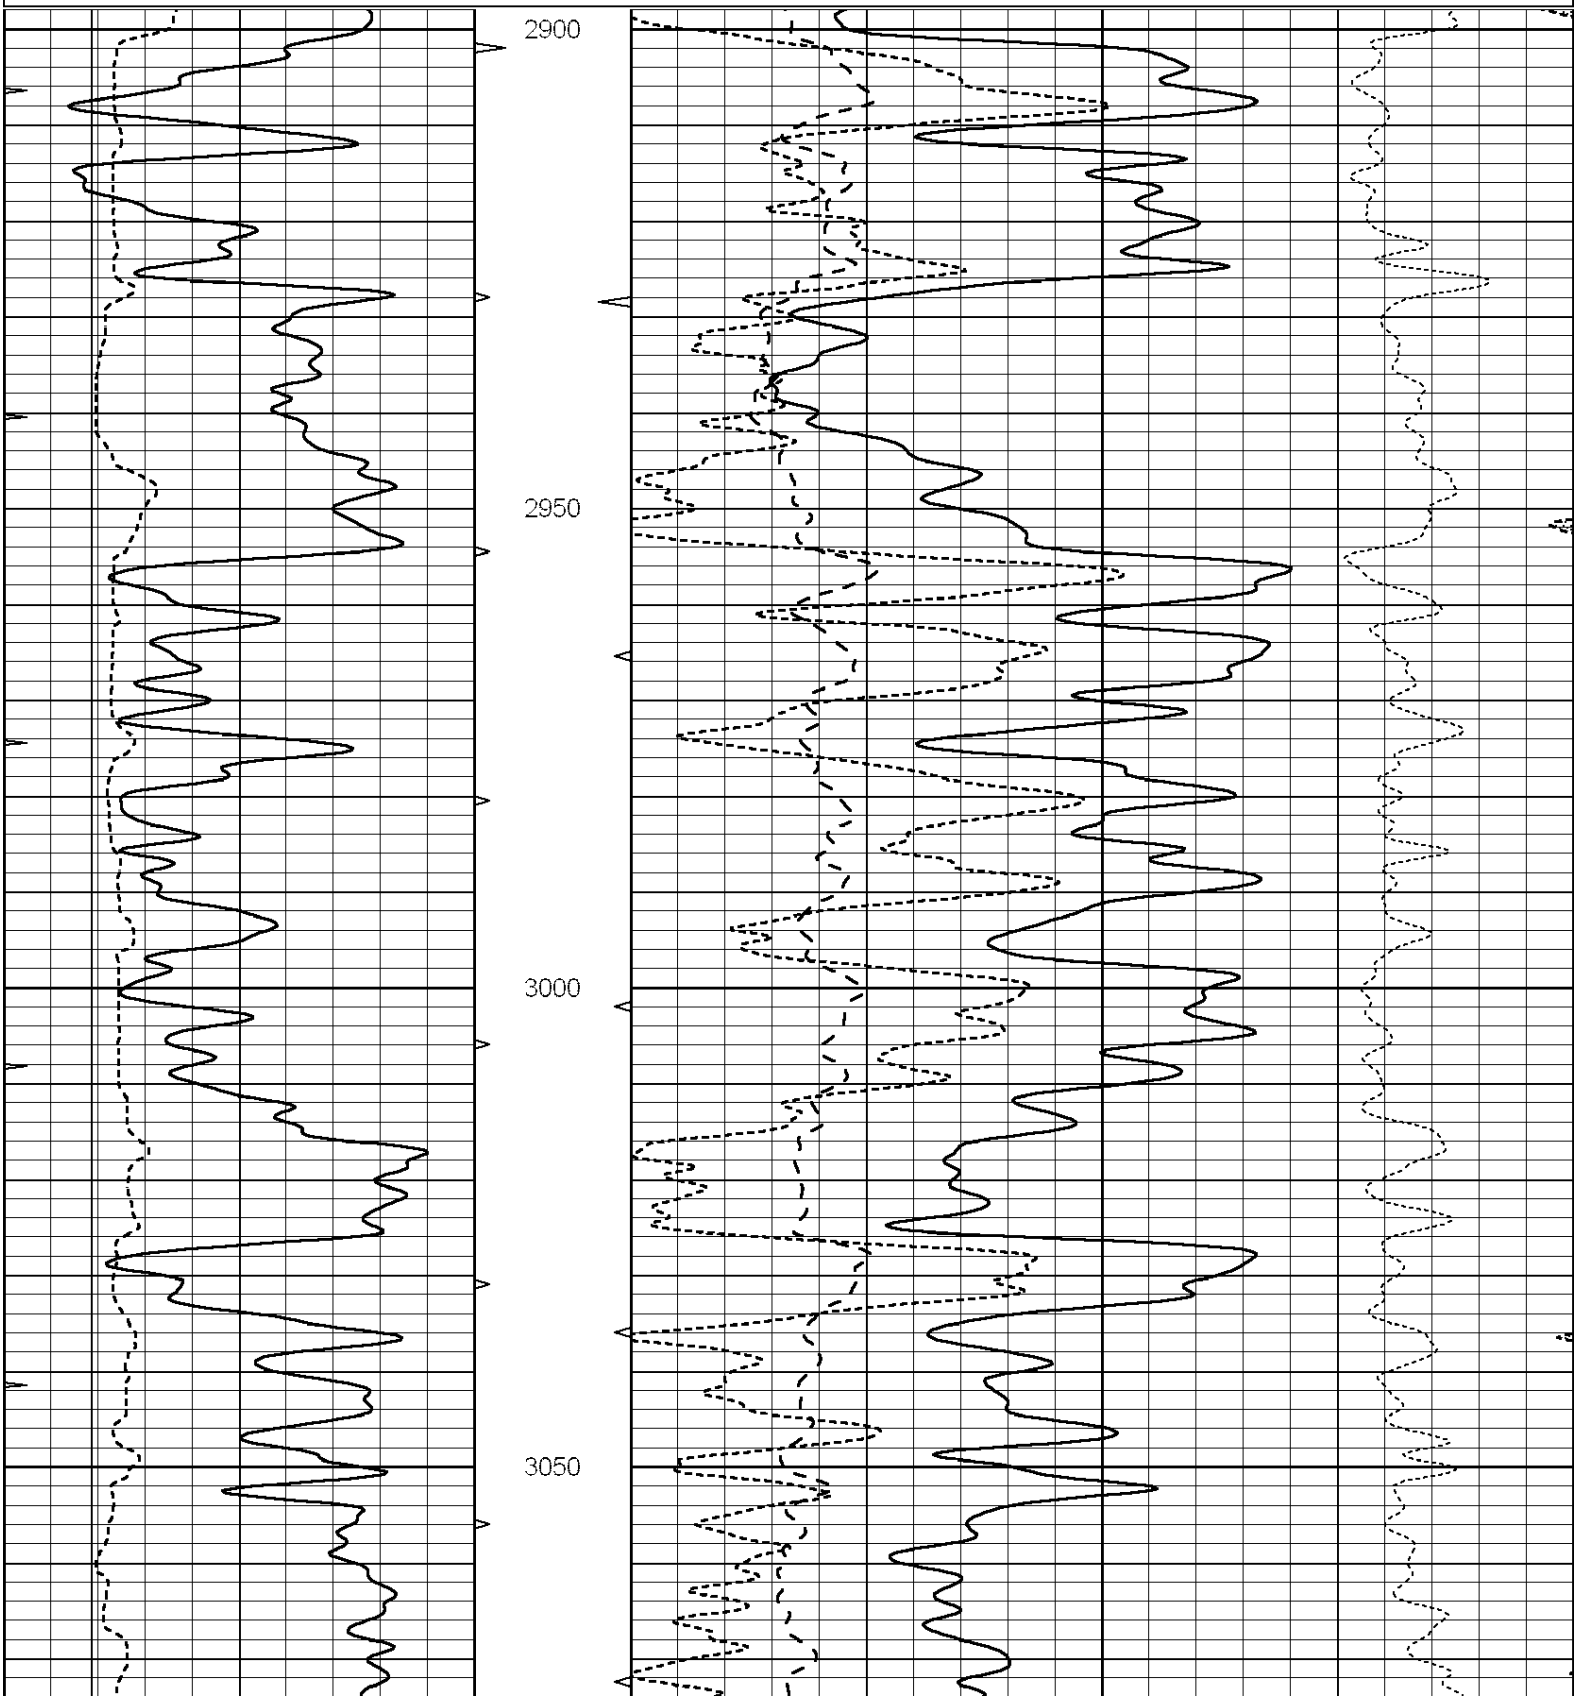

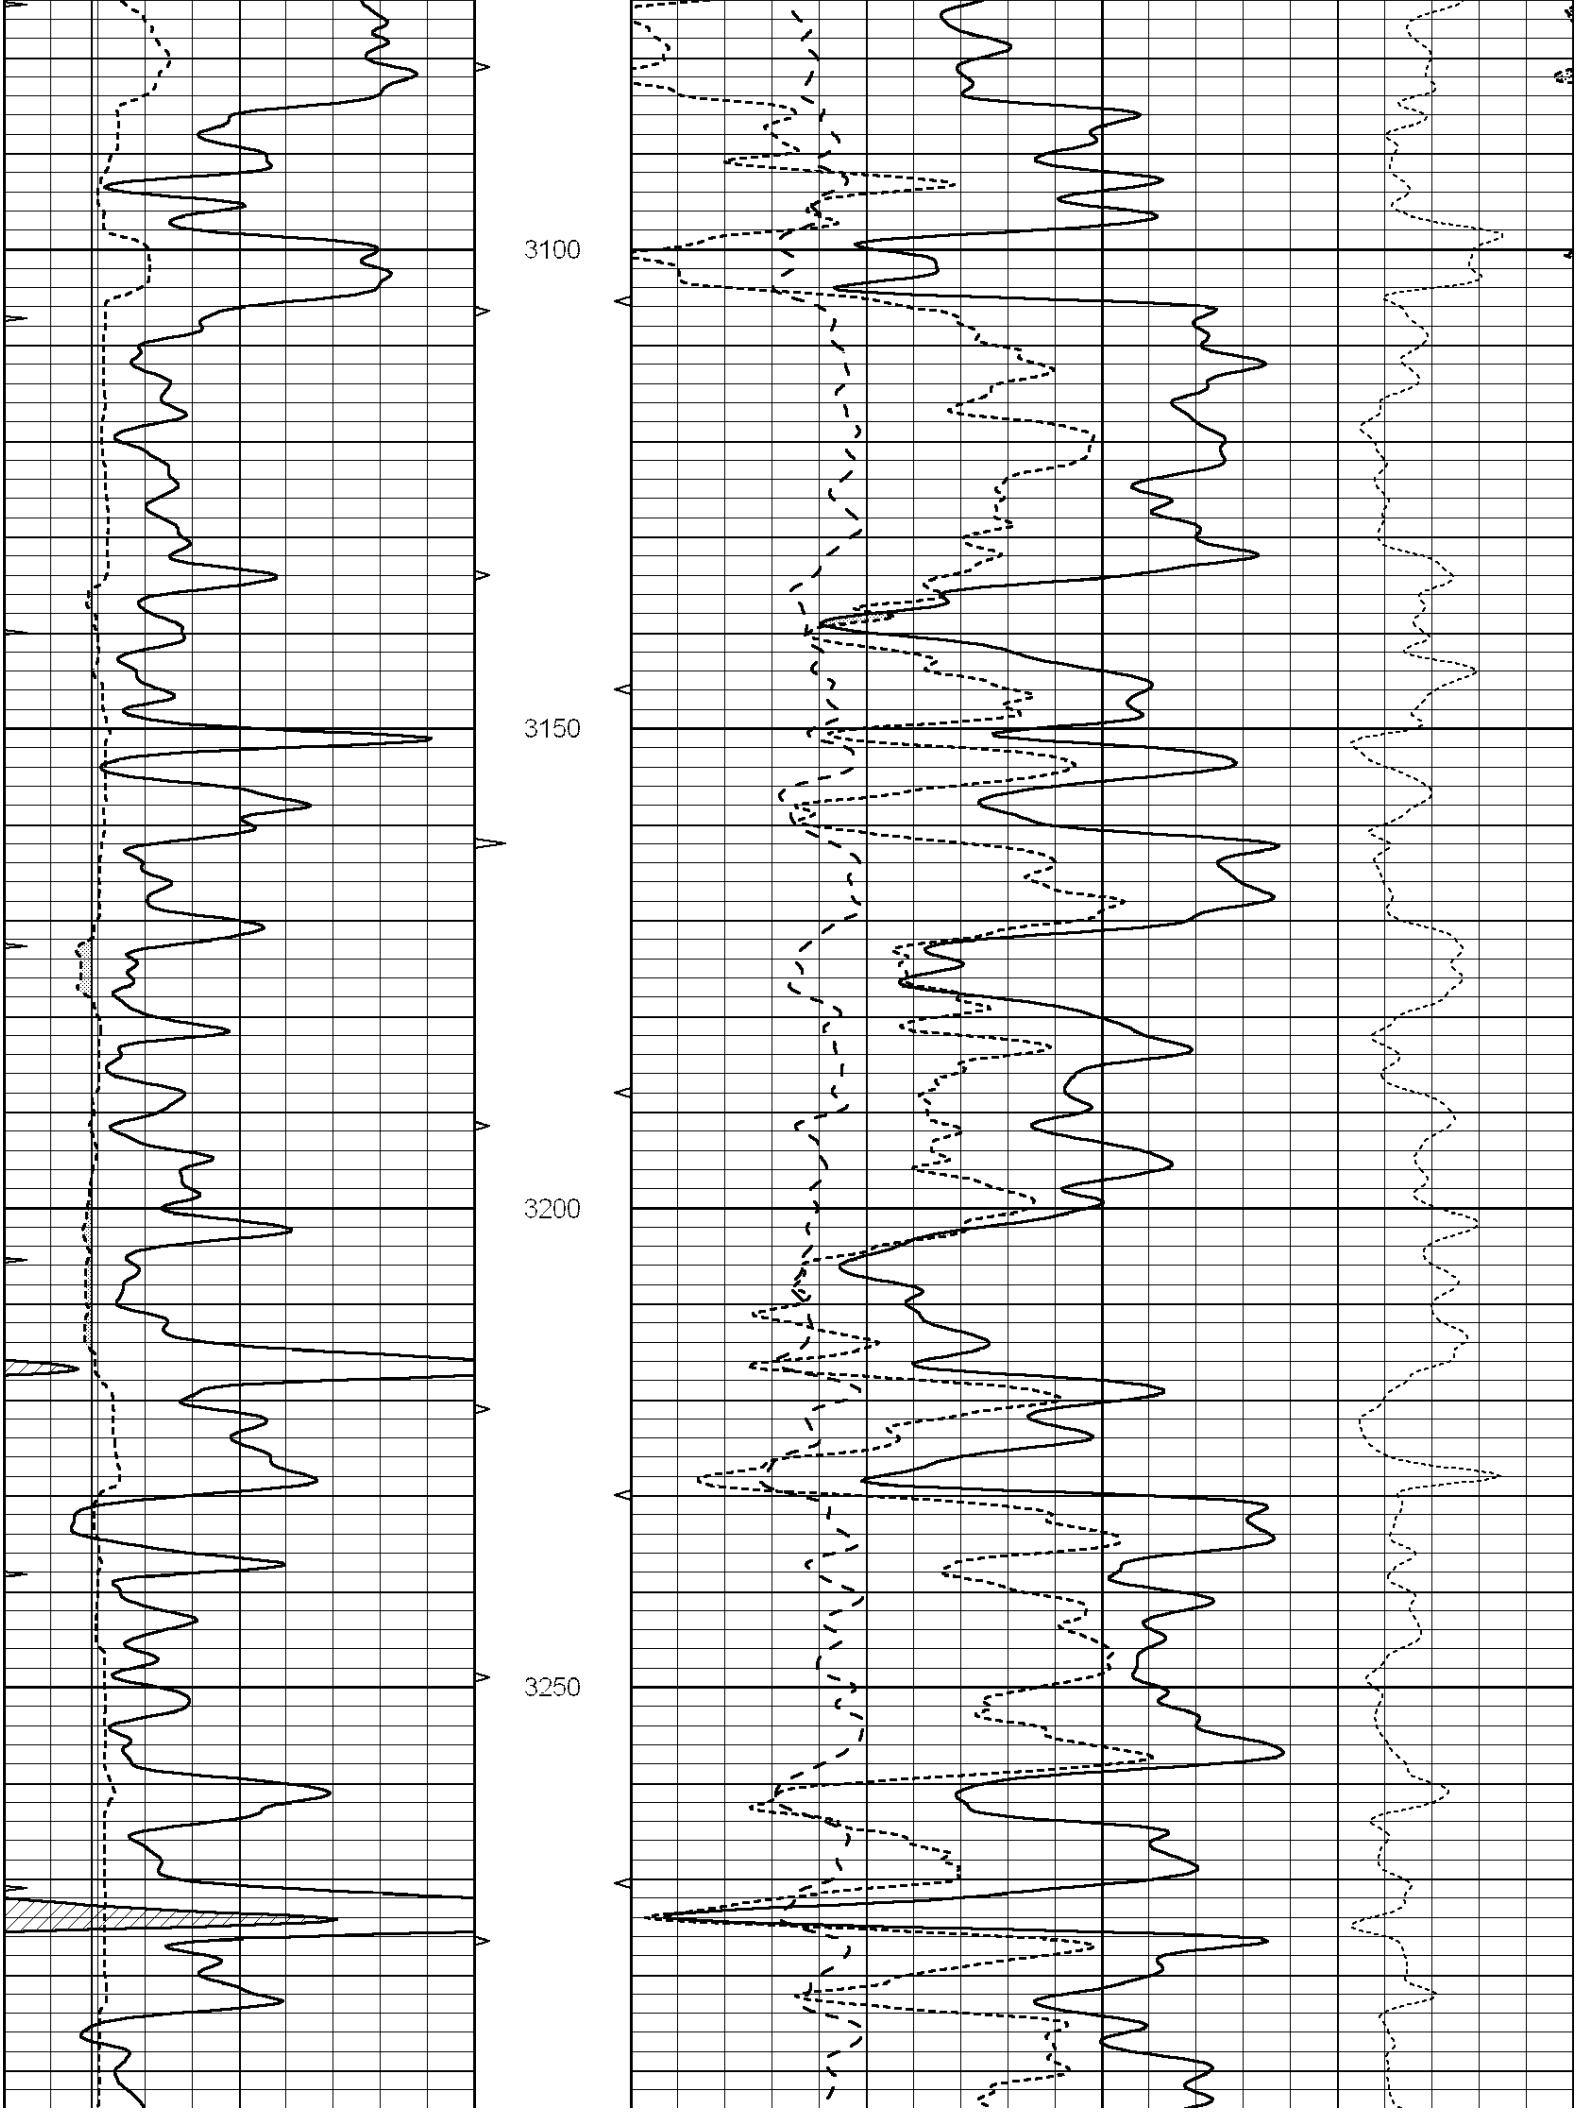
3100
3150
3200
3250

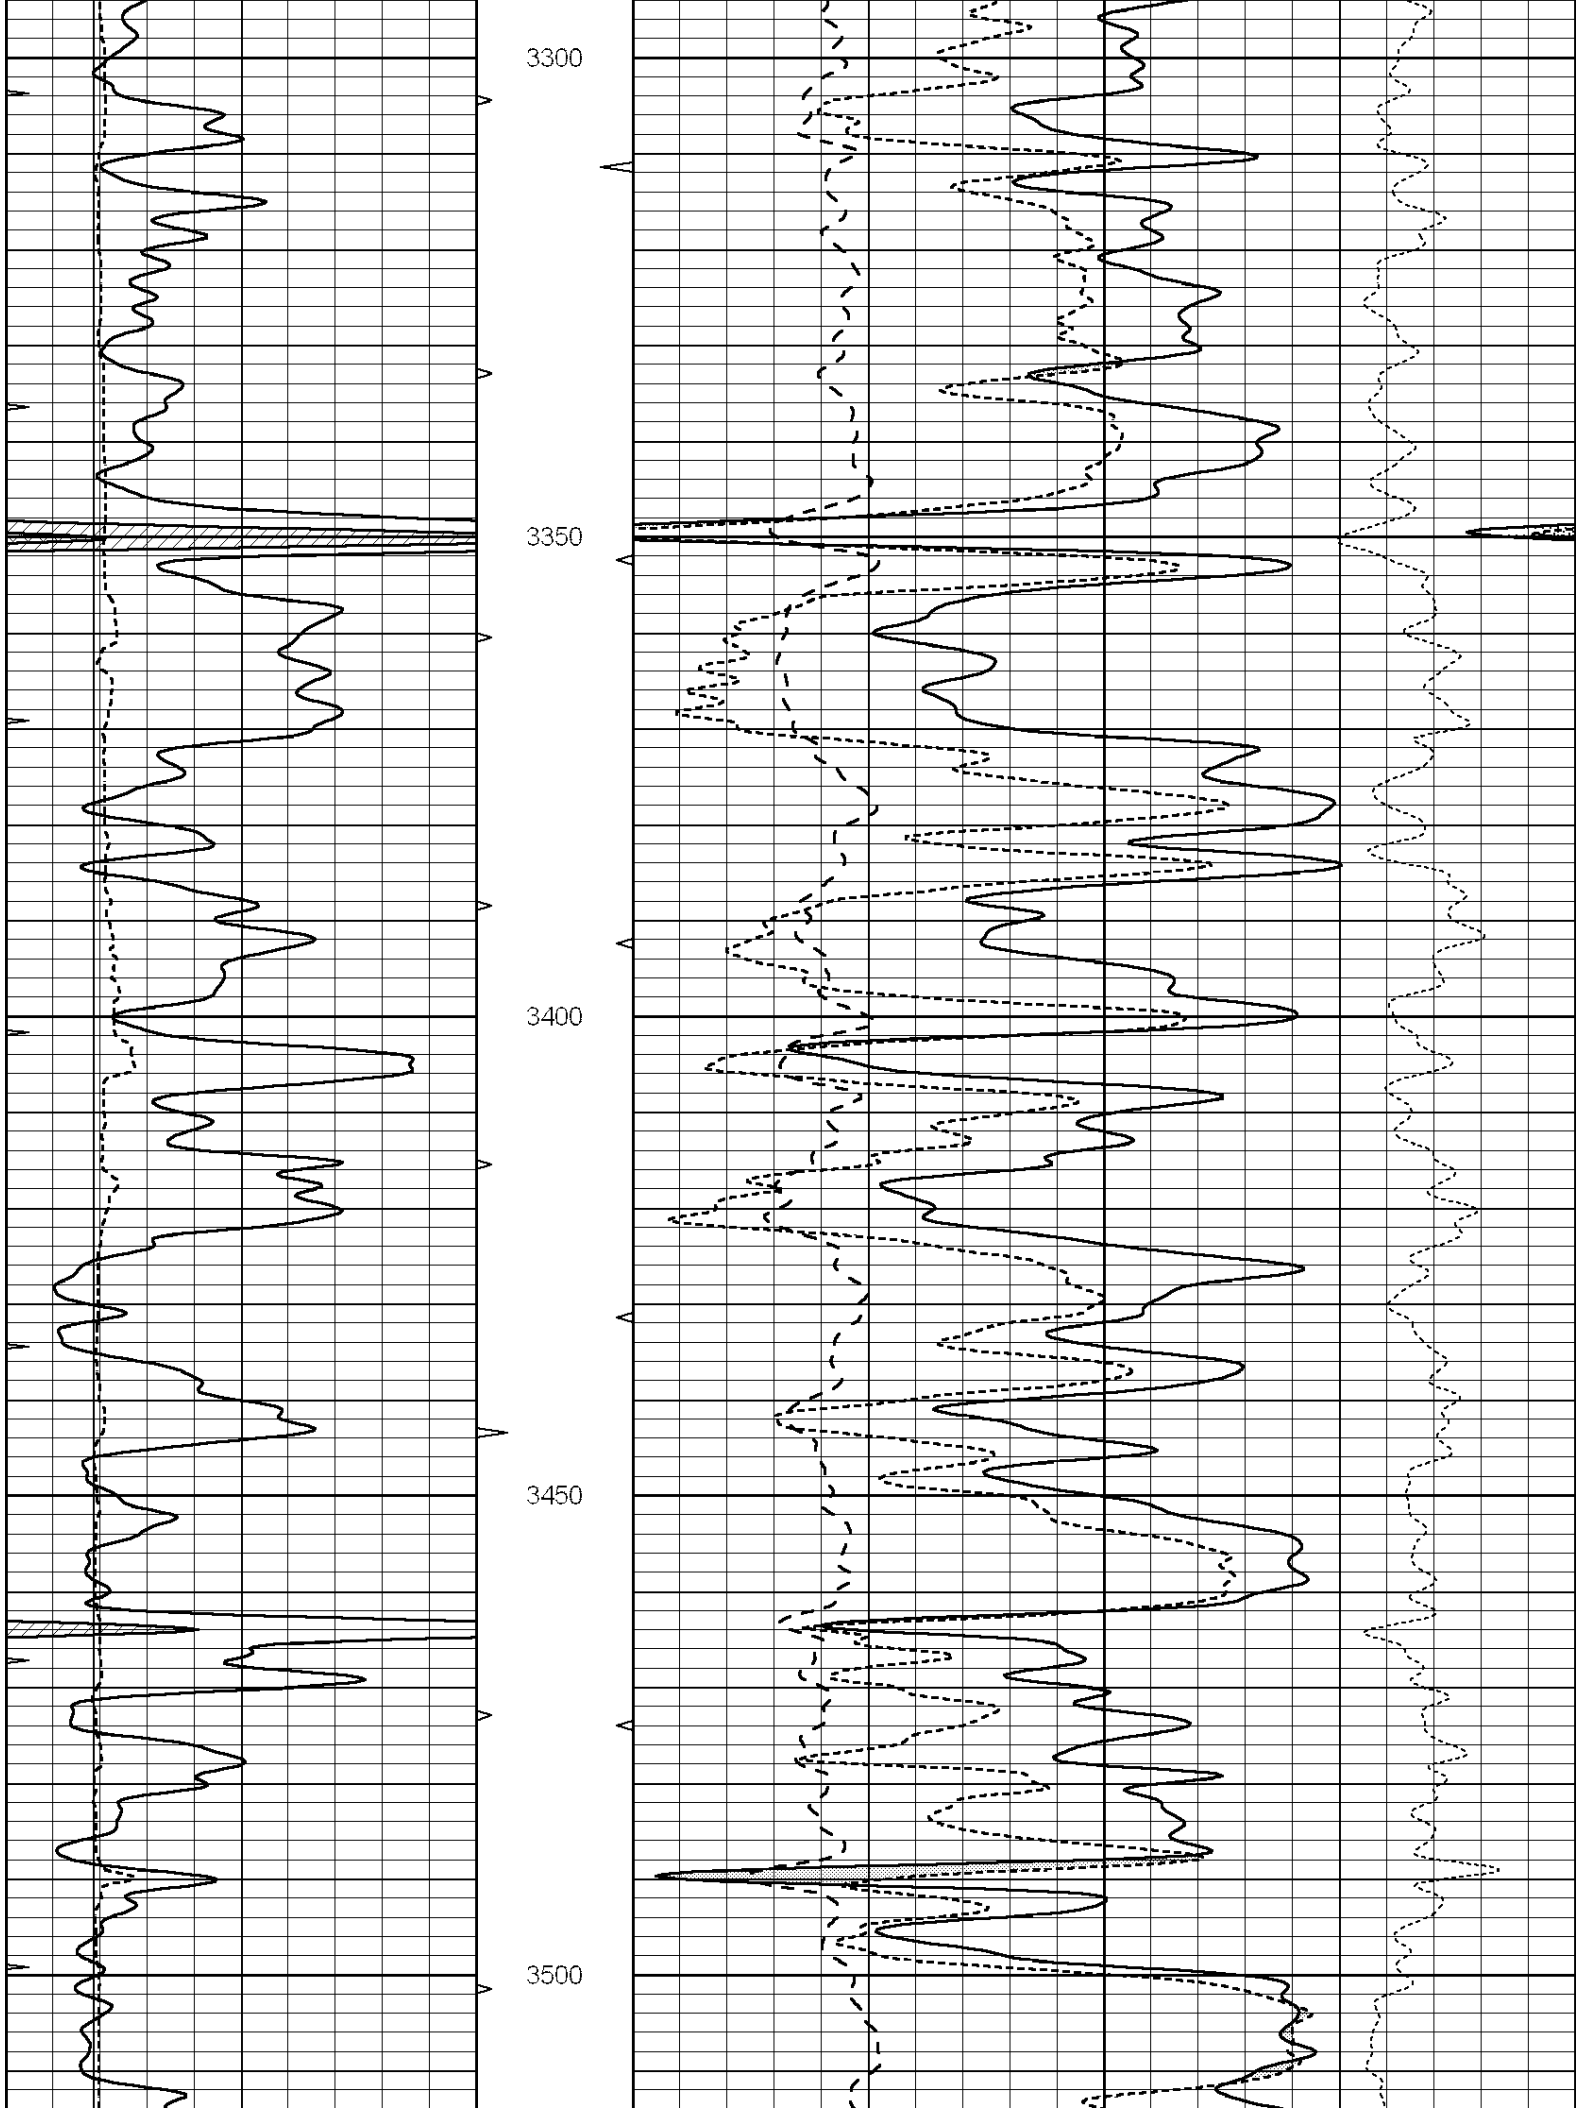
3300
3350
3400
3450
3500

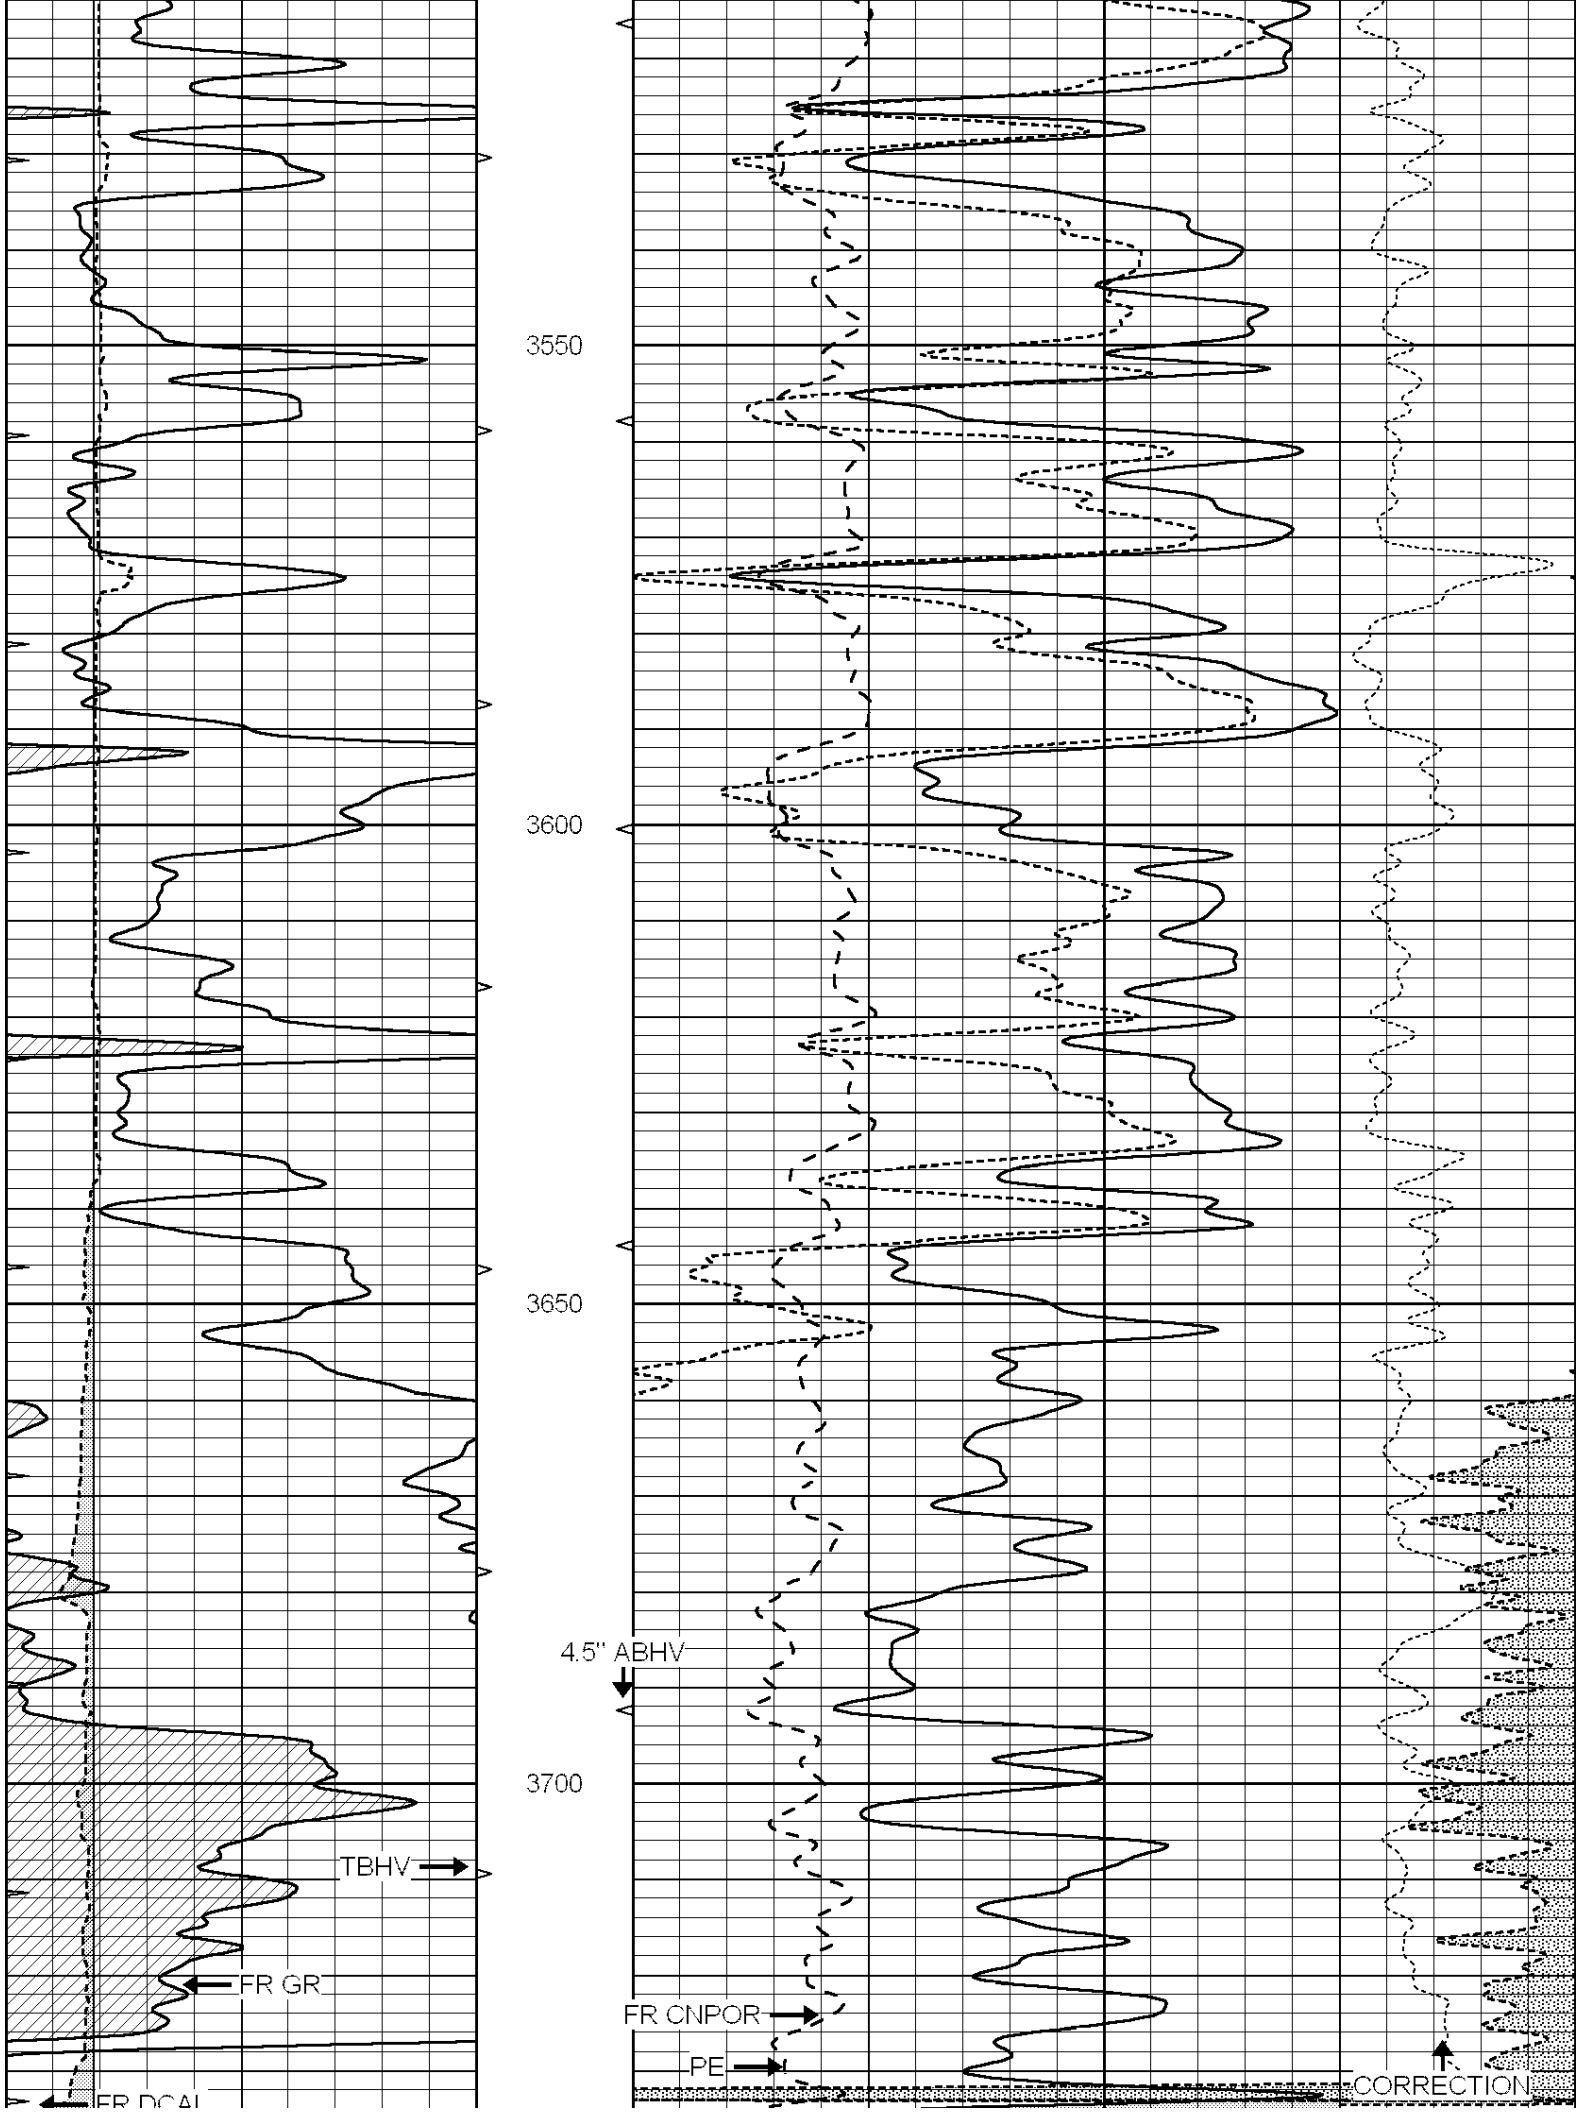
3550
3600
3650
4.5" ABHV
3700
TBHV
FR GR
FR DCAL
FR CNPOR
PE
CORRECTION

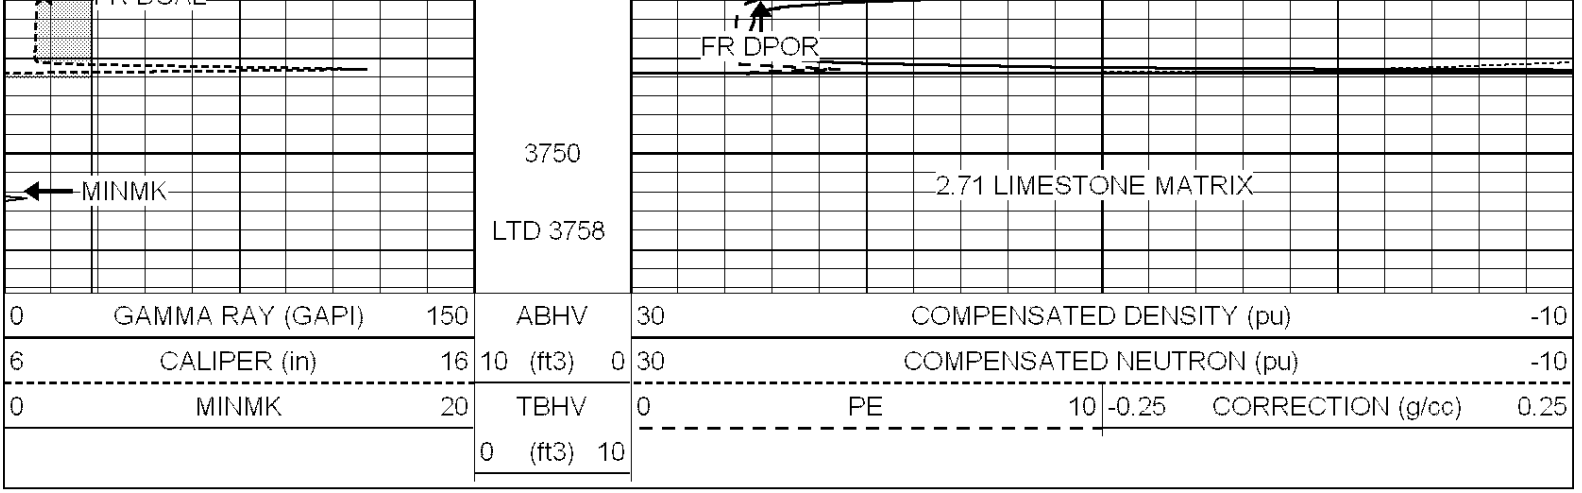



SUPERIOR WELL SERVICES

SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File:	006270pe.db
Dataset Pathname:	pass2.6
Presentation Format:	ldt_neu
Dataset Creation:	Mon Jan 17 14:49:52 2011 by Calc Open-Cased 090629
Charted by:	Depth in Feet scaled 1:240

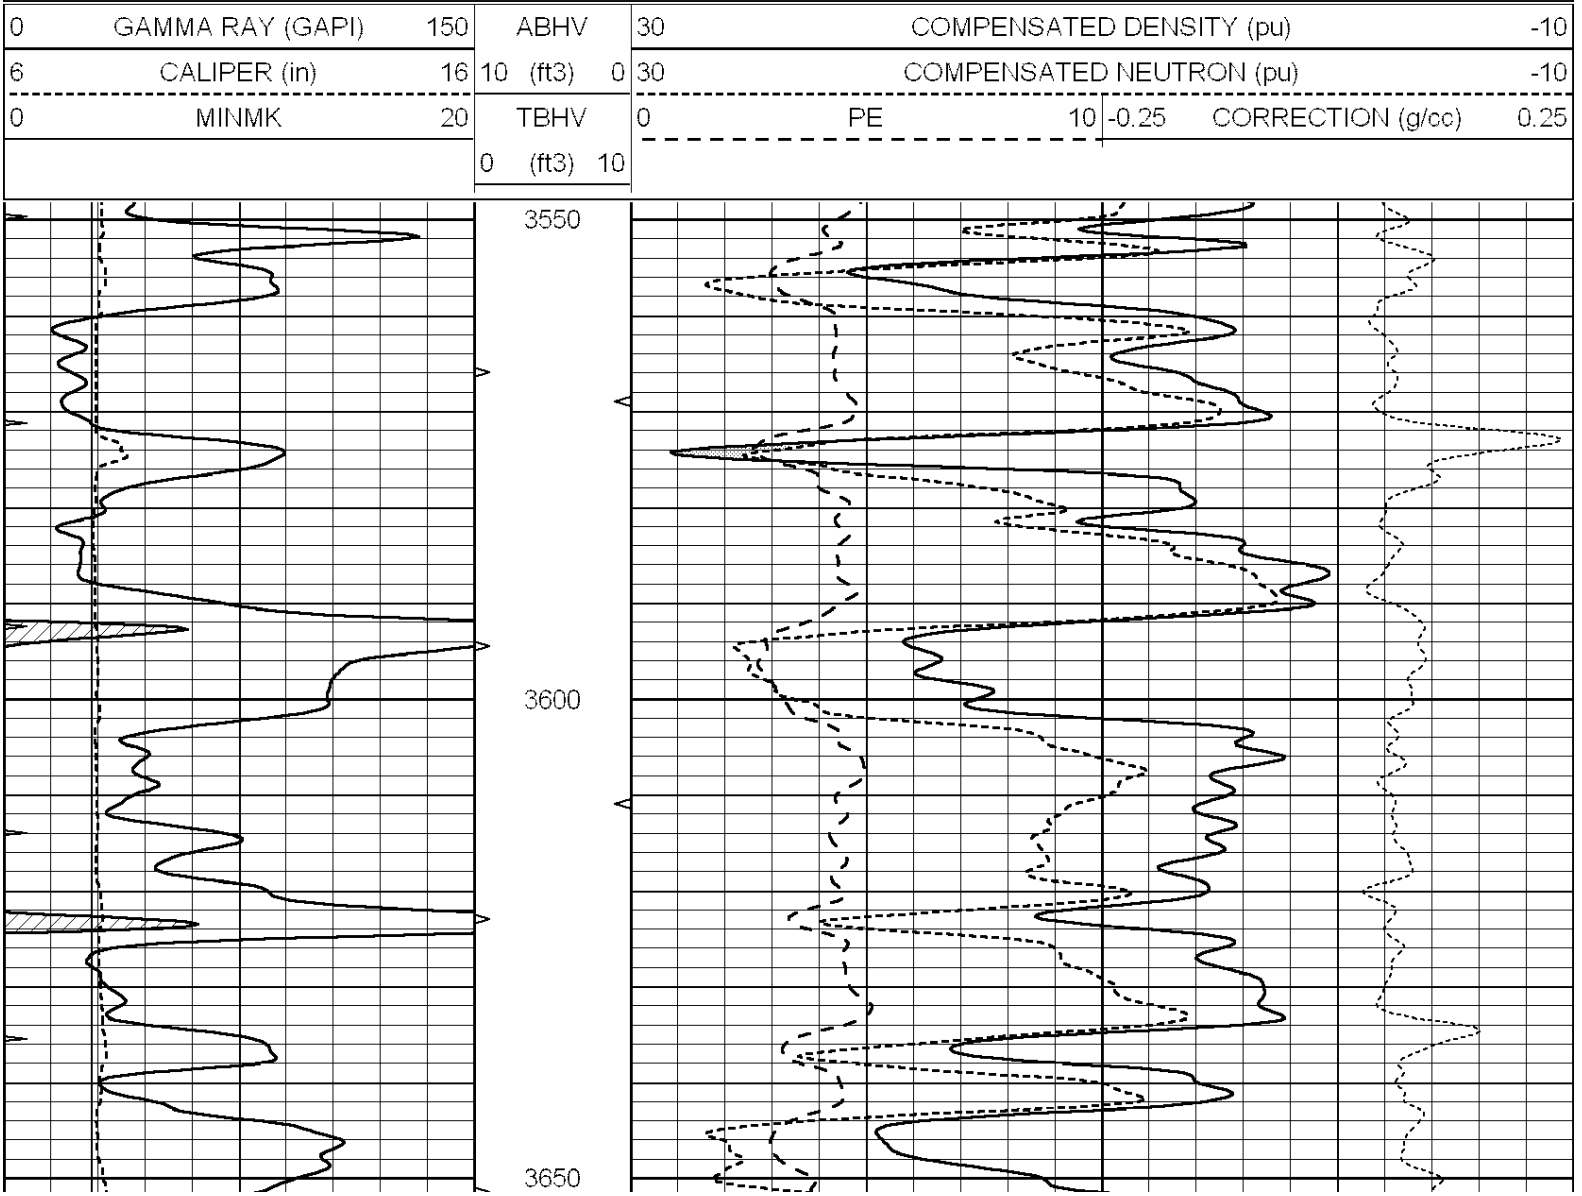

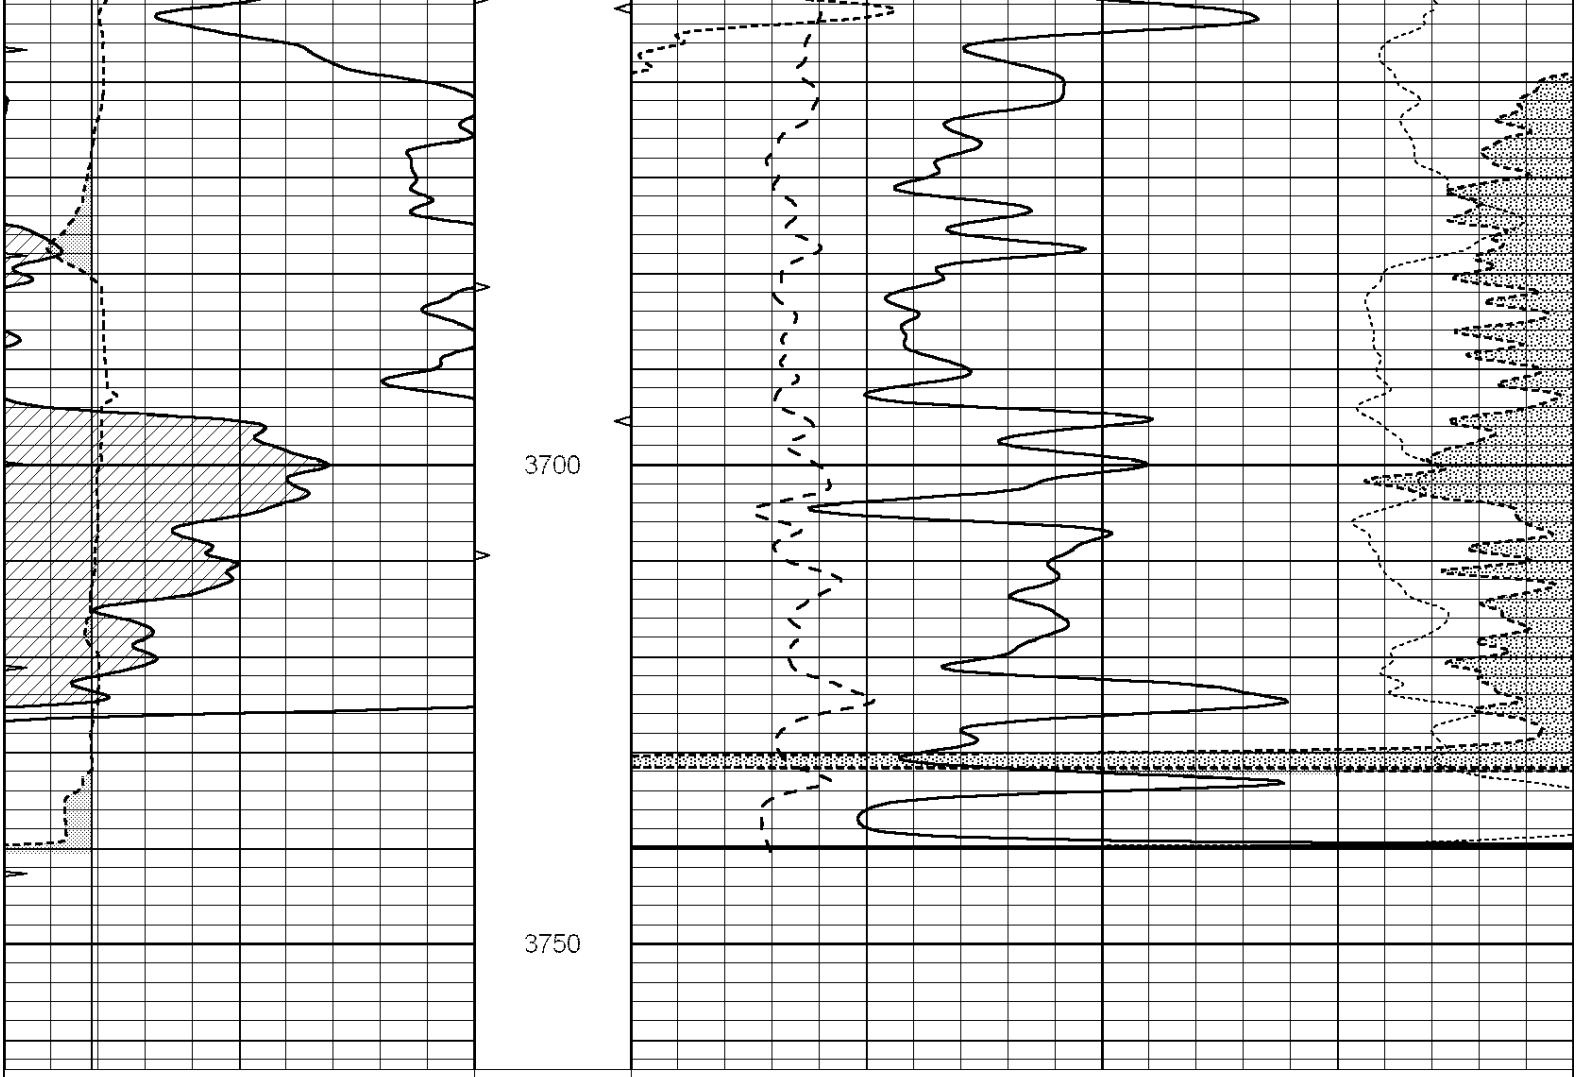

Calibration Report

Database File: 006270pe.db
Dataset Pathname: pass3.5
Dataset Creation: Mon Jan 17 14:42:36 2011 by Calc Open-Cased 090629

Dual Induction Calibration Report

Serial-Model: DIL3-GEAR
Performed: Fri Jan 14 14:29:55 2011

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	0.000	400.000	mmho/m	640.000	3.000
Medium	0.013	0.740	V	0.000	462.500	mmho/m	700.000	-15.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.002	0.645	V	0.000	400.000	mmho/m	622.059	-1.071
Medium	0.007	0.740	V	0.000	462.500	mmho/m	631.393	-4.555

Litho Density Calibration Report
Serial: 003N Model: PRB
Performed Tue Sep 08 14:14:44 2009

Litho Density Calibration

	Background	Magnesium	Aluminum	Sandstone	
Window 1	2042.6	12312.8	4225.8	13758.4	cps
Window 2	1855.8	10134.7	3624.2	11113.1	cps
Window 3	1639.4	6760.2	2716.3	7260.3	cps
Window 4	466.4	469.2	466.1	476.5	cps
Long Space	0.0	8278.9	1768.4	9257.4	cps
Short Space	2.2	2377.3	1544.1	2574.2	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe			2.5700	1.5500	

Rib Angle	: 44.4	Rib Slope	: 0.979	Density/Spine Ratio	: 0.549
Spine Angle	: 74.4	Spine Slope	: 3.577	Spine Intercept	: -18.8

Caliper

	Readings	Reference
Low Ref	1.8	6.3
High Ref	4.6	14.0
	Gain: 2.7	Offset: 1.5

Compensated Neutron Calibration Report

Serial Number: NEU_3I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	997.00	cps	1000.00	cps	1.0000
Long Space	986.00	cps	1000.00	cps	1.0000

Gamma Ray Calibration Report

Serial Number: GR3
Tool Model: OPEN
Performed: Mon Jan 17 14:04:04 2011

Calibrator Value: 200.0 GAPI

Background Reading: 3.0 cps
Calibrator Reading: 186.0 cps

Sensitivity: 0.6000 GAPI/cps