



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company		VINCENT OIL CORPORATION	
Well	KEOUGH #1-34		
Field			
County	FORD	State	KANSAS
Location:		API # : 15-057-20714-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		Elevation 2491	
Drilling Measured From		KELLY BUSHING 12' A.G.L.	
SEC 34 TWP 28S RGE 23W		CDL/CNL/PE DIL/SON	
Other Services		Elevation	
K.B. 2503		D.F. 2501	
G.L. 2491			
Date	2/14/11		
Run Number	TWO		
Depth Driller	5350		
Depth Logger	5360		
Bottom Logged Interval	5342		
Top Log Interval	4200		
Casing Driller	8 5/8 @ 610		
Casing Logger	609		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 10000 PPM	
Density / Viscosity	9.2/51		
pH / Fluid Loss	10.0/10.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.50 @ 68F		
Rmf @ Meas. Temp	.37 @ 68F		
Rmc @ Meas. Temp	.59 @ 68F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.26 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	128F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	MIKEAL MAUNE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE (785) 628-6395
DIRECTIONS
KINGSDOWN KS. - 2 N. TO WILBURN RD. - 3 3/4 W. - 3/4 N. INTO





SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File: 006692pe.db
 Dataset Pathname: pass6.1
 Presentation Format: _micro
 Dataset Creation: Tue Feb 15 02:24:35 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

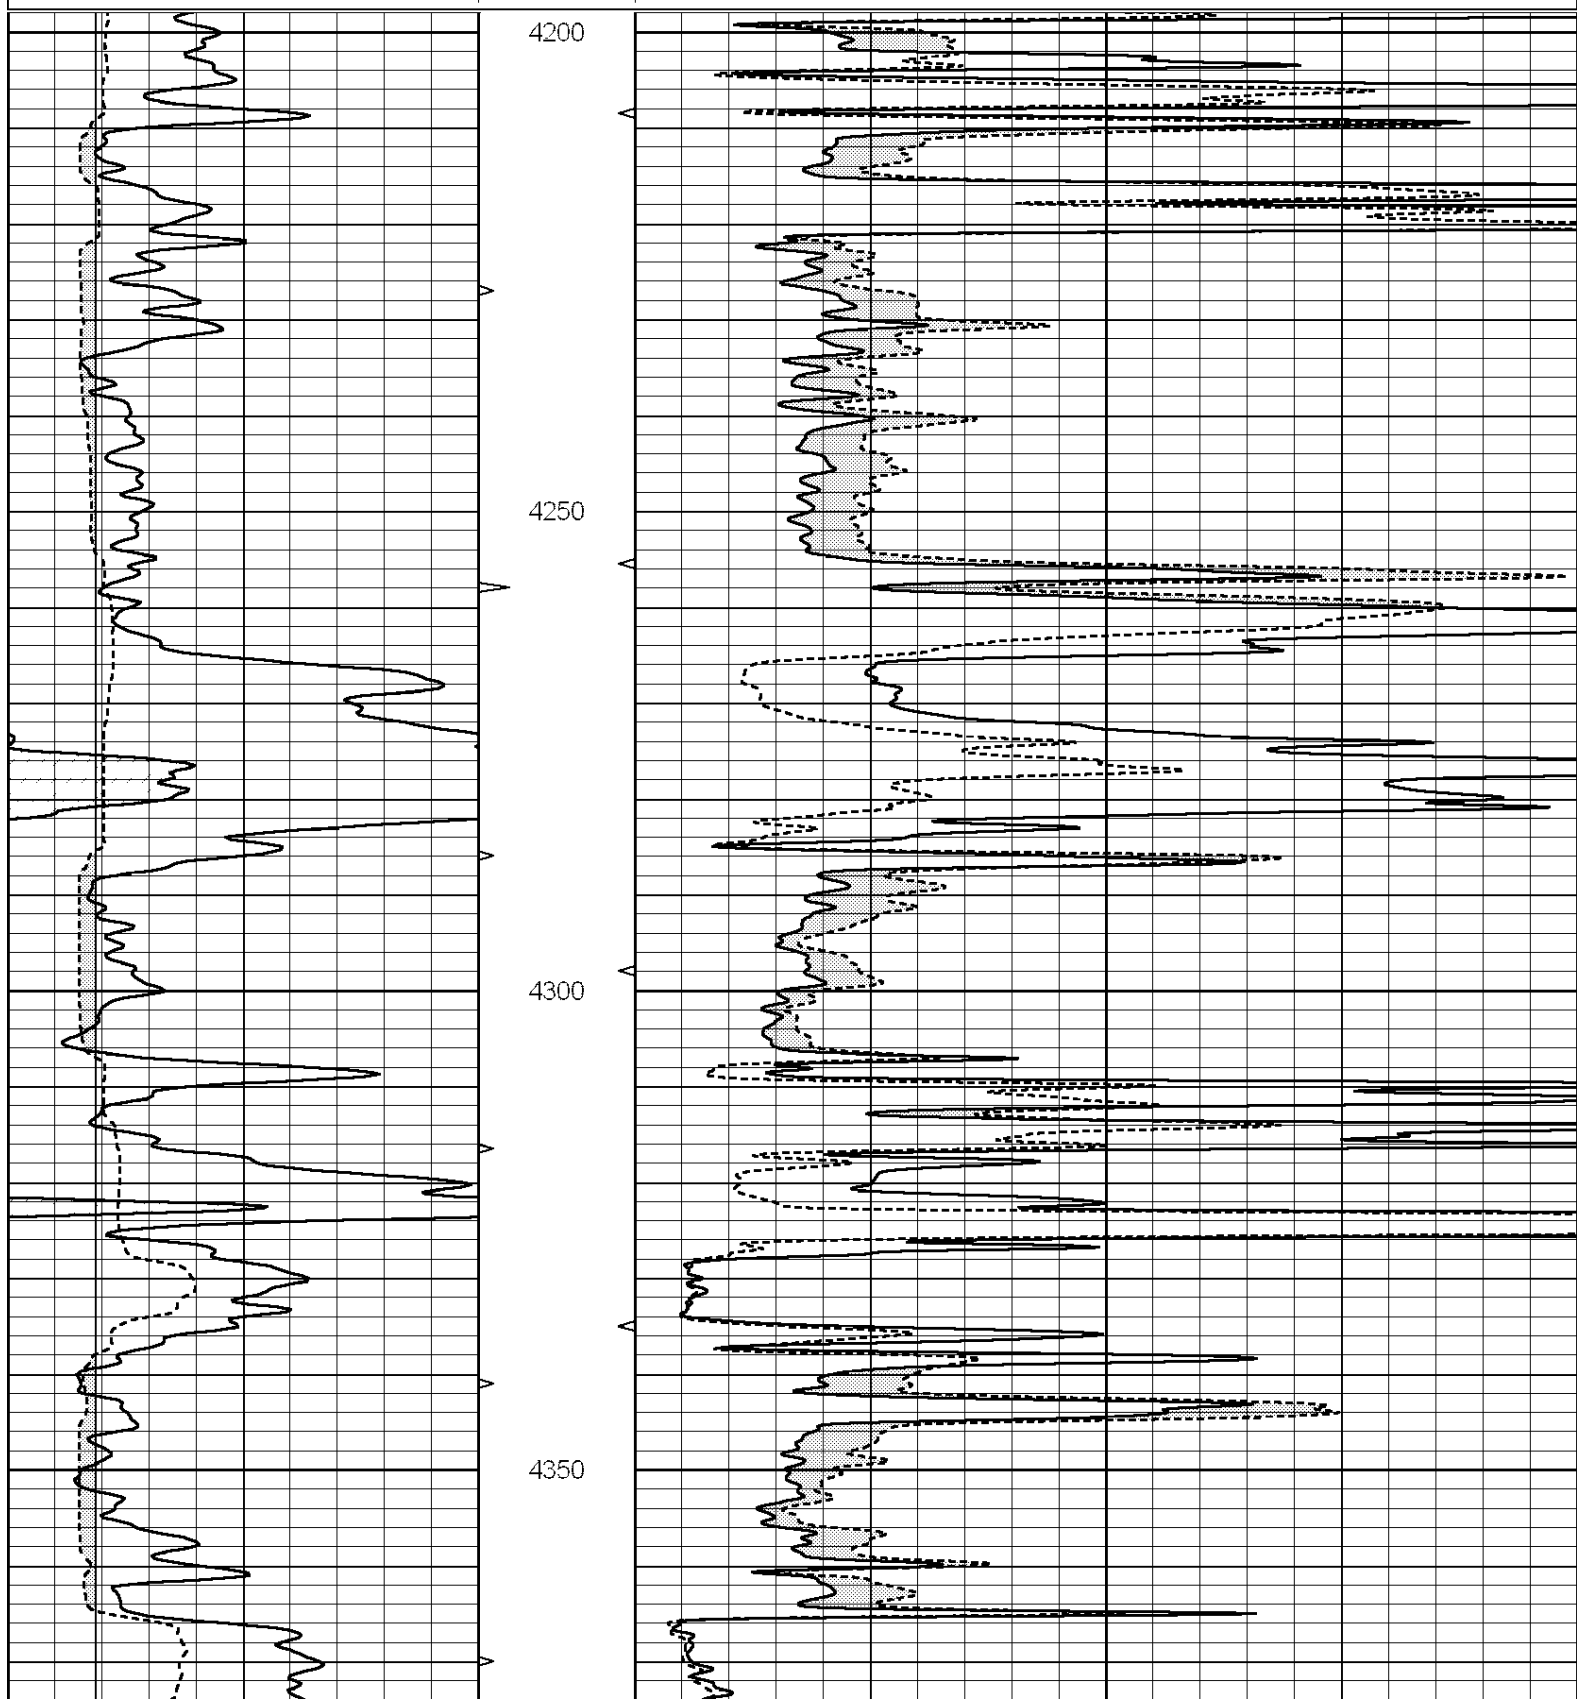

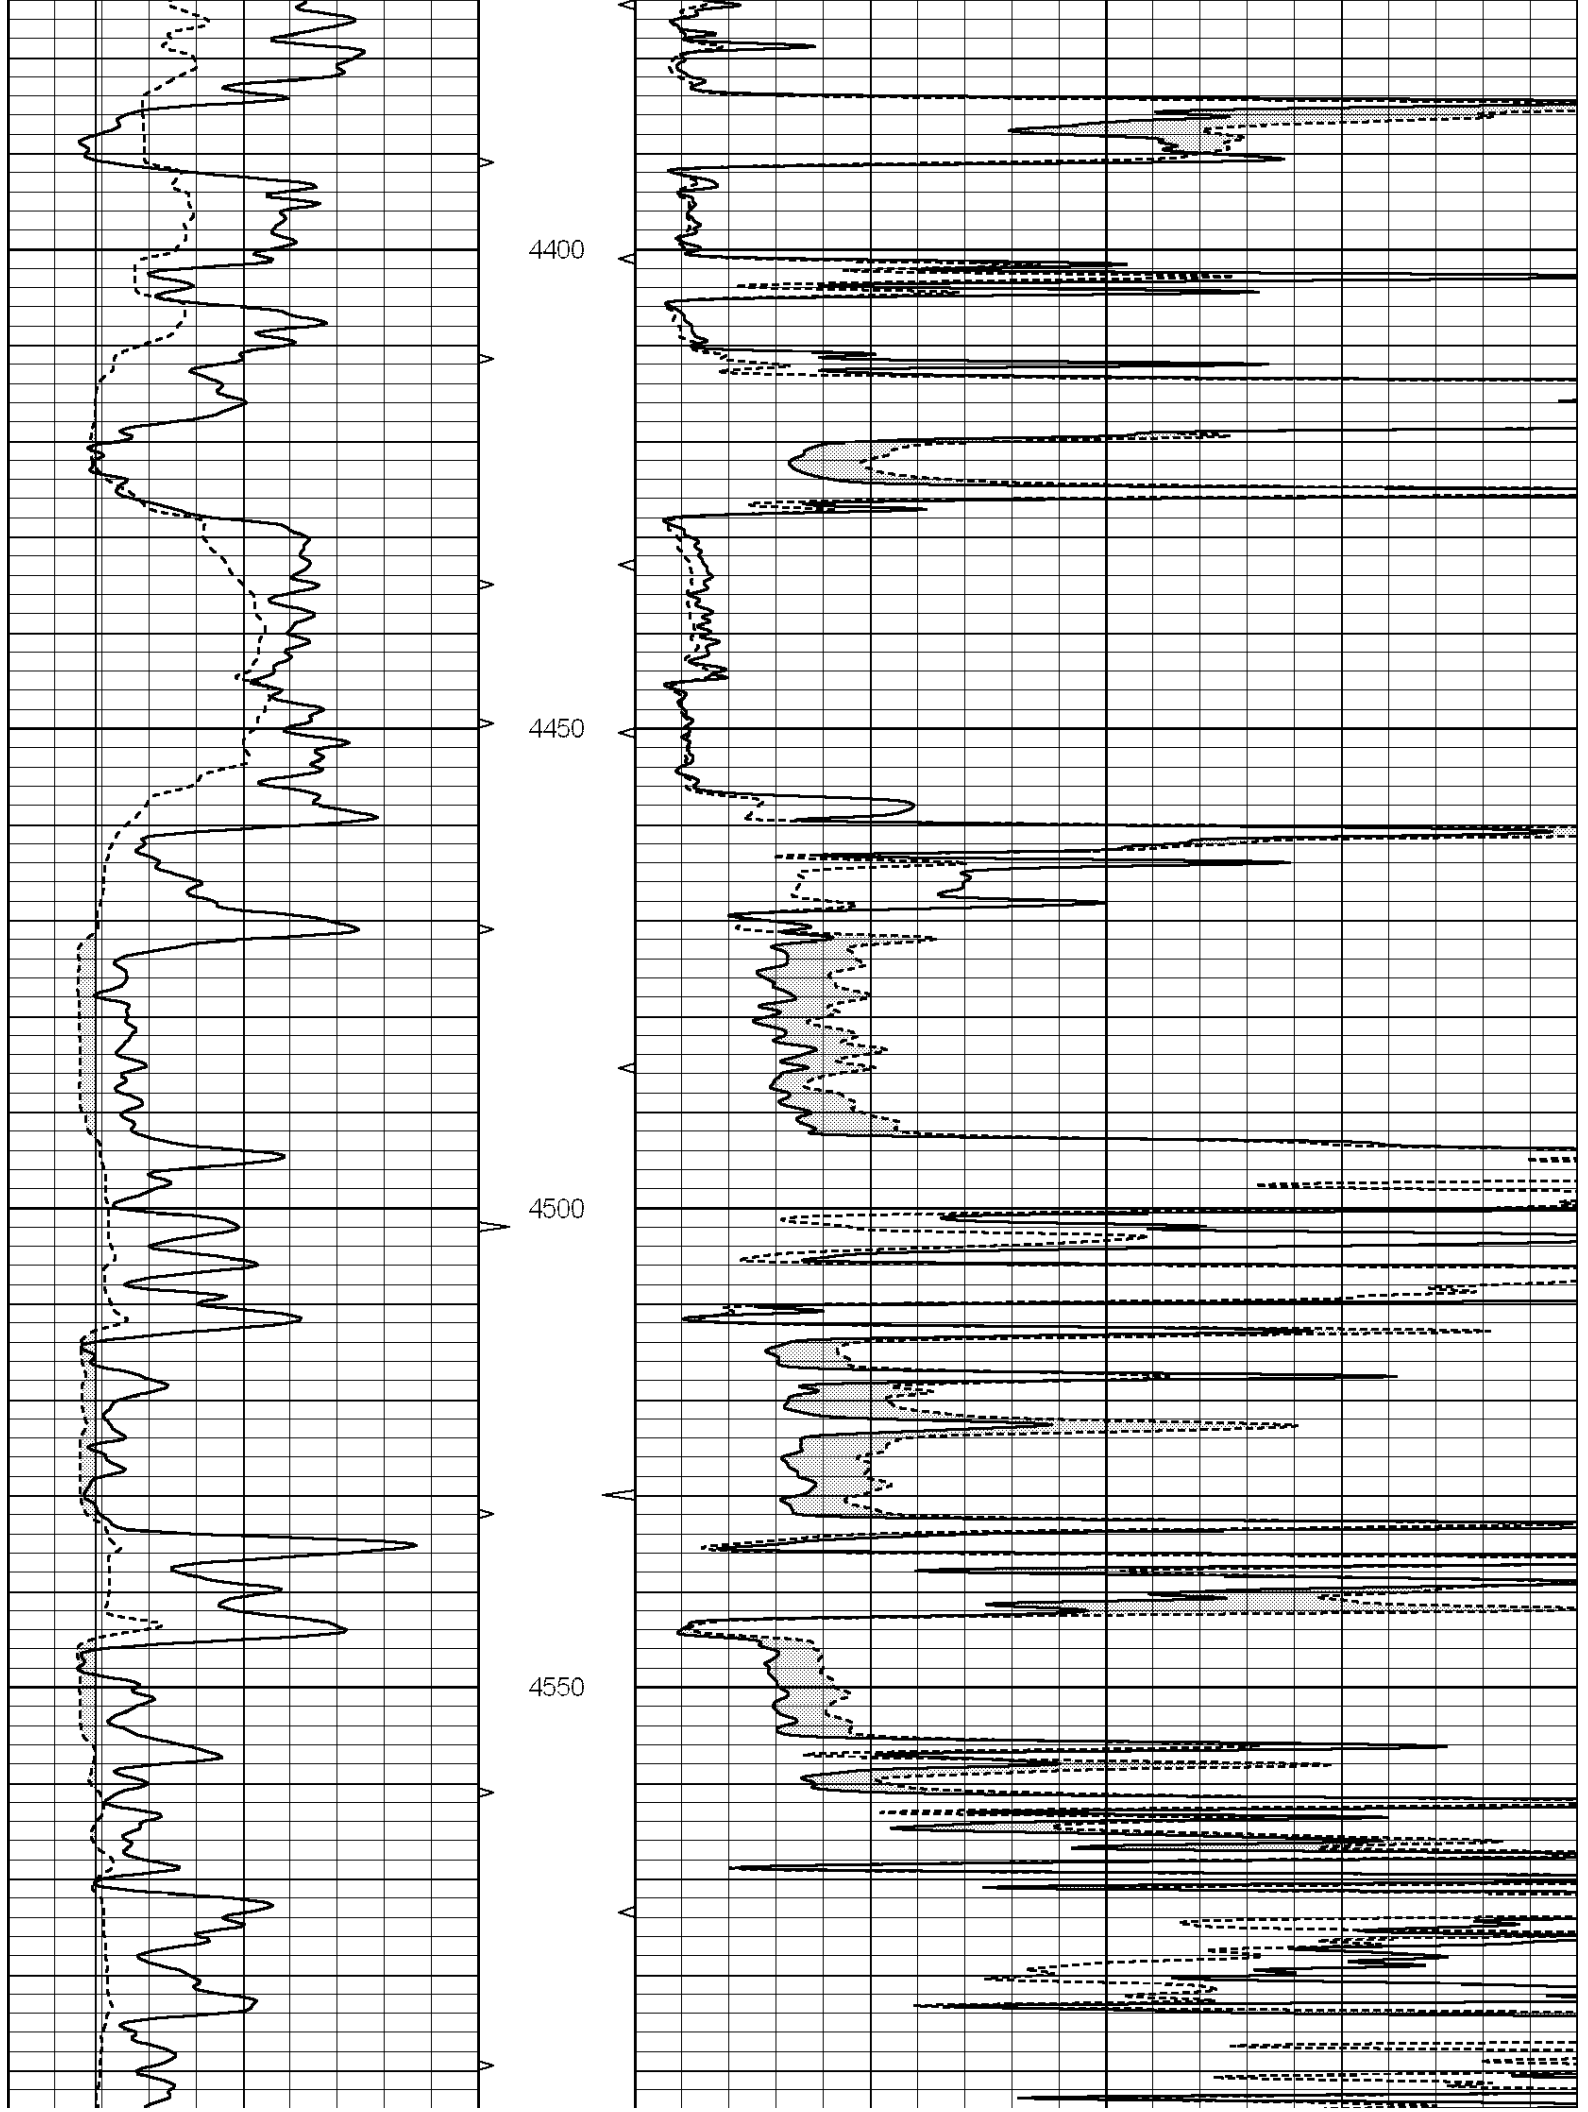

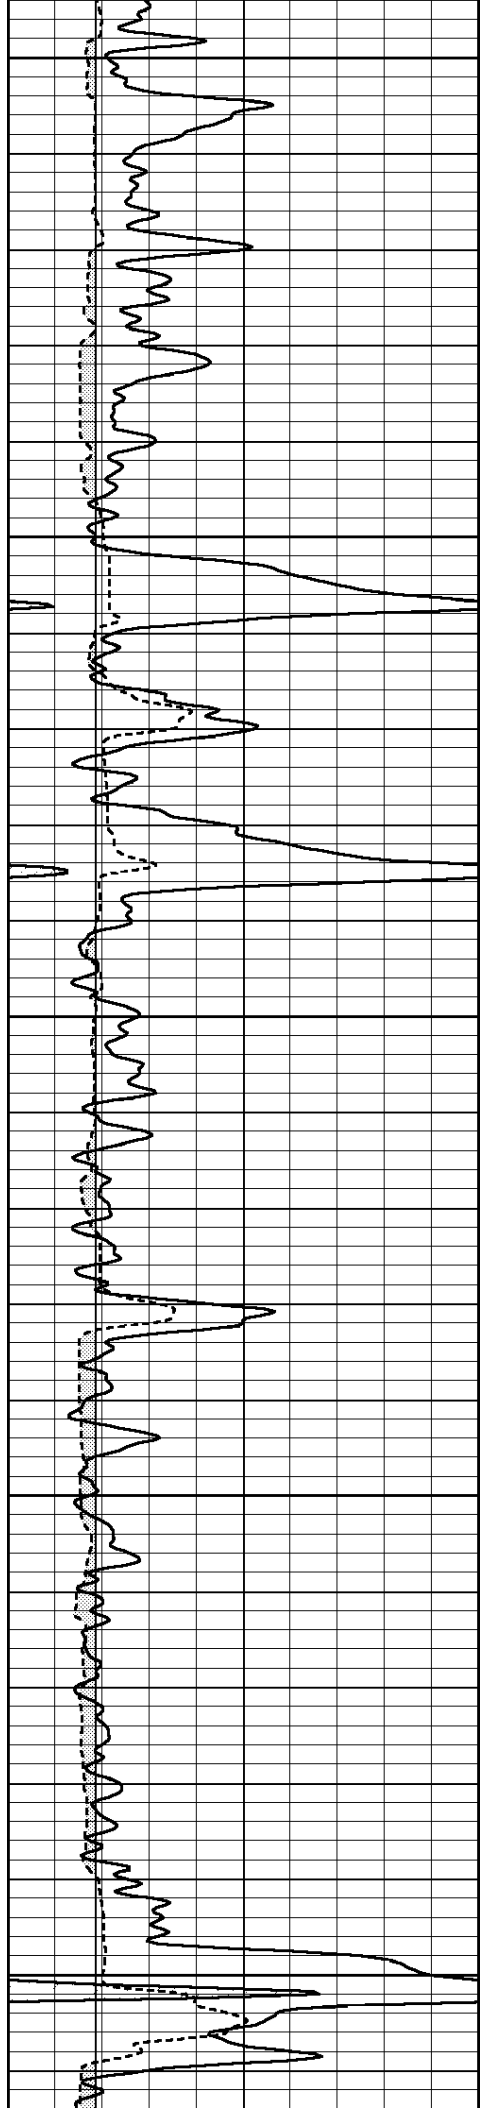


4600


4650

4700

4750

4800

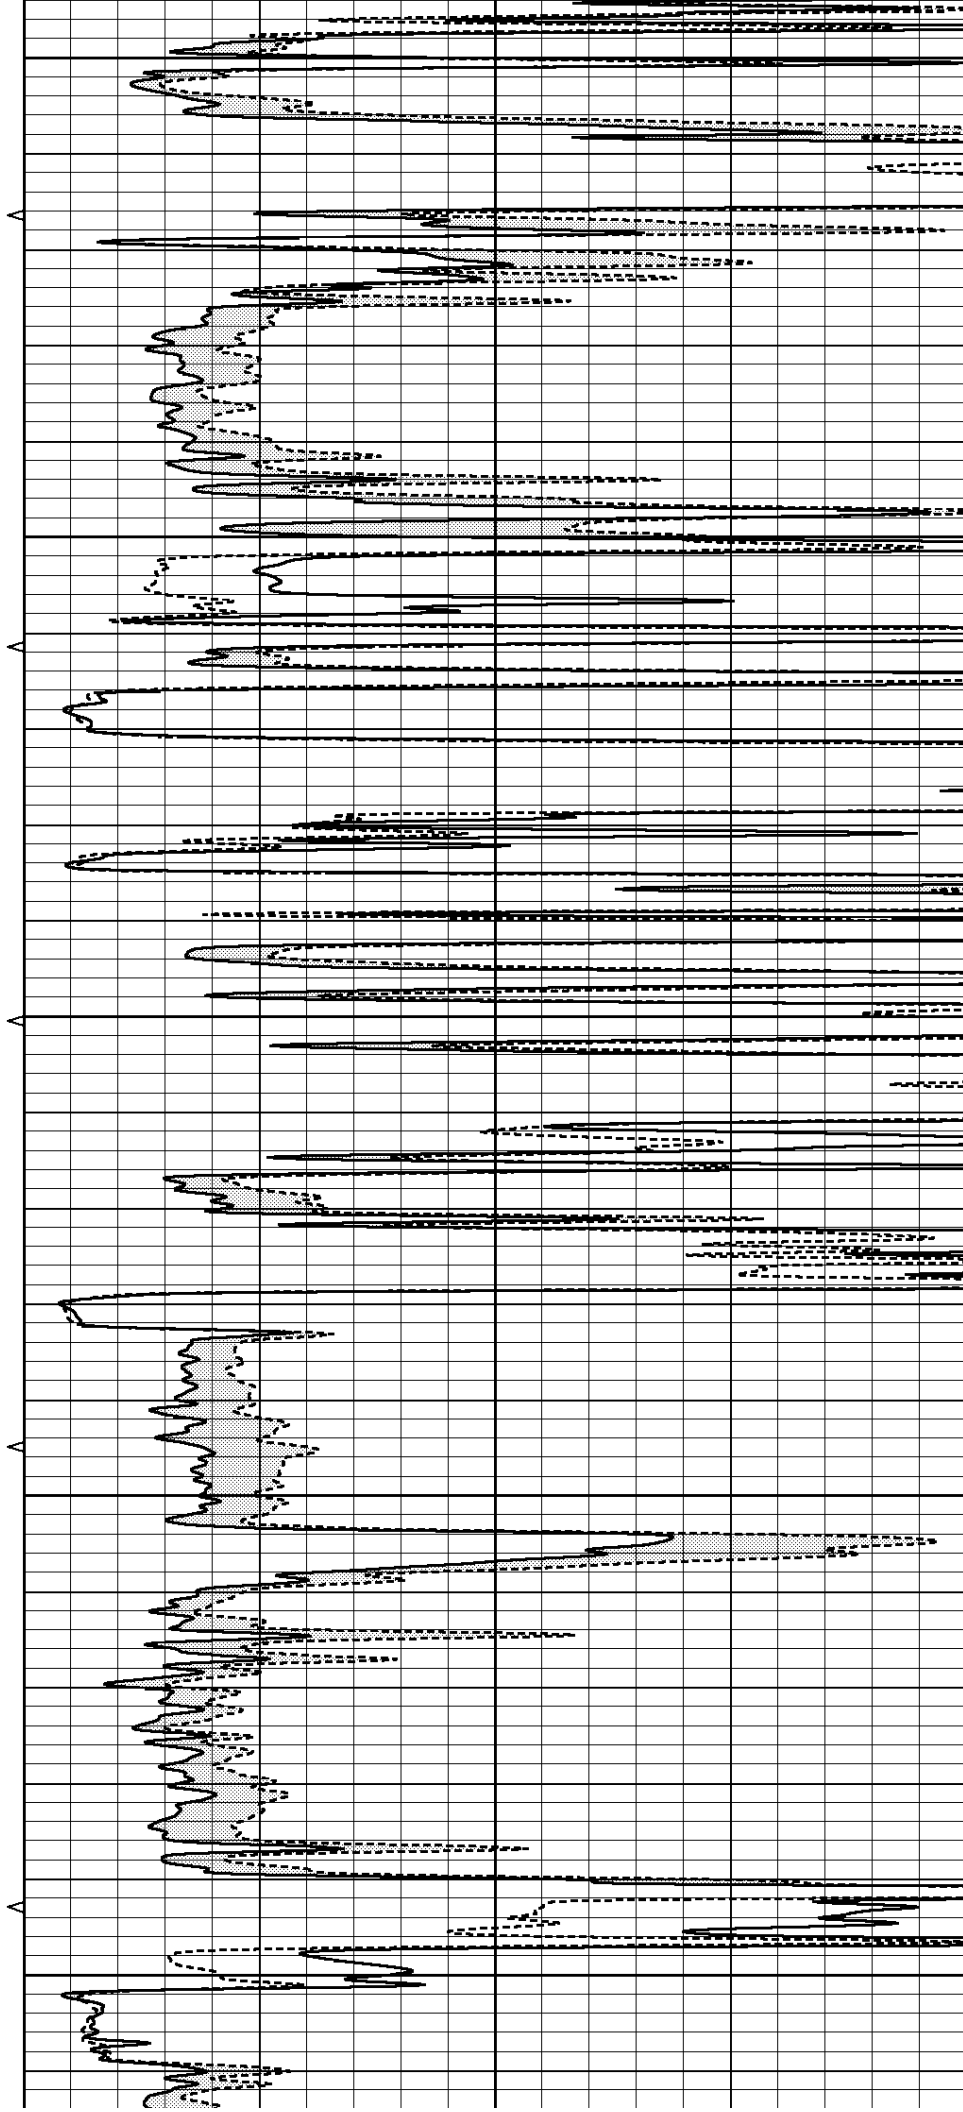

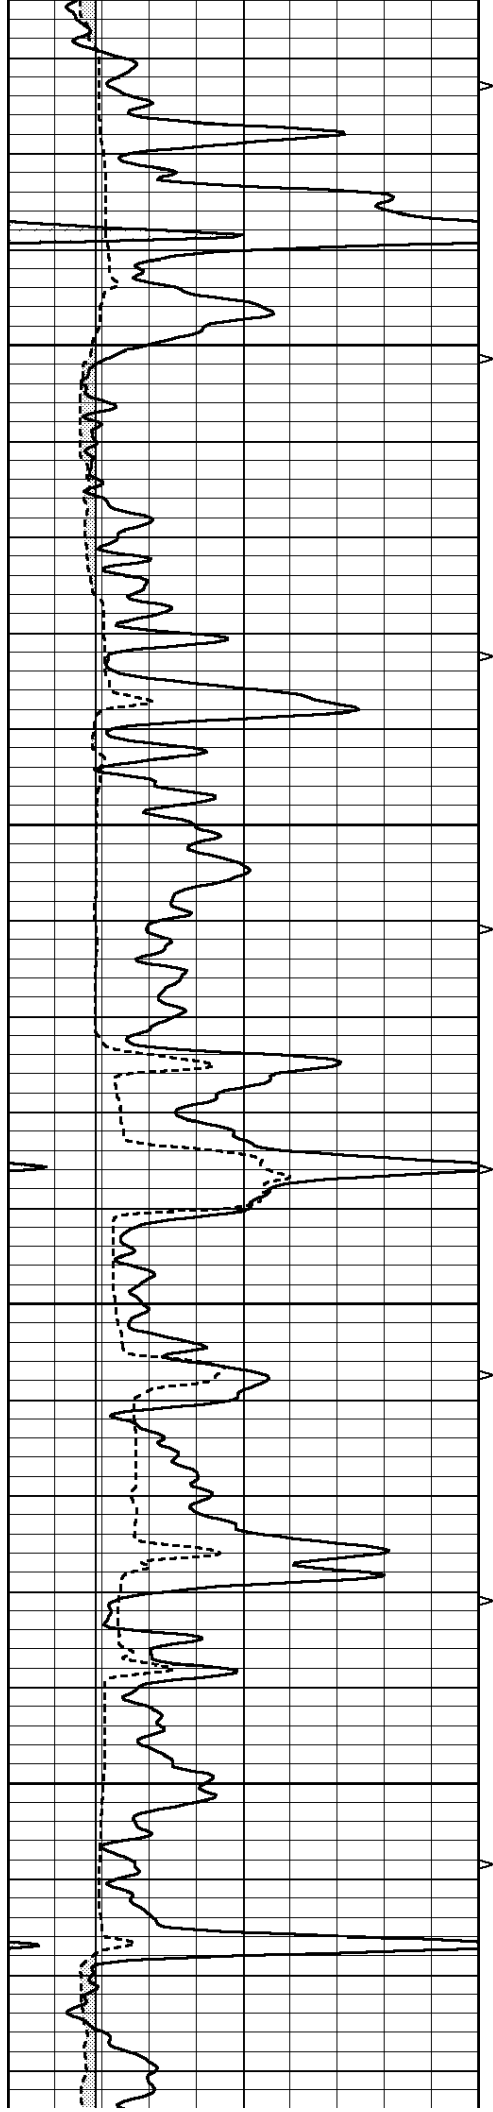



4850

4900

4950

5000

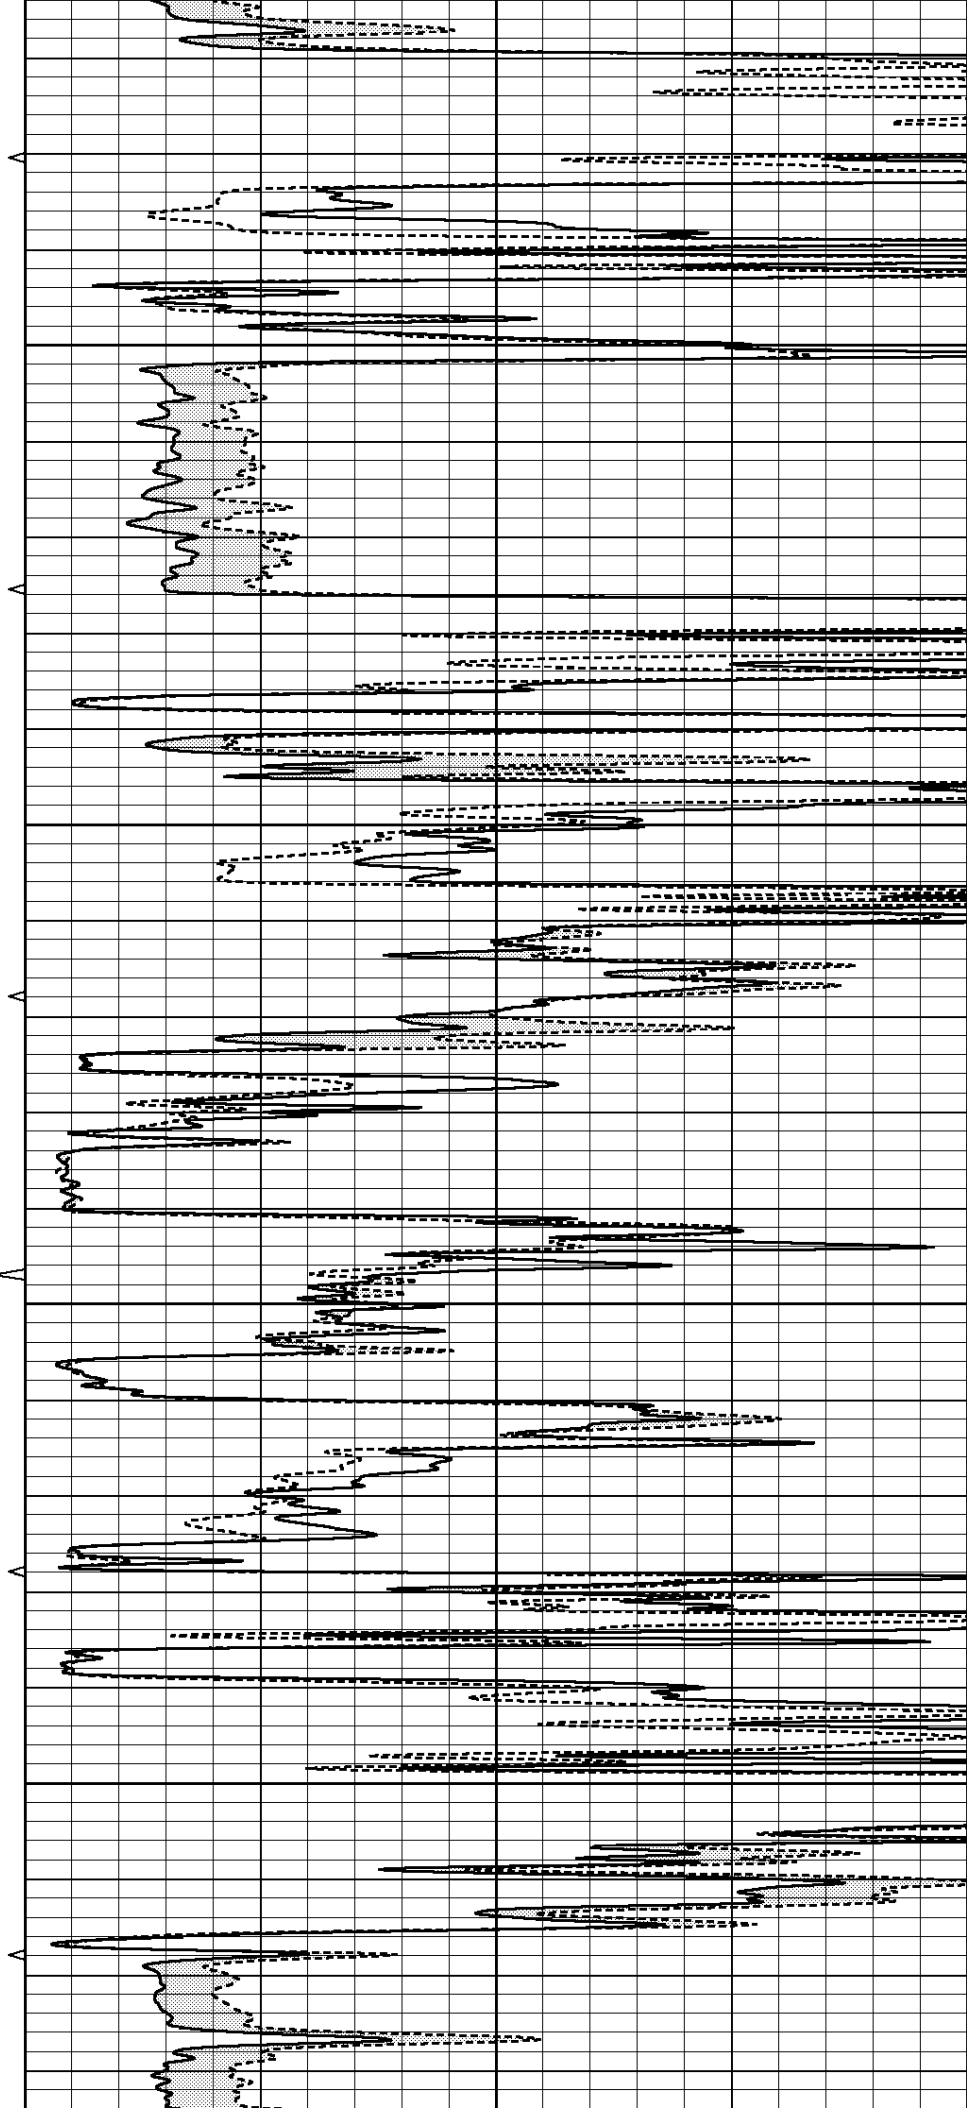

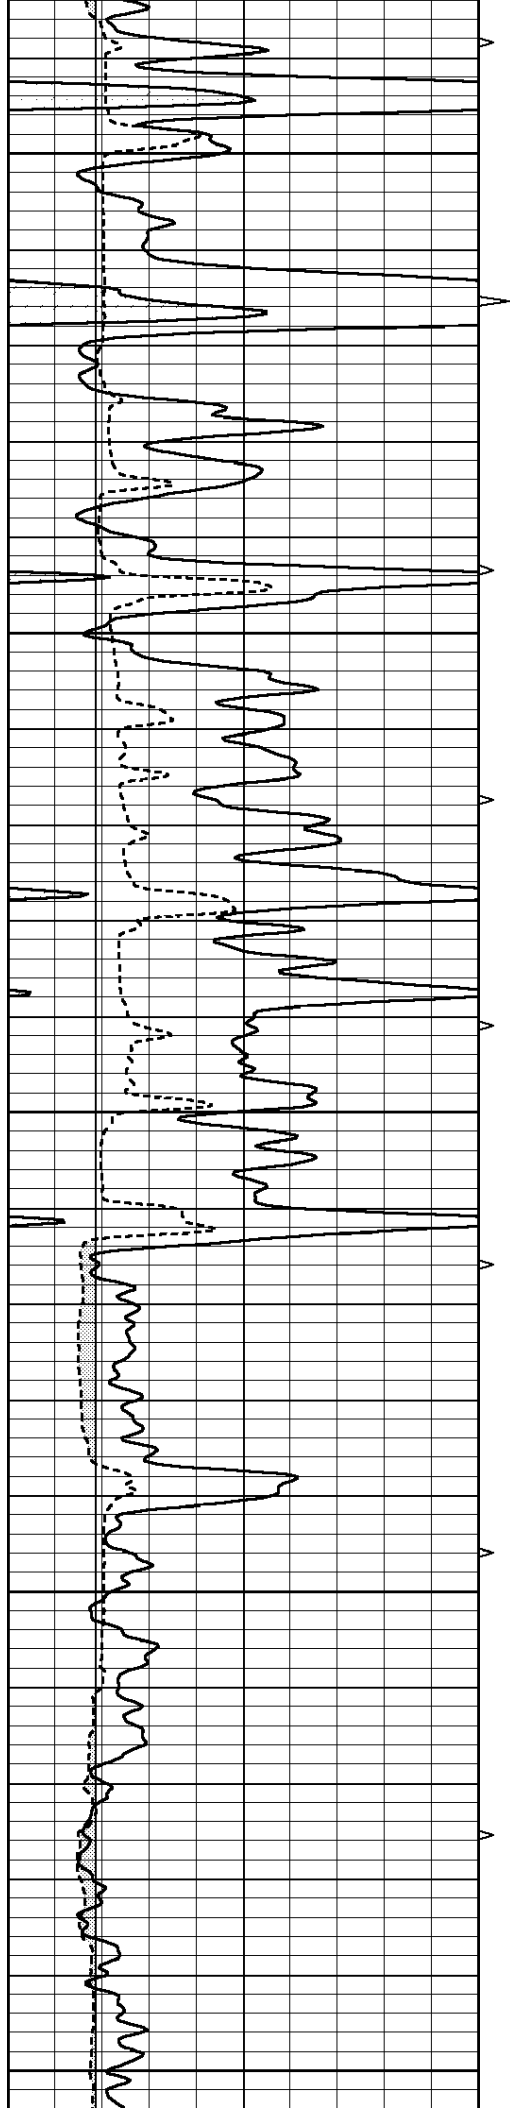


5050


5100

5150

5200

5250

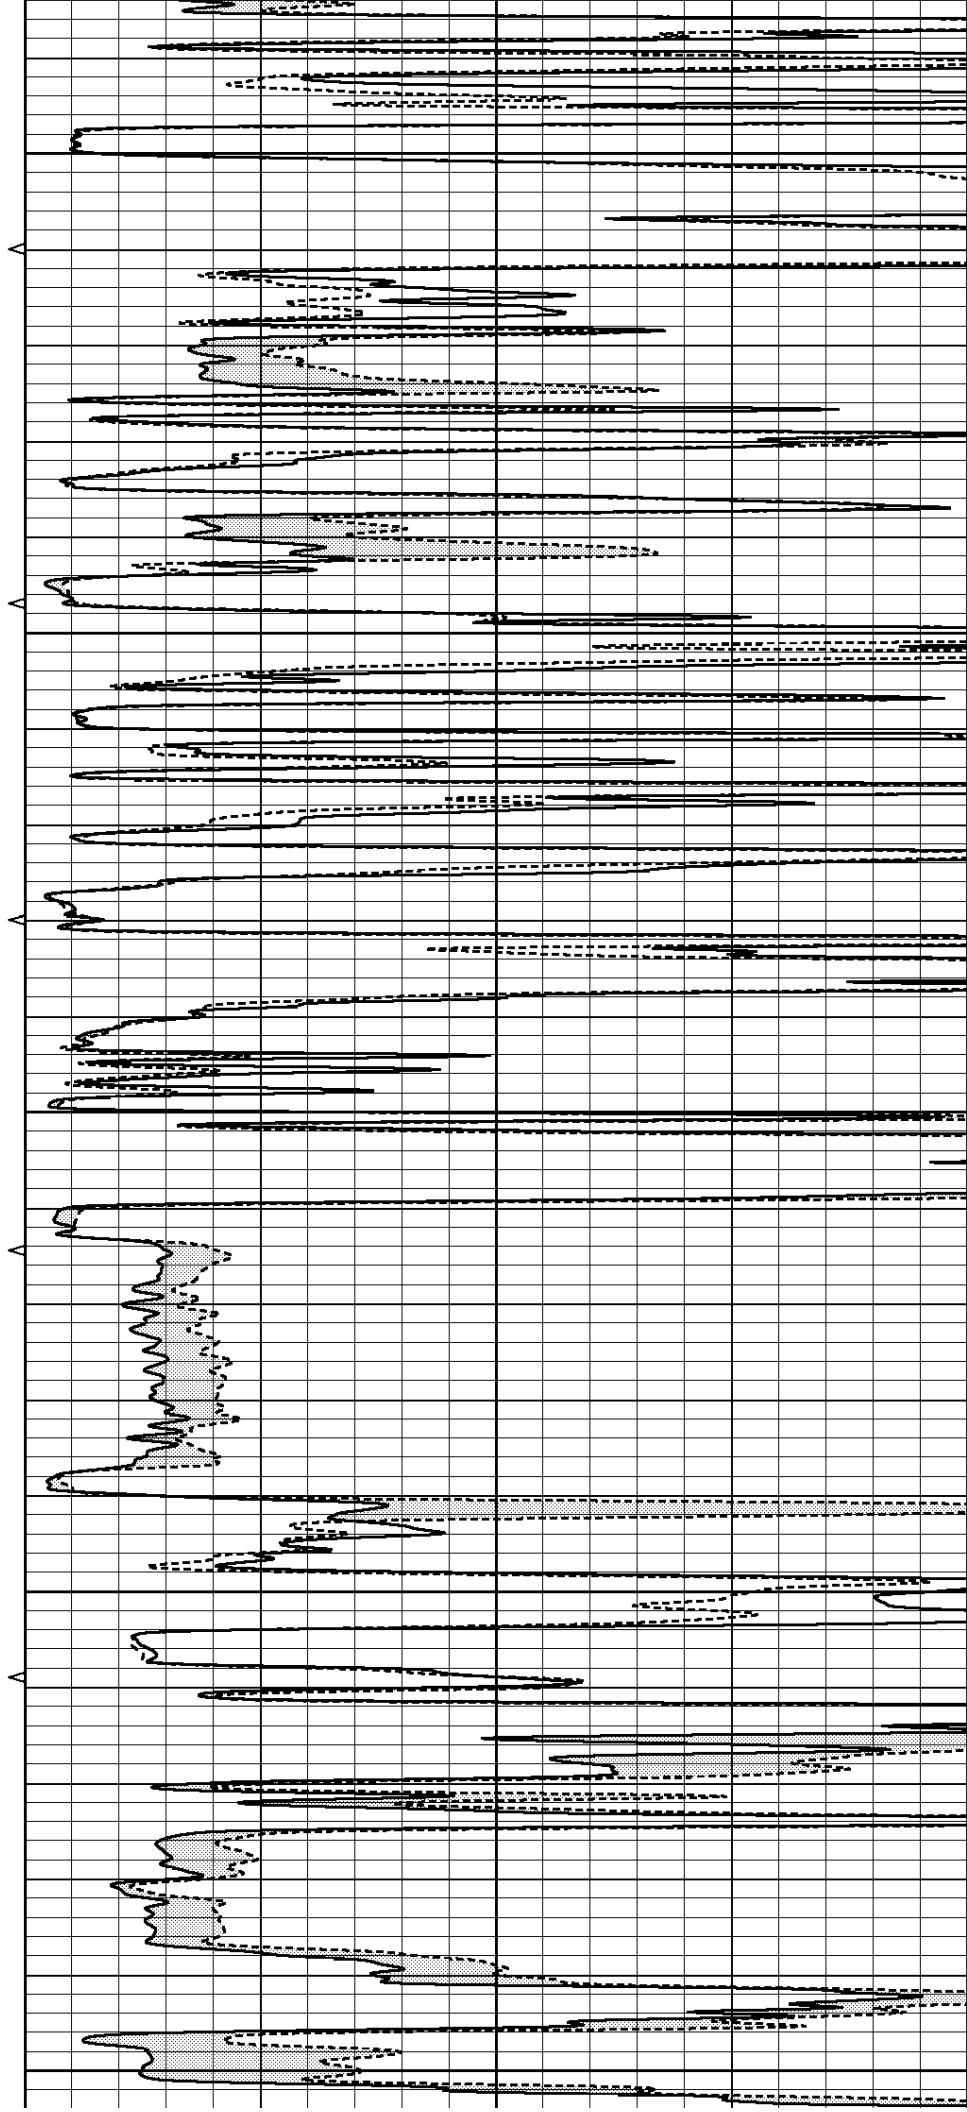

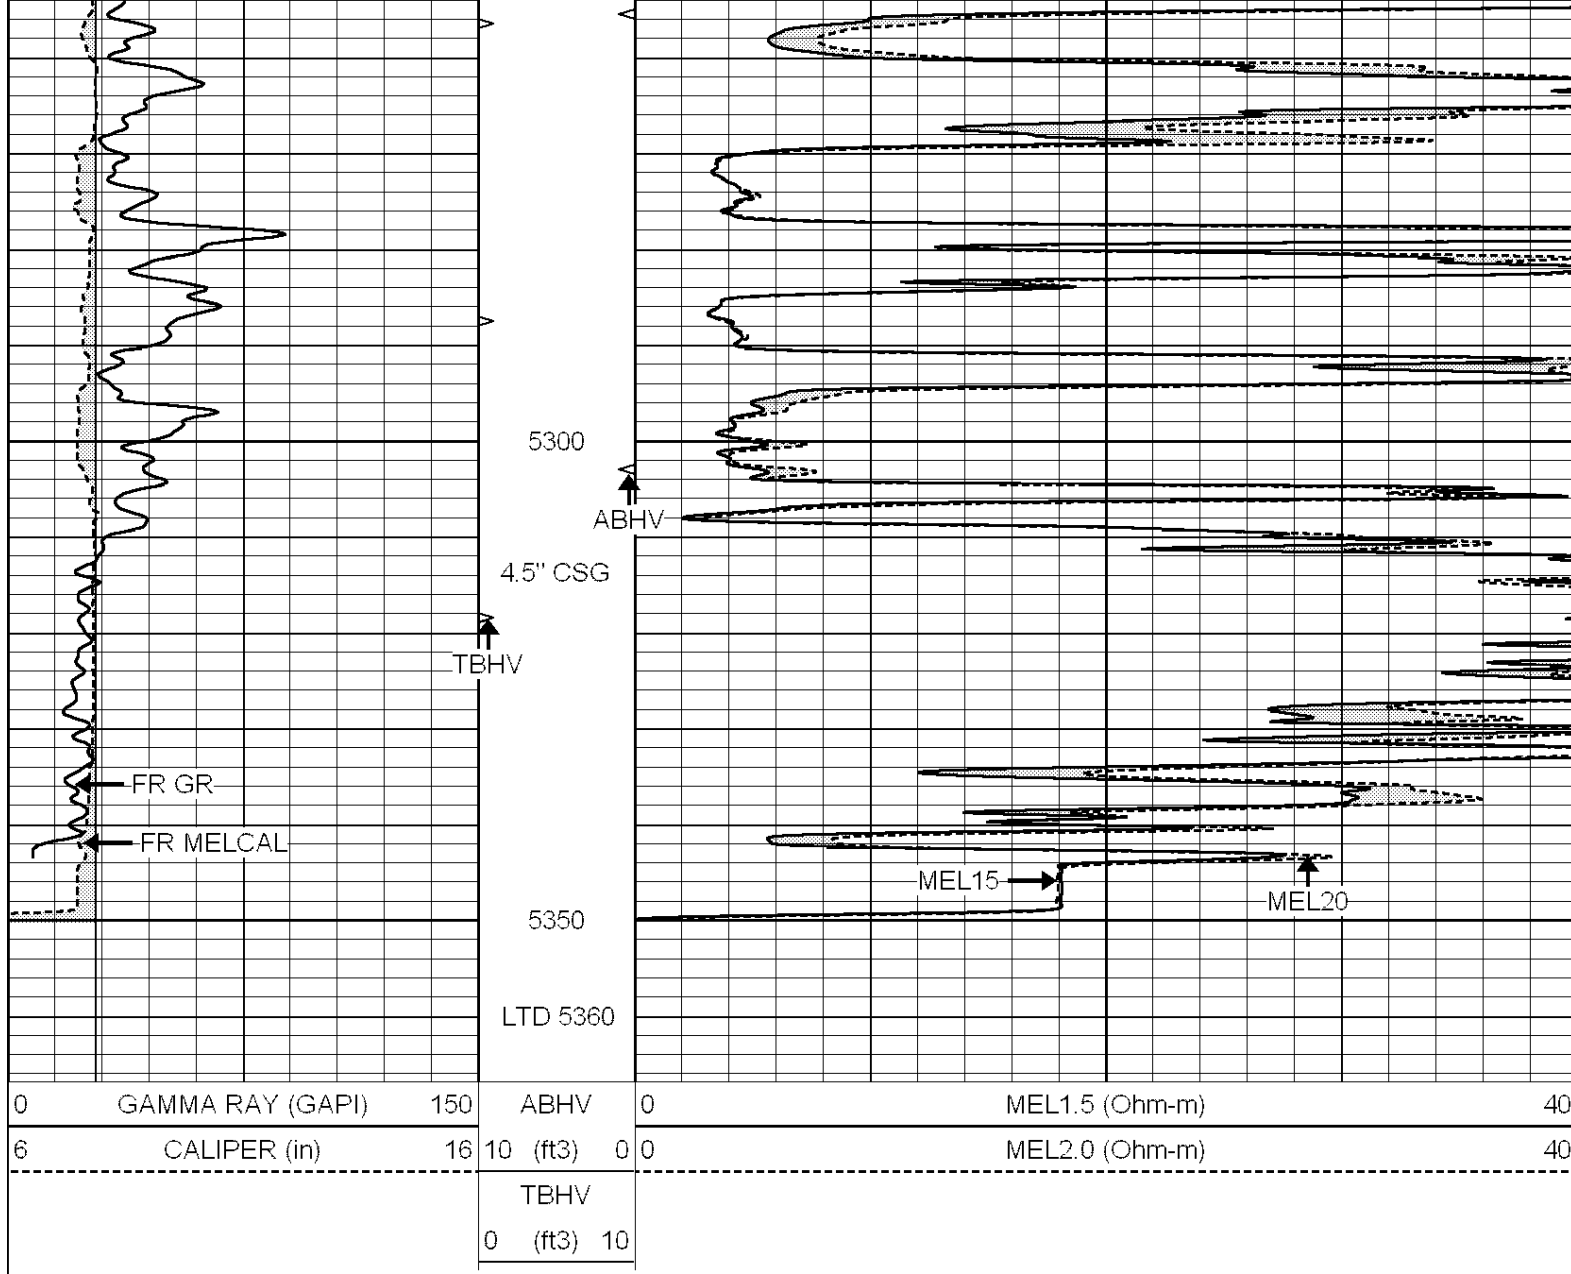


SUPERIOR


Hays,
Kansas

REPEAT SECTION

Database File: 006692pe.db
 Dataset Pathname: pass5.2
 Presentation Format: _micro
 Dataset Creation: Tue Feb 15 02:18:55 2011 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

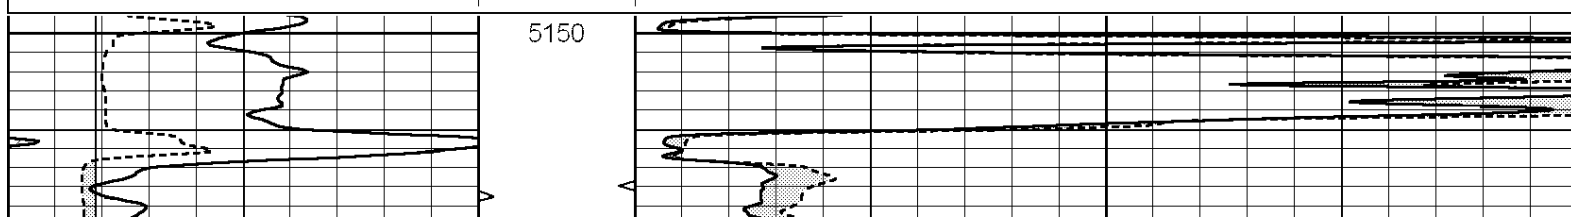

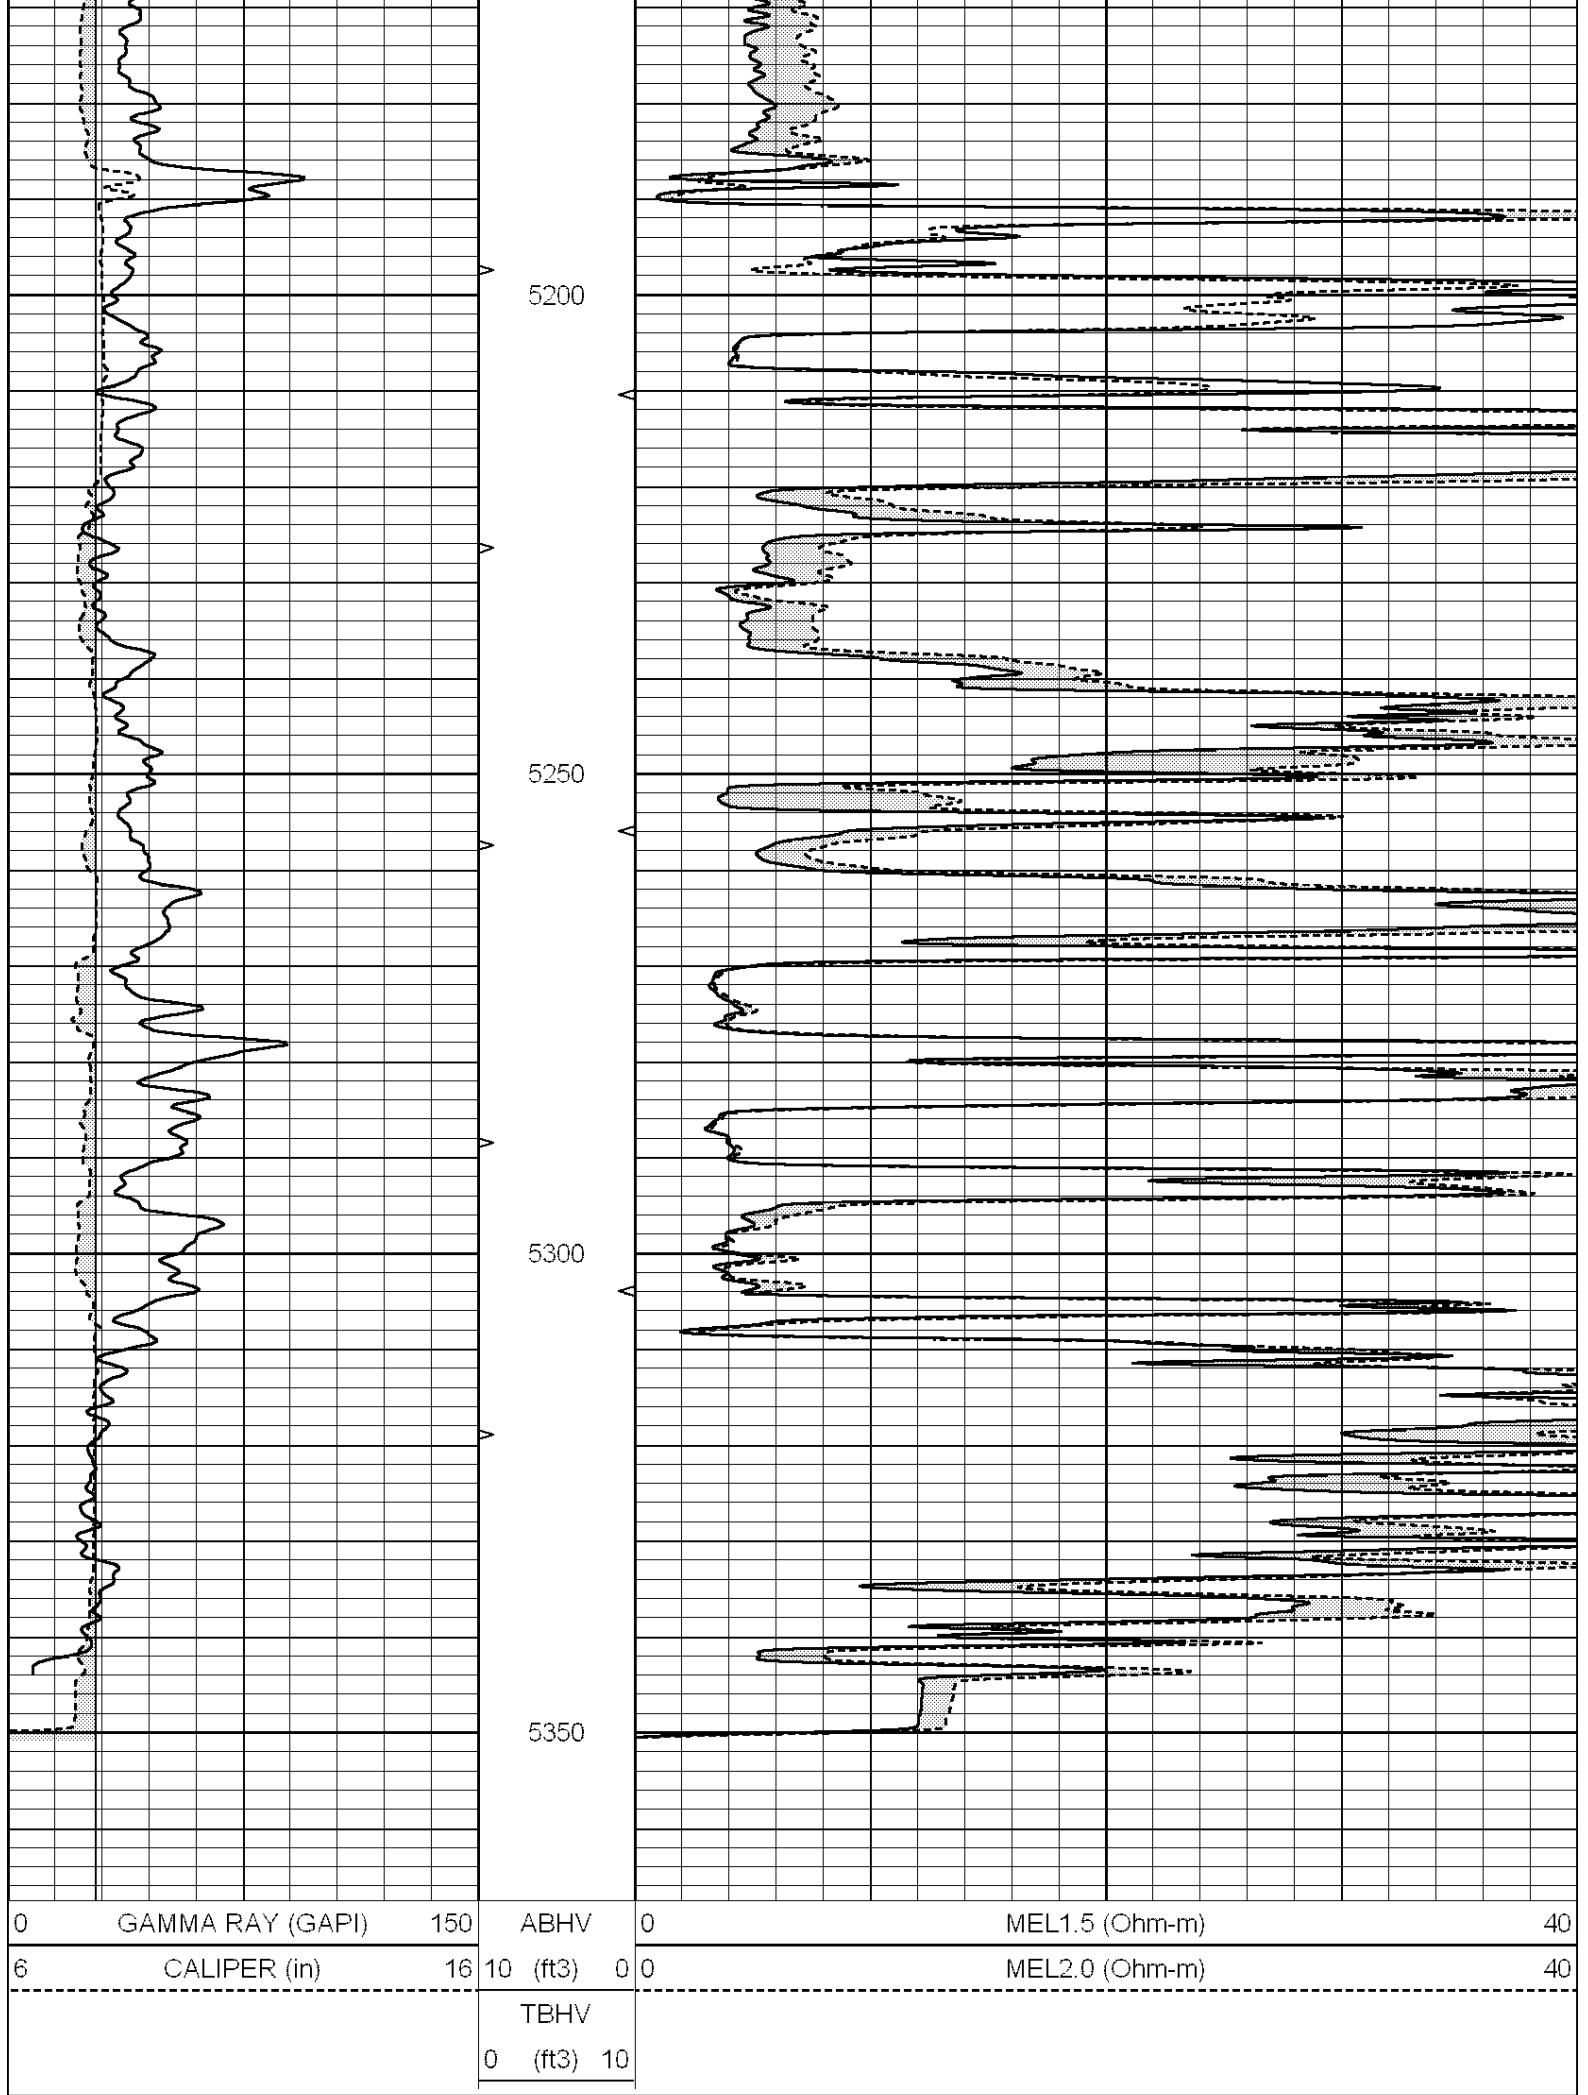

Calibration Report

Database File: 006692pe.db
 Dataset Pathname: pass5.2
 Dataset Creation: Tue Feb 15 02:18:55 2011 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO6
 Tool Model: PROBE
 Performed: Wed Jan 19 06:40:00 2011

Caliper Calibration:	Gain=5.211	Offset=1.160
	Low Cal	High Cal
References	8.000	14.000
Readings	1.178	2.330

1.5" Calibration:	Gain=40.000	Offset=-0.300
	Low Cal	High Cal
References	0.000	20.000
Readings	0.008	1.200

2" Calibration:	Gain=50.000	Offset=-0.600
	Low Cal	High Cal
References	0.000	20.000
Readings	0.008	0.888

Gamma Ray Calibration Report

Serial Number: GR6
 Tool Model: OPEN
 Performed: Mon Feb 14 09:44:17 2011

Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	1.5435	GAPI/cps