



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company JASON OIL COMPANY, INC.
Well WIRTH #6
Field KRAFT - PRUSA
County BARTON
State KANSAS

Company JASON OIL COMPANY, INC.
Well WIRTH #6
Field KRAFT - PRUSA
County BARTON State KANSAS

Location: API # : 15-009-25538

900' FSL & 2310' FVL

SEC 8 TWP 16S RGE 11W

Other Services
RAG

Permanent Datum GROUND LEVEL Elevation 1822
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1829
D.F.
G.L. 1822

Date	4-13-11		
Run Number	TWO		
Depth Driller	3310		
Depth Logger	3309		
Bottom Logged Interval	3307		
Top Log Interval	2500		
Casing Driller	397		
Casing Logger	395		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	8.9 / 61		
pH / Fluid Loss	8.0 / 10.4		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.55 @ 84F		
Rmf @ Meas. Temp	0.41 @ 84F		
Rmc @ Meas. Temp	0.66 @ 84F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.430 @ 108F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	2:00 P.M.		
Maximum Recorded Temperature	108F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	HERB DEINES		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

SUPERIOR WELL SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: DUBUQUE CHURCH, 2E, 2S, 1/4E, N INTO.




SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File: 006902rag.db
Dataset Pathname: pass5.1A
Presentation Format: micro
Dataset Creation: Wed Apr 13 16:26:31 2011
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

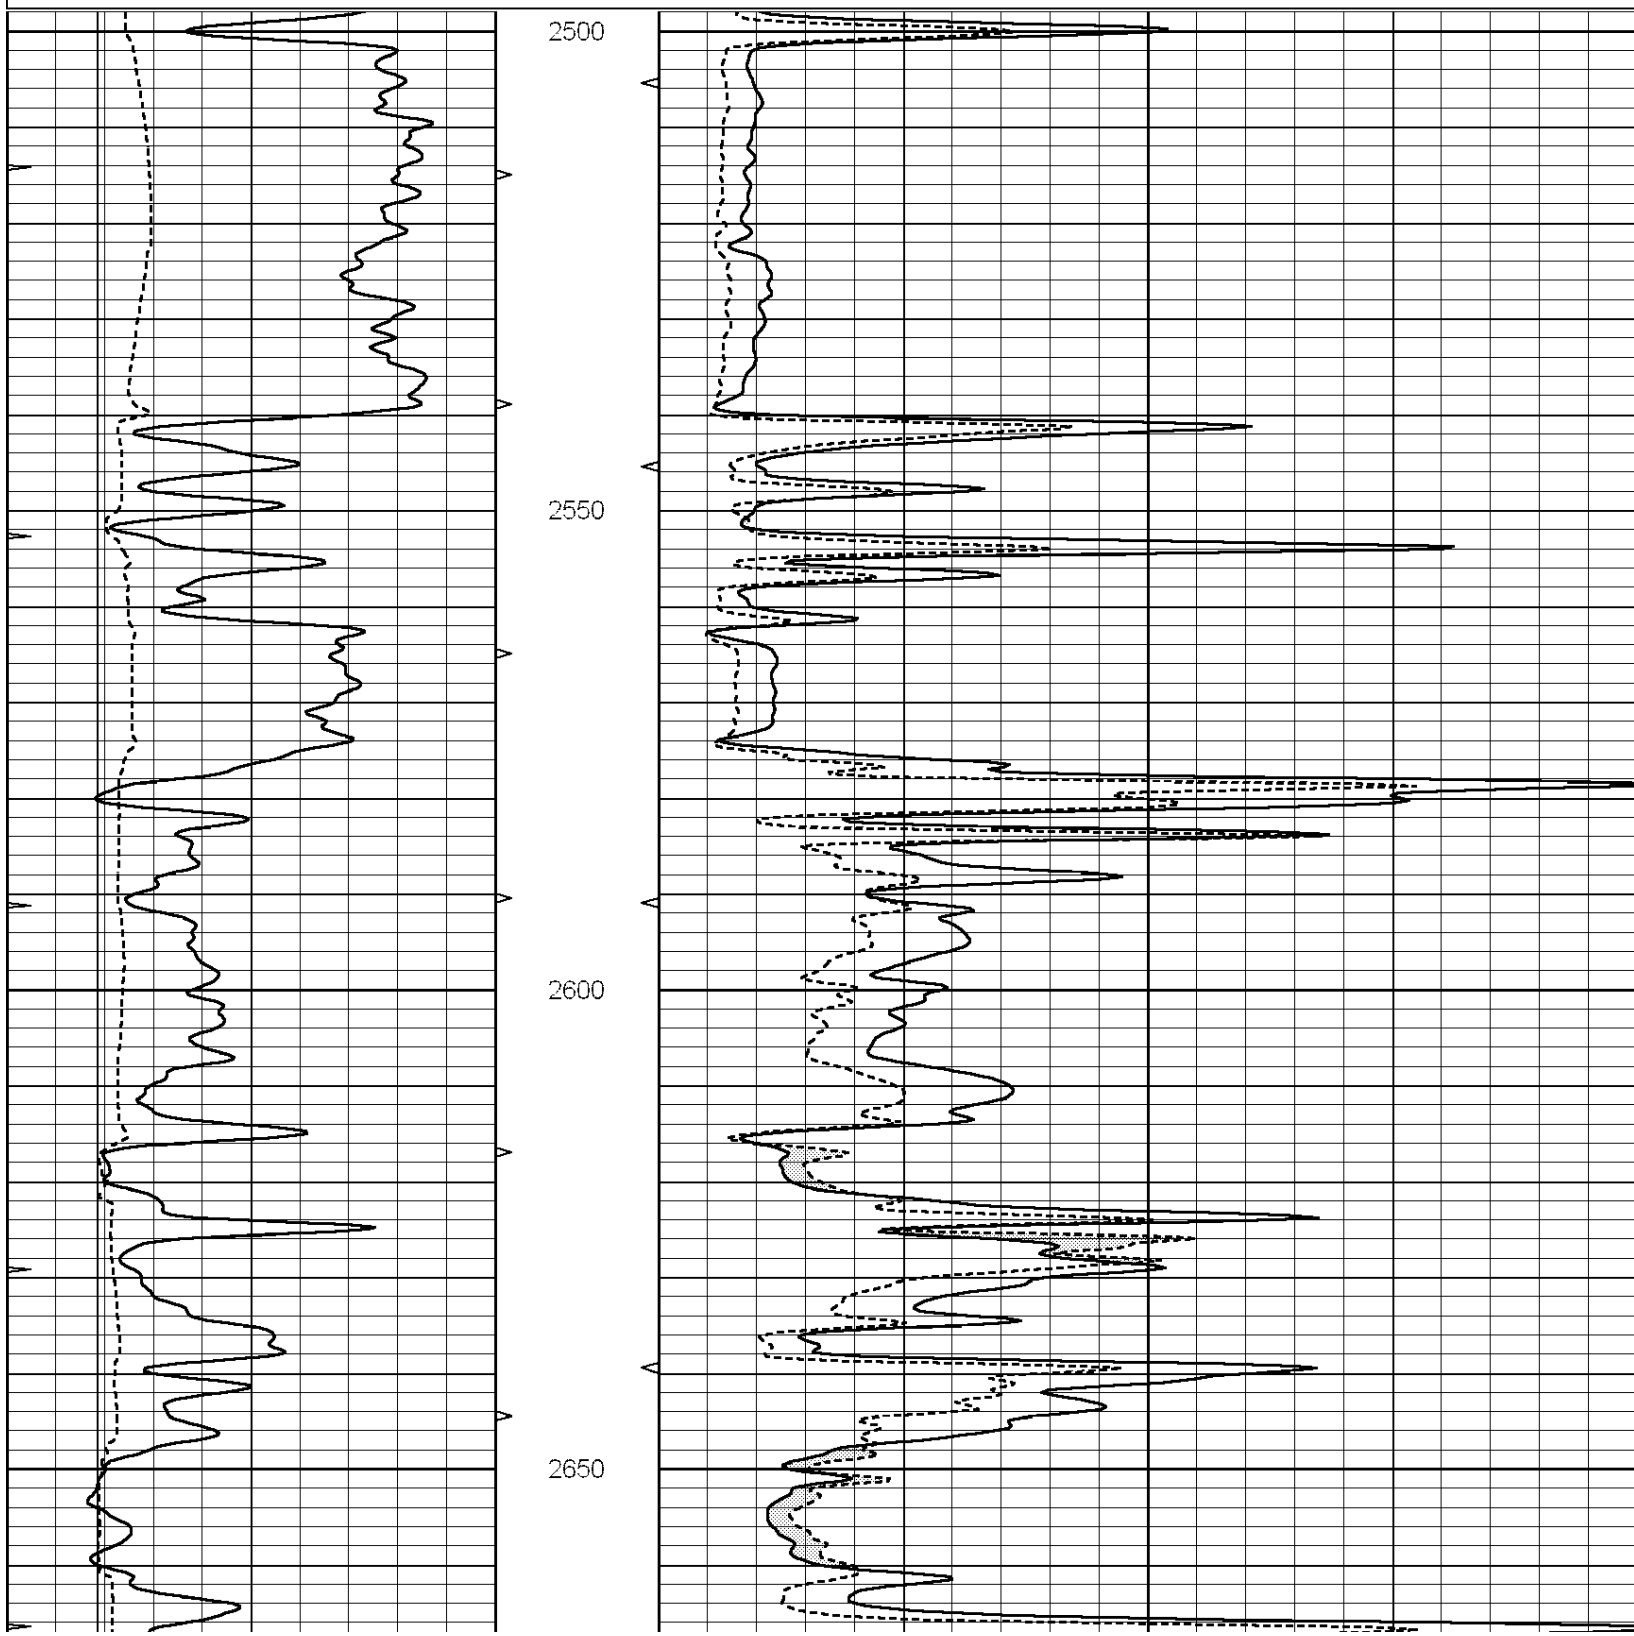

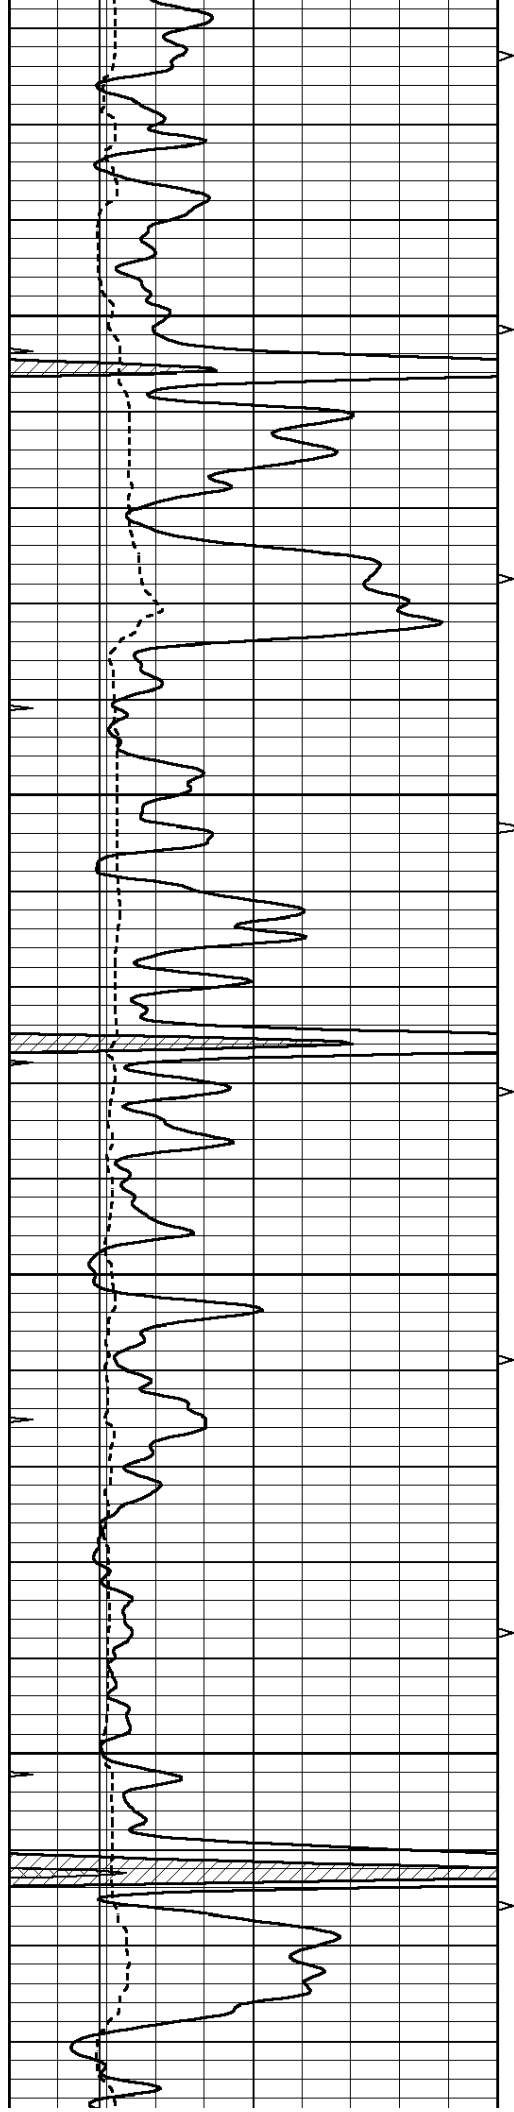




2700


2750

2800

2850

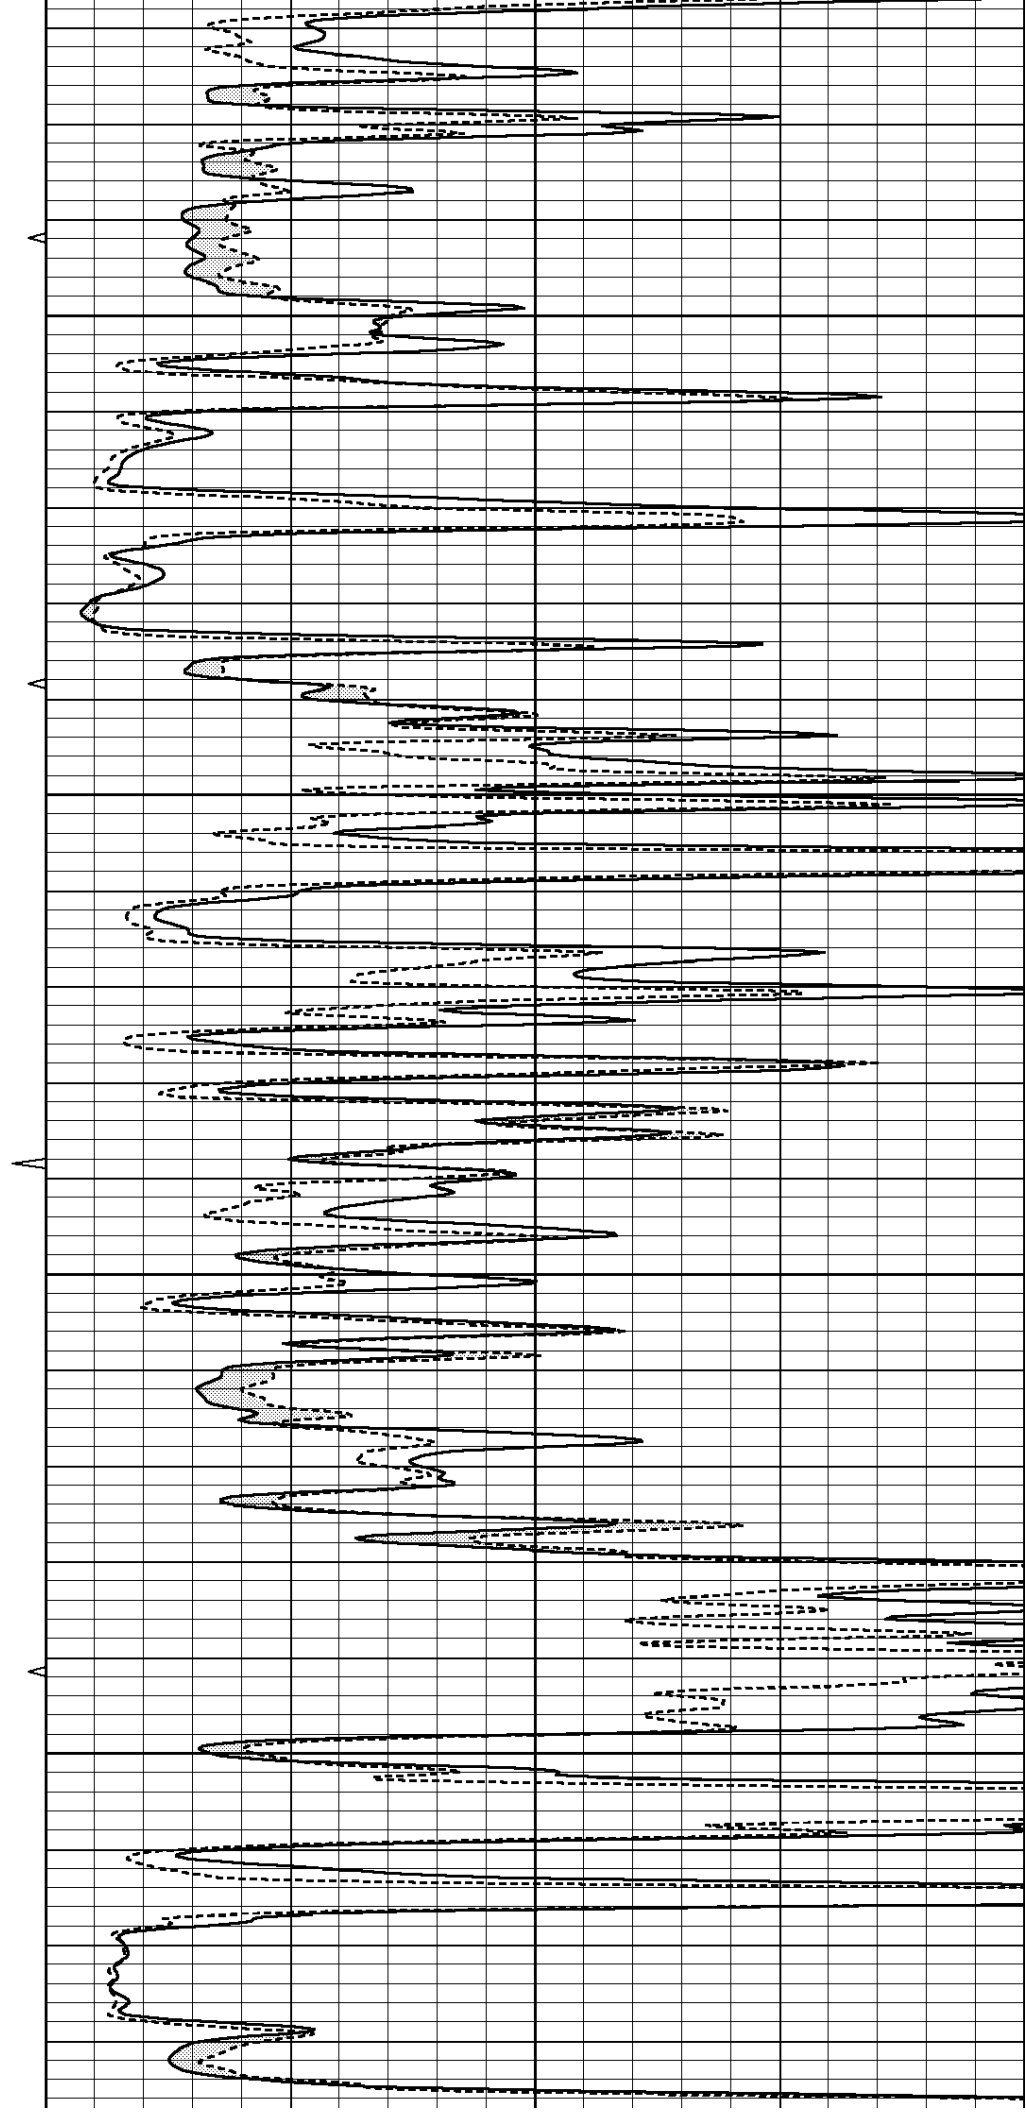

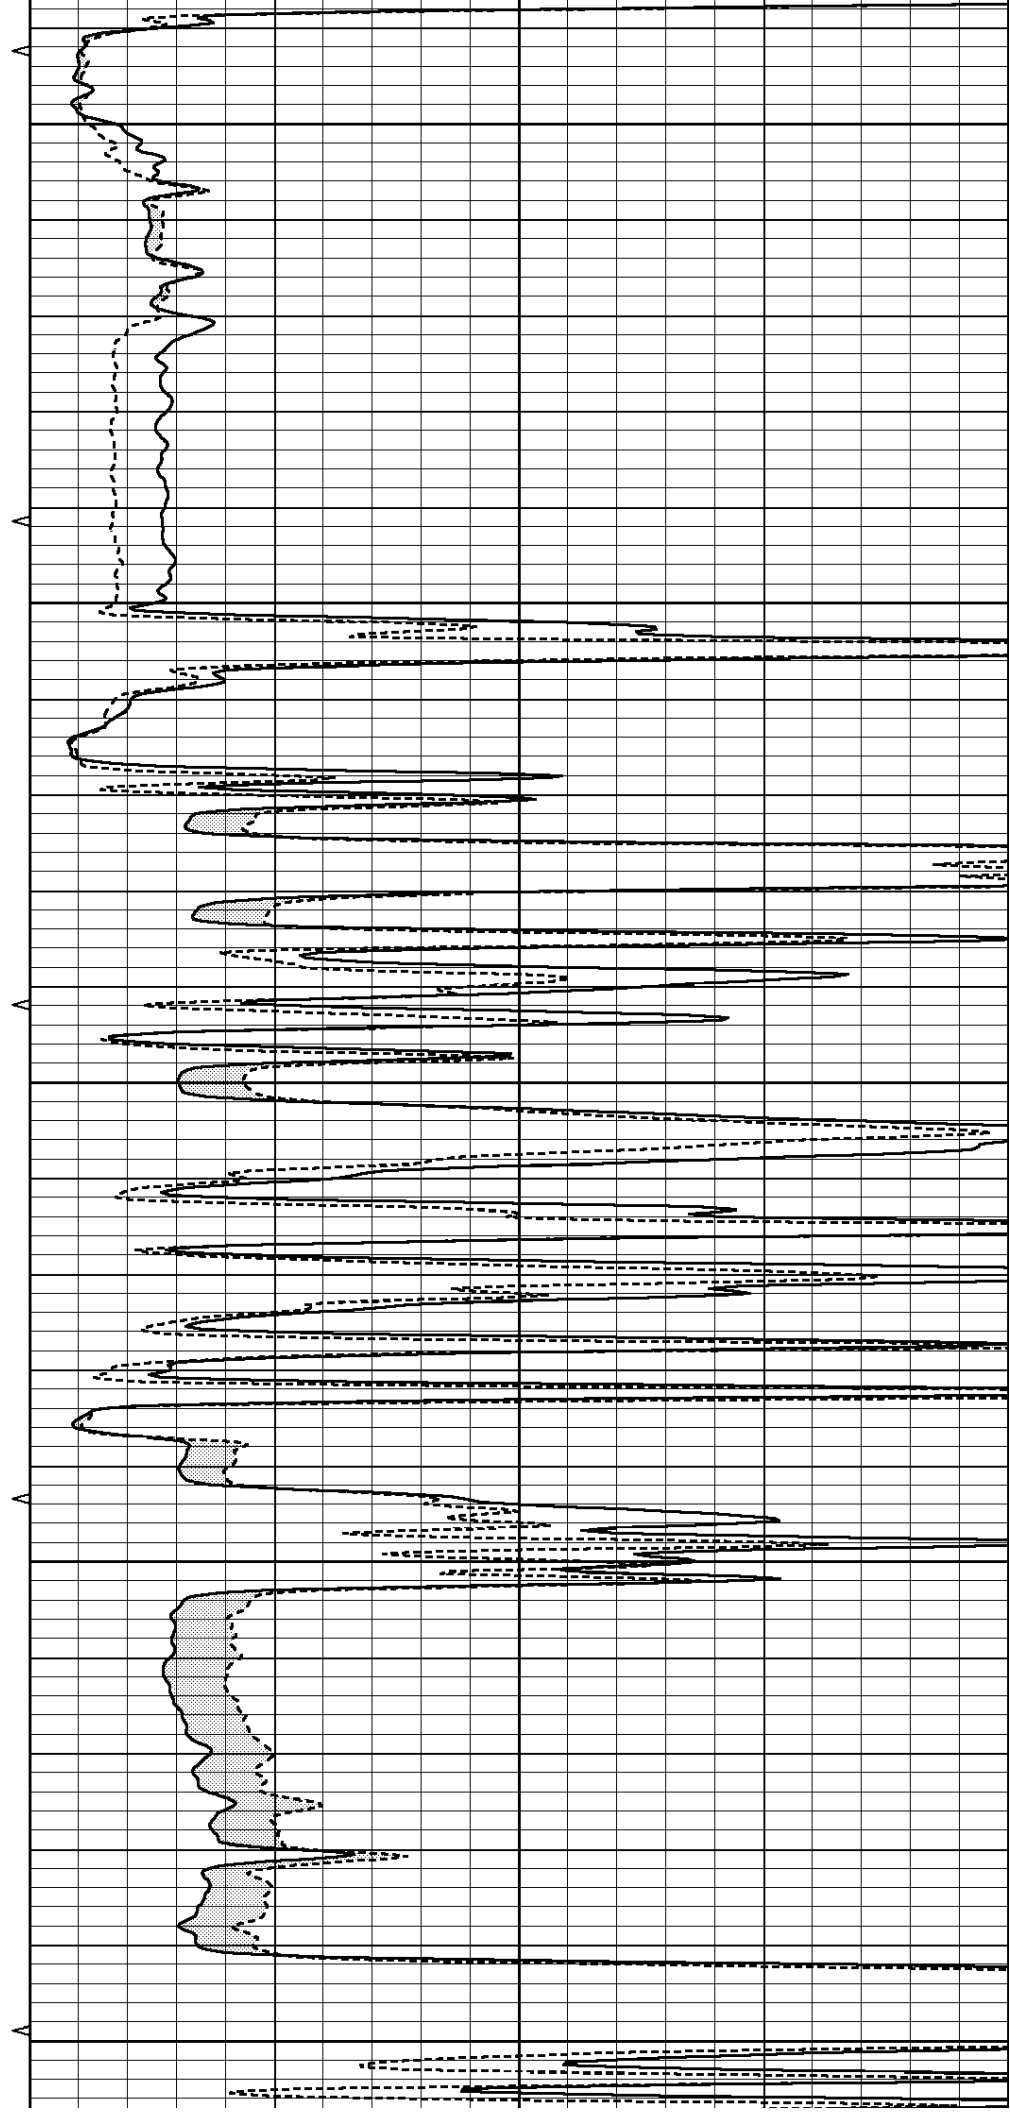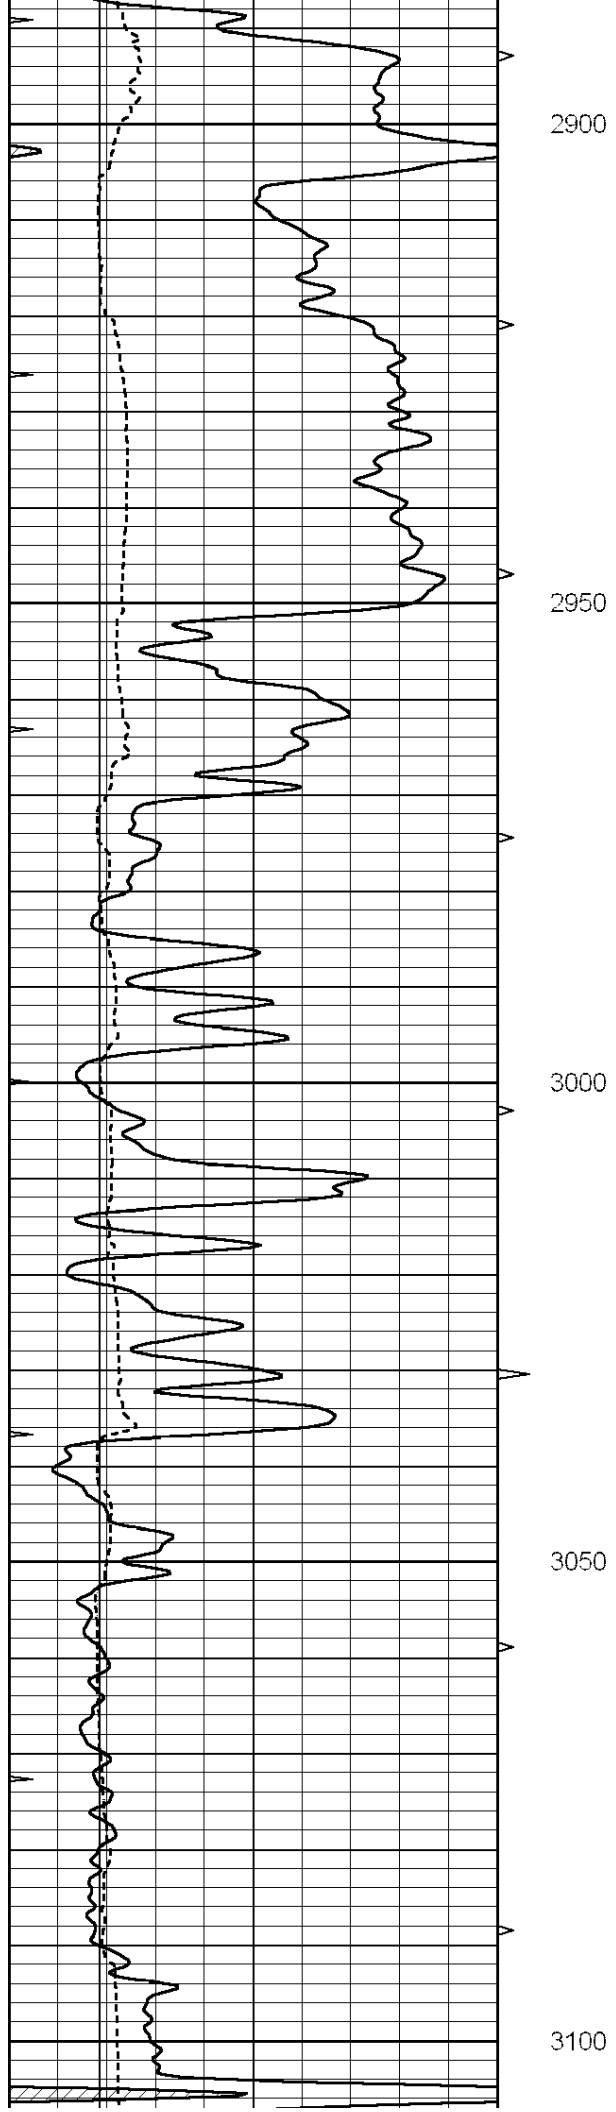

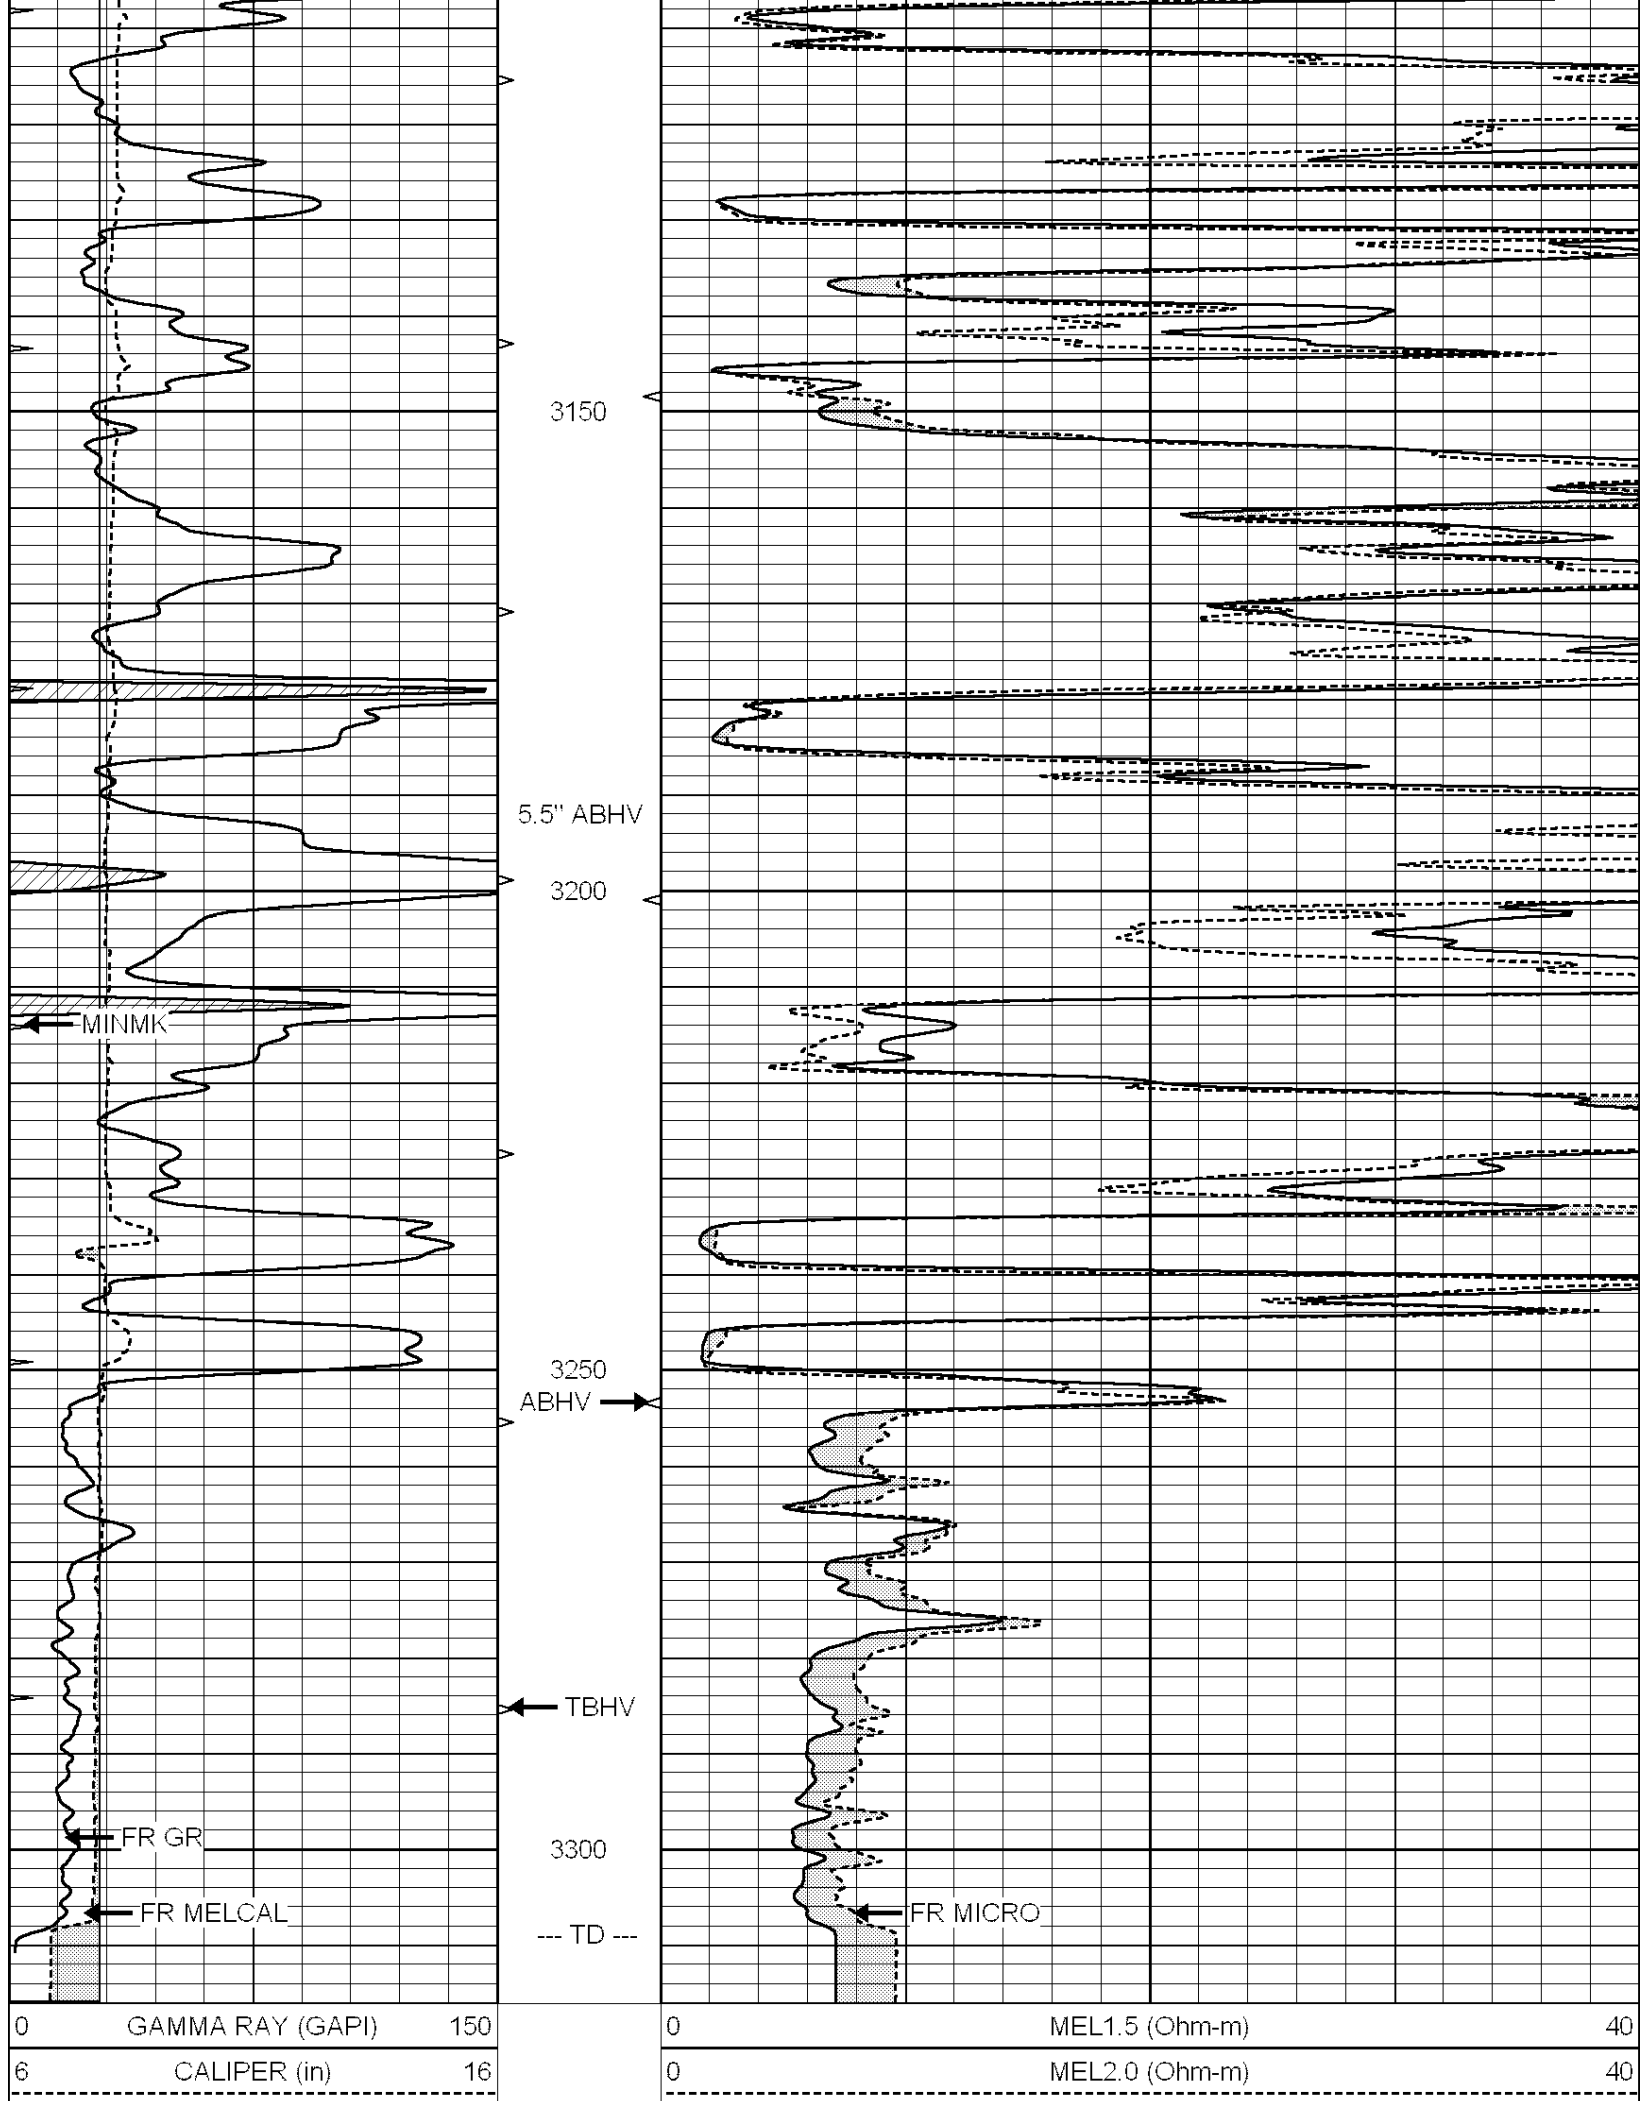

6	MELCAL (in)	16
0	MINMK	20




SUPERIOR
Hays,
Kansas


REPEAT SECTION

Database File: 006902rag.db
Dataset Pathname: pass4.1
Presentation Format: micro
Dataset Creation: Wed Apr 13 16:01:01 2011 by Calc Open-Cased 090629
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	CALIPER (in)	16
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

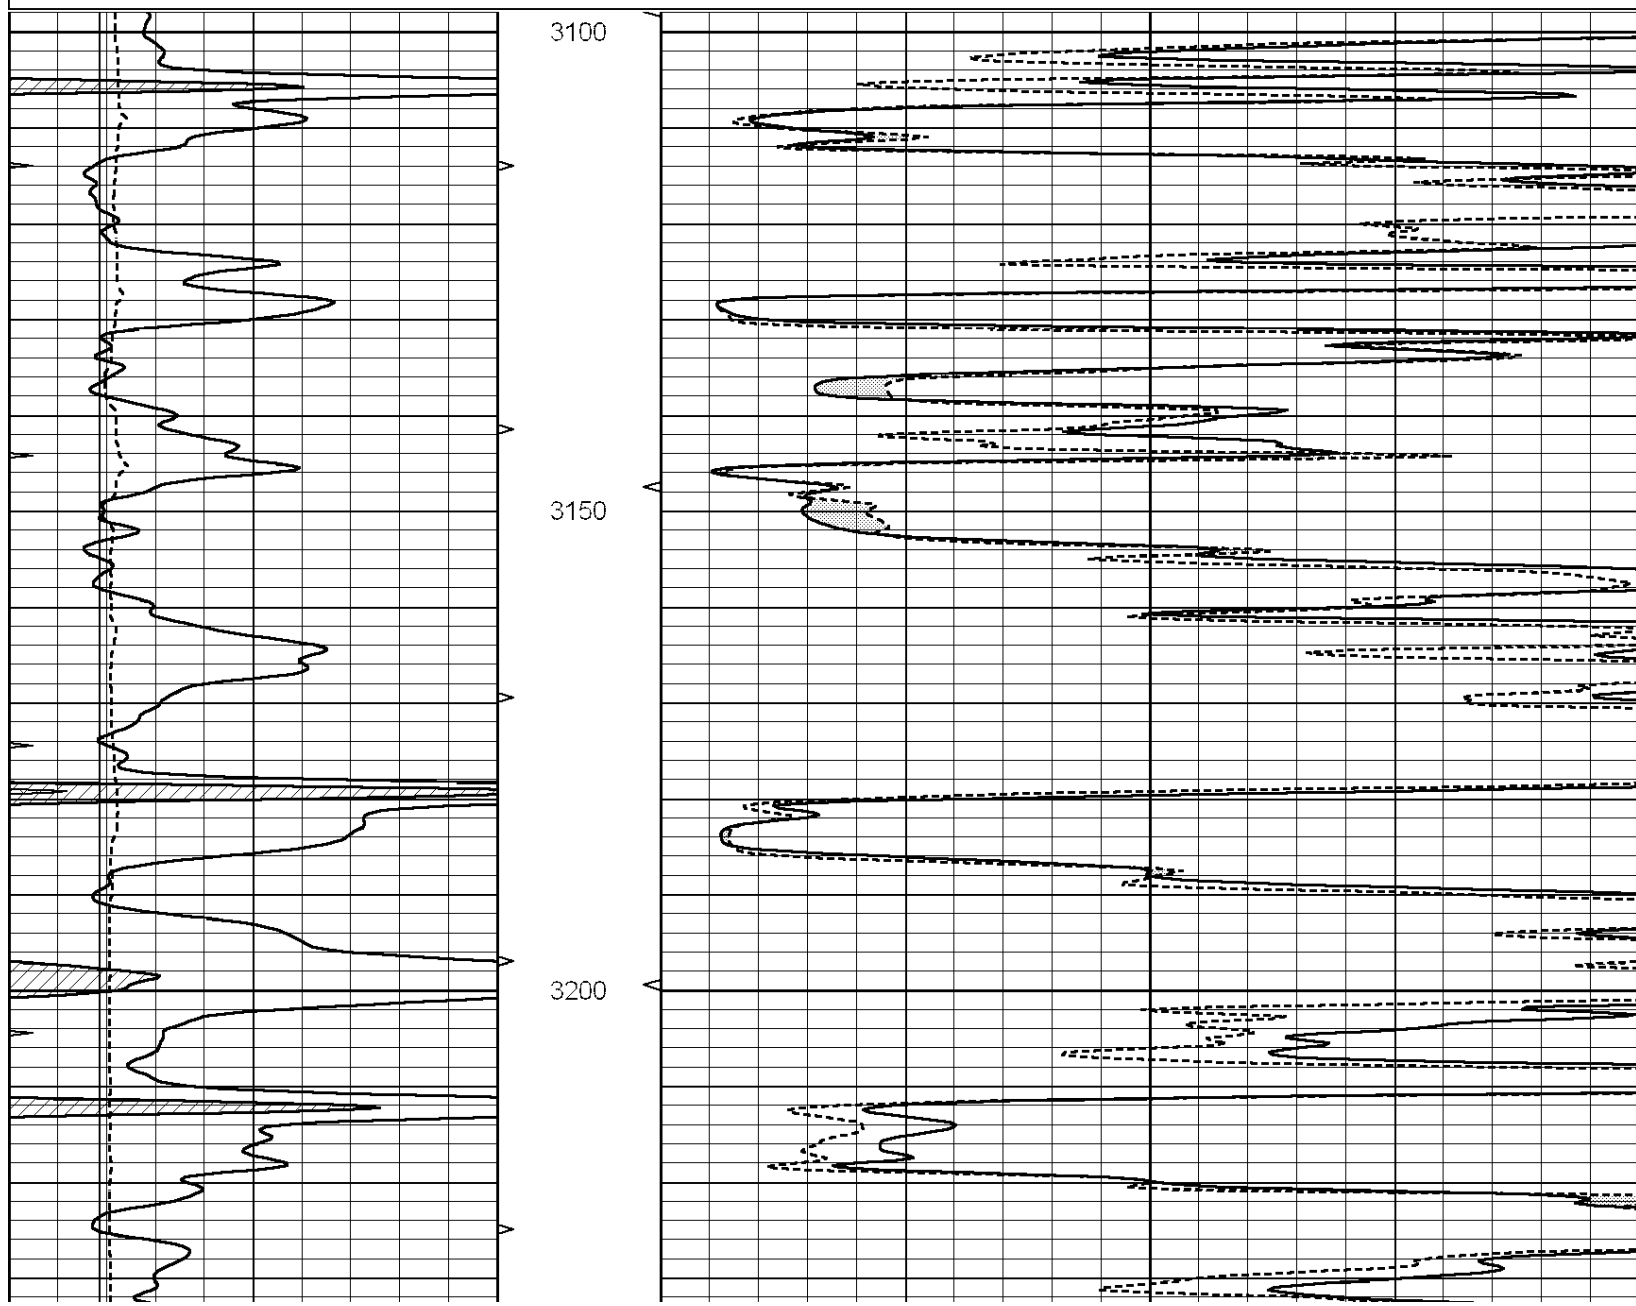

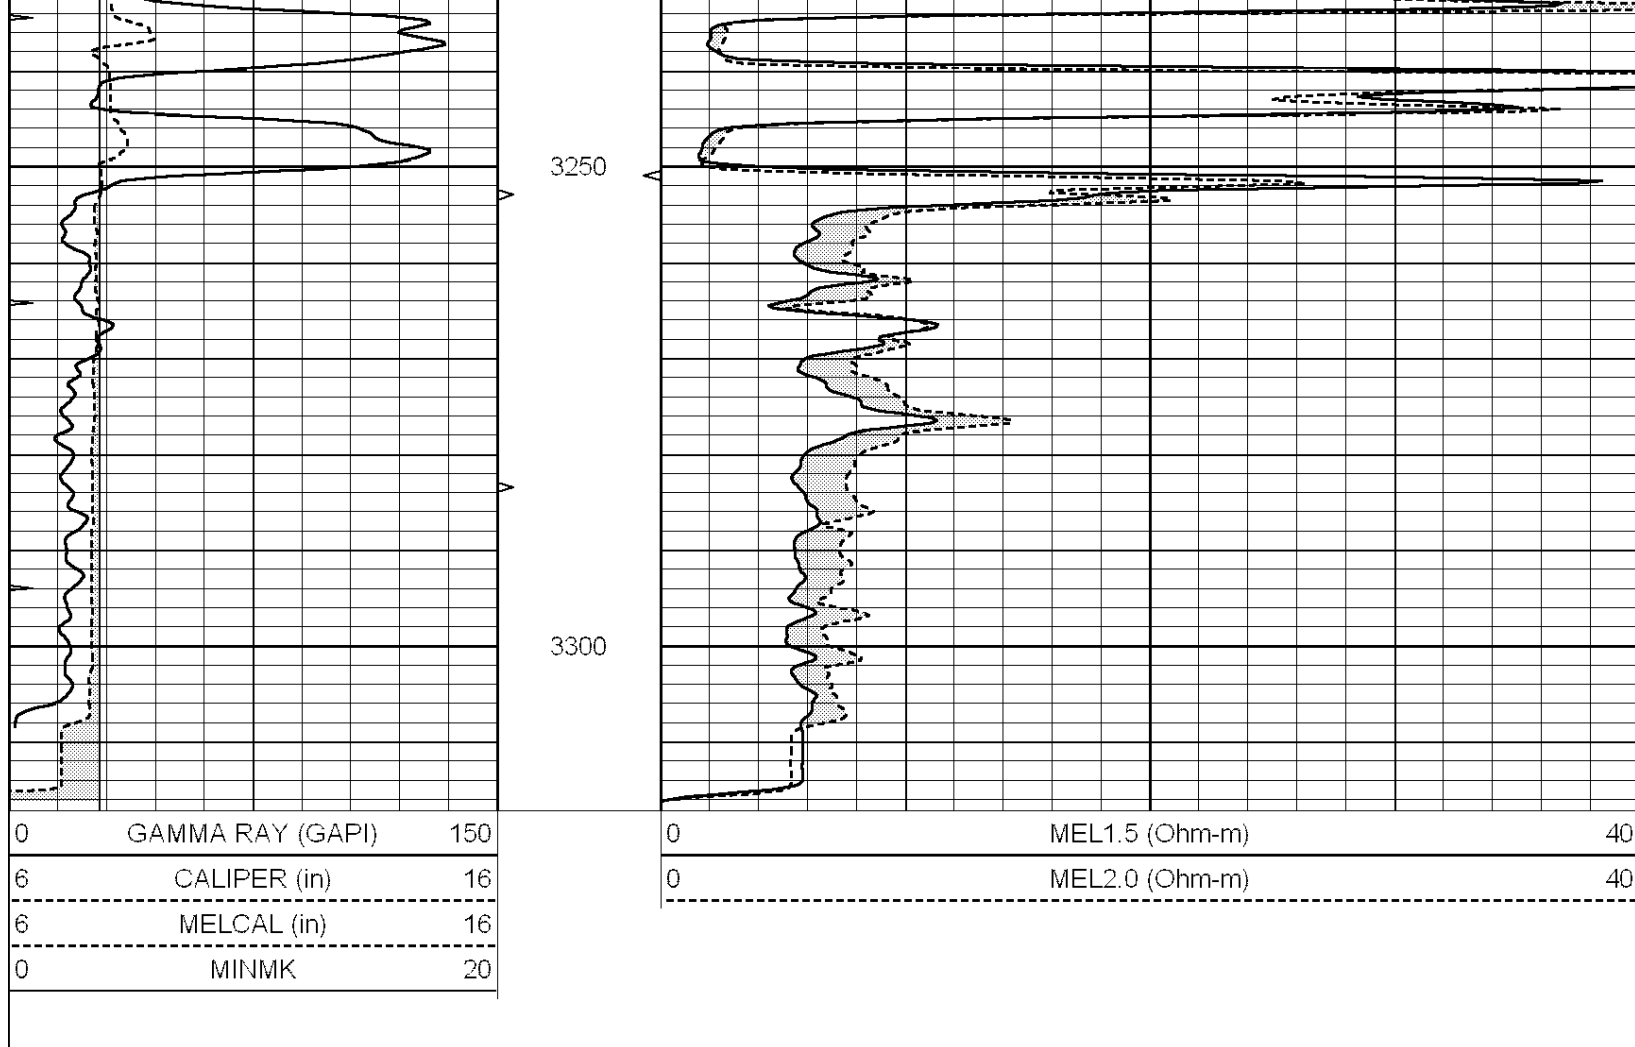

Calibration Report			
Database File:		006902rag.db	
Dataset Pathname:		pass5.1A	
Dataset Creation:		Wed Apr 13 16:26:31 2011	
MICRO Calibration Report			
Serial Number:		Micro1	
Tool Model:		ProbeL	
Performed:		Wed Apr 13 15:46:24 2011	
Caliper Calibration:		Gain=2.323	Offset=2.130
References		Low Cal	High Cal
Readings		7.900	12.000
		2.484	4.249
1.5" Calibration:		Gain=38.000	Offset=-0.200
References		Low Cal	High Cal
Readings		0.000	20.000
		0.003	0.844
2" Calibration:		Gain=34.000	Offset=-0.300
References		Low Cal	High Cal
Readings		0.000	20.000
		0.028	0.817
Gamma Ray Calibration Report			
Serial Number:		GR5	
Tool Model:		OPEN	

Test Method: OPEN
Performed: Tue Apr 12 02:57:58 2011

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.6000 GAPI/cps