LOG-TECH

DIGITAL LOG (785) 625-3858

Microresistivity Log

API No. 15-141-20,426-00-00

Company Murfin Drilling Company, Inc.

Well Chris #1-17

Field Wildcat

County Osborne State Kansas

Location SE NW NW NE
380' FNL & 2210' FEL

Sec: 17 Twp: 10 S Rge: 14 W

Other Services
CNL/CDL
DIL/BHCS

Elevation
K.B. 1847
D.F.
G.L. 1842

Permanent Datum Ground Level Elevation 1842
Log Measured From Kelly Bushing 5 Ft. Above Perm. Datum
Drilling Measured From Kelly Bushing

Date	1/2/2011		
Run Number	Two		
Depth Driller	3620		
Depth Logger	3619		
Bottom Logged Interval	3618		
Top Log Interval	2650		
Casing Driller	8.625 @ 221		
Casing Logger	220		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	5,200		
Density / Viscosity	9.2 / 56		
pH / Fluid Loss	11.5 / 6.8		
Source of Sample	Flowline		
Rm @ Meas. Temp	.5 @ 52		
Rmf @ Meas. Temp	.38 @ 52		
Rmc @ Meas. Temp	.68 @ 52		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.23 @ 112		
Operating Rig Time	4 Hours		
Max. Rec. Temp. F	112		
Equipment Number	15		
Location	Hays		
Recorded By	T. Martin		
Witnessed By	Brad Rine		

<<< Fold Here >>>

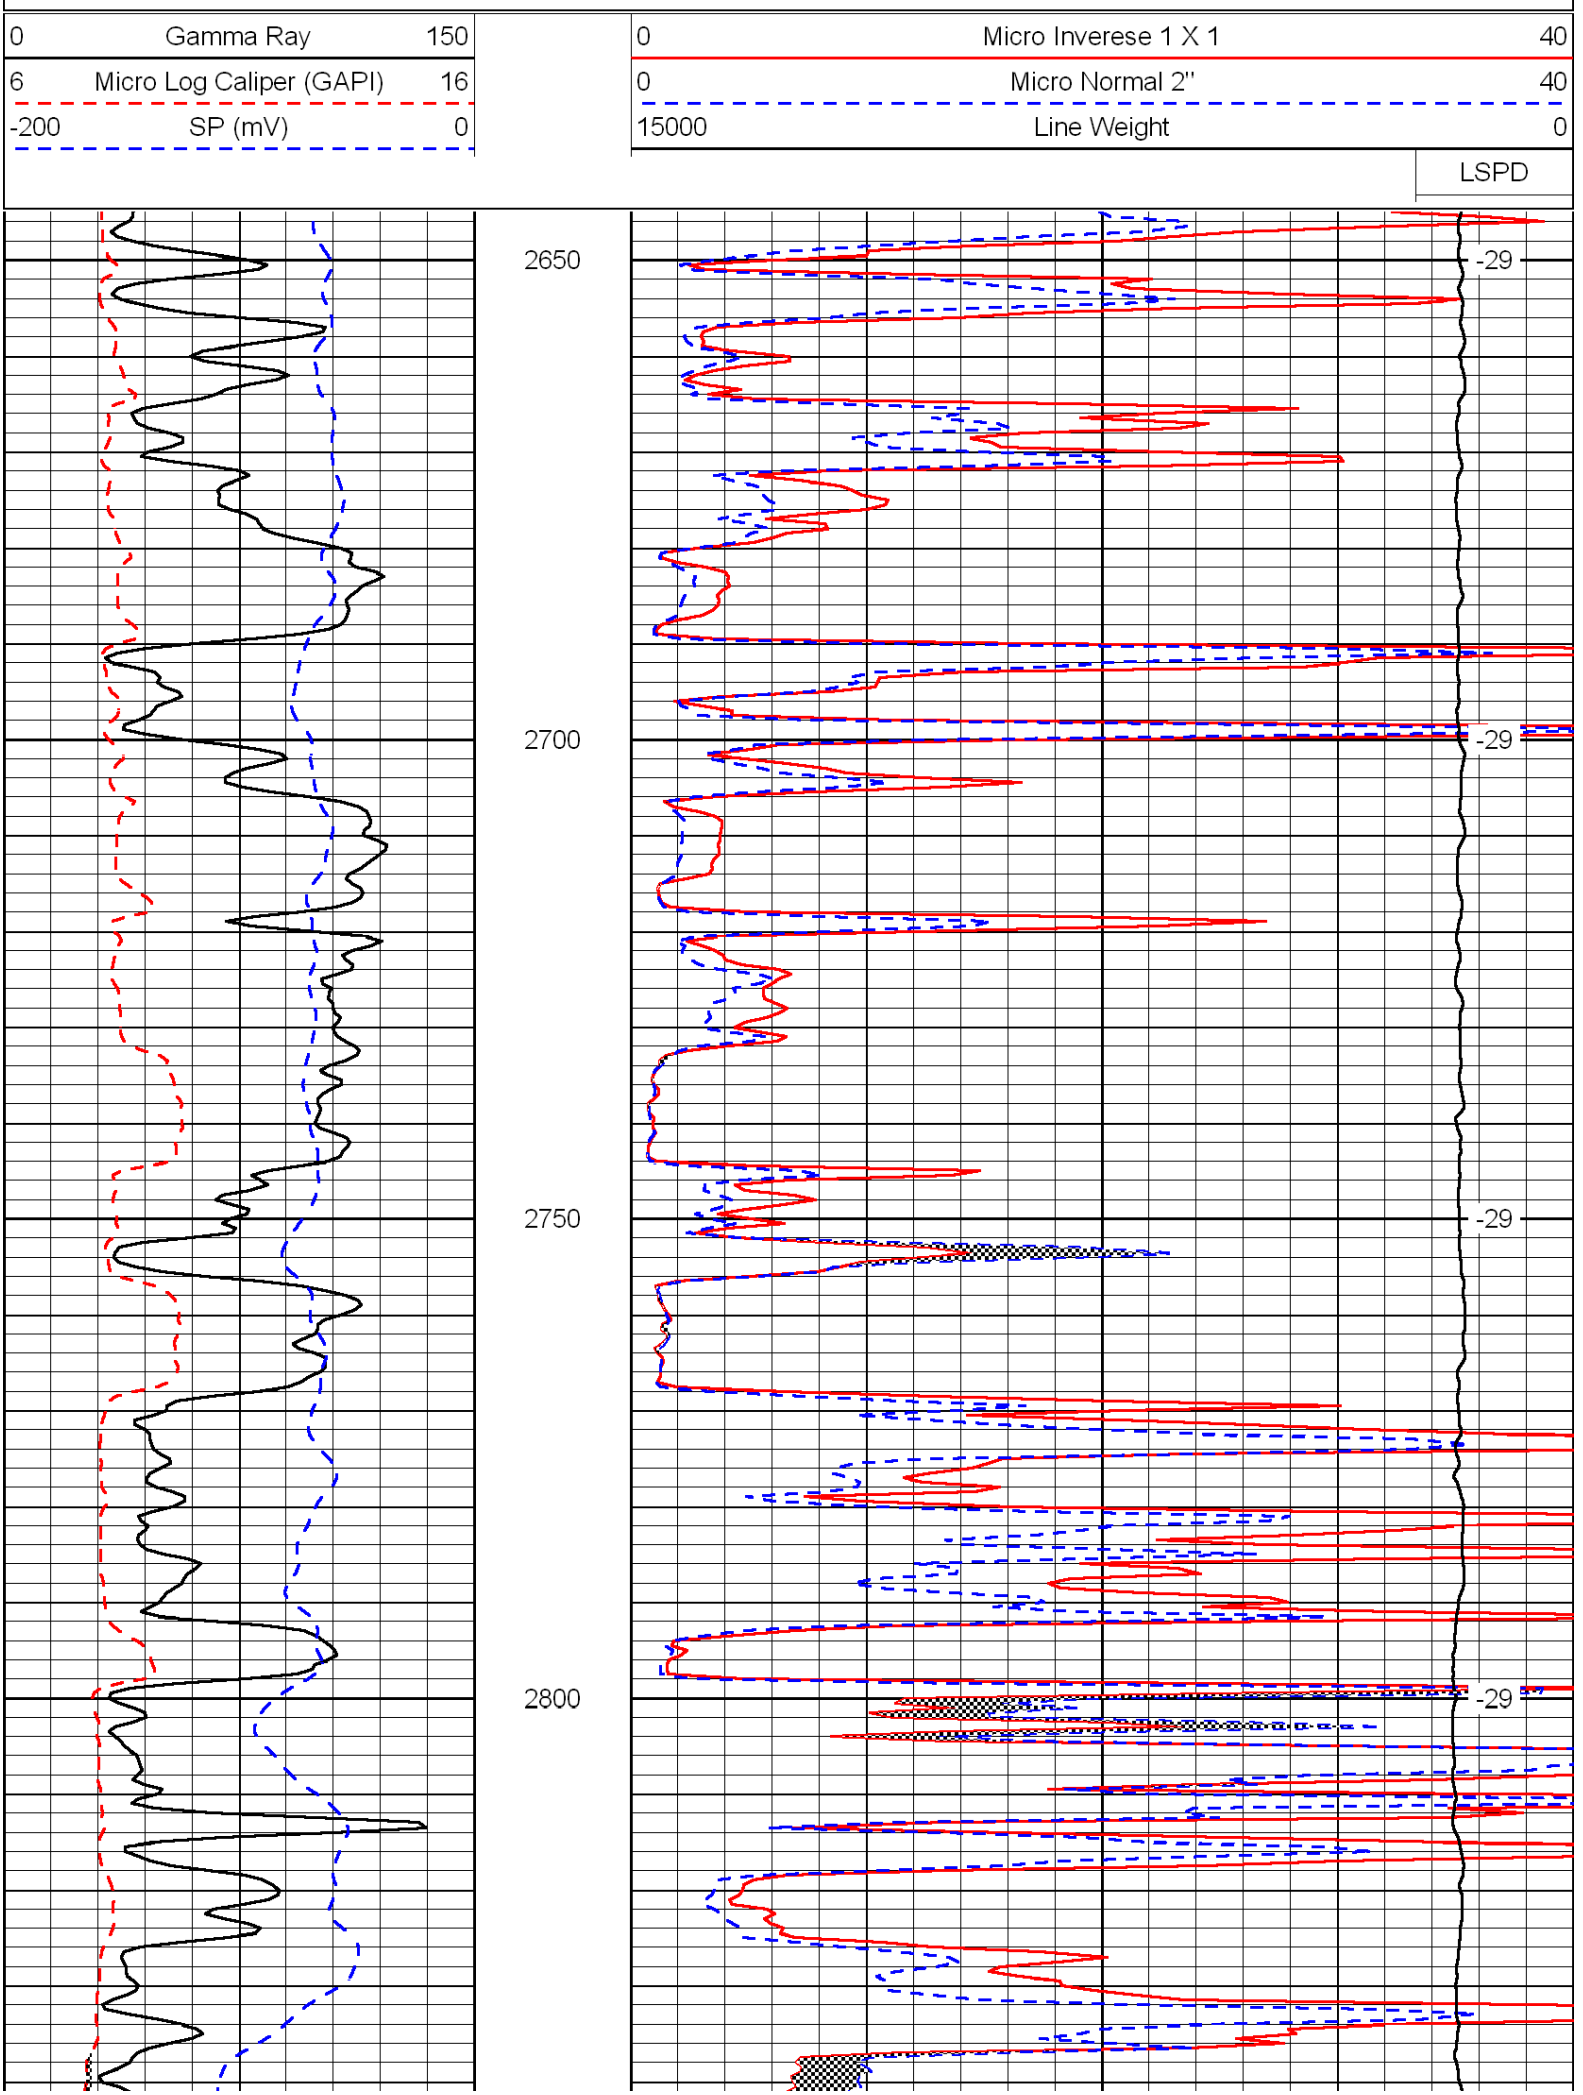
All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

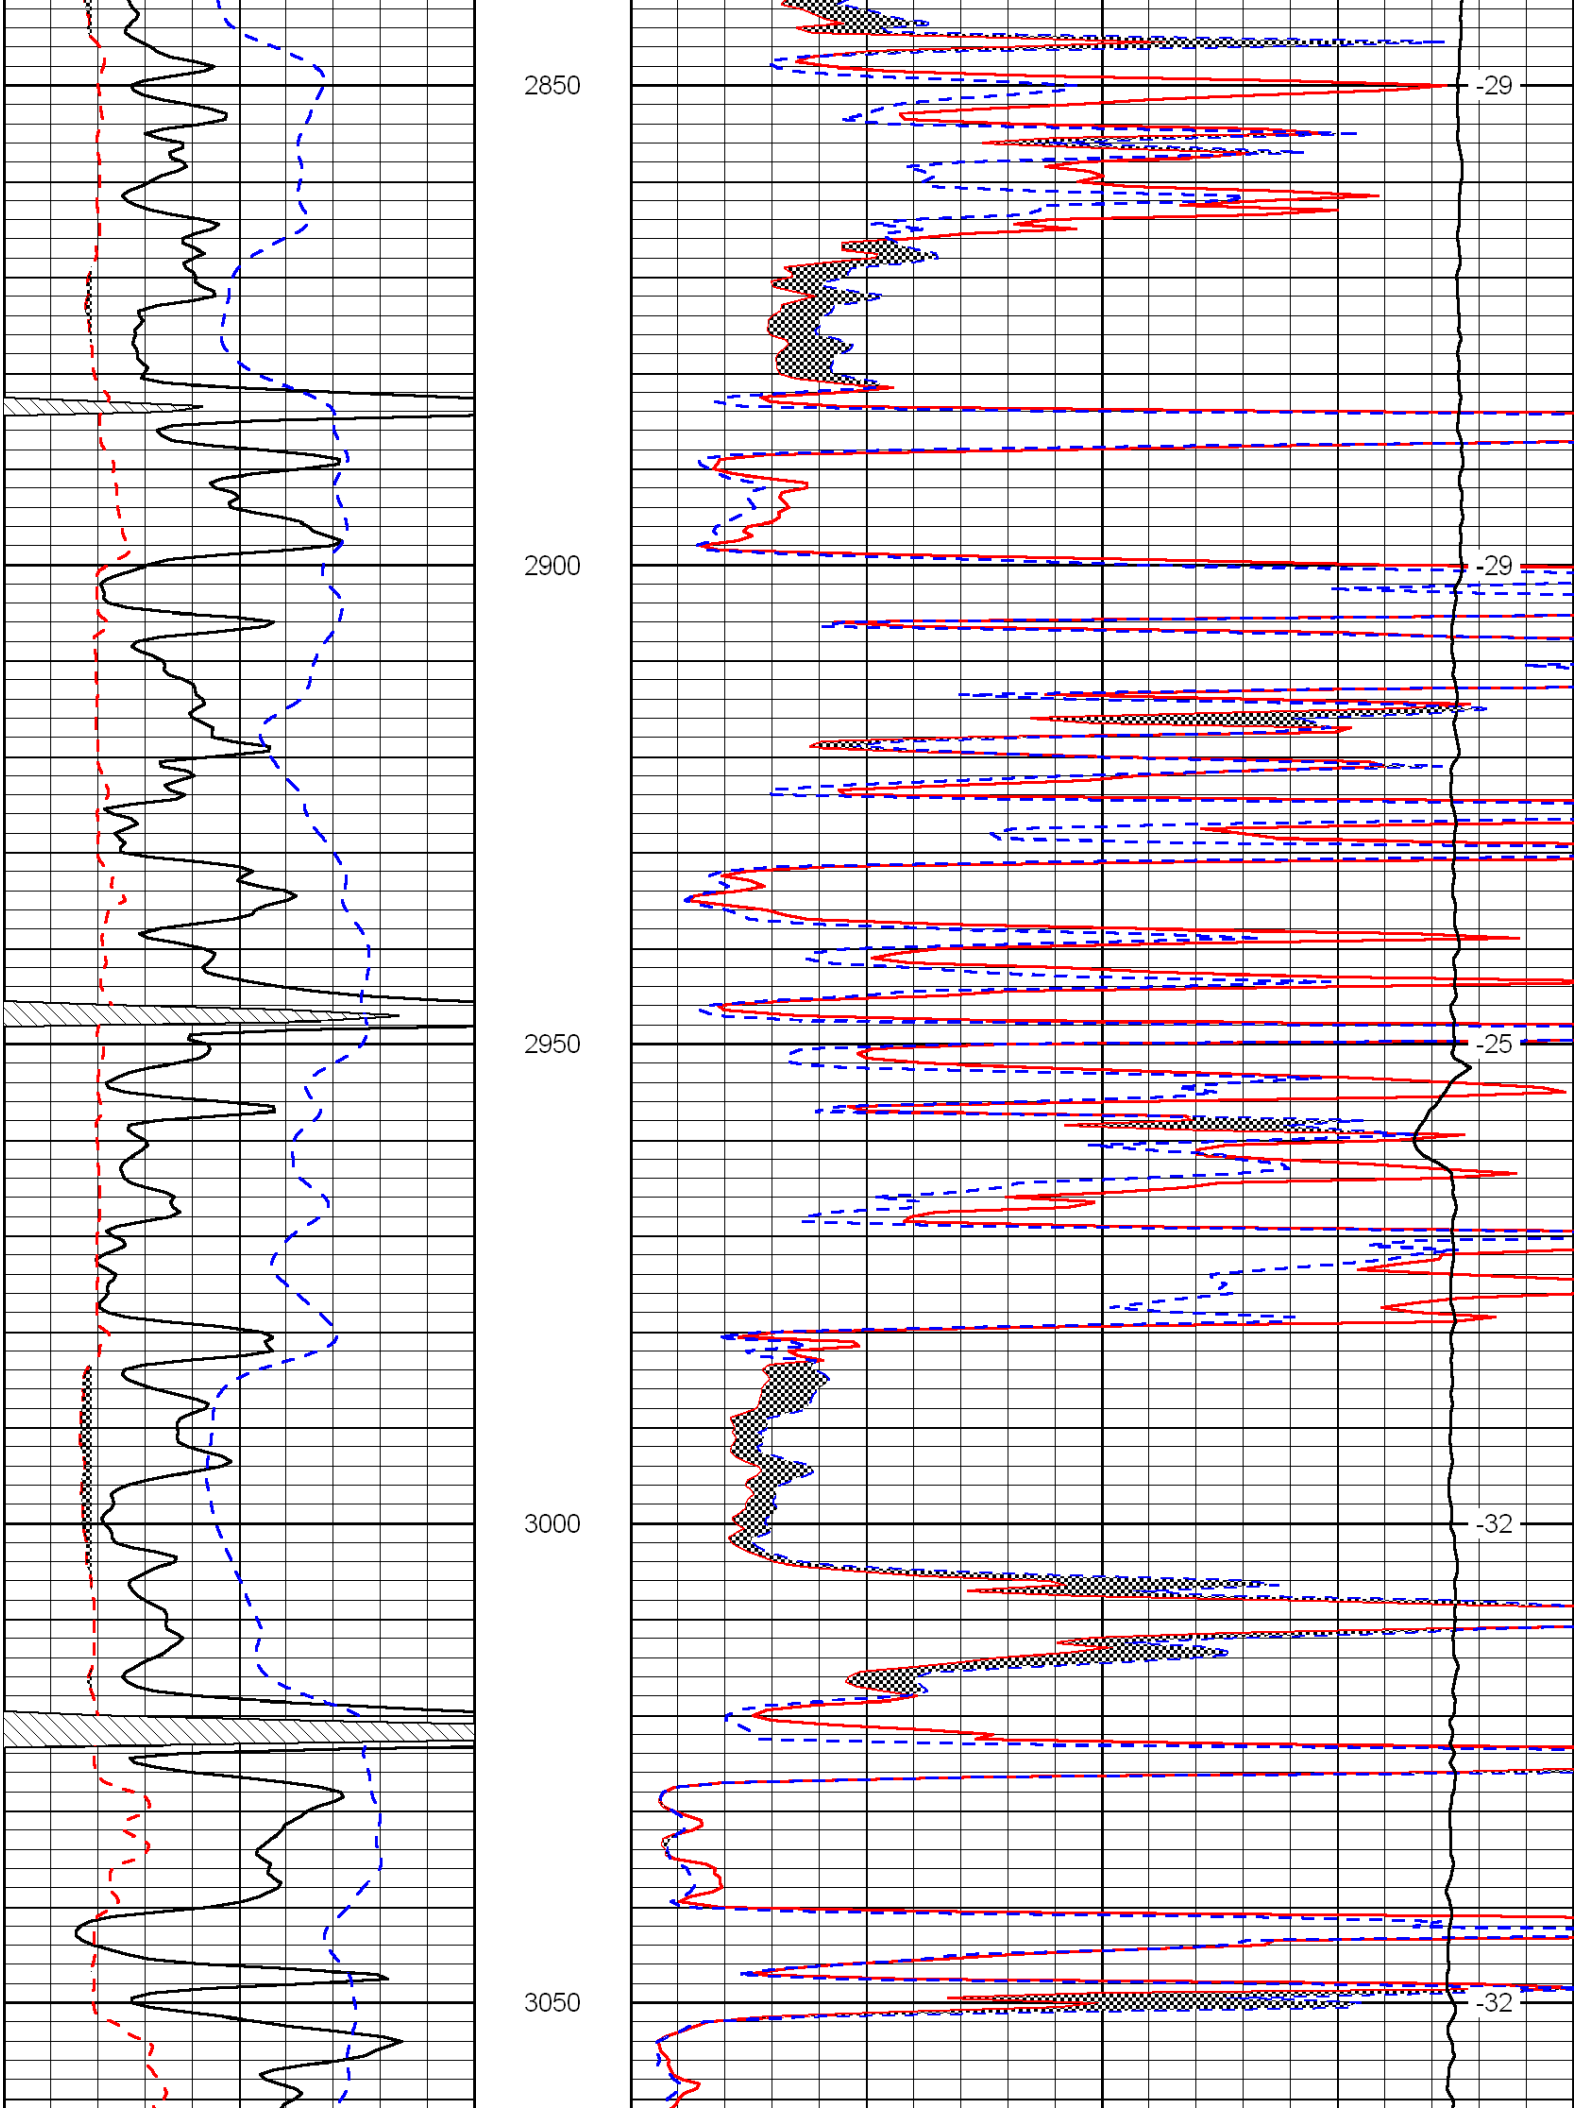
Comments

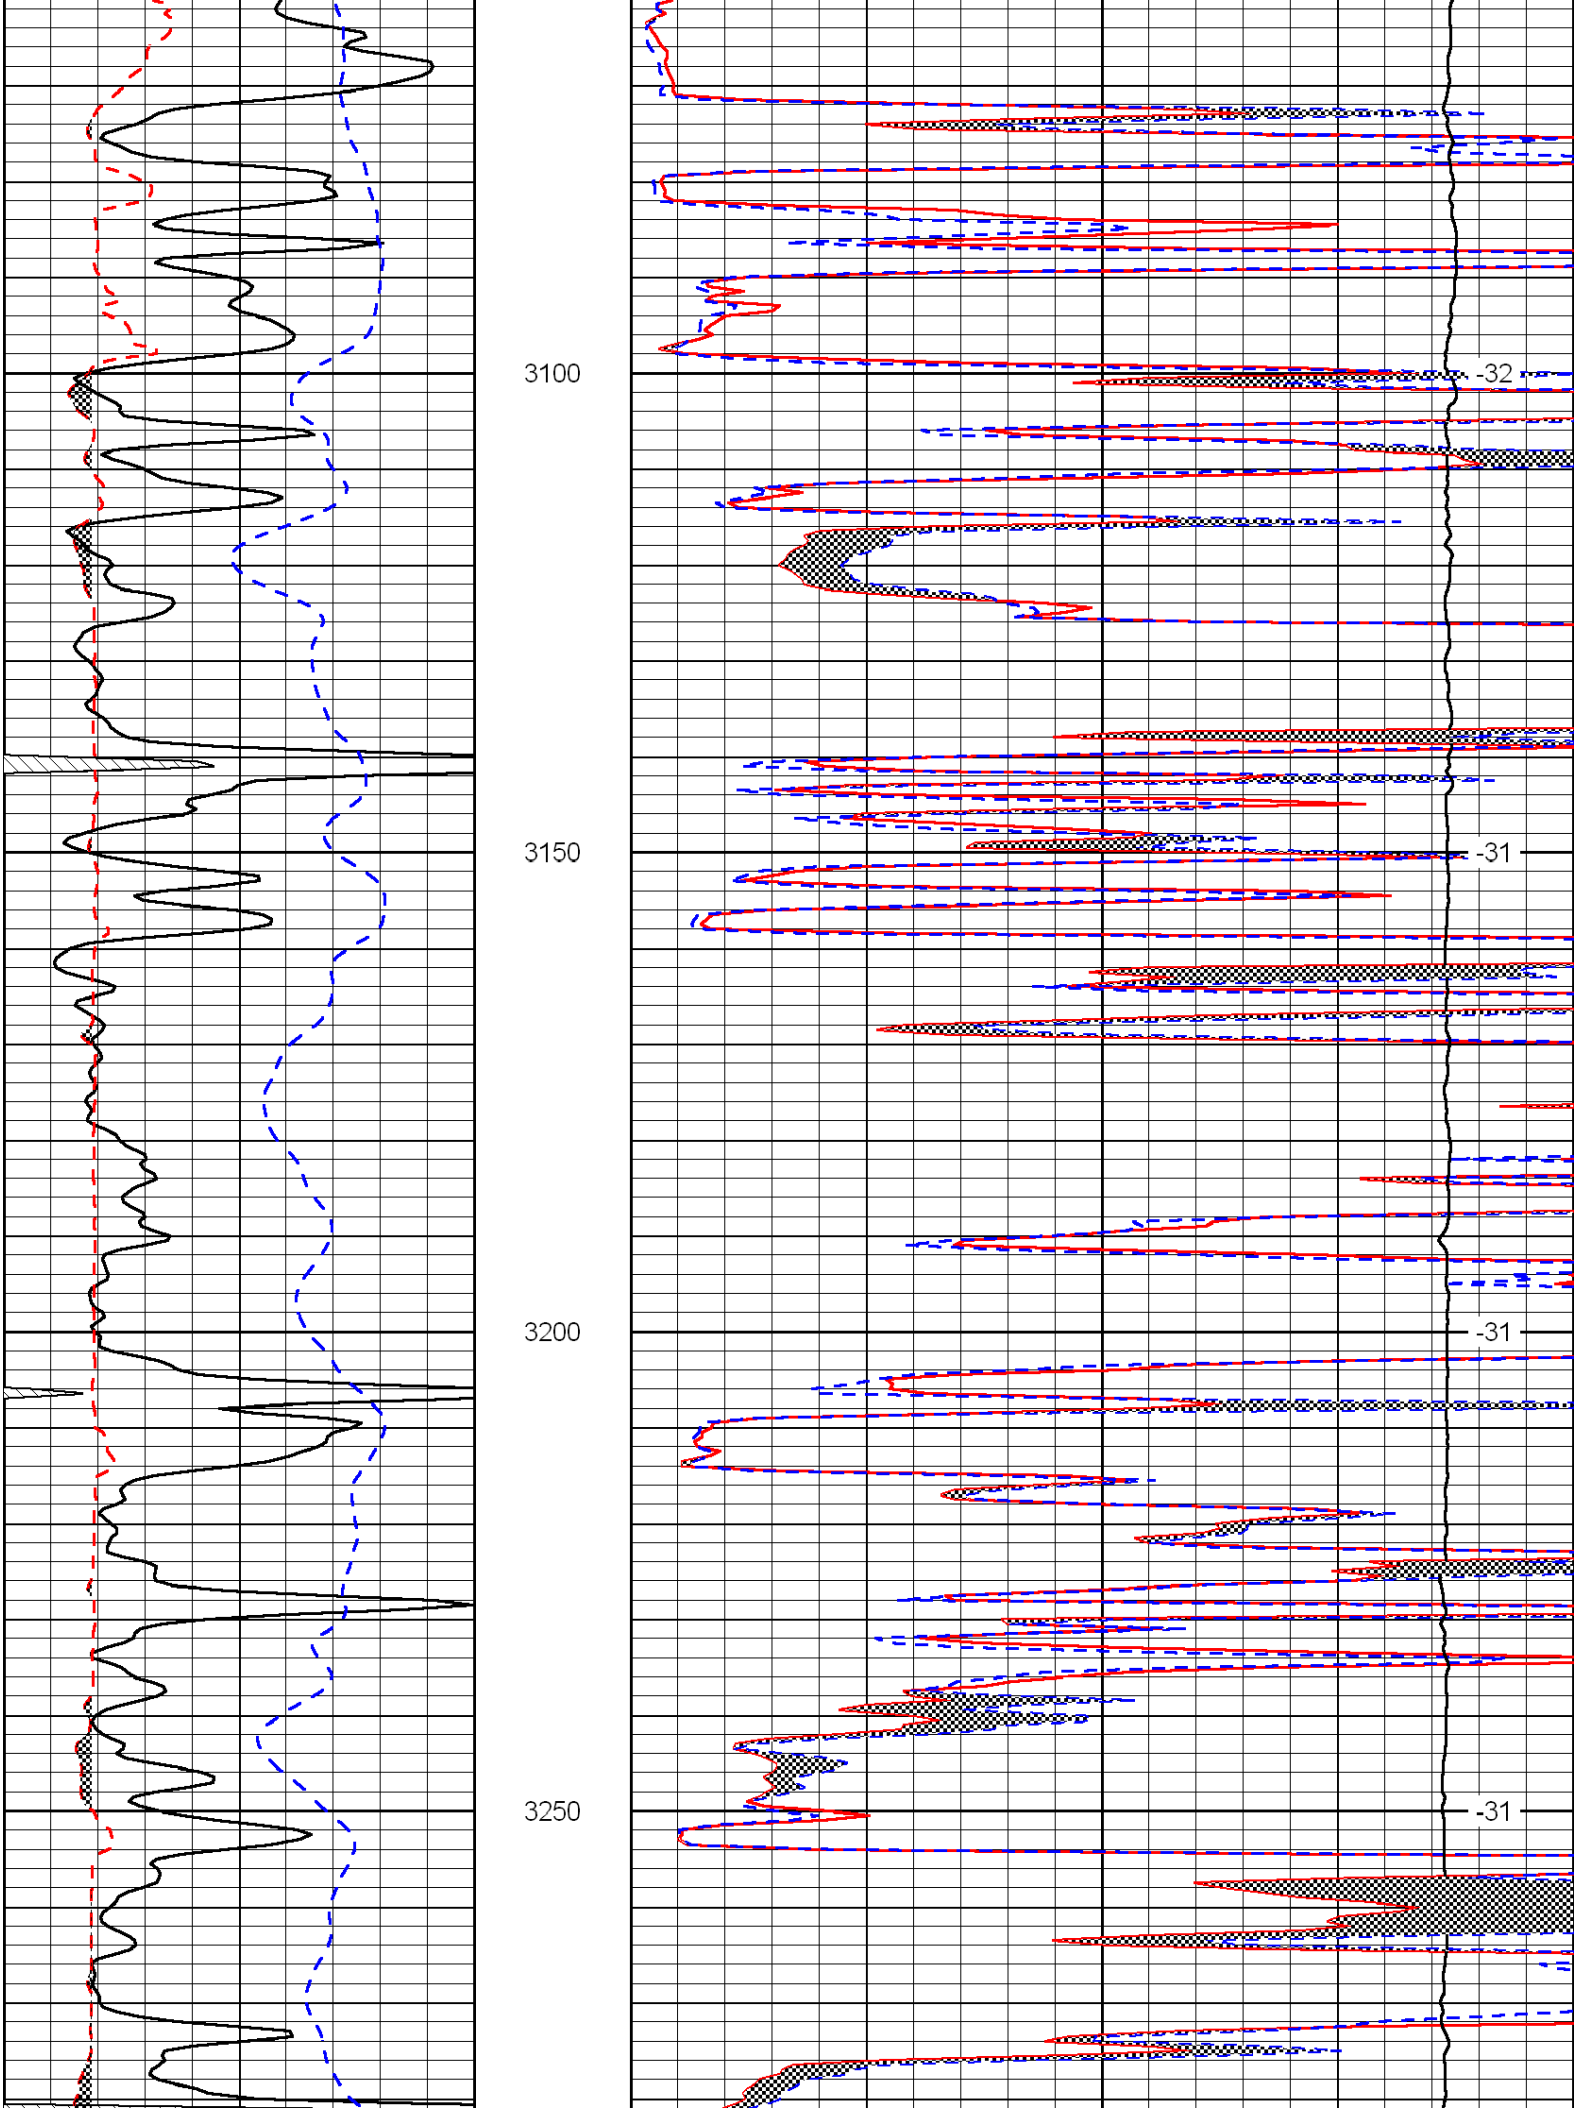
Thank you for using Log-Tech, Inc.
(785) 625-3858

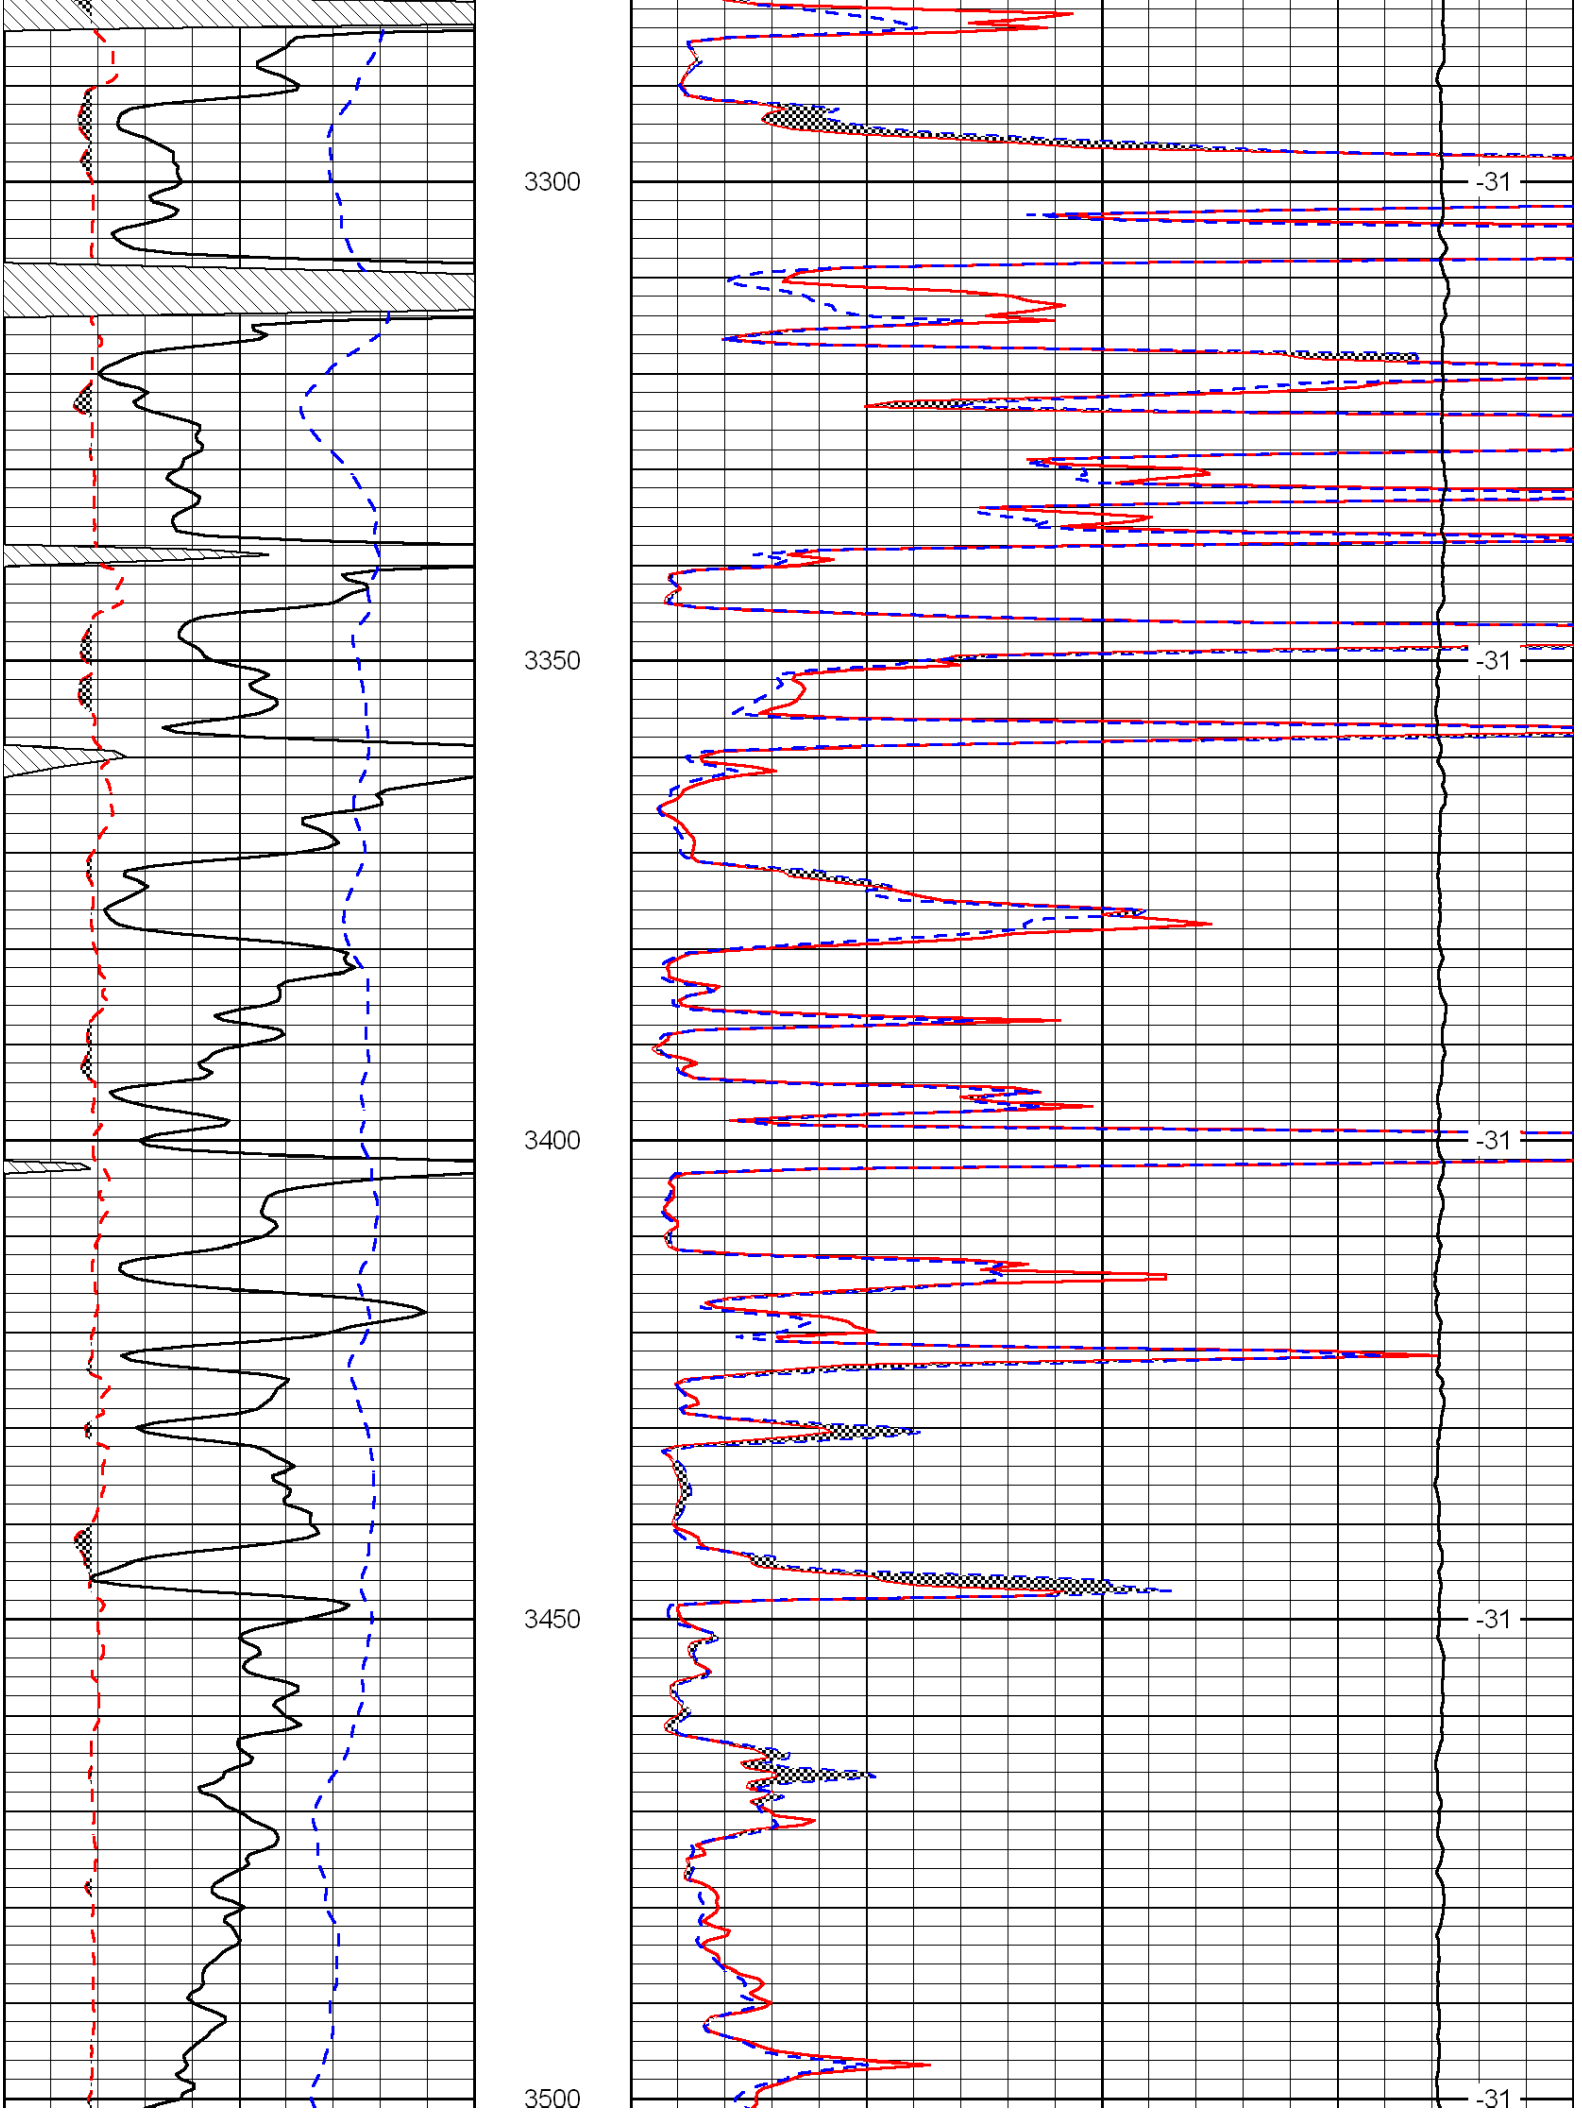
Russell, N on 281 to Hwy 18, 3 W to 182nd St
1 N, 1/2 W, 4 N, E into

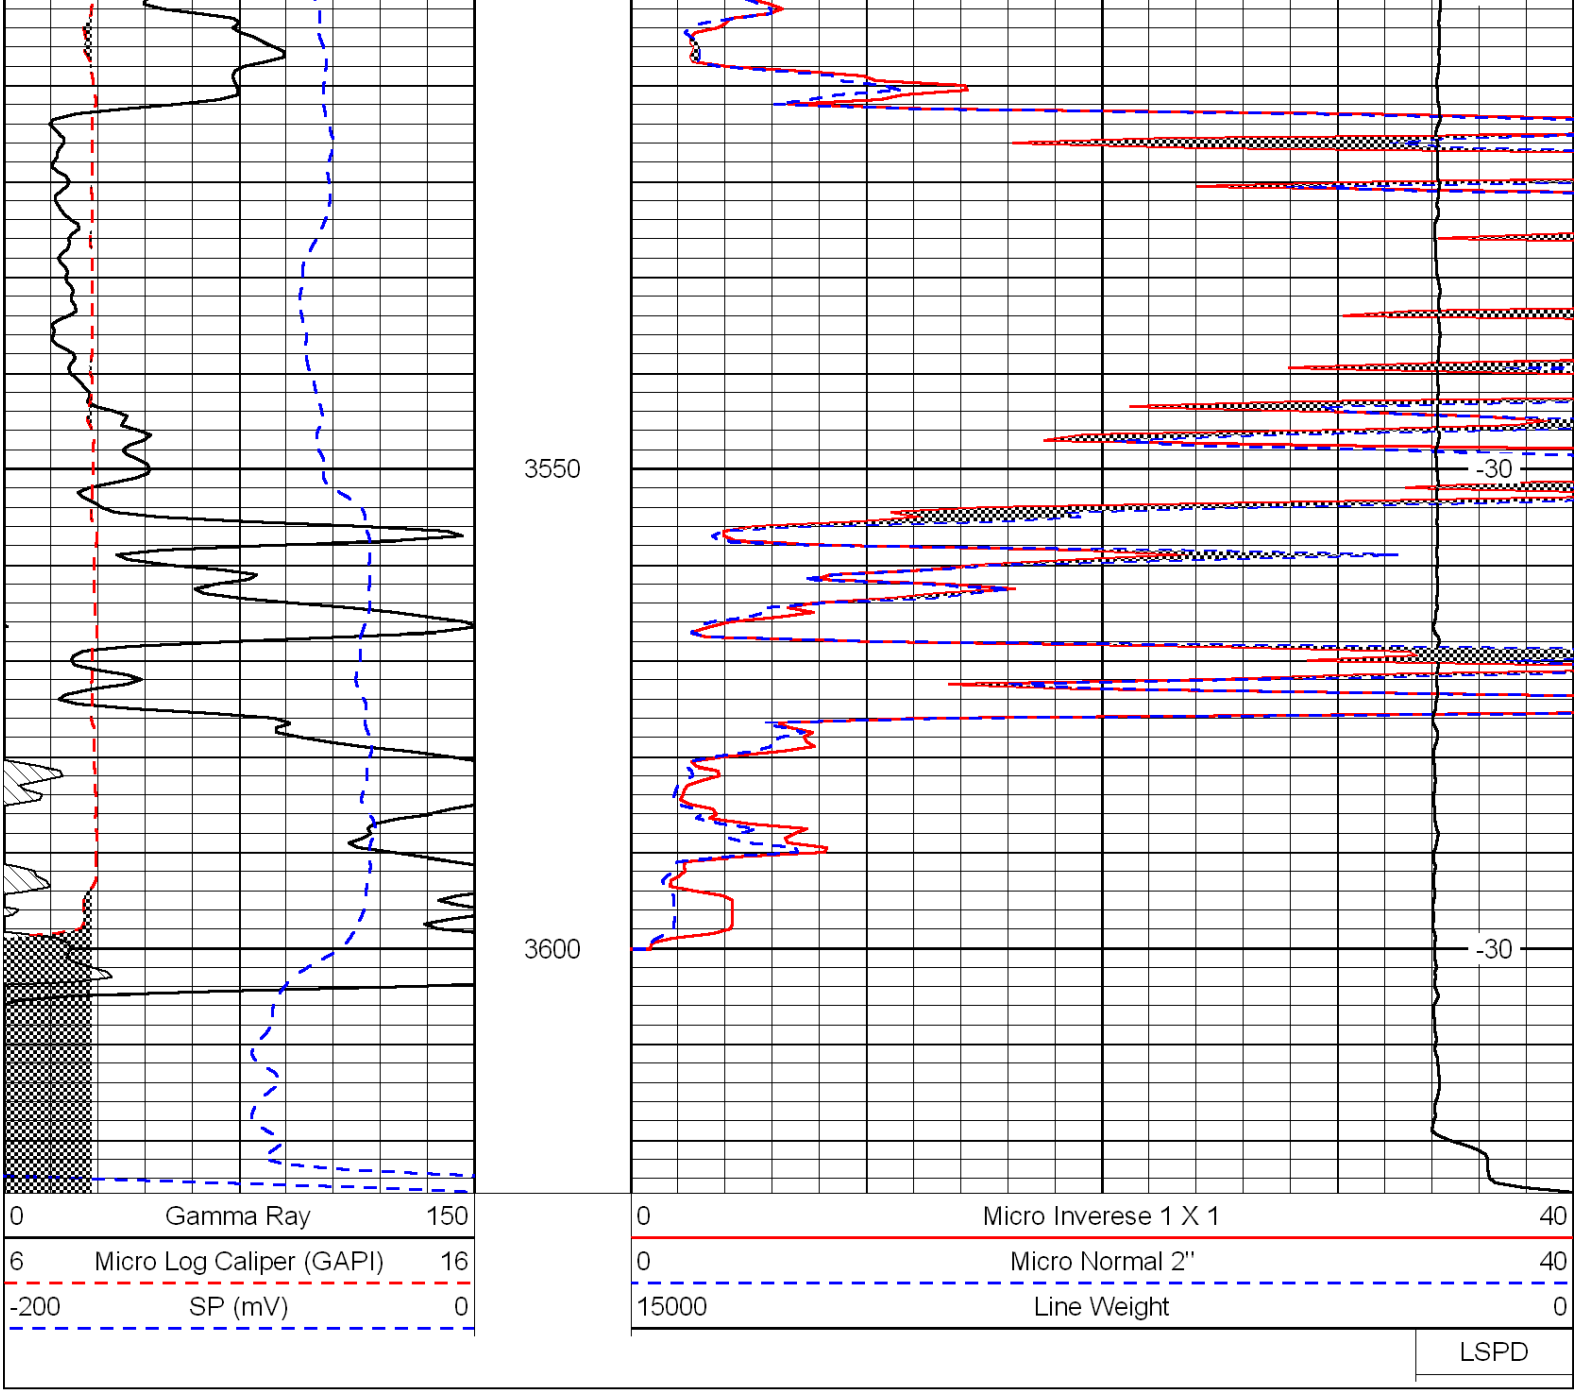
Database File: c:\warrior\data\murfin_chris #1-17\mfnhd.db
Dataset Pathname: dil/mfnstk
Presentation Format: micro
Dataset Creation: Mon Jan 03 02:02:35 2011
Charted by: Depth in Feet scaled 1:240


0 Gamma Ray 150
6 Micro Log Caliper (GAPI) 16
-200 SP (mV) 0
0 Micro Inverese 1 X 1 40
0 Micro Normal 2" 40
15000 Line Weight 0
LSPD
2650
2700
2750
2800
-29
-29
-29
-29


2850
2900
2950
3000
3050
-29
-29
-25
-32
-32


3100
3150
3200
3250
-32
-31
-31
-31


3300
3350
3400
3450
3500
-31
-31
-31
-31
-31


3550
3600
-30
-30
0
Gamma Ray
150
6
Micro Log Caliper (GAPI)
16
-200
SP (mV)
0
0
Micro Inverese 1 X 1
40
0
Micro Normal 2"
40
15000
Line Weight
0
LSPD