



Microresistivity Log

DIGITAL LOG (785) 625-3858

API No. 15-163-23,694-00-00	Company McCoy Petroleum Corporation		
	Well KST A No. 1-3		
	Field Riseley		
	County Rocks	State	Kansas
	Location 165' E SE SW NW 2310' FNL & 1155' FWL	Other Services CNL/CDL DIL	
	Sec: 3	Twp: 7 S	Rge: 19 W
Permanent Datum	Ground Level	Elevation 2002	
Log Measured From	Kelly Bushing	5 Ft. Above Perm. Datum	
Drilling Measured From	Kelly Bushing	K.B. 2007 D.F. 2002 G.L. 2002	
Date	7/16/2011		
Run Number	Two		
Depth Driller	3508		
Depth Logger	3505		
Bottom Logged Interval	3504		
Top Log Interval	2800		
Casing Driller	8.625 @ 219		
Casing Logger	218		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity, ppm CL	1,900		
Density / Viscosity	9.3 53		
pH / Fluid Loss	9.0 8.0		
Source of Sample	Flowline		
Rm @ Meas. Temp	.95 @ 78		
Rmf @ Meas. Temp	.71 @ 78		
Rmc @ Meas. Temp	1.28 @ 78		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.67 @ 113		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	113		
Equipment Number	4		
Location	Hays		
Recorded By	K. Bange		
Witnessed By	Larry Nicholson		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858


Stockton, W on Hwy 24 to 11 rd, 3 N
1 W, 3/4 N, E into


Database File: c:\warrior\data\mccoy_kst a no. 1-3\mccoy071611hd.db
Dataset Pathname: dil/mccystack
Presentation Format: micro
Dataset Creation: Sat Jul 16 08:09:17 2011
Charted by: Depth in Feet scaled 1:240

0	Gamma Ray	150
6	Micro Log Caliper (GAPI)	16
-200	SP (mV)	0

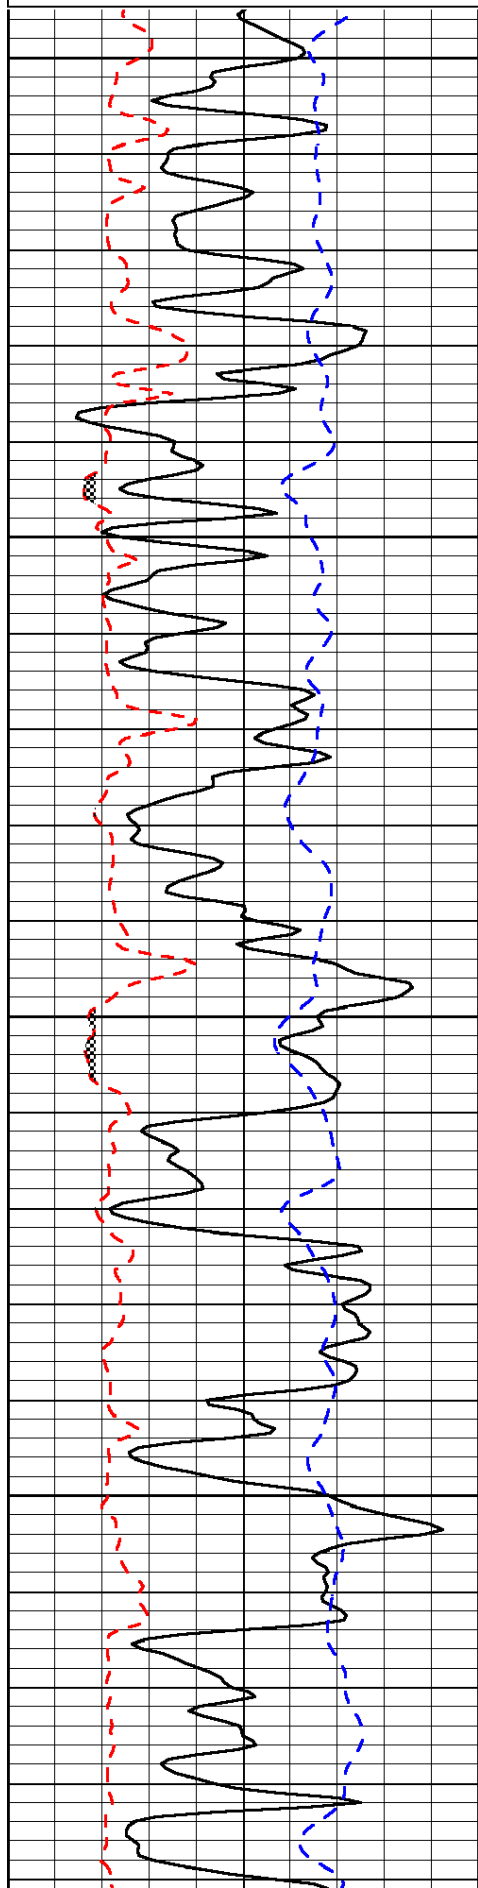

0	Micro Inverse 1 X 1	40
0	Micro Normal 2"	40
15000	Line Weight	0

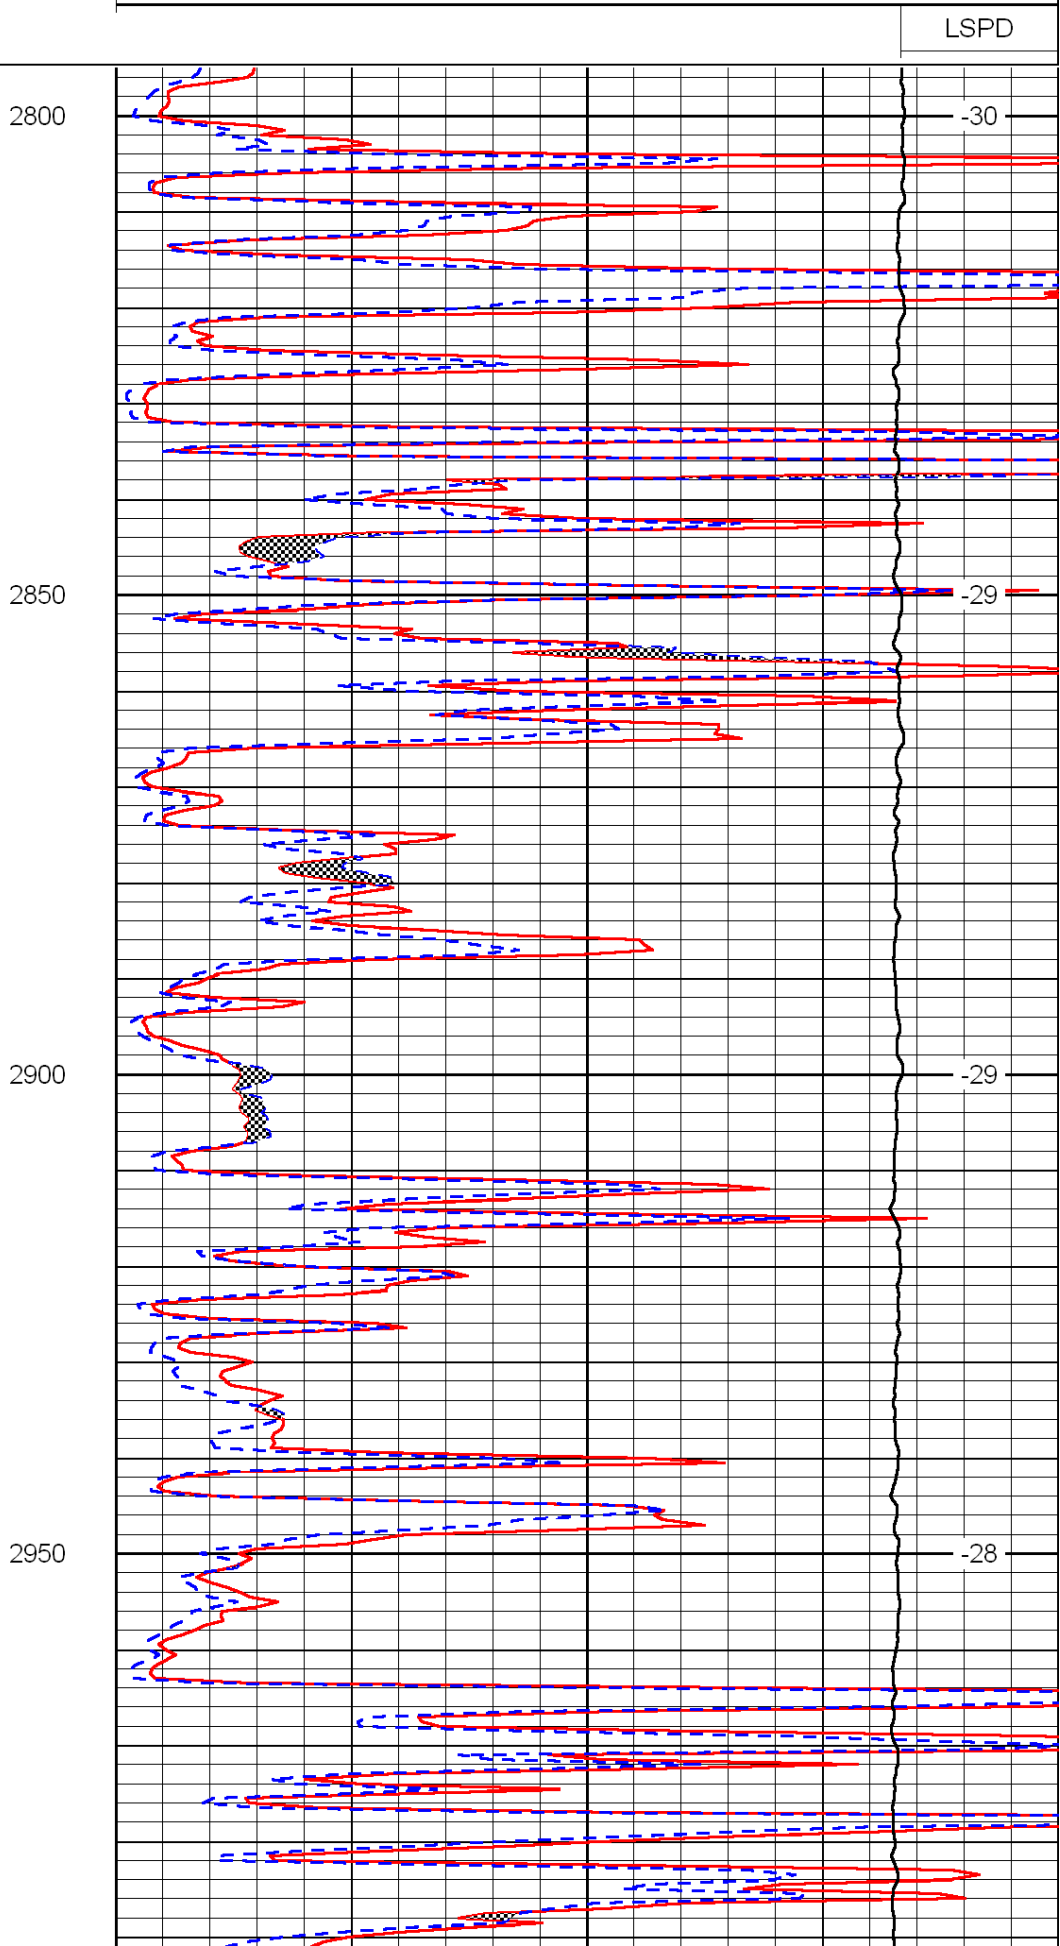

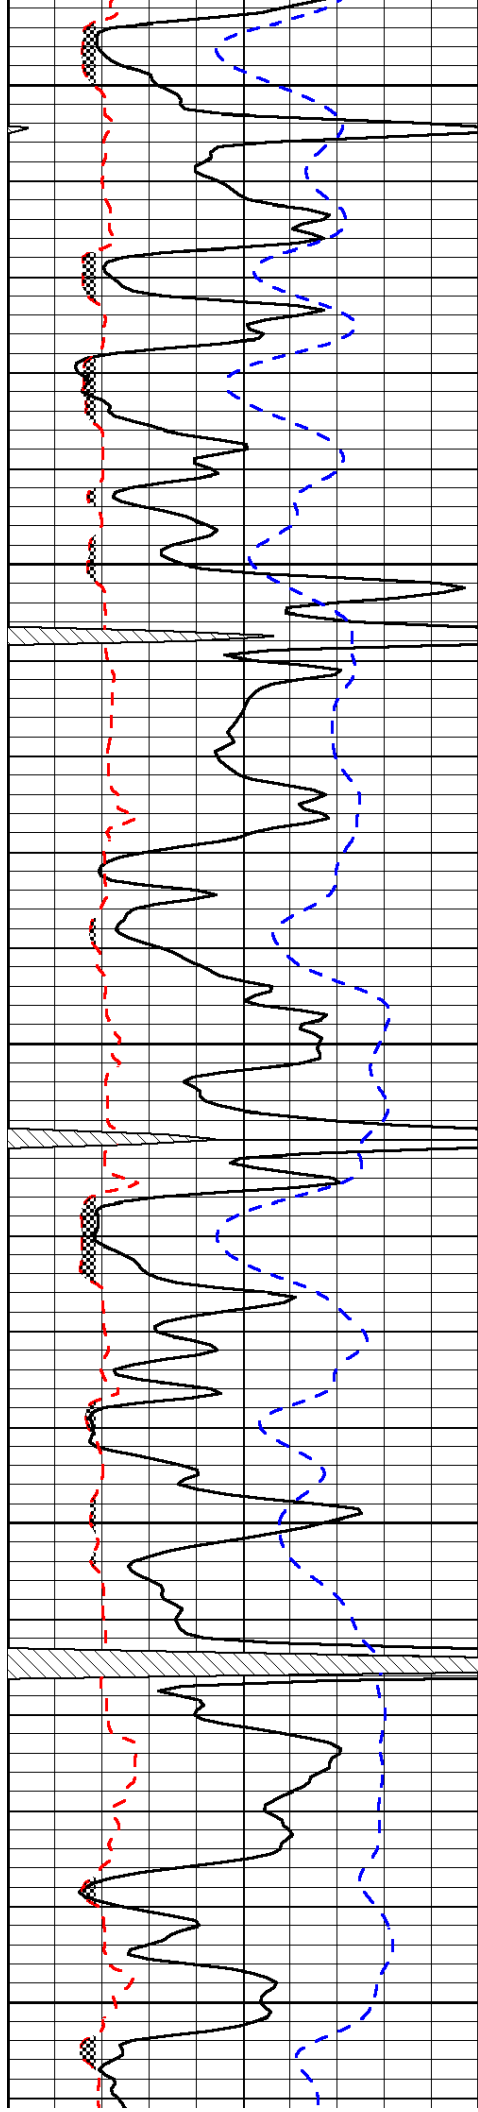


3000

3050

3100

3150

3200

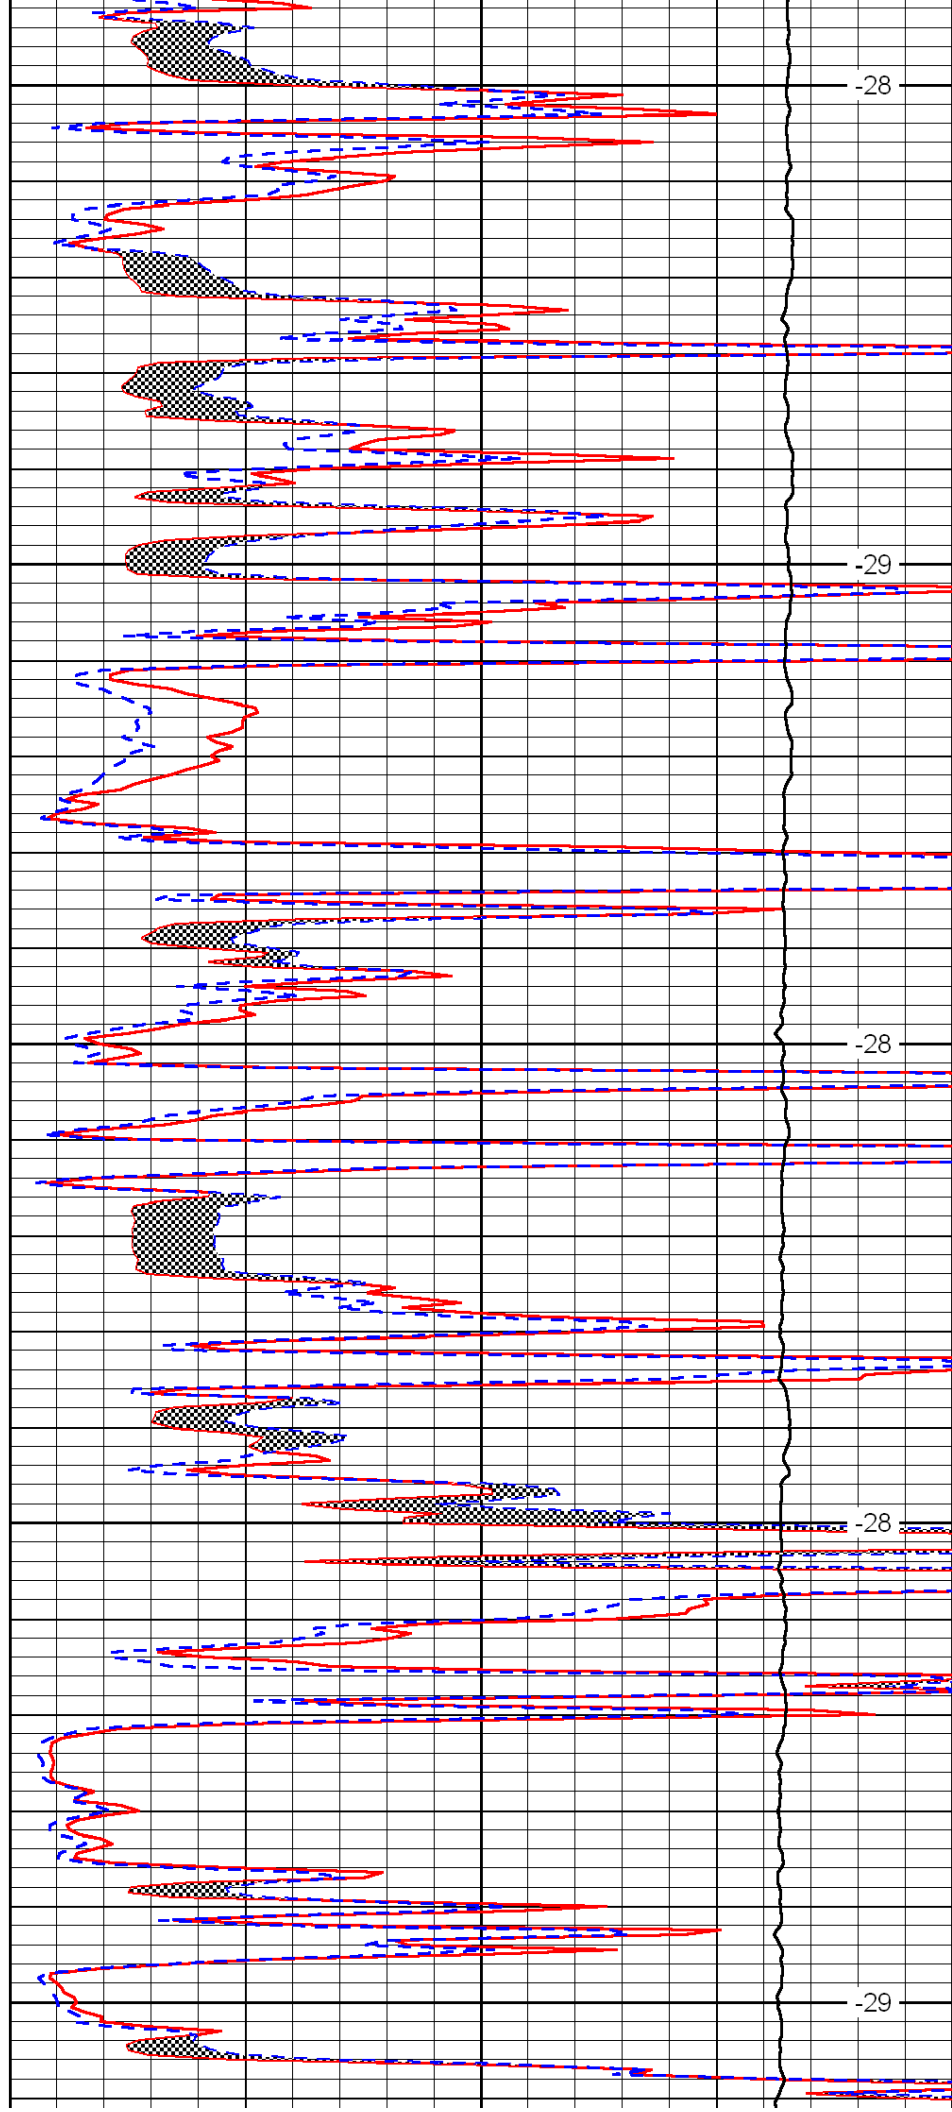


-28

-29

-28

-28

-29

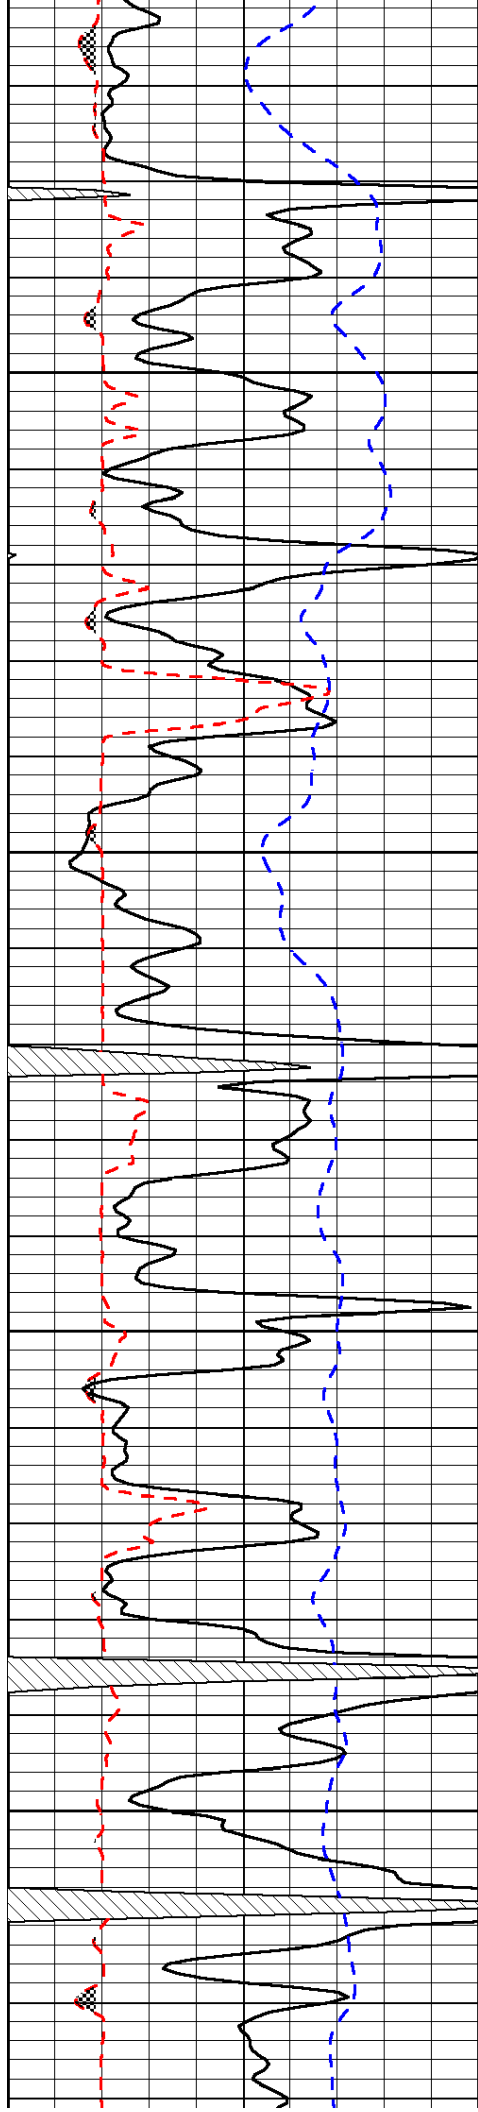



3250

3300

3350


3400

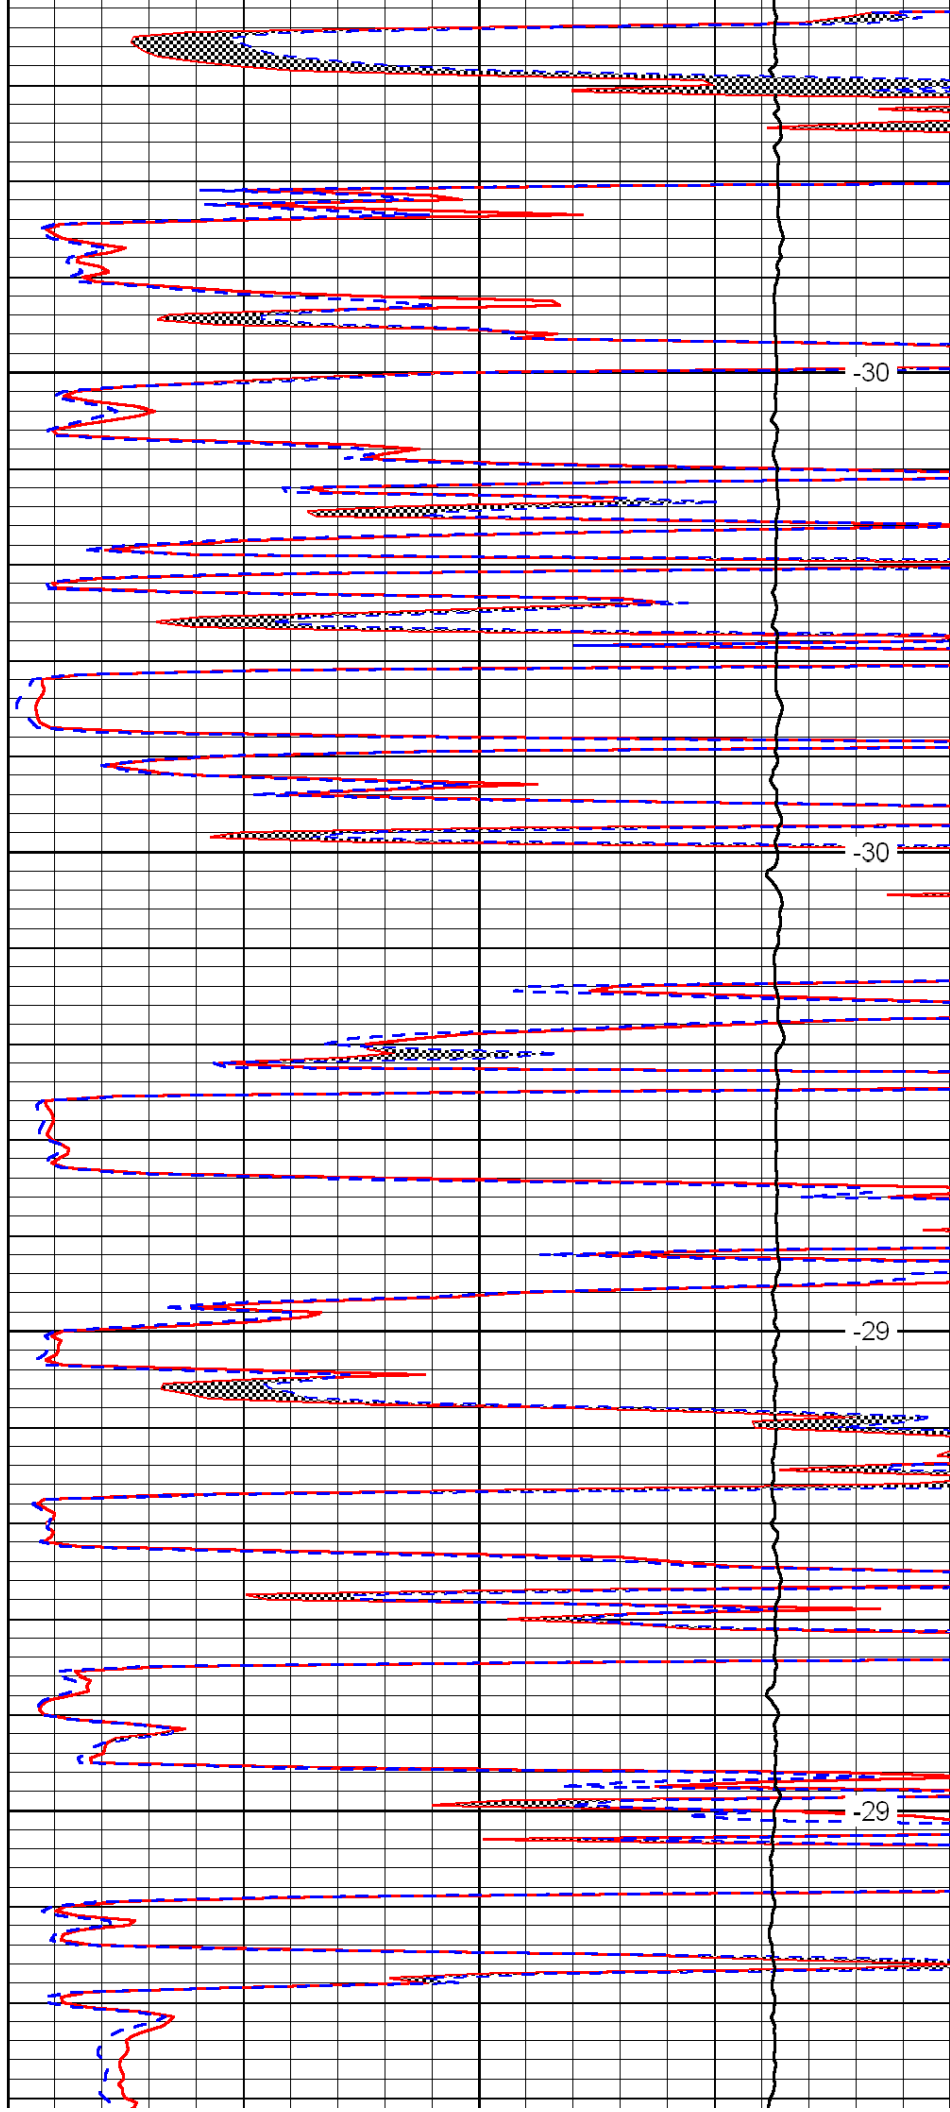

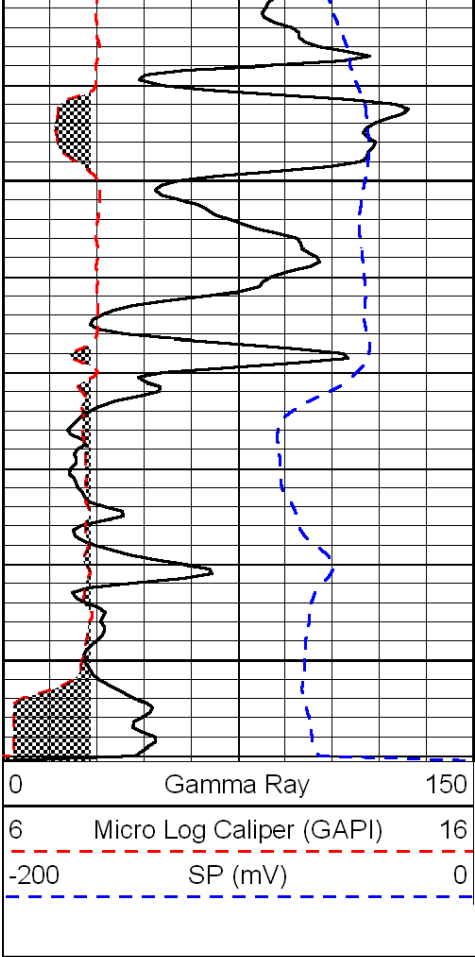

3450

3500

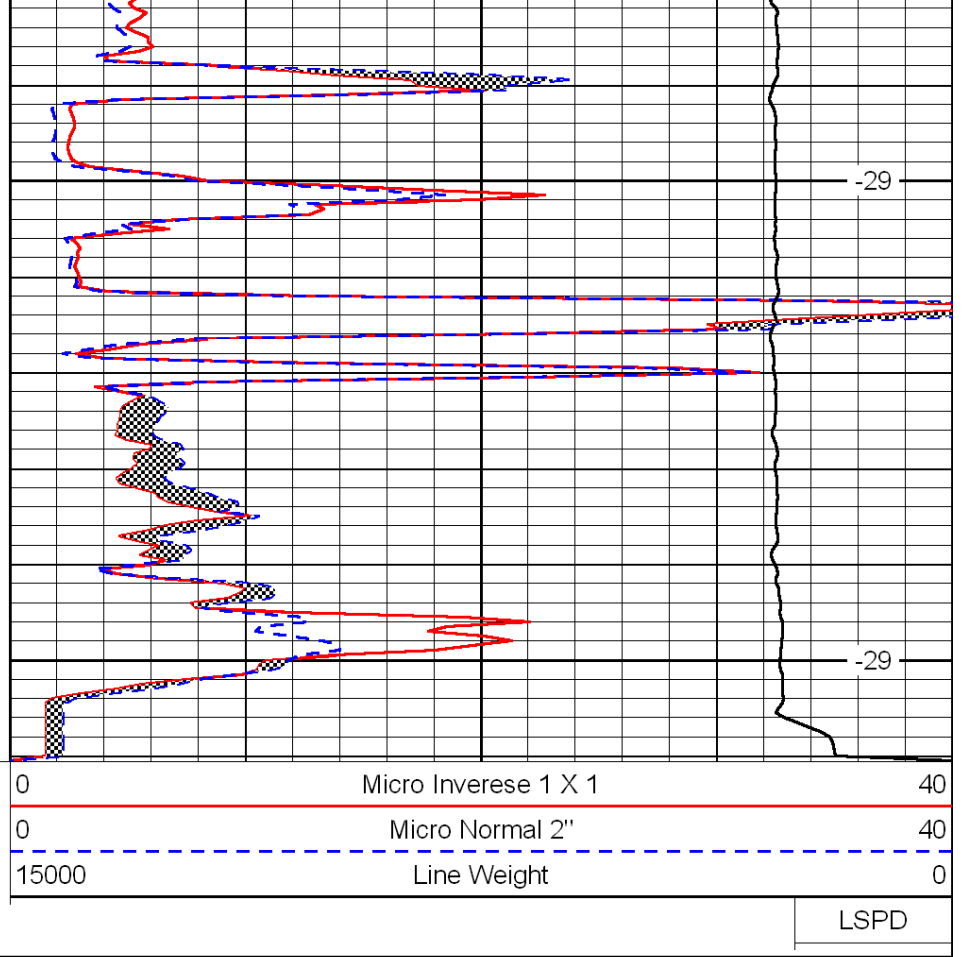

-29

-29

LSPD