



SUPERIOR
Hays,
Kansas

MICRO LOG

Company LOTUS OPERATING COMPANY, LLC.	
Well #5 KOPPITZ	
Field STRANATHAN	
County BARBER	
State KANSAS	
Location: API # : 15-007-23782-0000	
670' FNL & 2290' FEL	
SEC 2 TWP 35S RGE 12W	
Permanent Datum GROUND LEVEL	Elevation 1391
Log Measured From KELLY BUSHING 12' A.G.L.	
Drilling Measured From KELLY BUSHING	
Other Services CDL/CNL/PE DIL/SONIC	
Elevation K.B. 1403 D.F. 1401 G.L. 1391	
Date 10/24/11	
Run Number TWO	
Depth Driller 5500	
Depth Logger 5498	
Bottom Logged Interval 5475	
Top Log Interval 3700	
Casing Driller 10 3/4"@263'	
Casing Logger 263	
Bit Size 7 7/8"	
Type Fluid in Hole CHEMICAL MUD	CHLORIDES 4,500 PPM
Density / Viscosity 9.2/54	
pH / Fluid Loss 9.6/10.5	
Source of Sample FLOWLINE	
Rm @ Meas. Temp 2.00@90F	
Rmt @ Meas. Temp 1.50@90F	
Rmc @ Meas. Temp 2.40@90F	
Source of Rmt / Rmc MEASUREMENT	
Rm @ BHT 1.38@130F	
Time Circulation Stopped 5 HOURS	
Time Logger on Bottom 4:30 P.M.	
Maximum Recorded Temperature 130F	
Equipment Number 4010	
Location HAYS, KANSAS	
Recorded By JEFF LUEBBERS	
Witnessed By TIM HELLMAN	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS

MEDICINE LODGE, KS. (JUNCTION OF HWY 160 & 281) 16 1/2S. ON HWY 281 TO "DRIFTWOOD RD.",
1W., JOG N. TO "DRIFTWOOD RD.", 1/2 W., S. INTO





SUPERIOR
Hays,
Kansas



MAIN SECTION



Database File: 007471pe.db
 Dataset Pathname: pass7.2
 Presentation Format: micro
 Dataset Creation: Mon Oct 24 20:34:51 2011 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

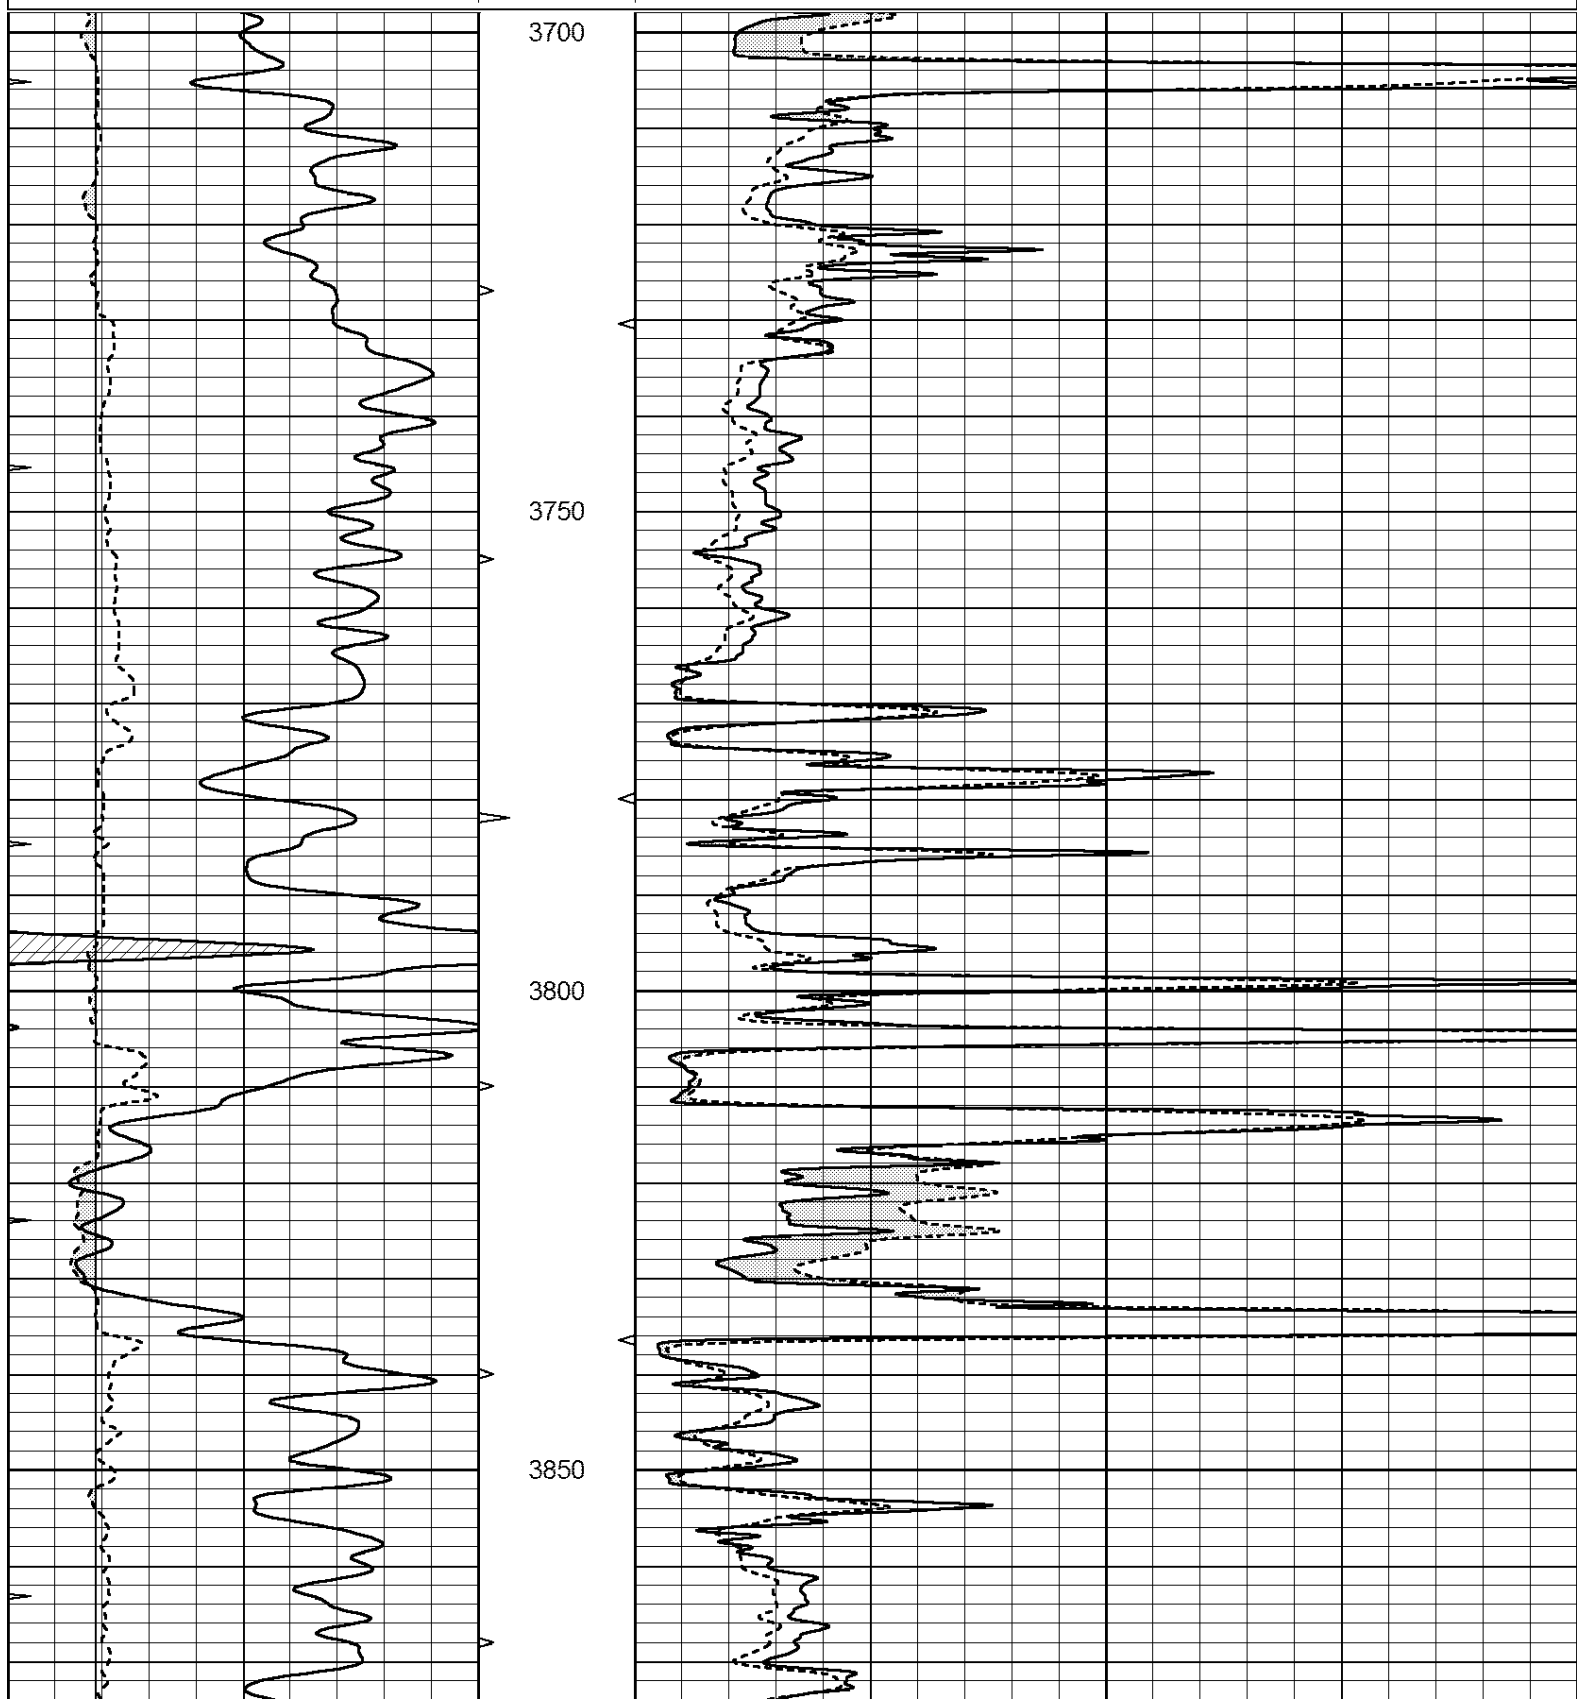

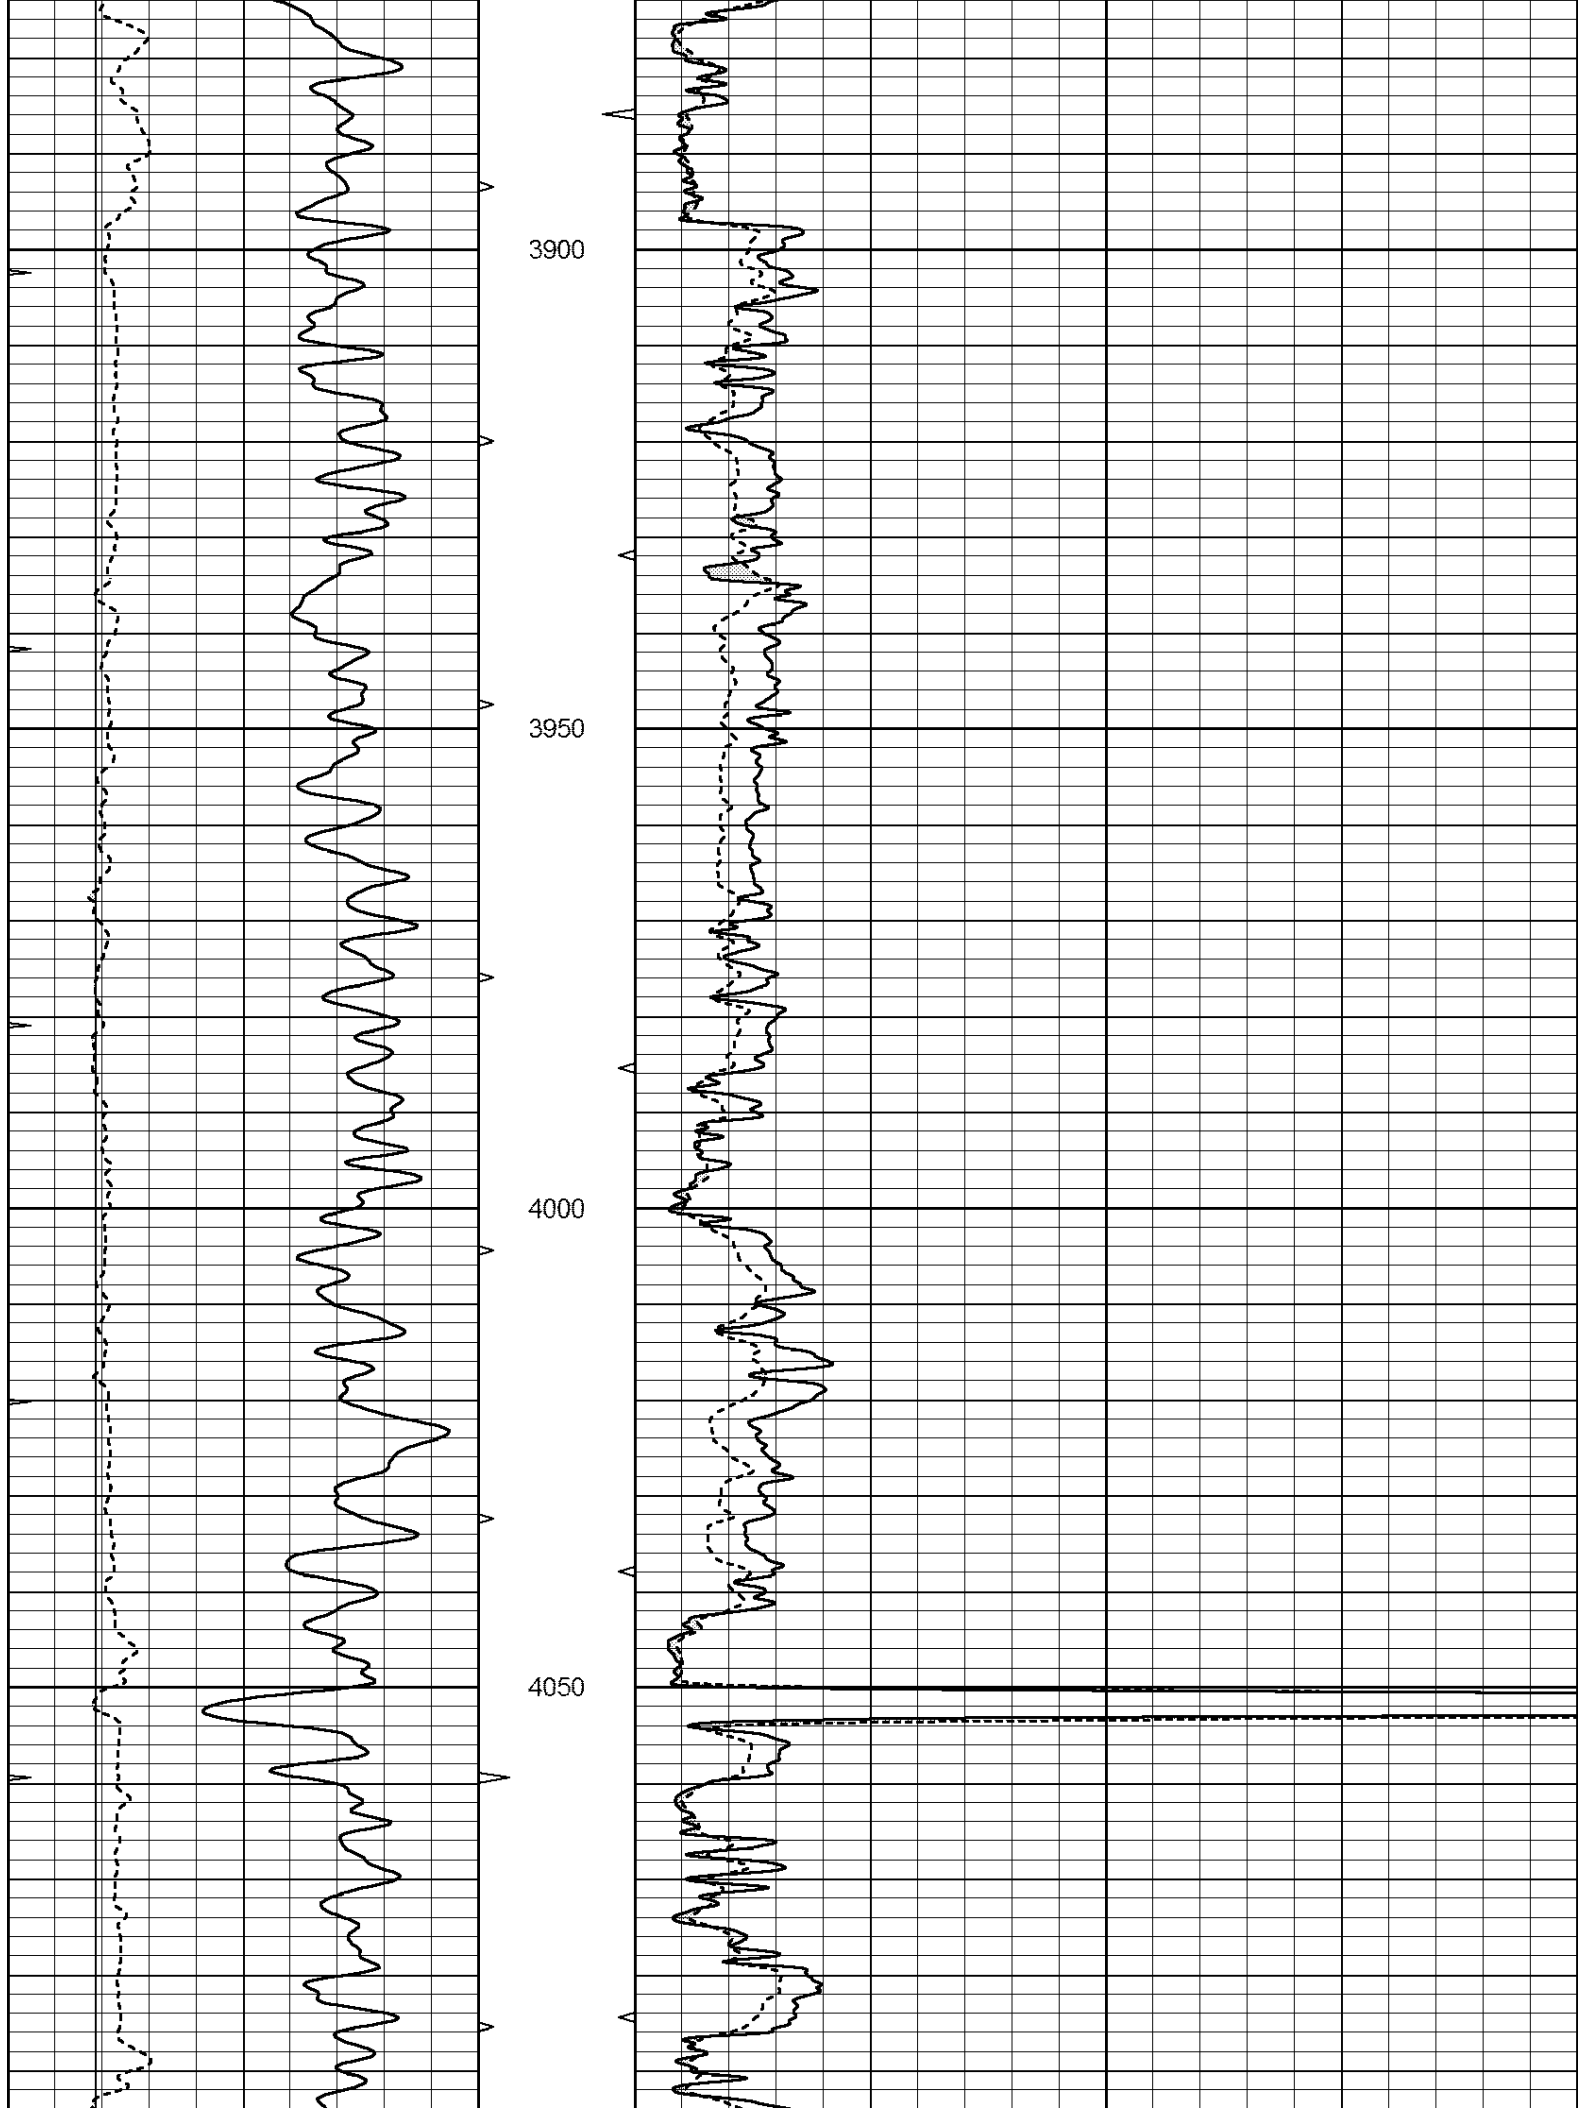

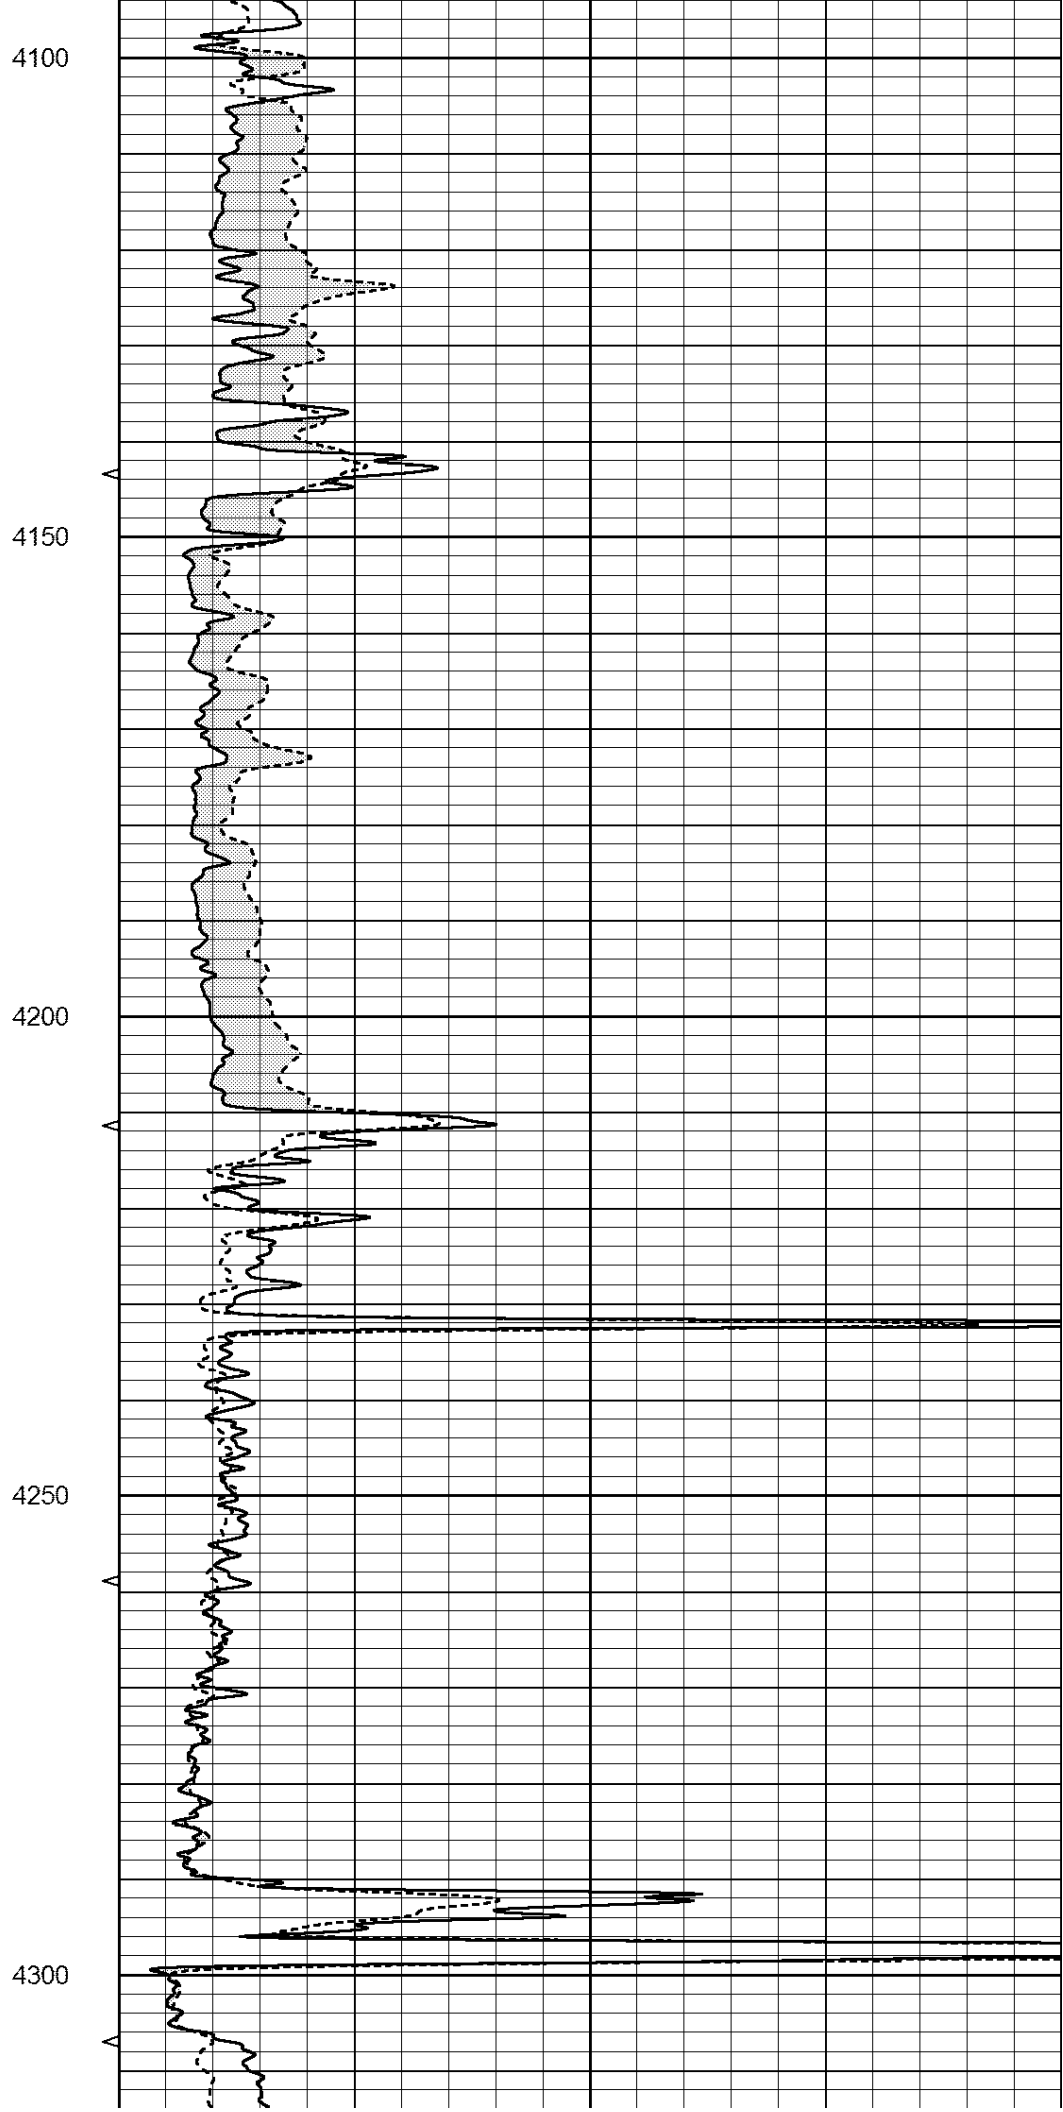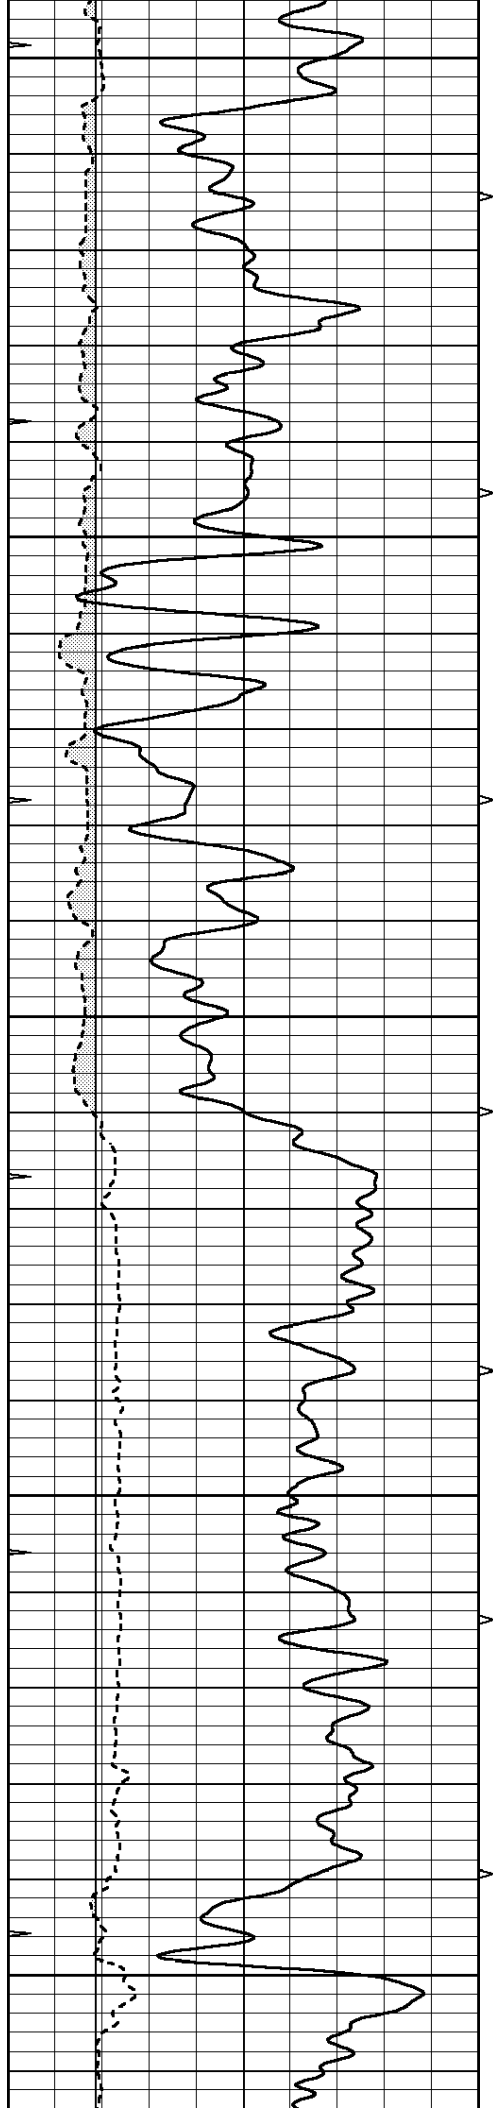

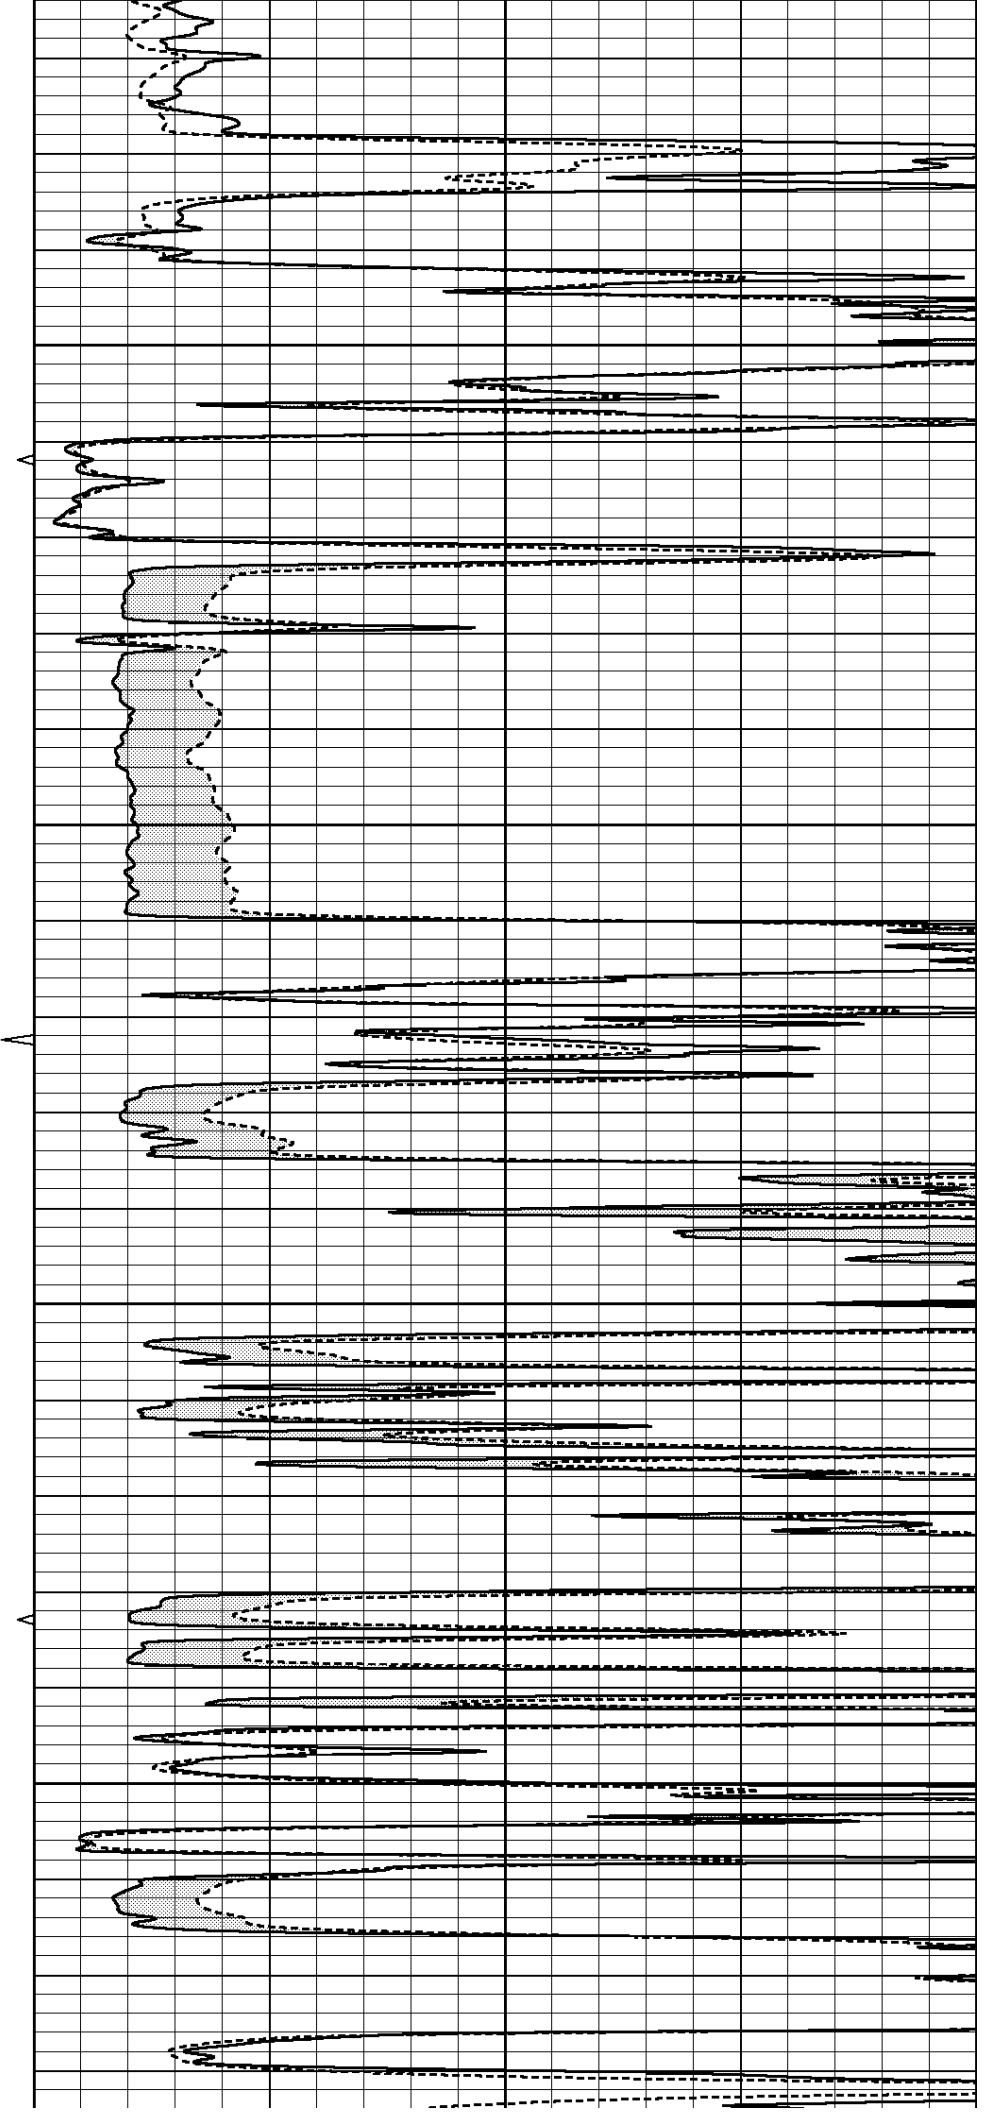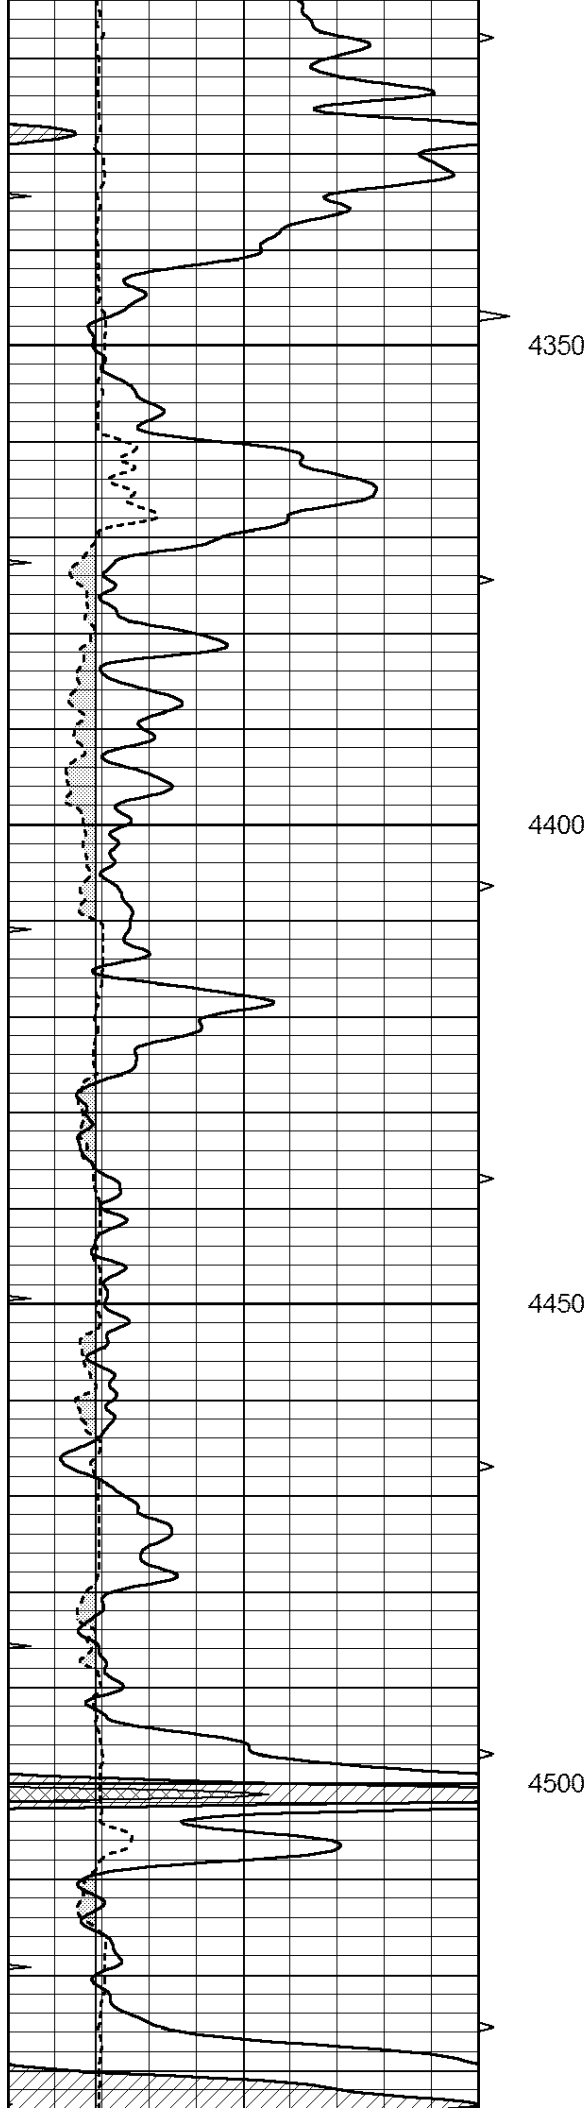

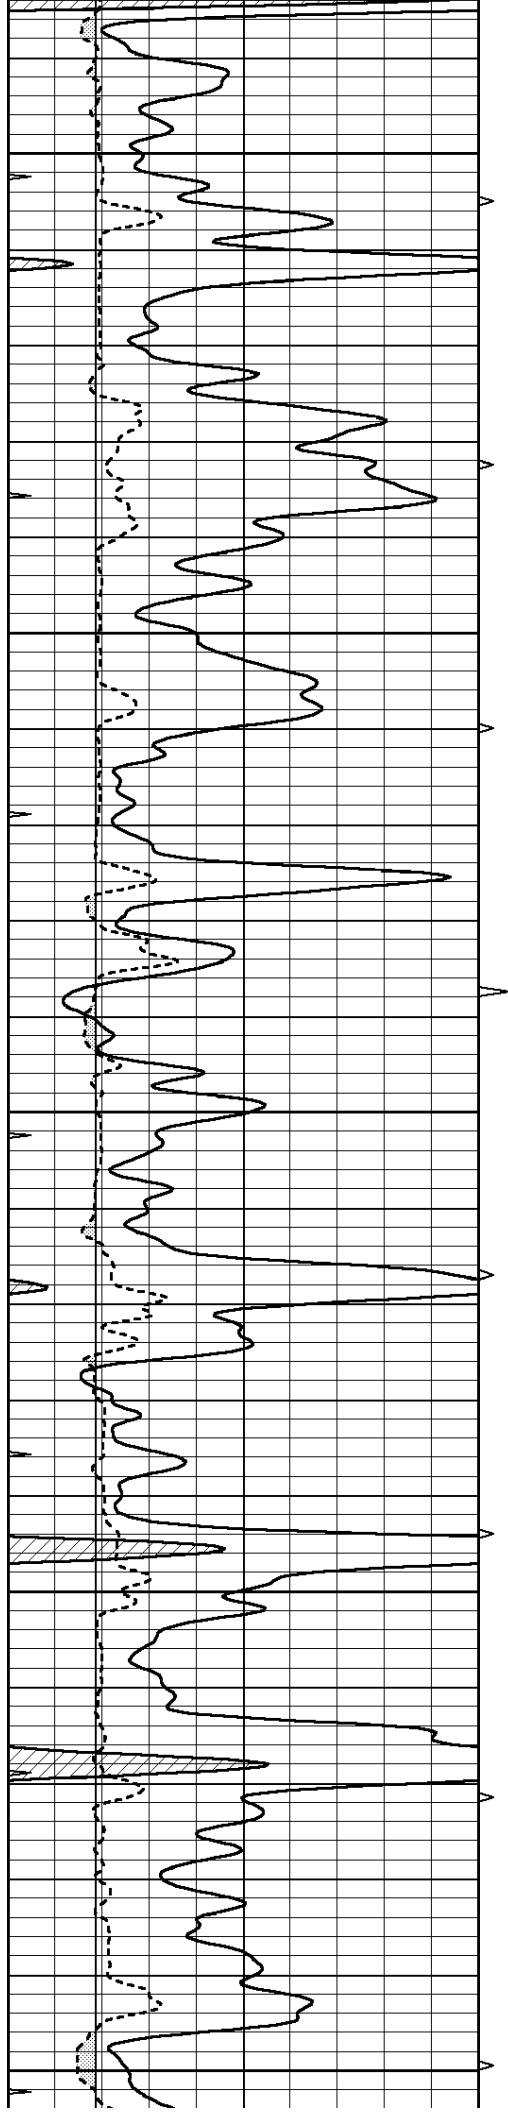


4550



4600


4650

4700

4750

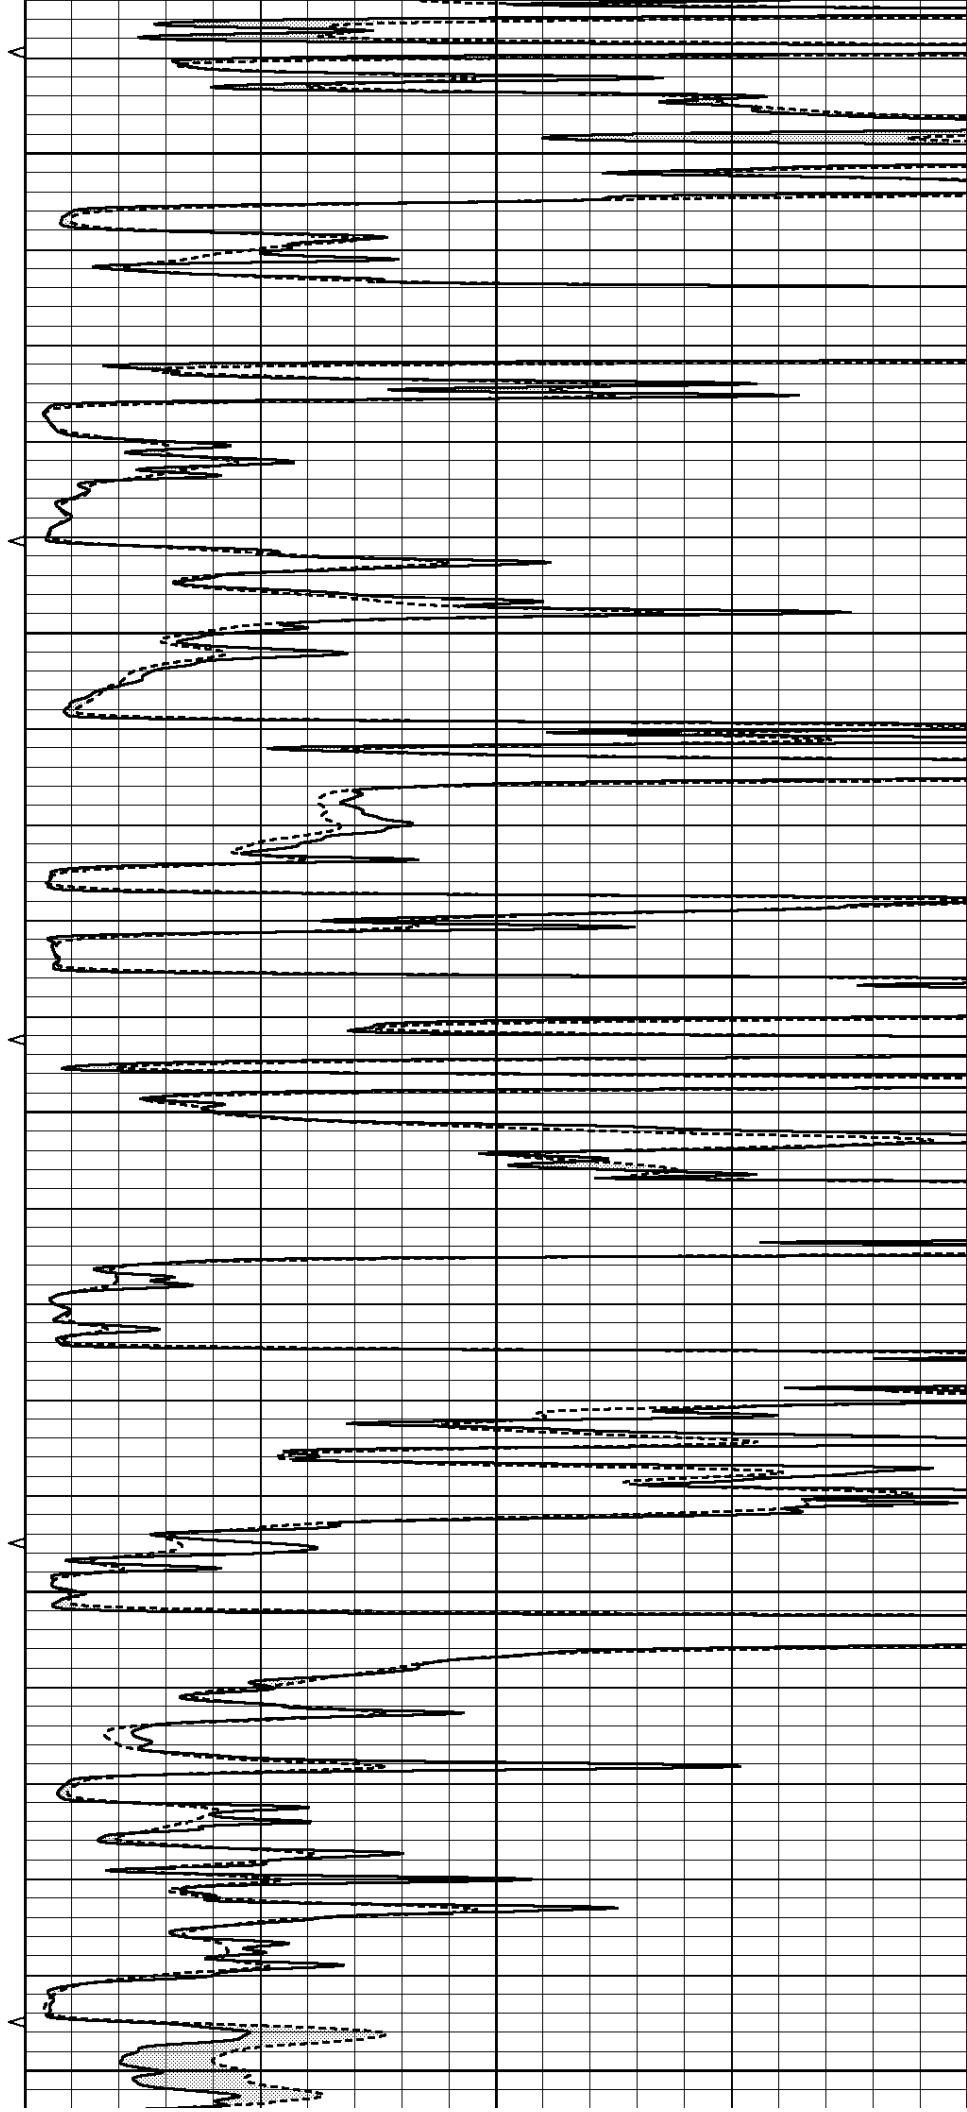

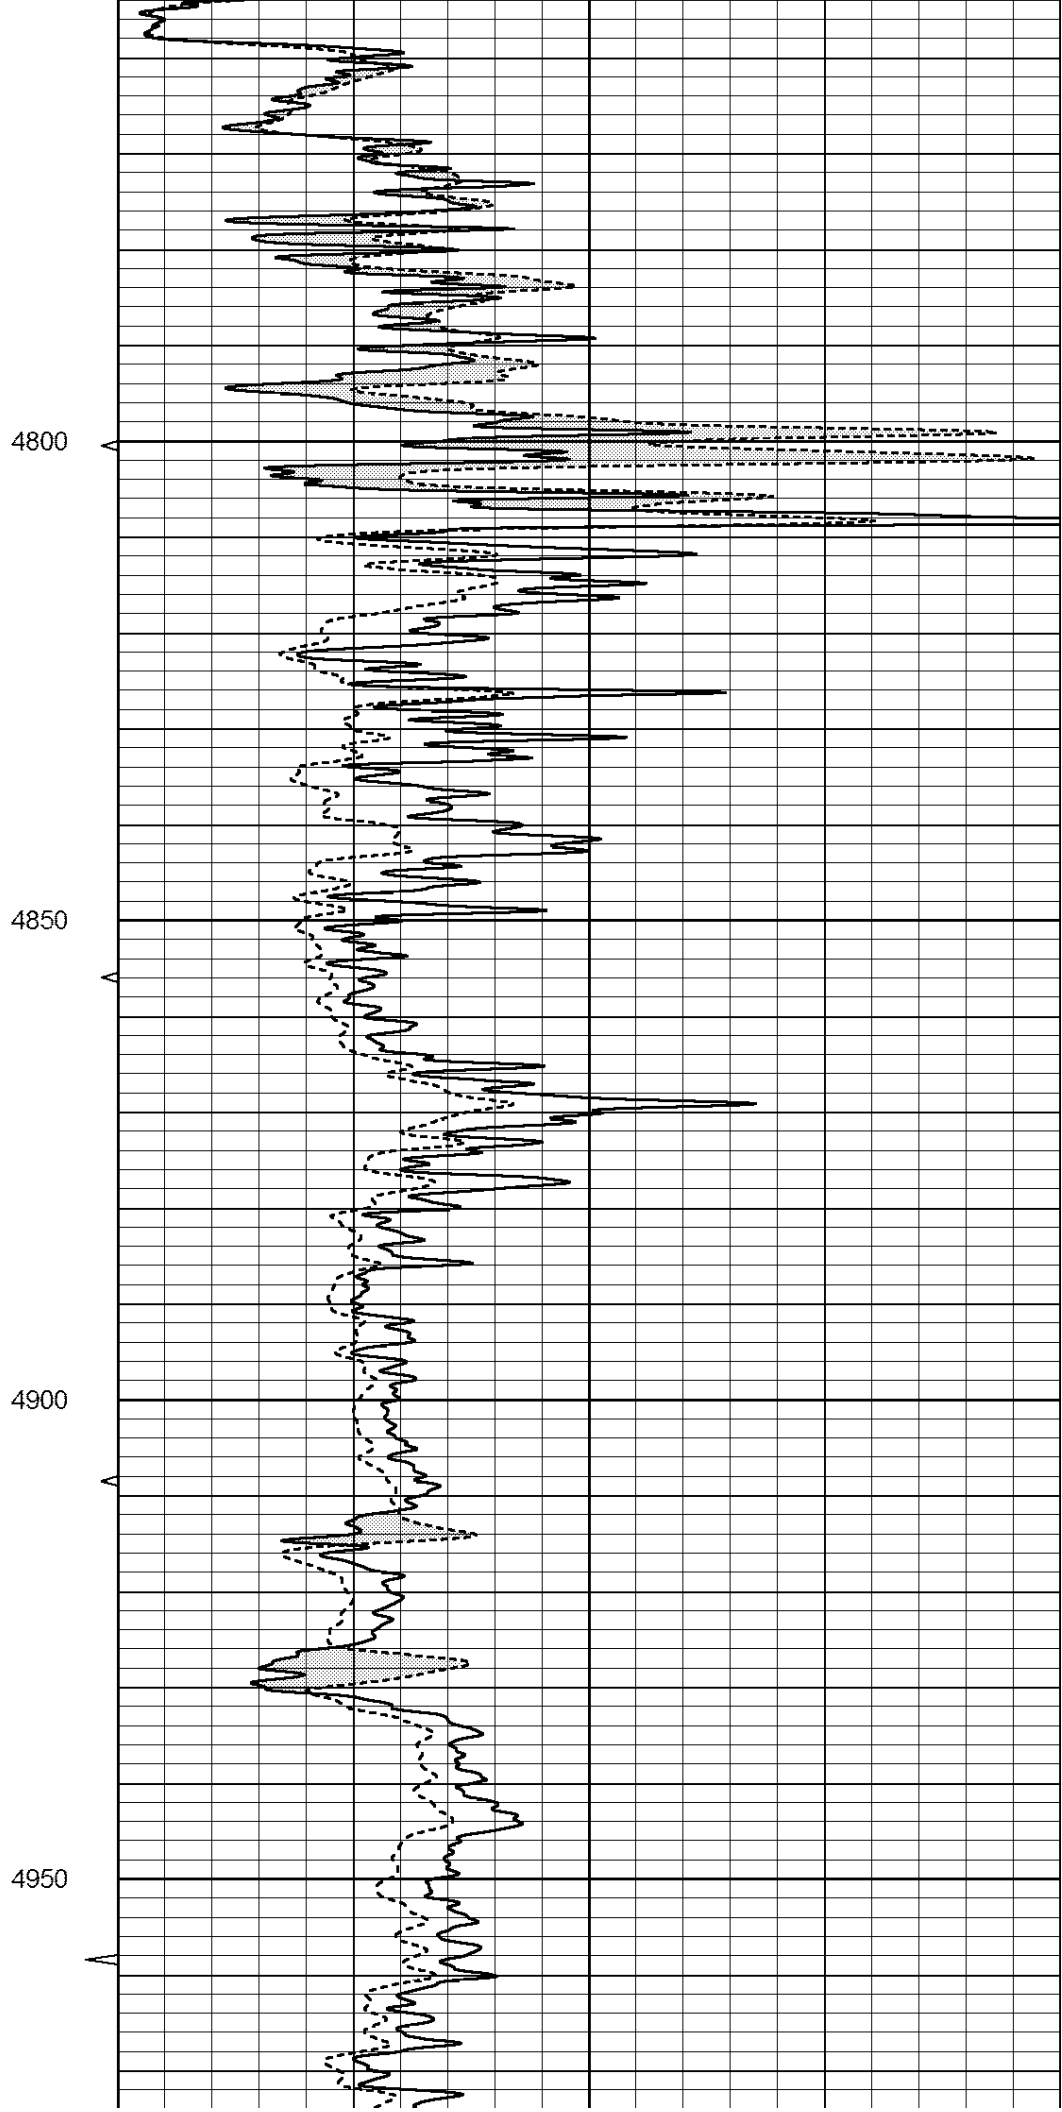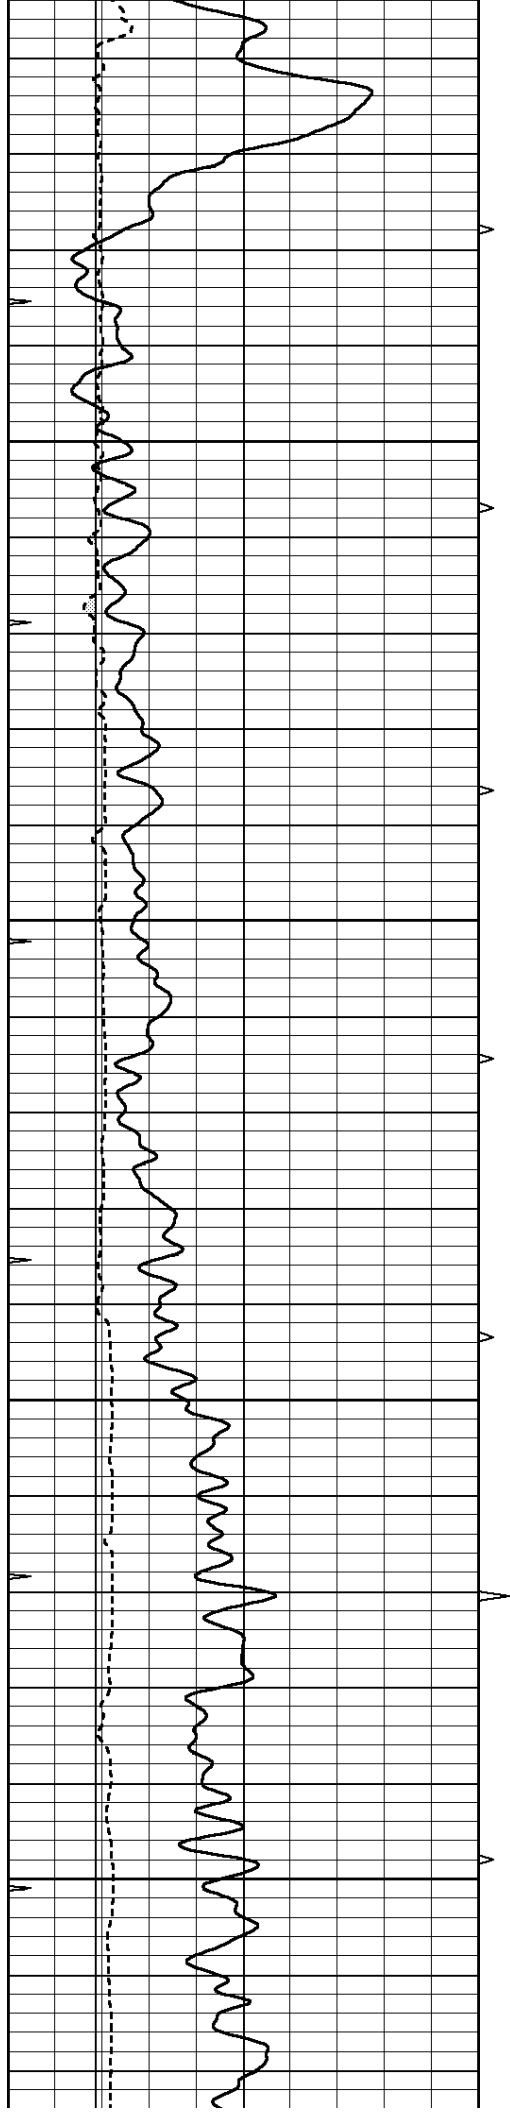

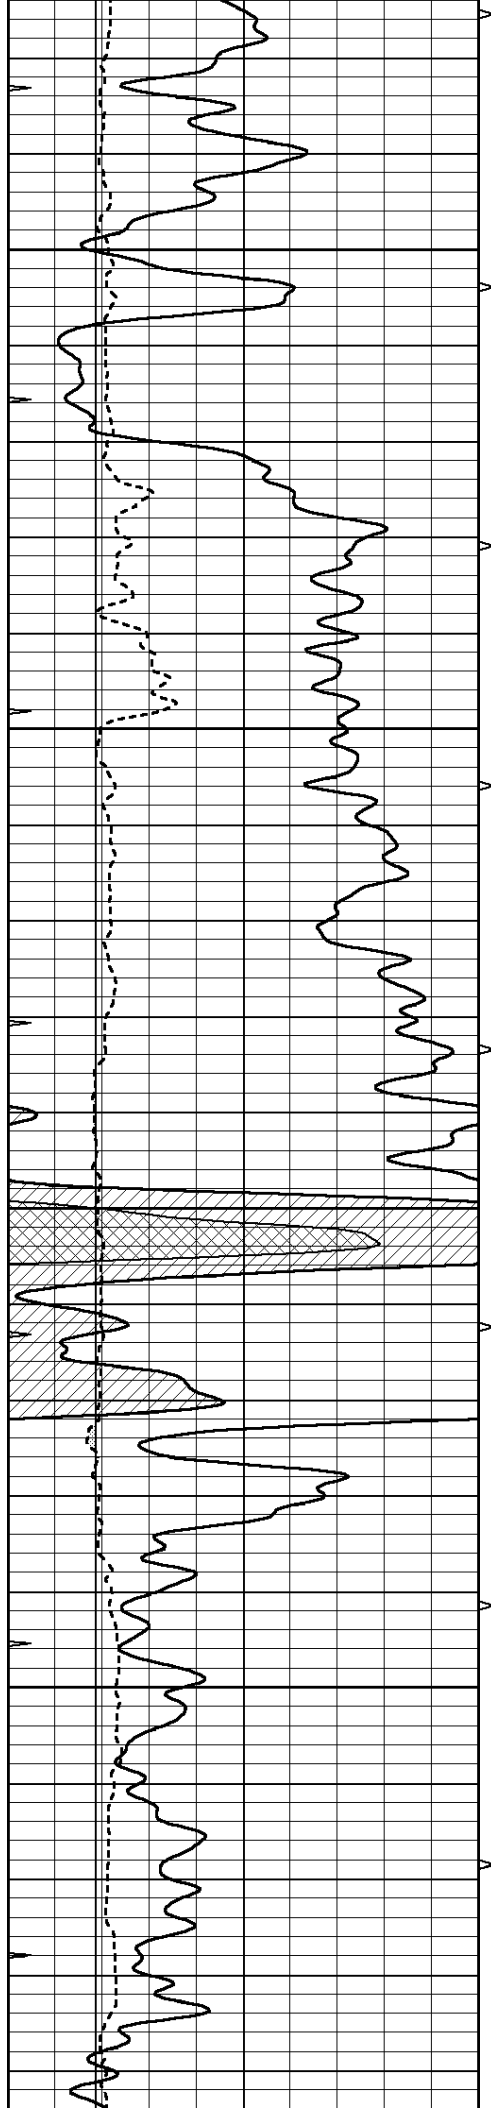




5000


5050

5100

5150

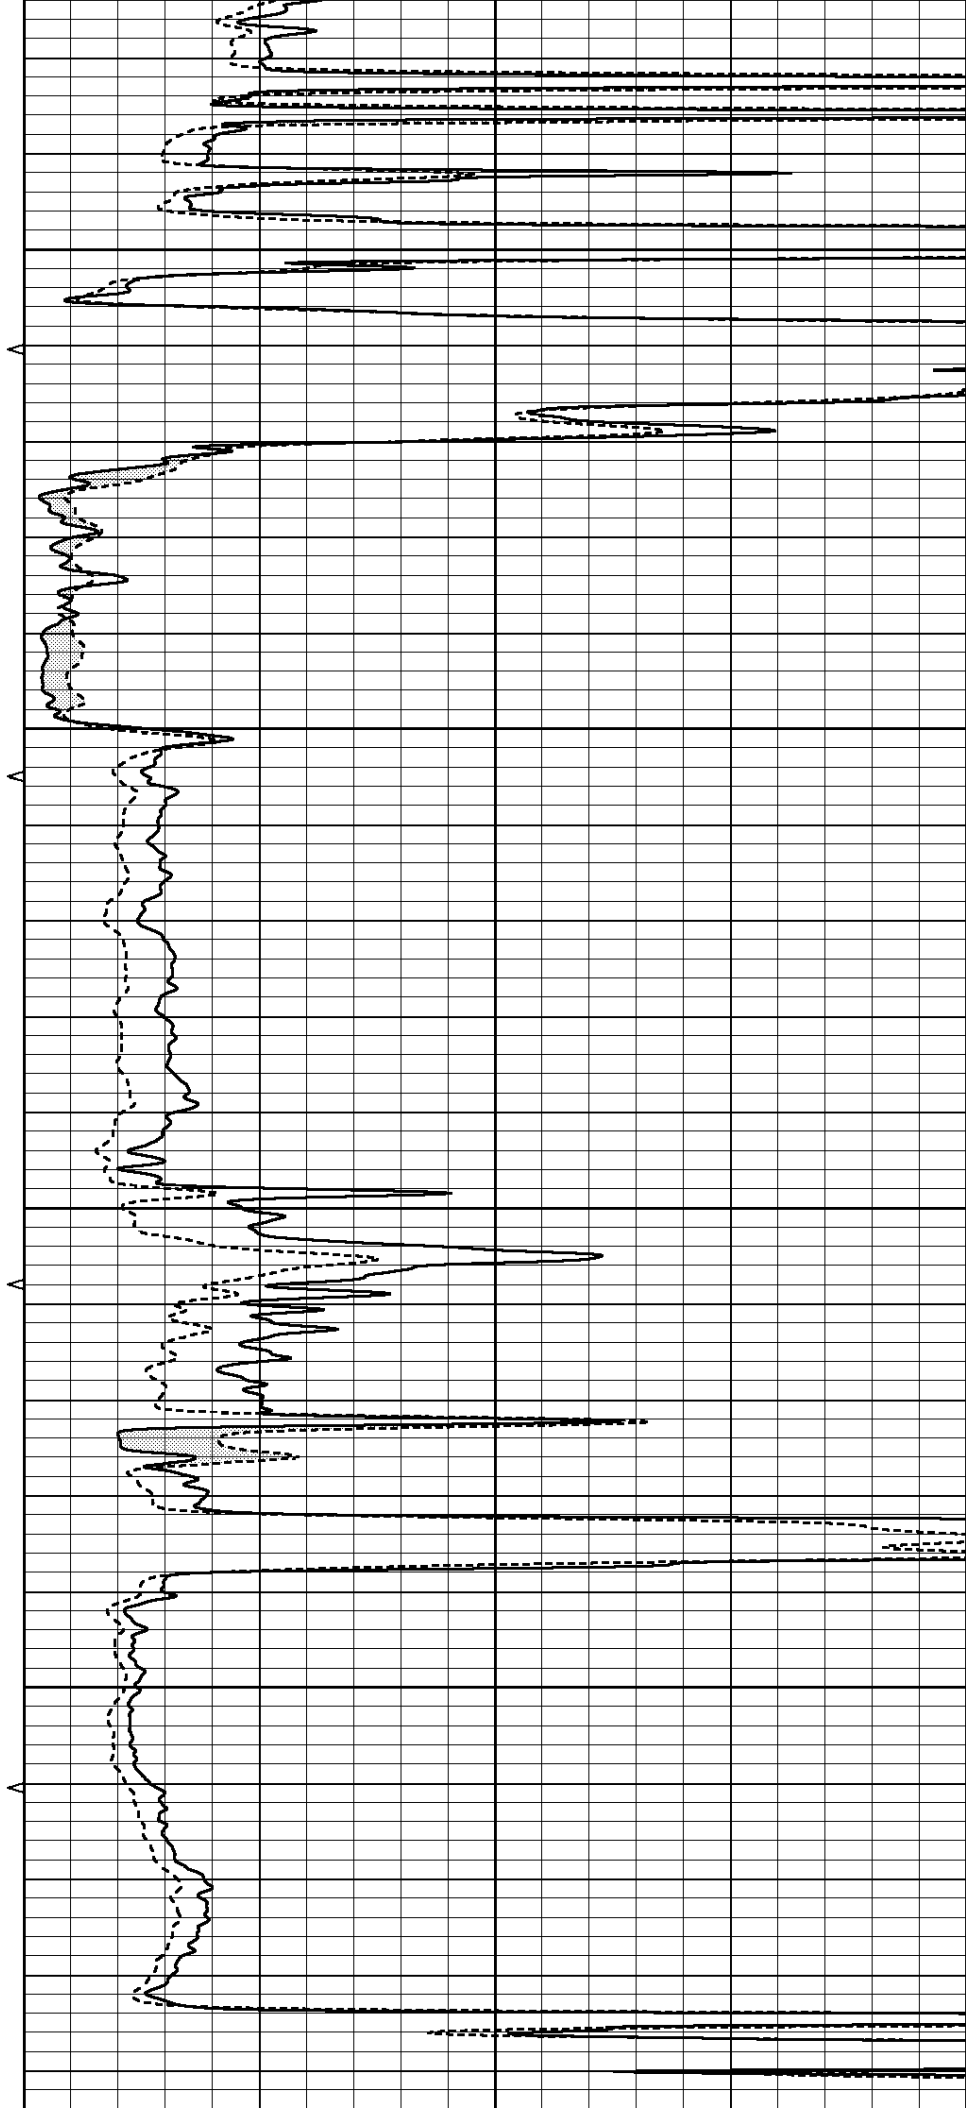

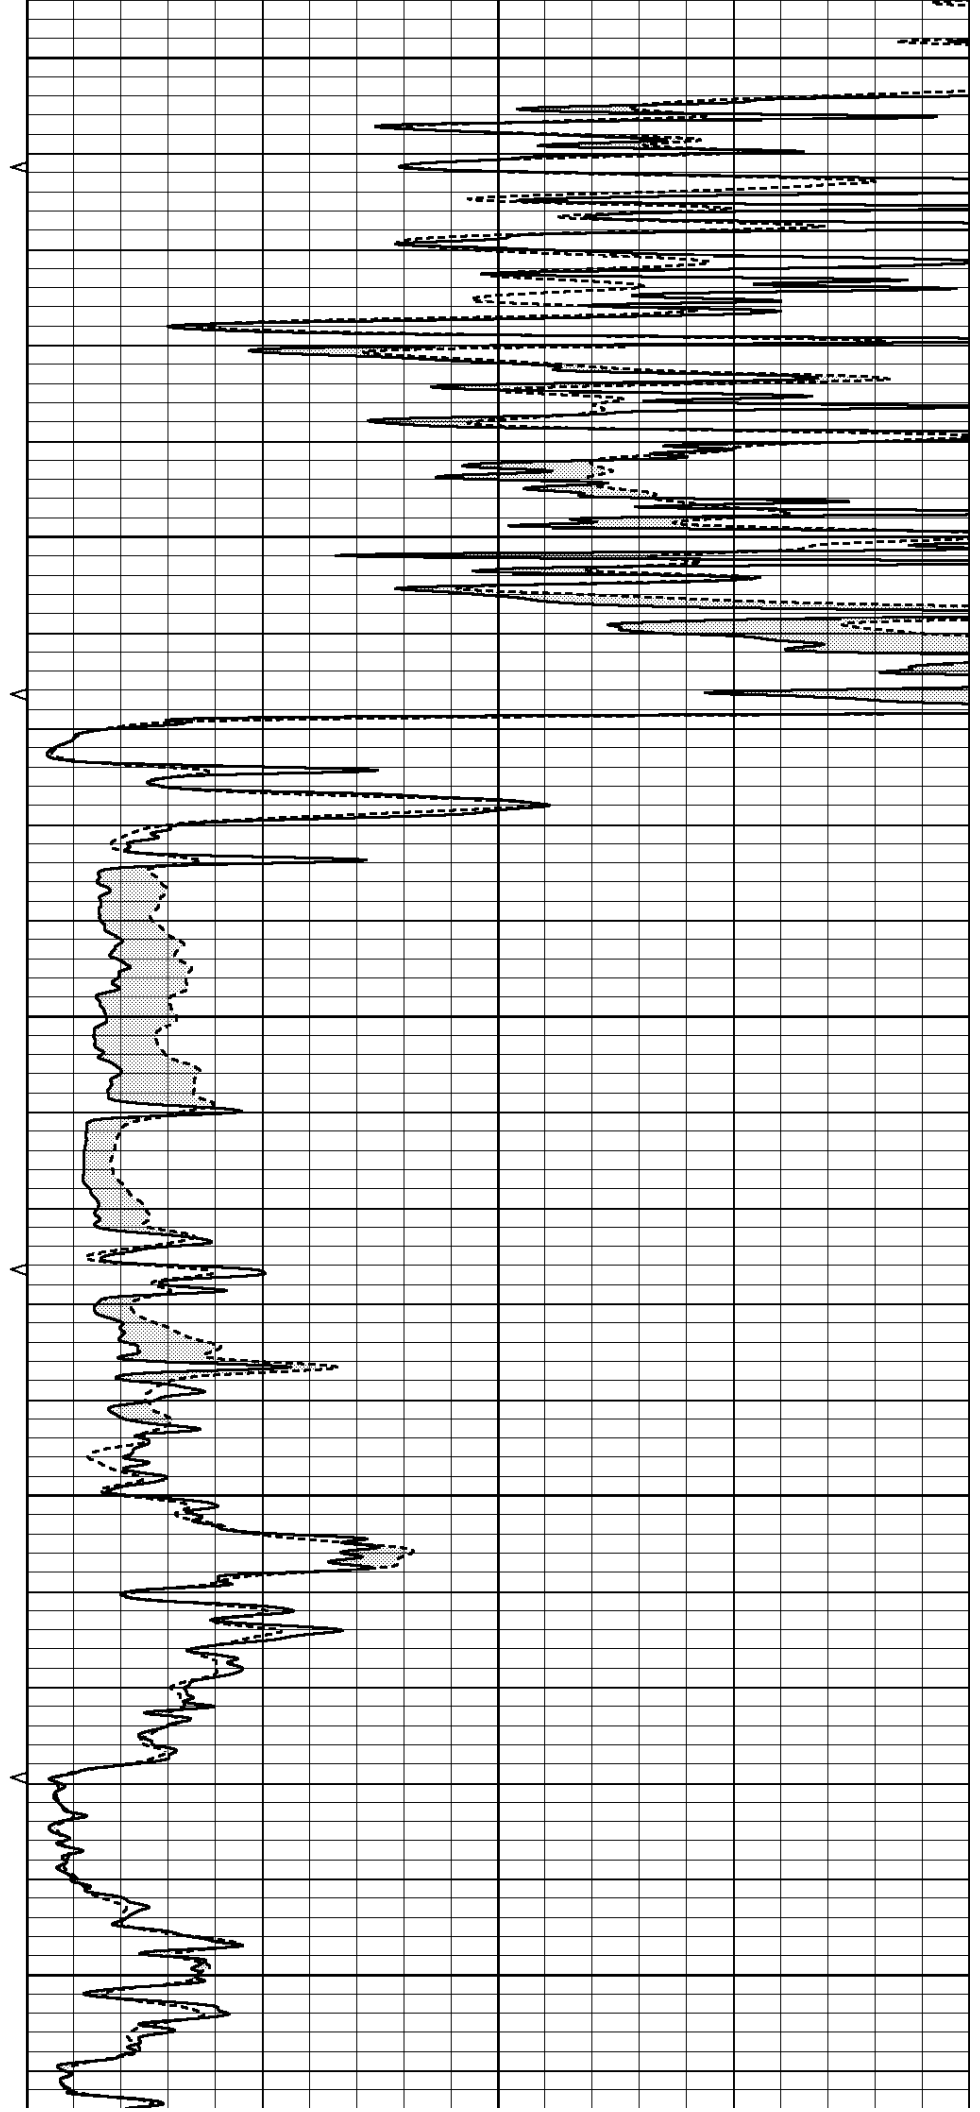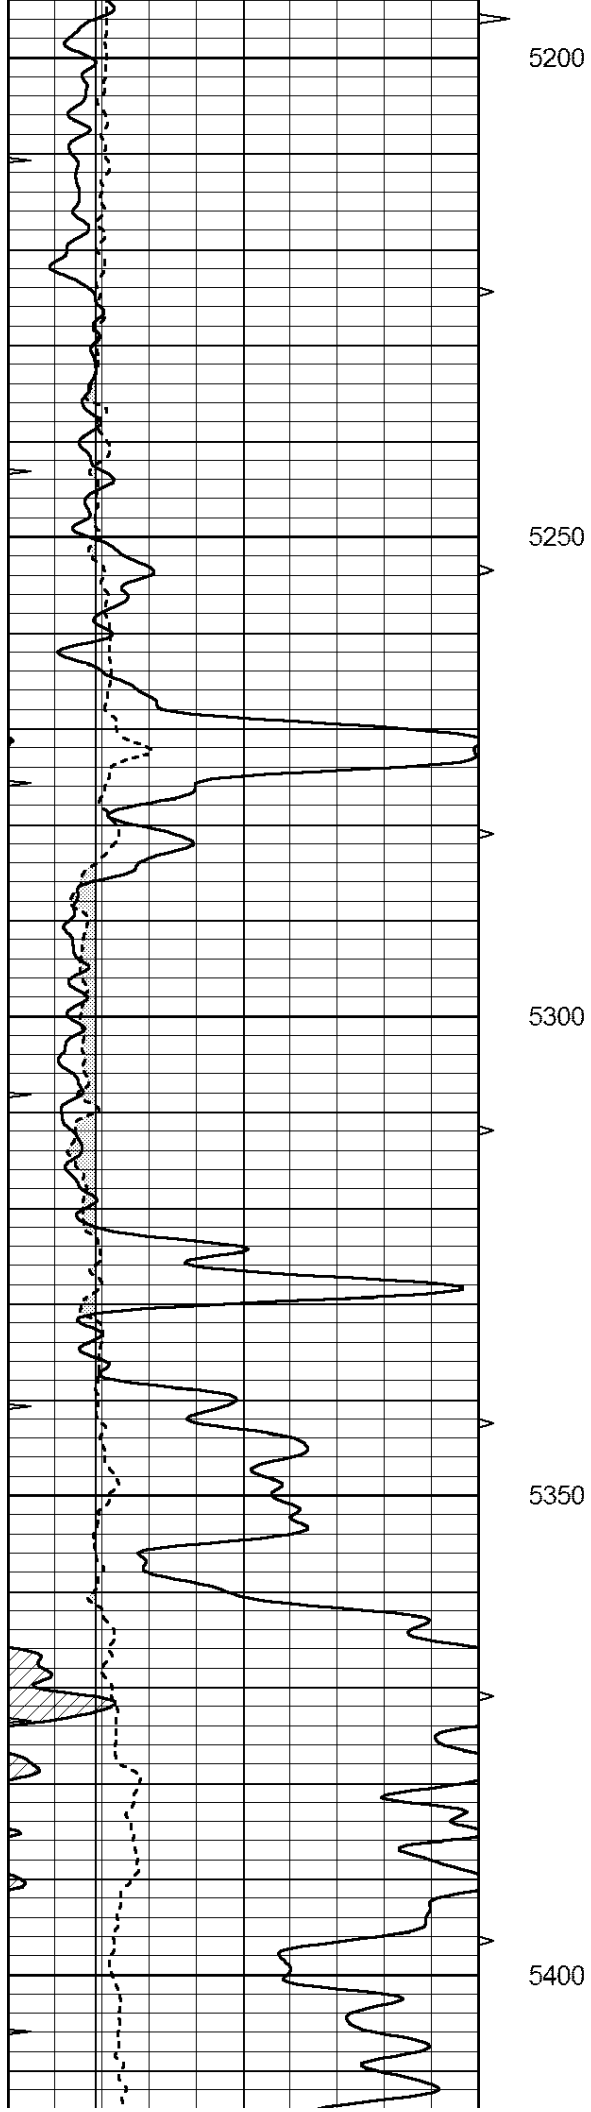

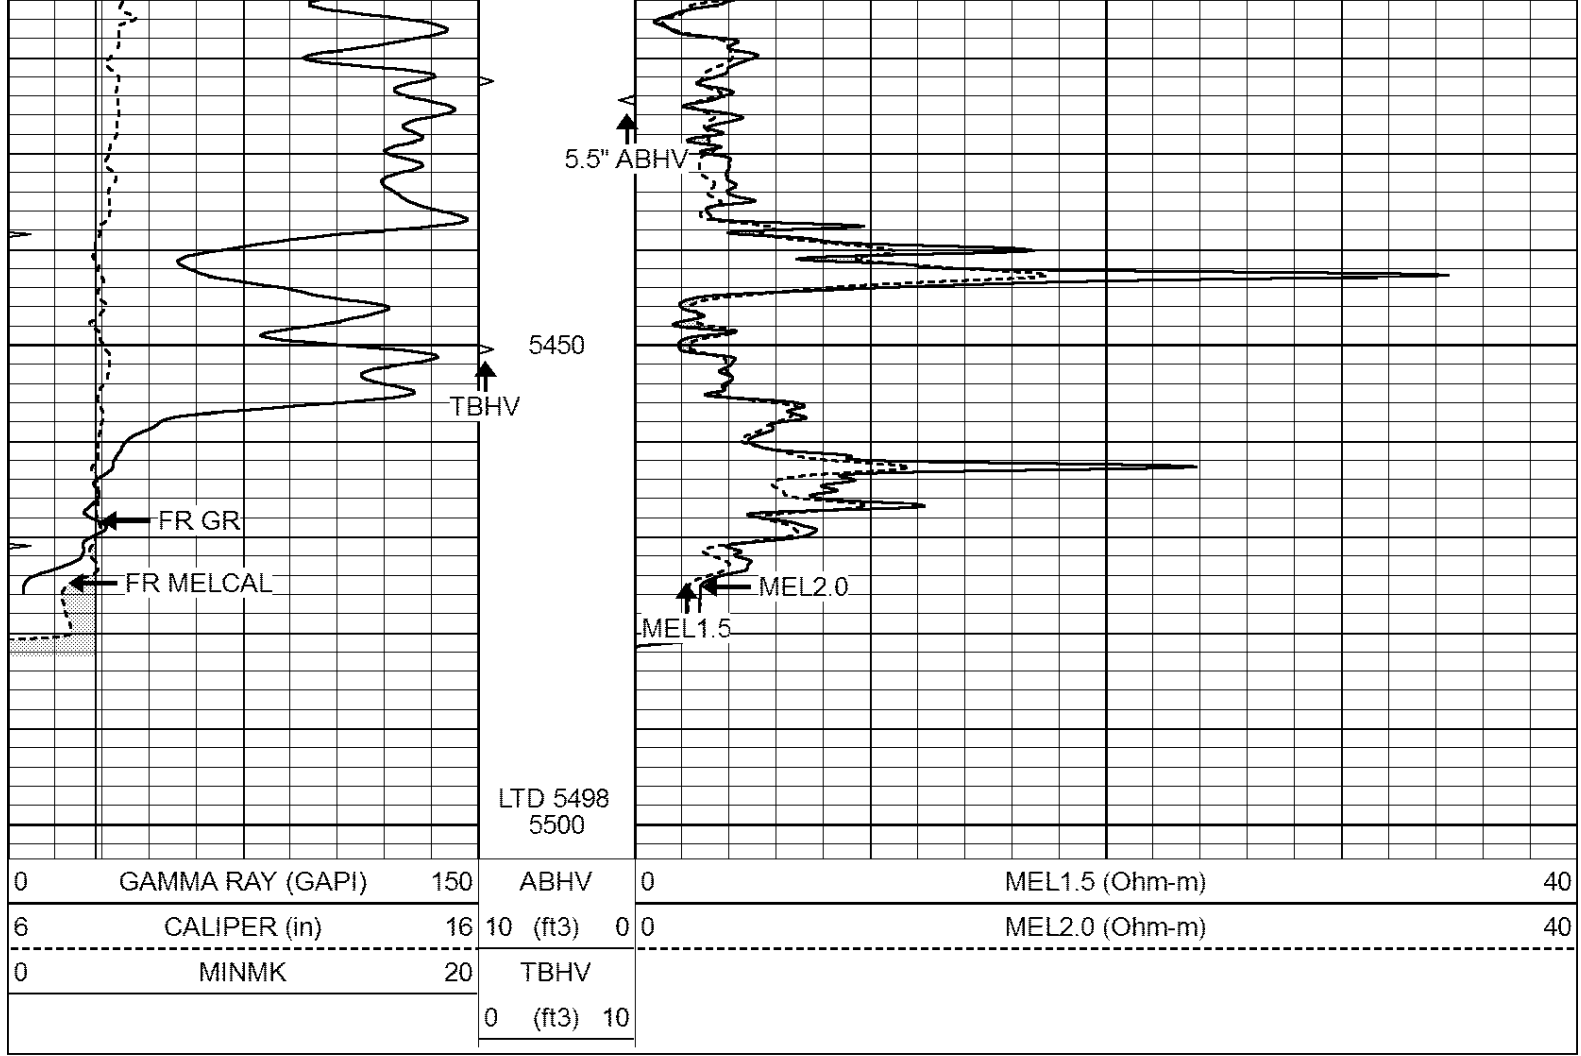



SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 007471pe.db
 Dataset Pathname: pass5.1
 Presentation Format: micro
 Dataset Creation: Mon Oct 24 19:34:56 2011 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

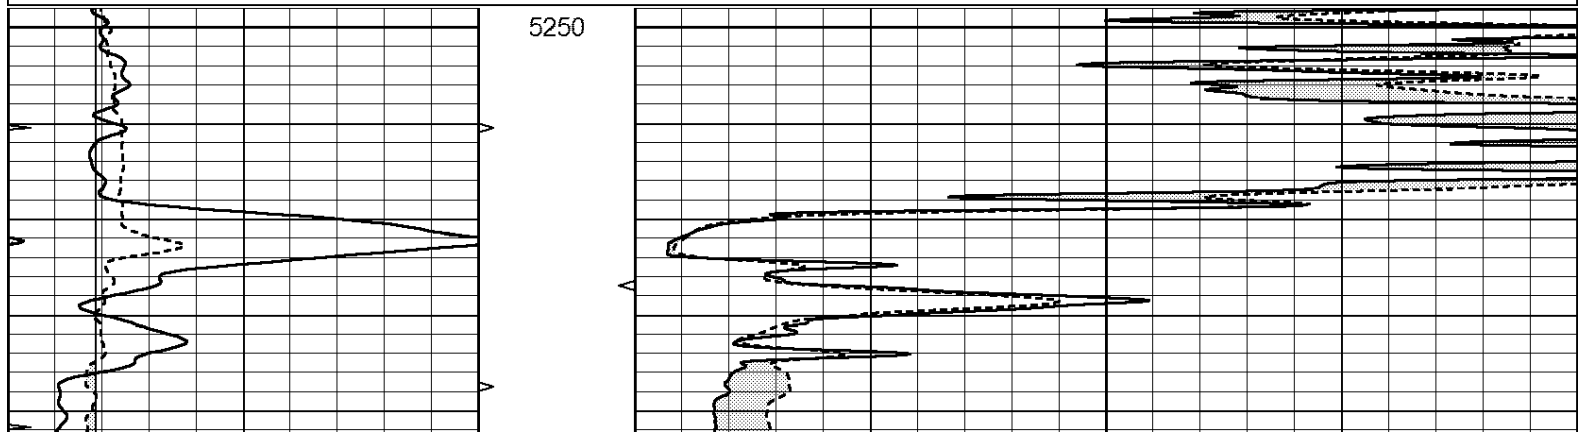

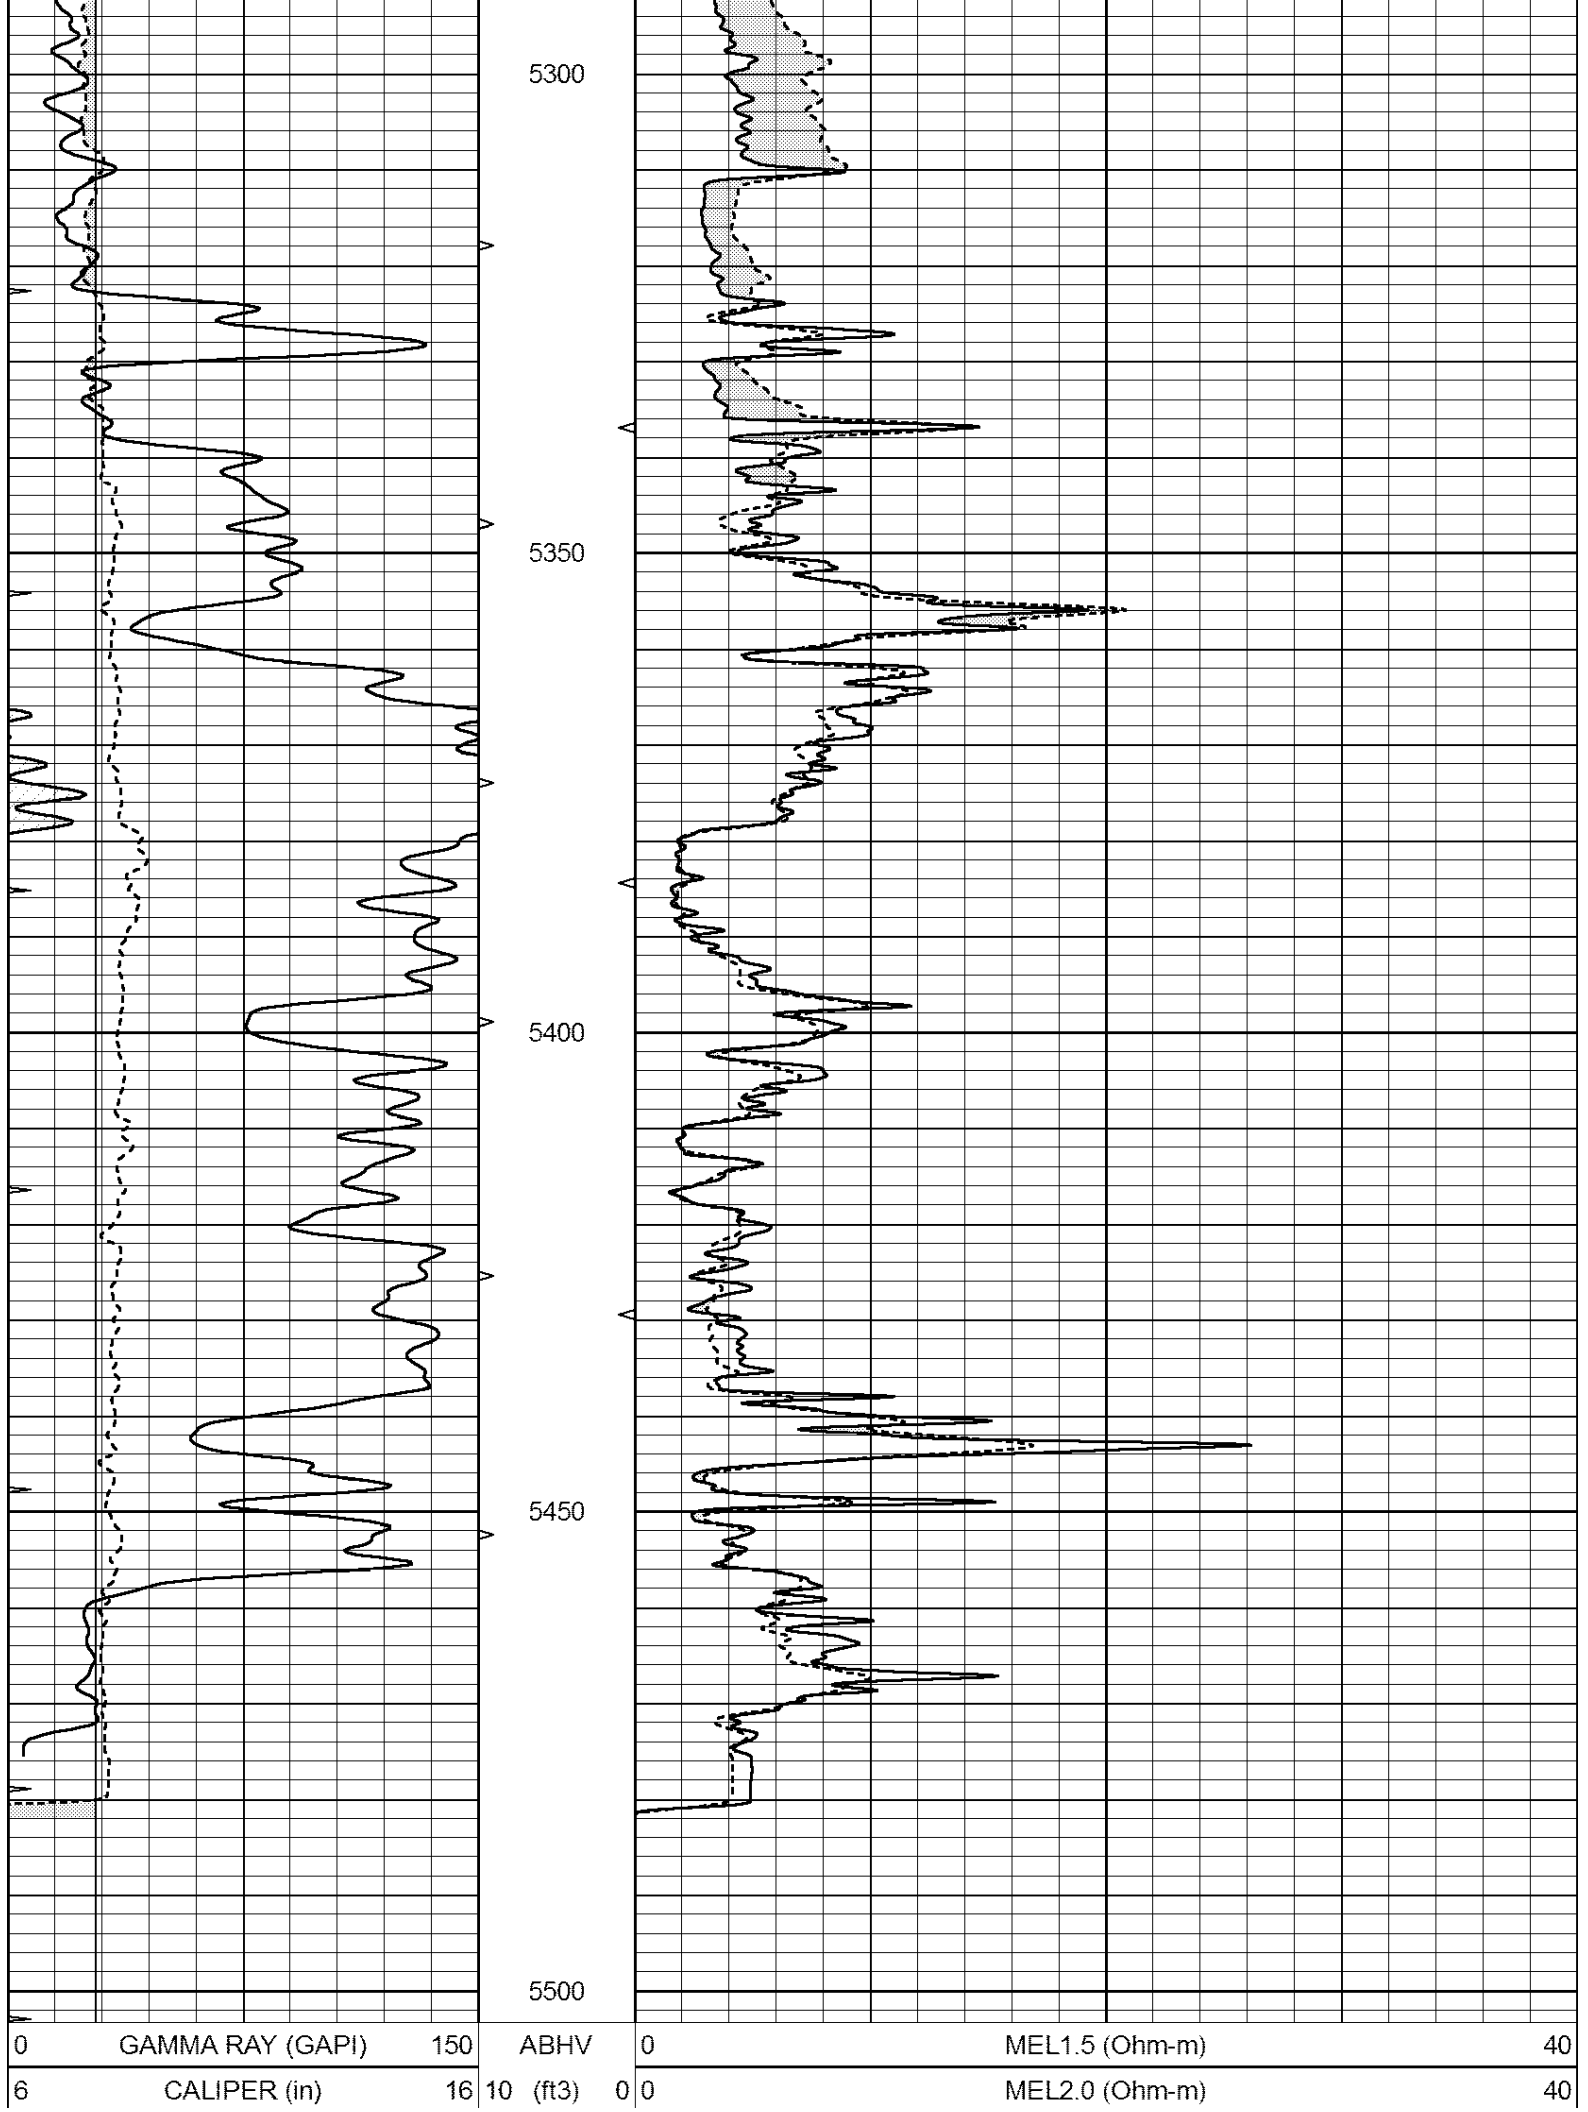

0	MINMK	20	TBHV	
			0 (ft3) 10	

Calibration Report

Database File: 007471pe.db
Dataset Pathname: pass7.2
Dataset Creation: Mon Oct 24 20:34:51 2011 by Calc Open-Cased 110302

MICRO Calibration Report

Serial Number: MICRO5
Tool Model: PROBE
Performed: Mon Oct 24 19:35:18 2011

Caliper Calibration: Gain=2.914 Offset=-1.342

	Low Cal	High Cal
References	8.300	14.000
Readings	3.309	5.265

1.5" Calibration: Gain=27.000 Offset=-0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.009	0.990

2" Calibration: Gain=48.000 Offset=-1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.000	0.929

Gamma Ray Calibration Report

Serial Number: GR3
Tool Model: OPEN
Performed: Mon Oct 24 19:35:22 2011

Calibrator Value: 200.0 GAPI

Background Reading: 3.0 cps
Calibrator Reading: 186.0 cps

Sensitivity: 2.3000 GAPI/cps