



SUPERIOR
Hays,
Kansas

MICRO
LOG

Company	GORE OIL COMPANY		
Well	ROSS "C" #6		
Field	PLAINVILLE		
County	ROOKS		
State	KANSAS		
Company	GORE OIL COMPANY		
Well	ROSS "C" #6		
Field	PLAINVILLE		
County	ROOKS		
State	KANSAS		
Location:	API # : 15-163-24026-0000		Other Services CDL/CNL DIL
1650' FNL & 800' FWL			
SEC 7 TWP 10S RGE 17W			
Permanent Datum	GROUND LEVEL		Elevation 2094
Log Measured From	KELLY BUSHING 8' A.G.L.		K.B. 2102
Drilling Measured From	KELLY BUSHING		D.F. 2100
			G.L. 2094
Date	5/20/12		
Run Number	TWO		
Depth Driller	3696		
Depth Logger	3694		
Bottom Logged Interval	3692		
Top Log Interval	2900		
Casing Driller	8 5/8"@263'		
Casing Logger	263		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 3,200 PPM
Density / Viscosity	8.9/52		
pH / Fluid Loss	11.0/7.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.850@73F		
Rmt @ Meas. Temp	.636@73F		
Rmc @ Meas. Temp	1.02@73F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.549@113F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	3:45 A.M.		
Maximum Recorded Temperature	113F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	MARC DOWNING		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395

DIRECTIONS

PLAINVILLE, KS., 2S. ON HWY 183 TO "AA RD."(AIRPORT RD.), 1 1/2E. TO "RD. 19", 3/4N., E. INTO @CATTLE GUARD THEN BACK N.





SUPERIOR
Hays,
Kansas

MAIN SECTION

Database File: 408771ddn.db
 Dataset Pathname: pass6.5
 Presentation Format: micro
 Dataset Creation: Sun May 20 06:35:04 2012
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

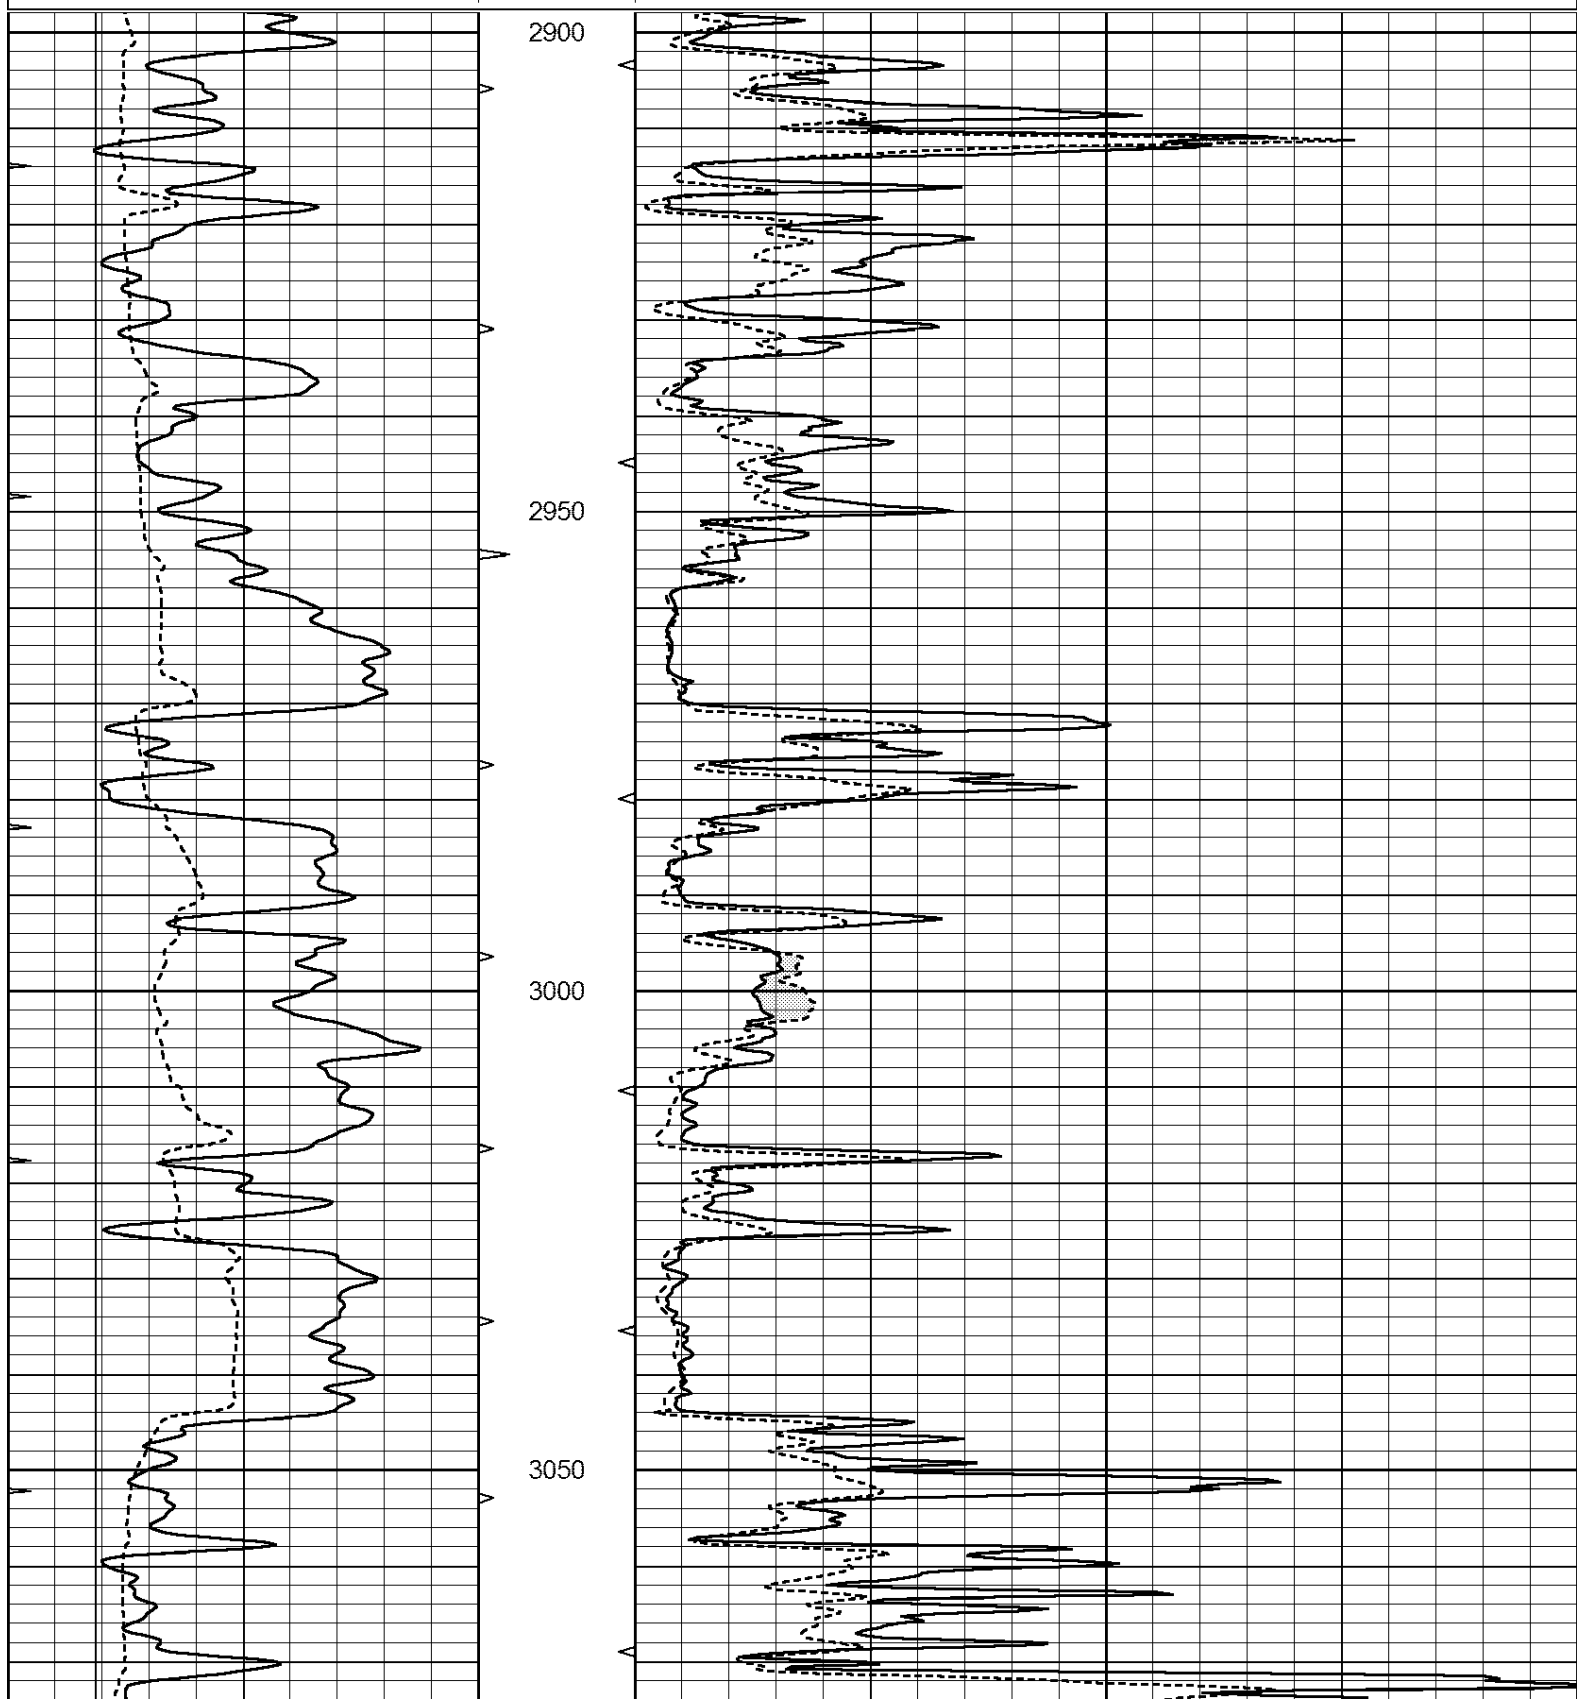

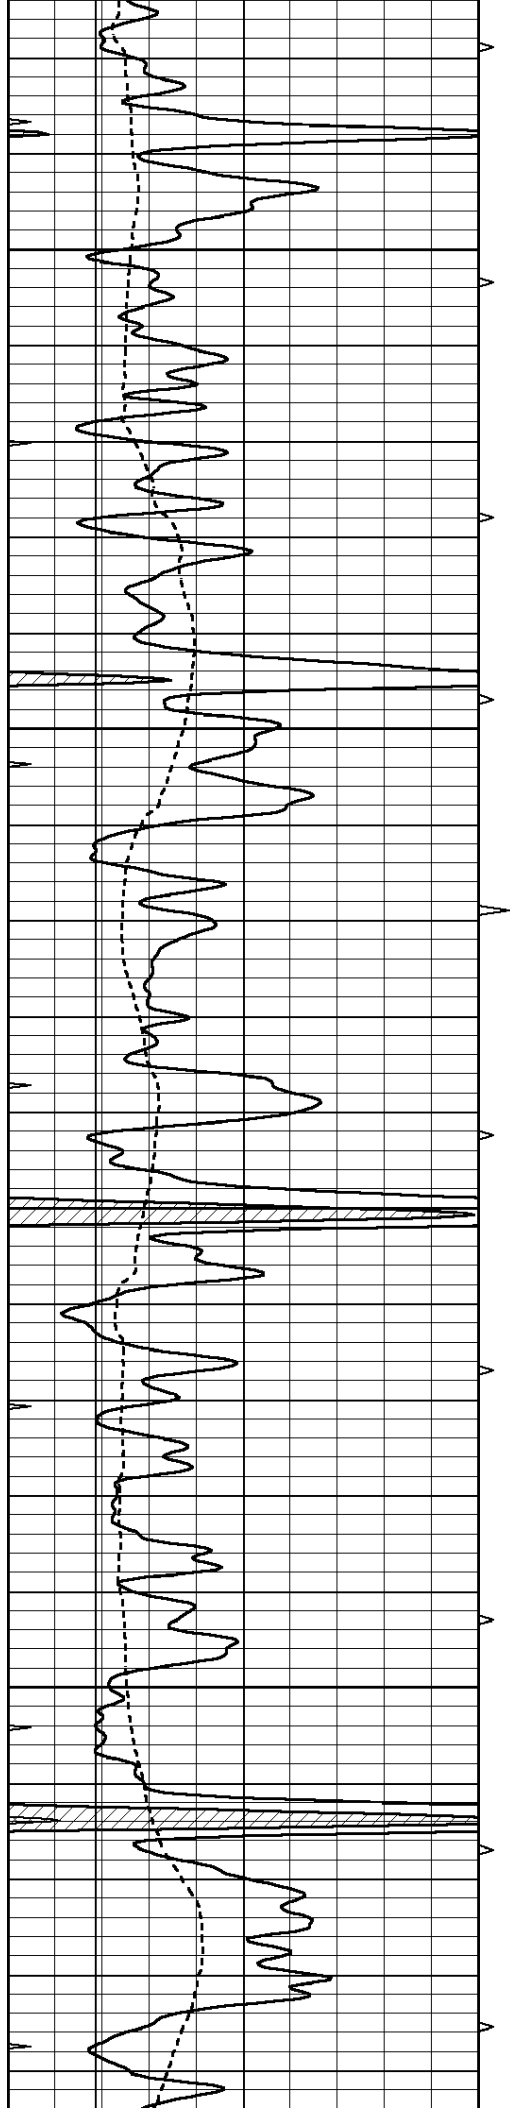




3100


3150

3200

3250

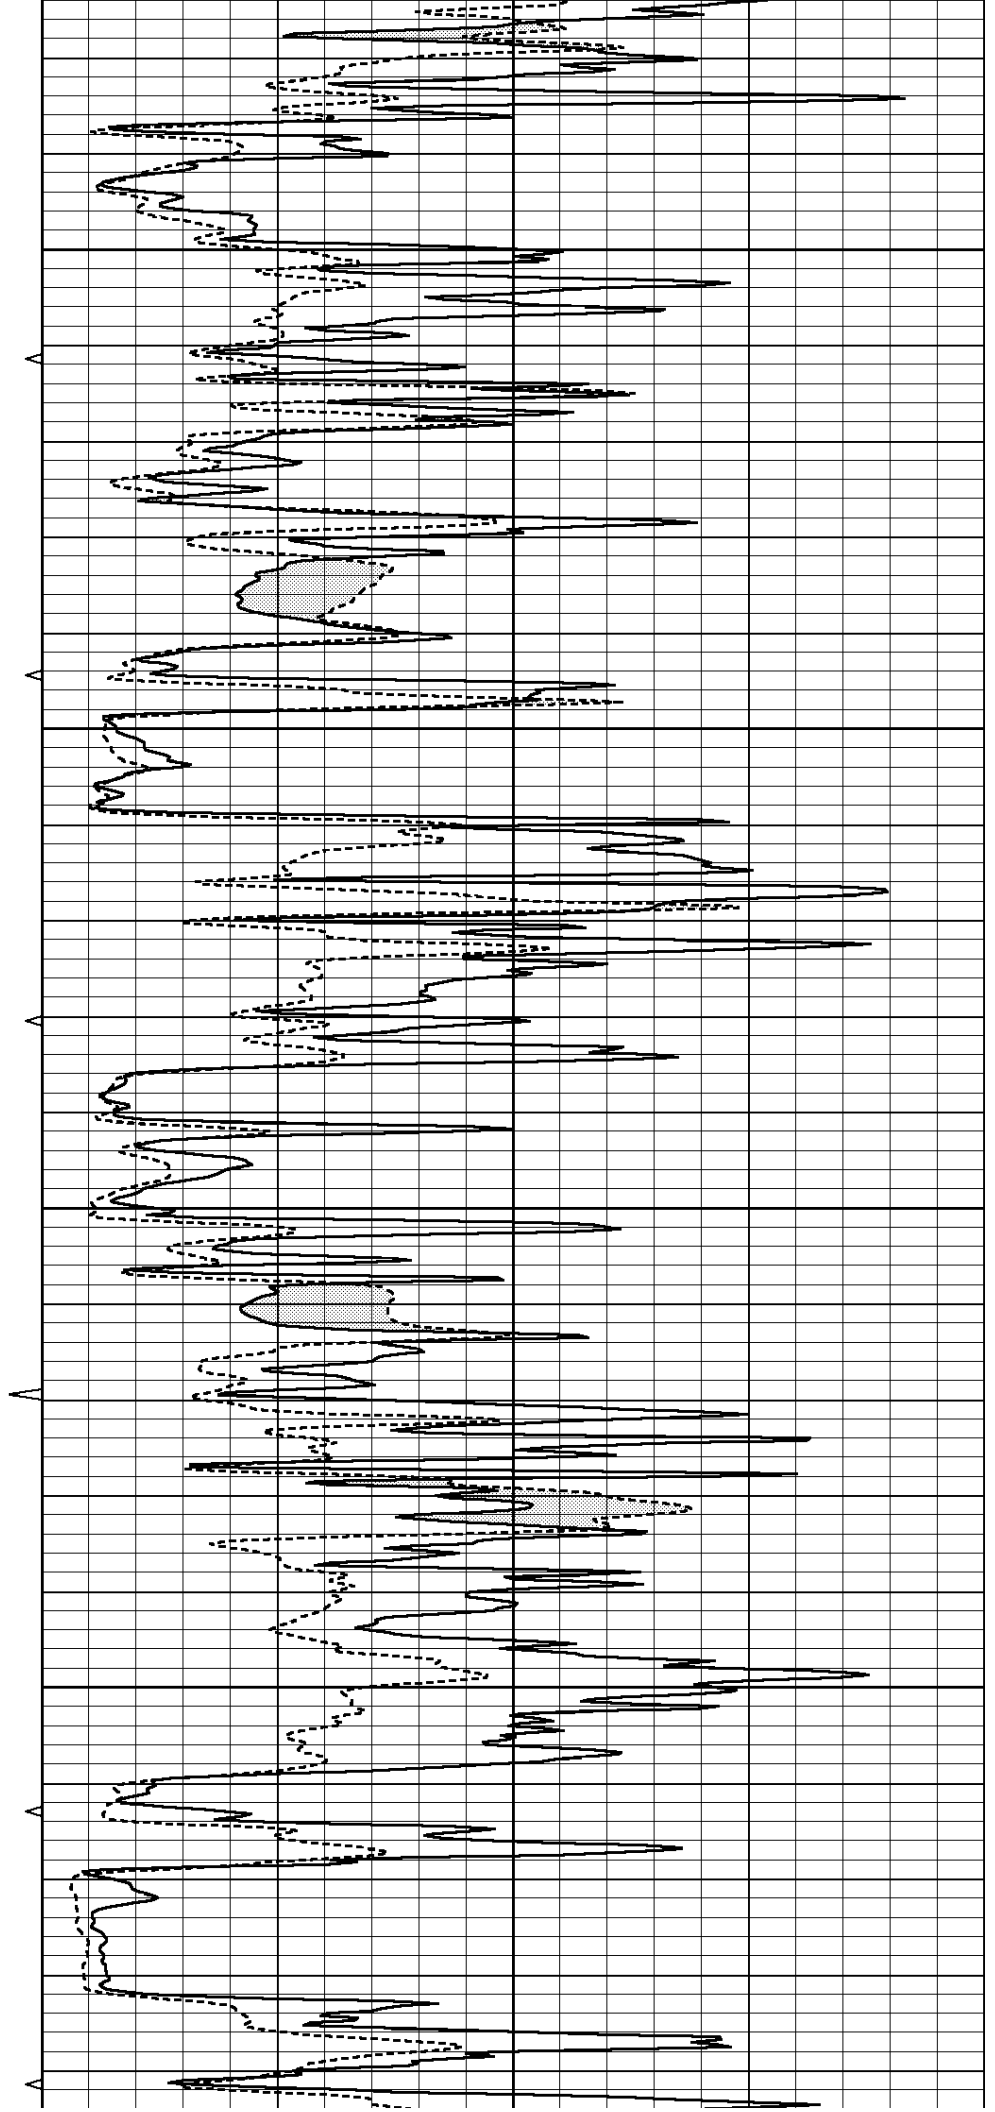

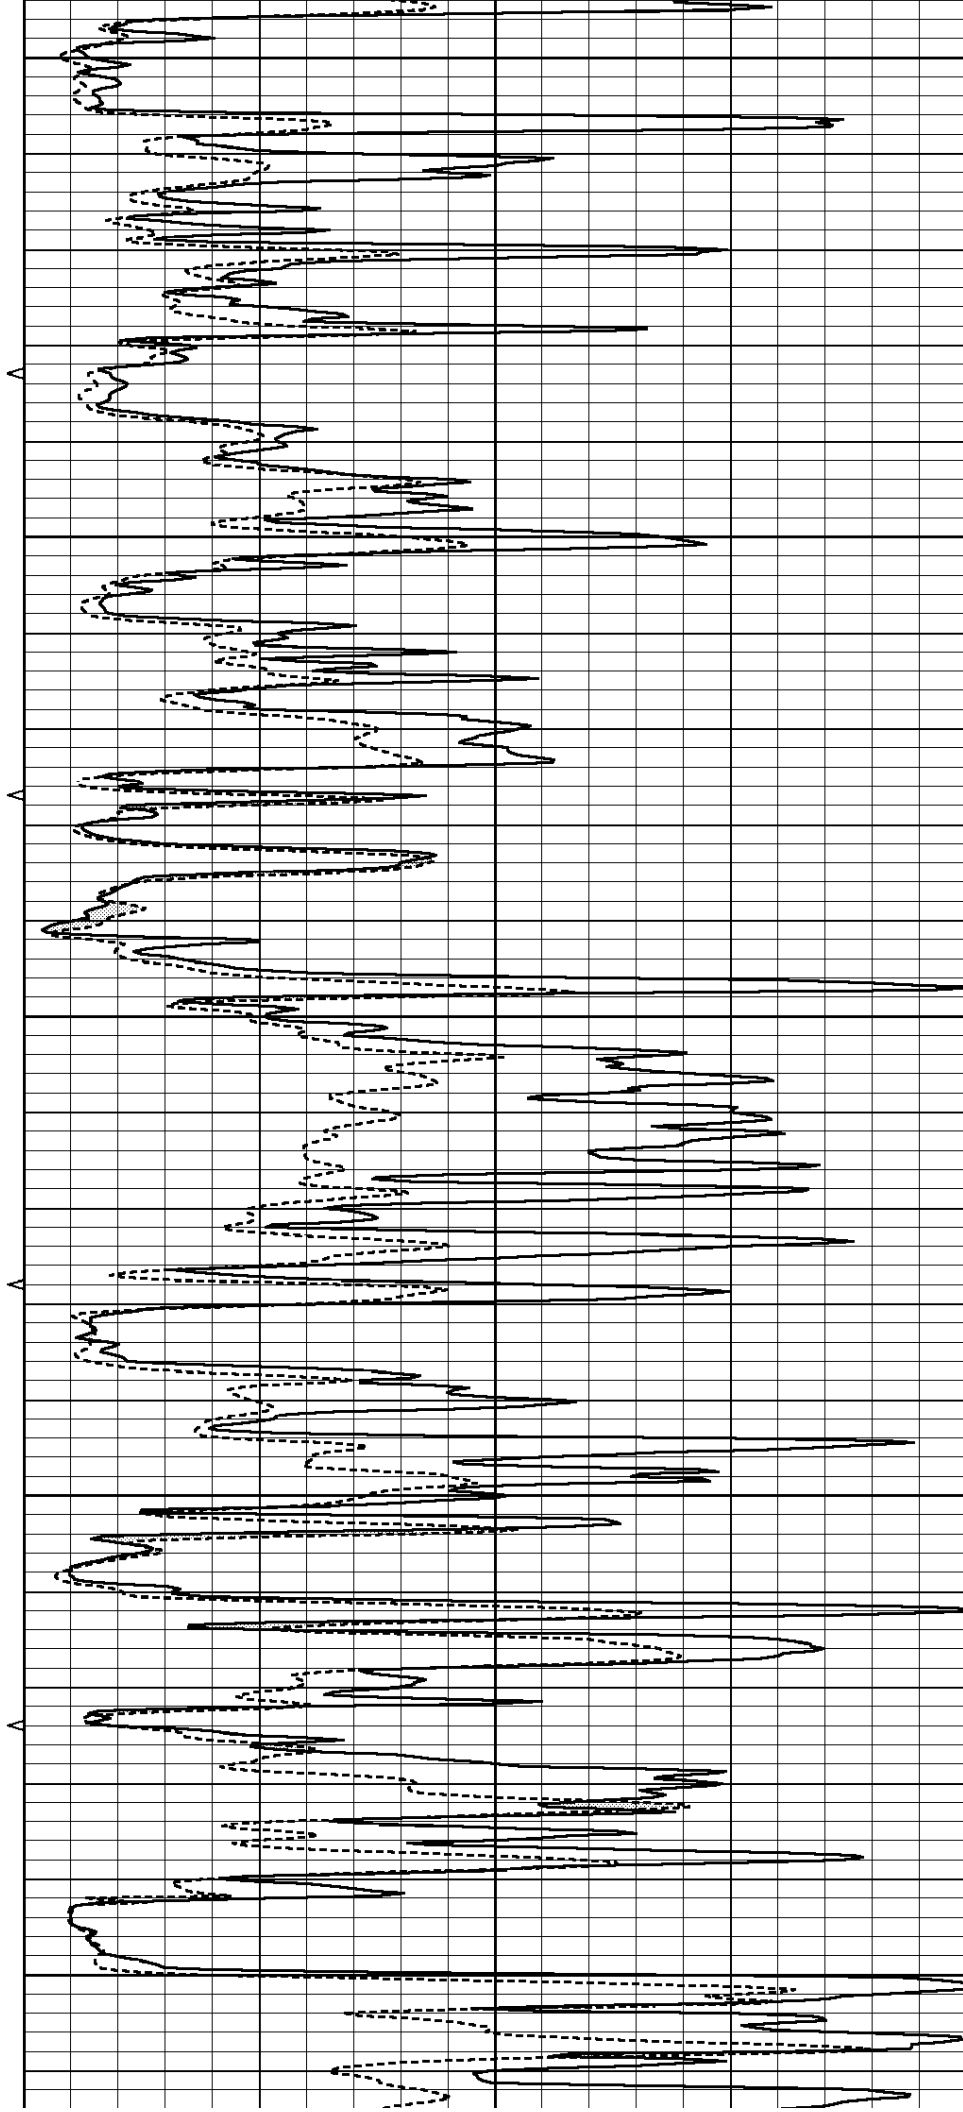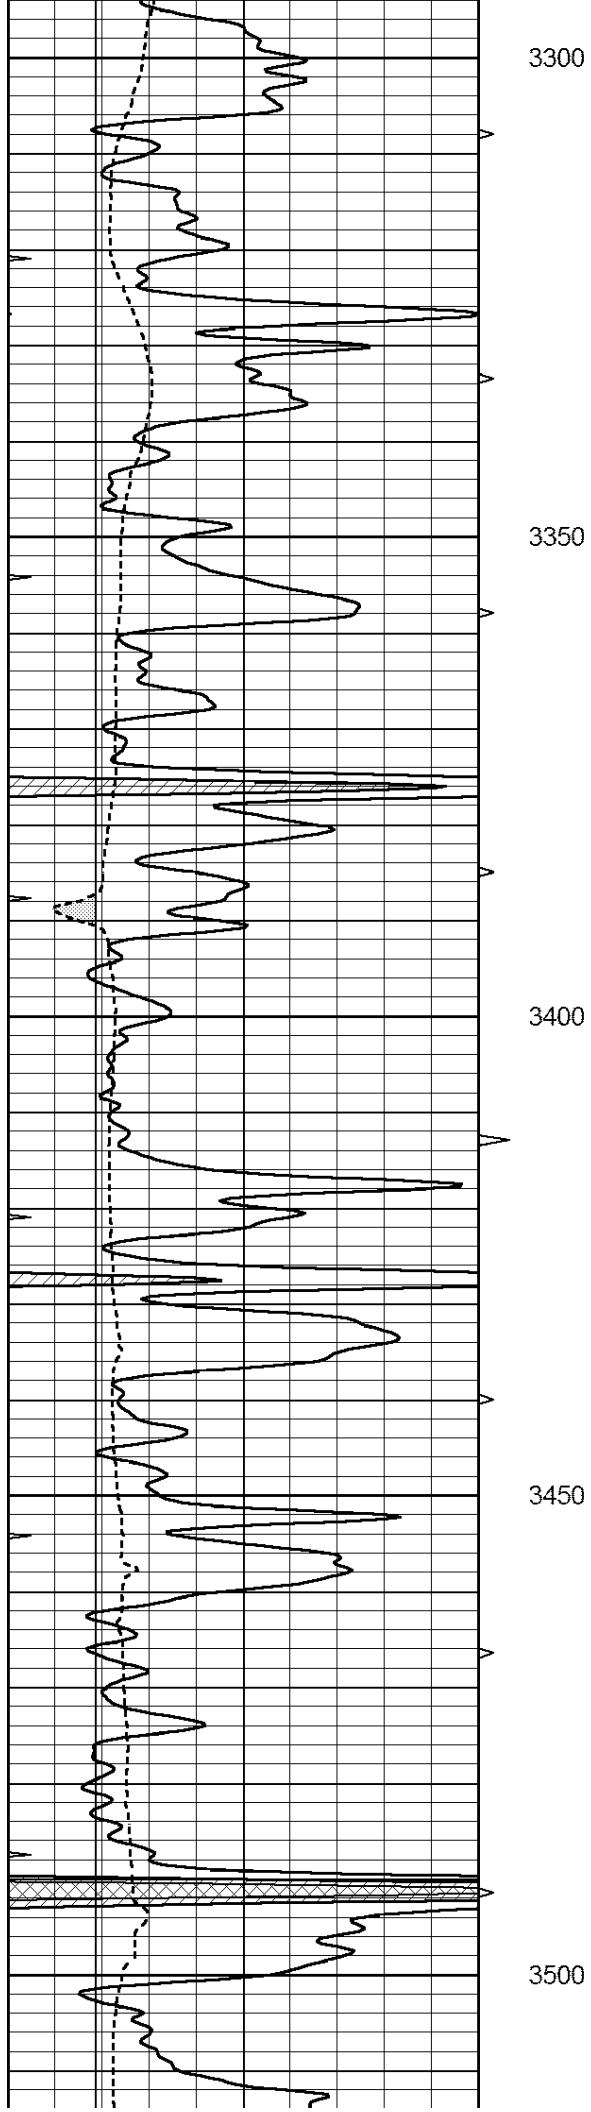

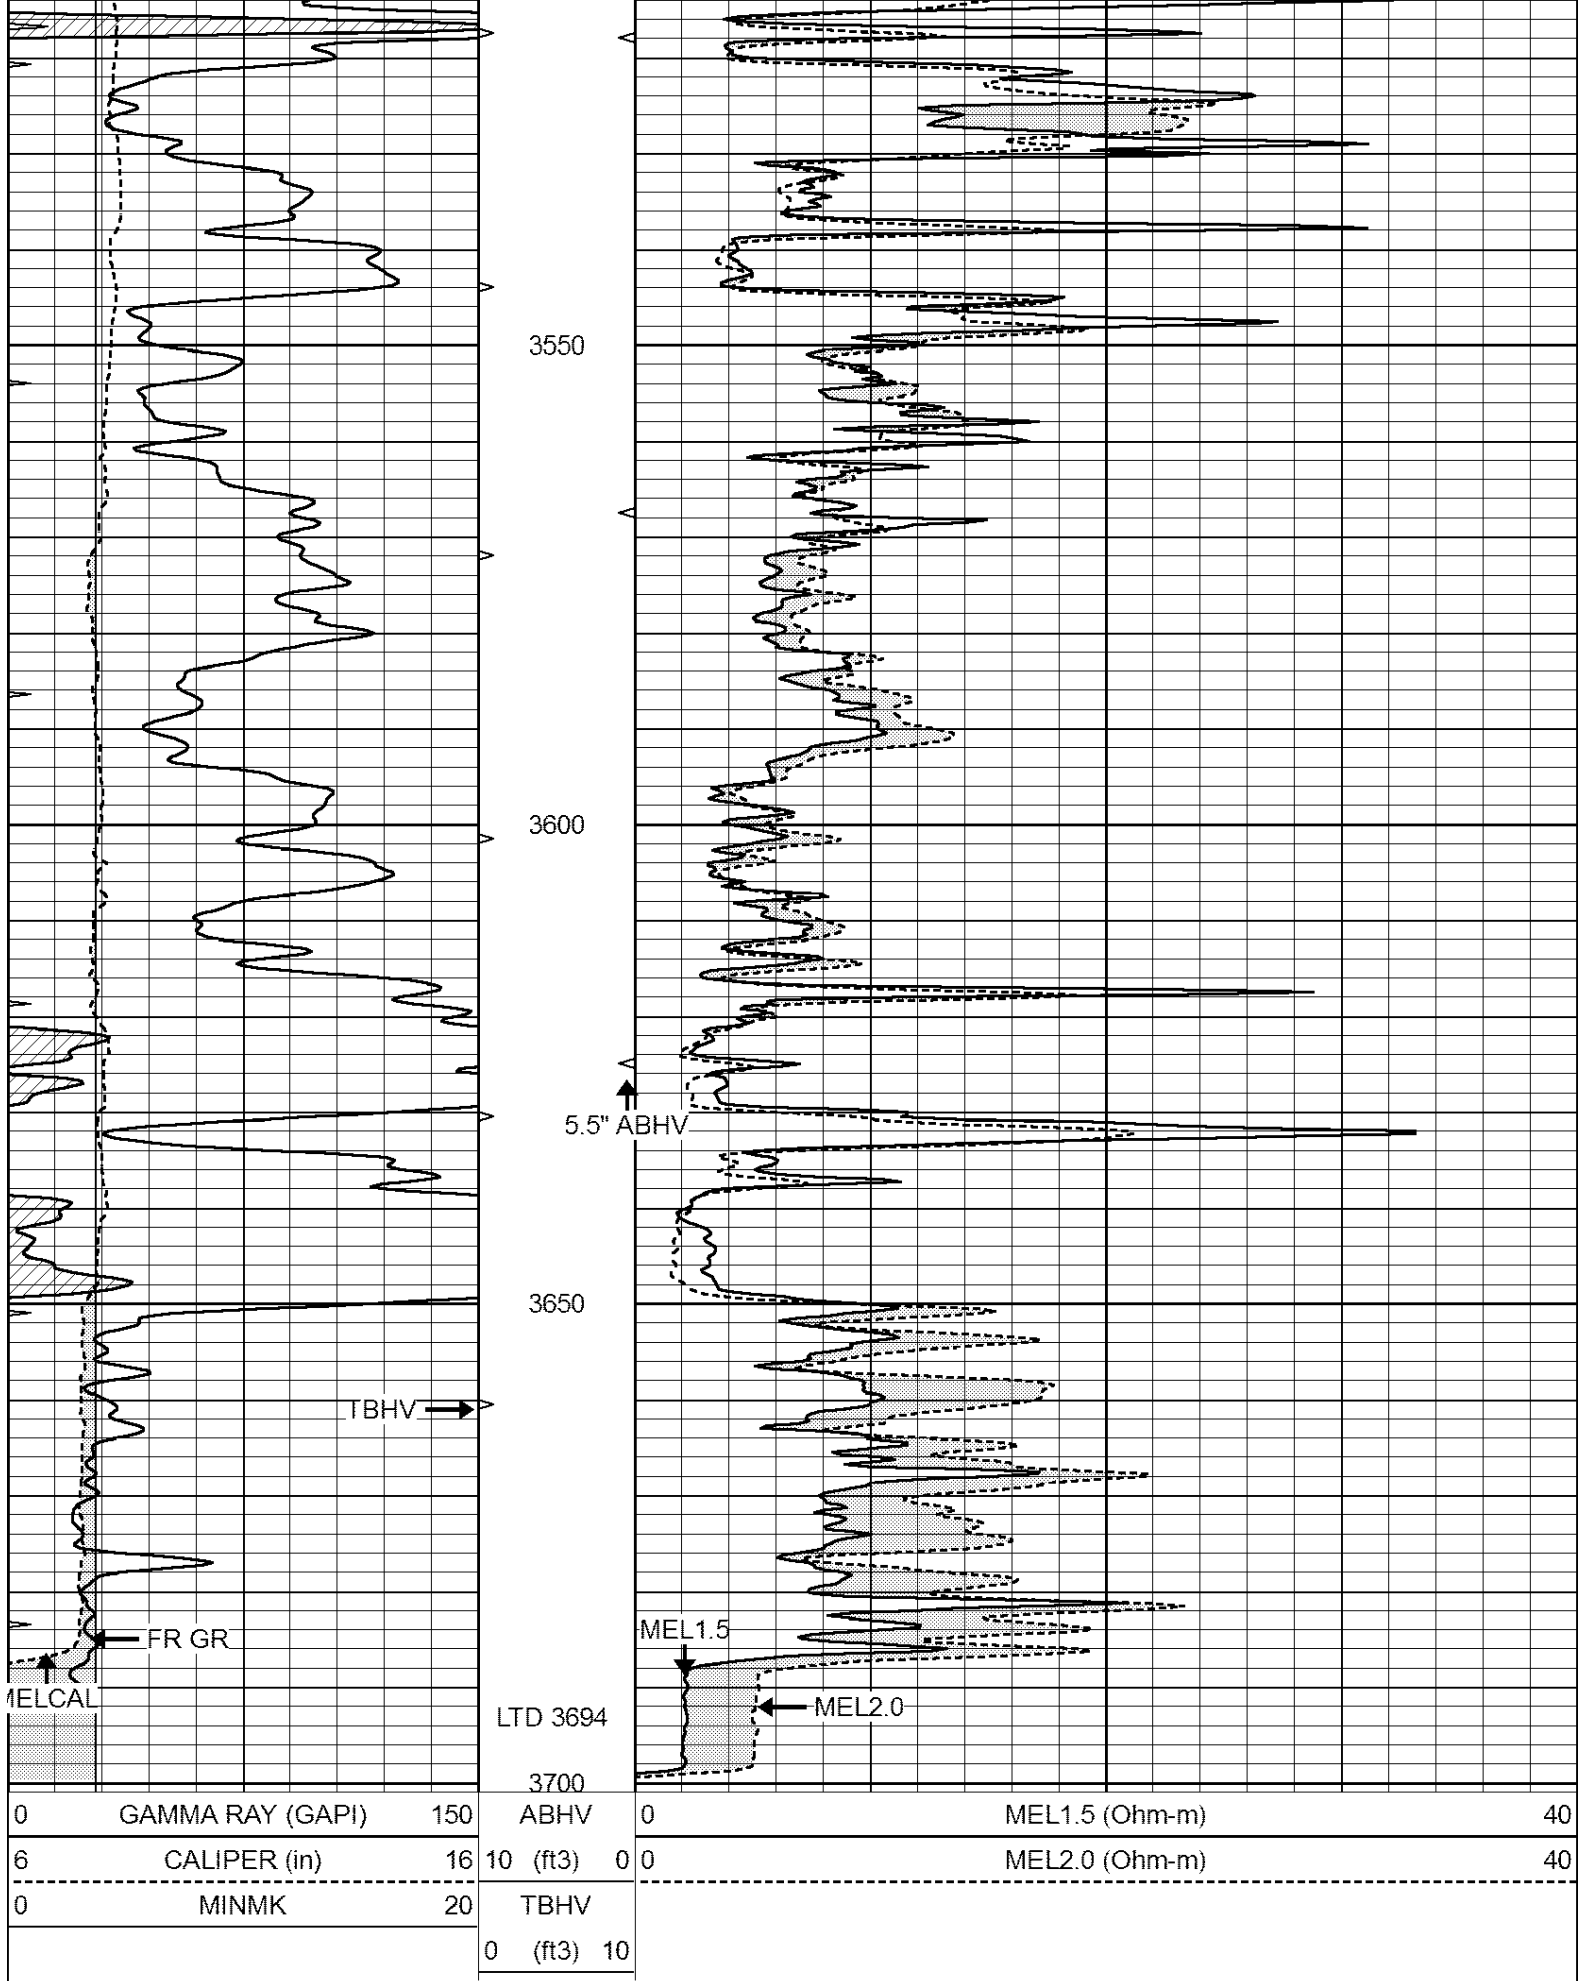





REPEAT SECTION

Database File: 408771ddn.db
Dataset Pathname: pass5.2
Presentation Format: micro
Dataset Creation: Sun May 20 06:32:22 2012 by Calc Open-Cased 110302
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

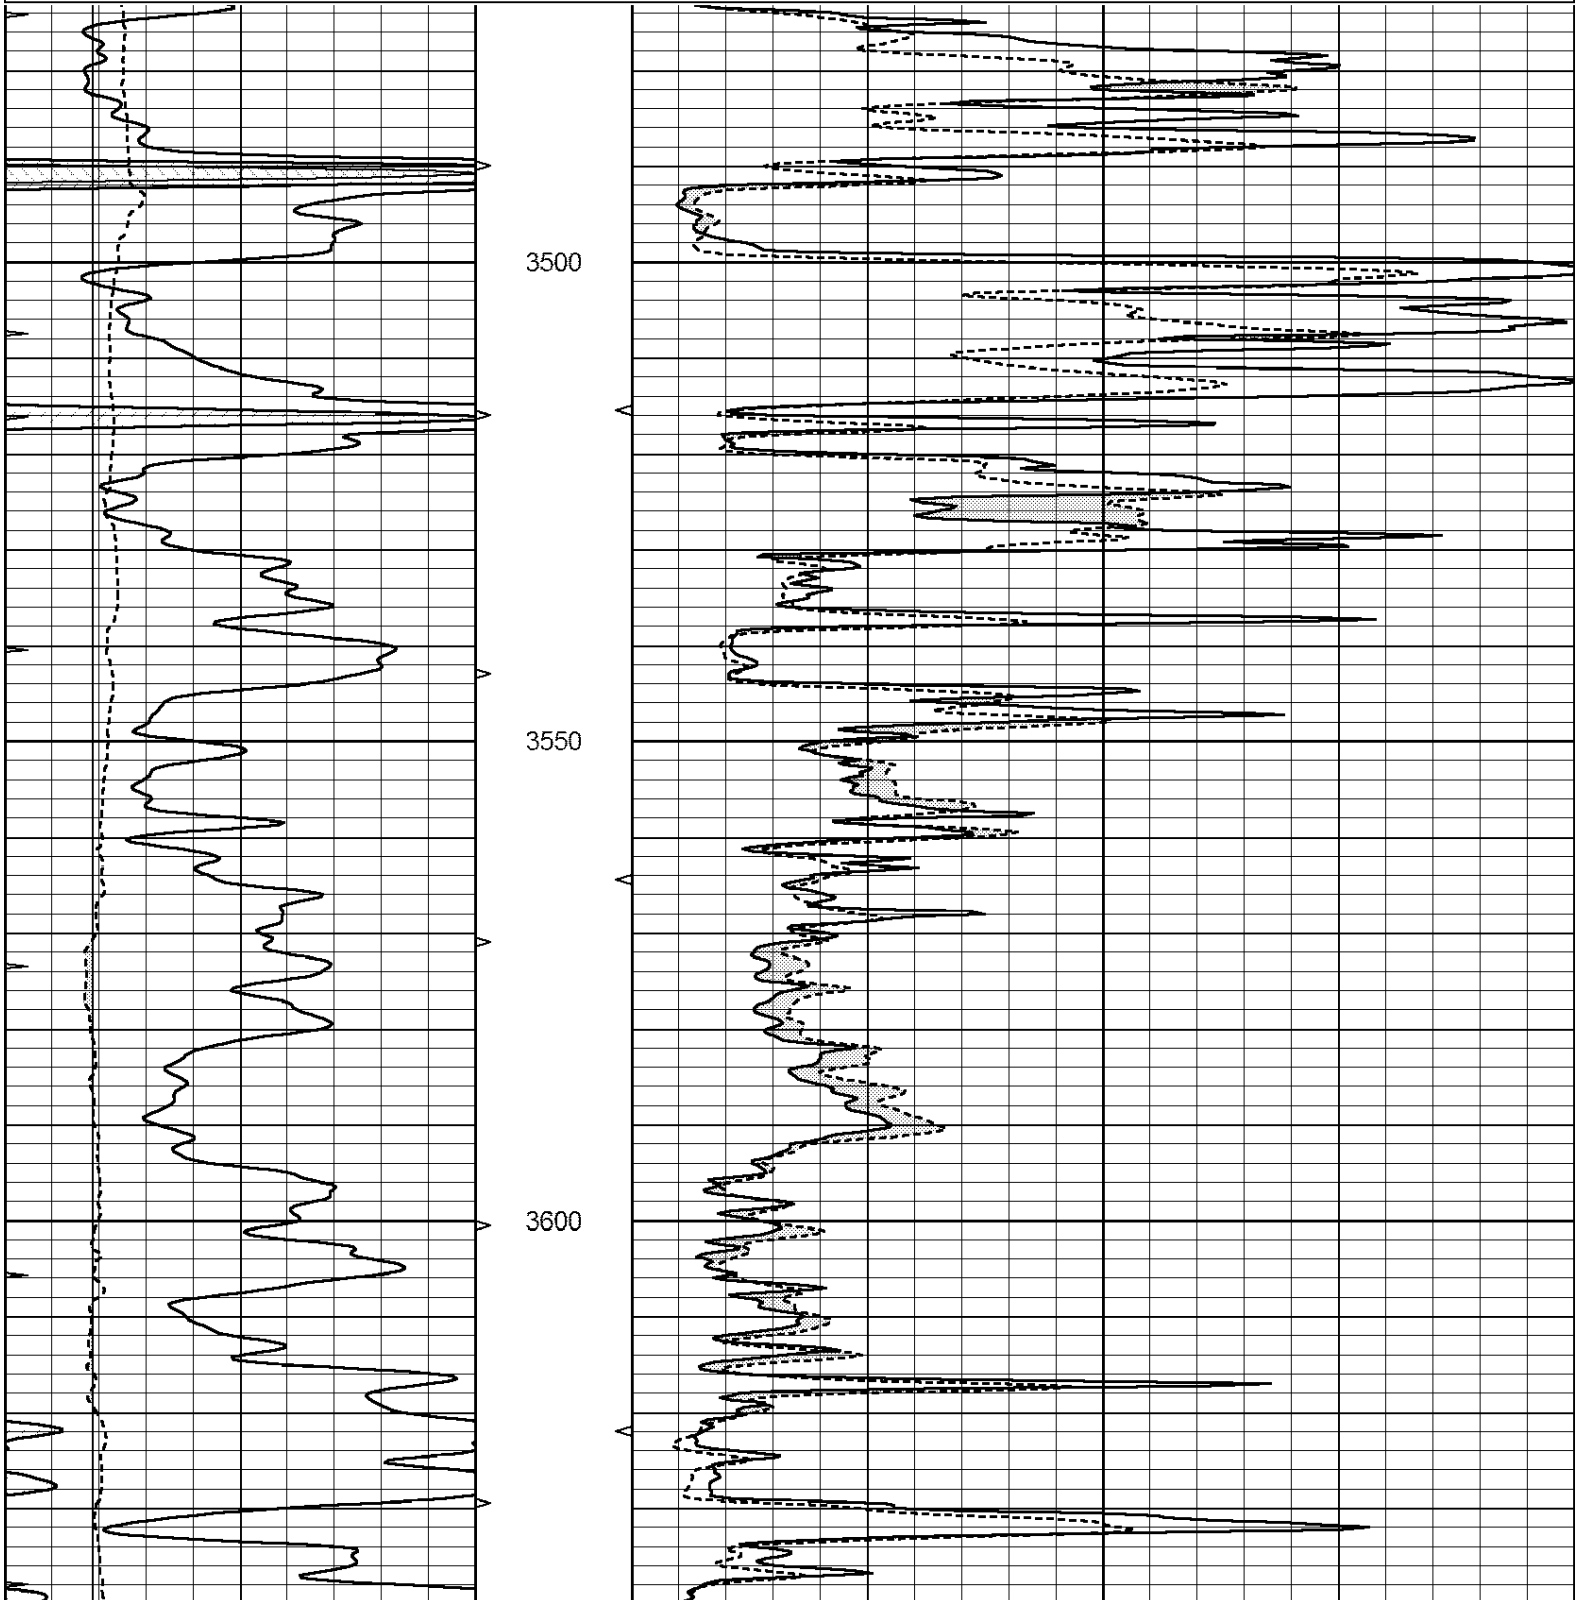

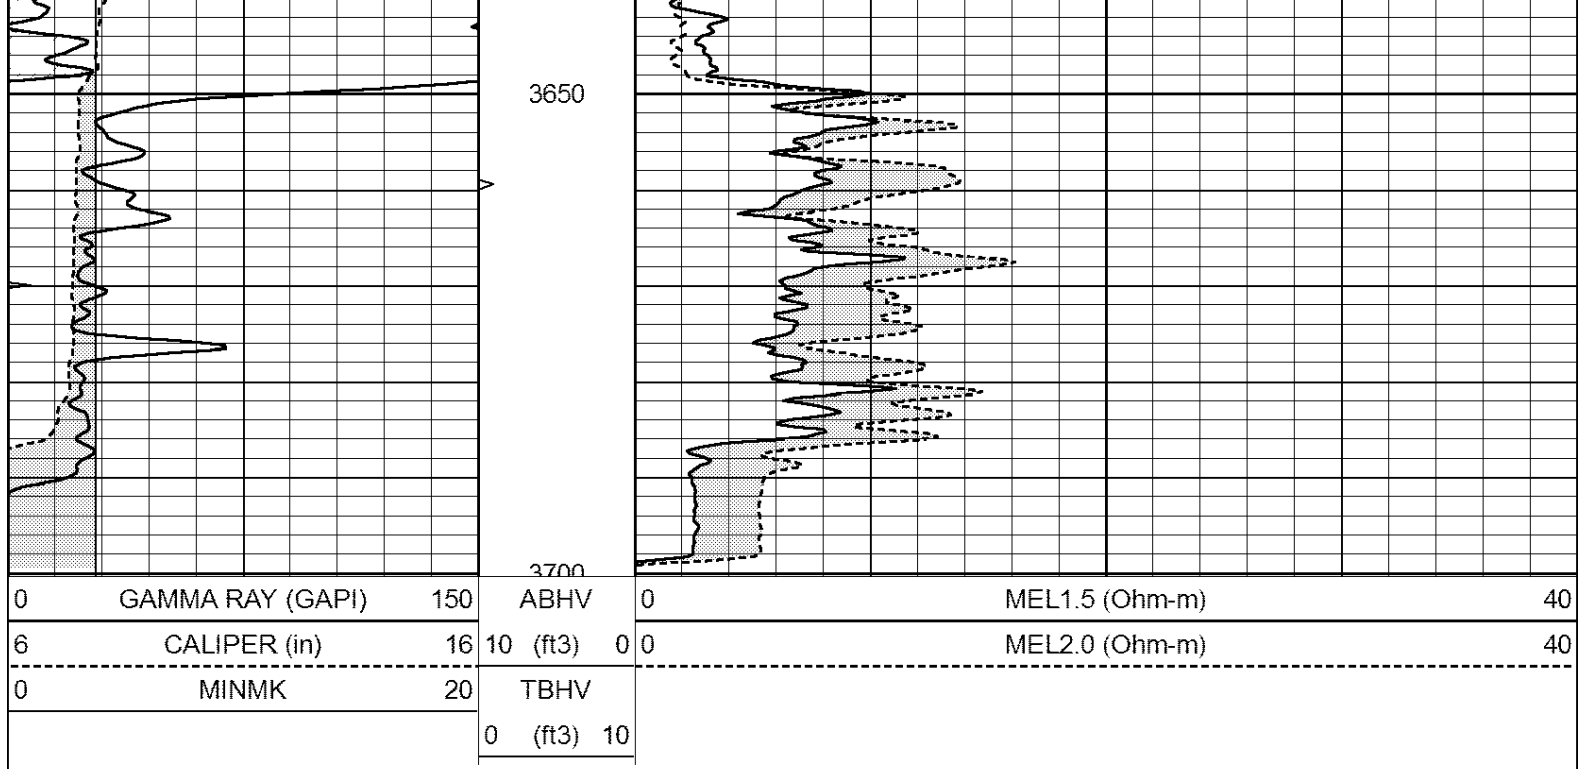

Calibration Report			
Database File:	408771ddn.db		
Dataset Pathname:	pass6.5		
Dataset Creation:	Sun May 20 06:35:04 2012		
MICRO Calibration Report			
Serial Number:	2		
Tool Model:	PROBE		
Performed:	Fri May 18 02:41:13 2012		
Caliper Calibration:	Gain=4.164	Offset=3.193	
	Low Cal	High Cal	
References	7.900	15.000	
Readings	1.130	2.835	
1.5" Calibration:	Gain=25.000	Offset=-0.700	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.065	1.210	
2" Calibration:	Gain=60.000	Offset=-1.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.012	1.043	
Gamma Ray Calibration Report			
Serial Number:	GR4		
Tool Model:	OPEN		
Performed:	Sun May 20 05:50:45 2012		
Calibrator Value:	200.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	189.0	cps	
Sensitivity:	1.2000	GAPI/cps	