



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	REYNOLDS #1-33		
Field	MULLBERRY CREEK		
County	FORD		
State	KANSAS		
Company	VINCENT OIL CORPORATION		
Well	REYNOLDS #1-33		
Field	MULLBERRY CREEK		
County	FORD		
State	KANSAS		
Location:	API # : 15-057-20774-0000 2513' FSL & 330' FWL		
Permanent Datum	GROUND LEVEL	Elevation	2513
Log Measured From	KELLY BUSHING 13' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 33	TWP 28S	RGE 23W	
Other Services CDL/CNL/PE DIL/SONIC			
Elevation			
K.B. 2526 D.F. 2524 G.L. 2513			
Date	1/2/12		
Run Number	TWO		
Depth Driller	5650		
Depth Logger	5652		
Bottom Logged Interval	5632		
Top Log Interval	4100		
Casing Driller	8 5/8" @ 846'		
Casing Logger	646		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 14,400 PPM	
Density / Viscosity	9.2/46		
pH / Fluid Loss	8.5/22.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400 @ 70F		
Rmt @ Meas. Temp	.300 @ 70F		
Rmc @ Meas. Temp	.480 @ 70F		
Source of Rmt / Rmc	MEASUREMENT		
Rm @ BHT	.214 @ 131F		
Time Circulation Stopped	6 HOURS		
Time Logger on Bottom	11:30 P.M.		
Maximum Recorded Temperature	131F		
Equipment Number	4010		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM HALL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS

KINGSDOWN, KS. & HWY 54, 2N. ON "RD. 125" TO "WILBURN RD.", 5W. TO "RD. 120", 1/2N. TO SECOND
TANK BATTERY, E. INTO THEN S. THROUGH FENCE





SUPERIOR
Hays,
Kansas

MAIN SECTION

Database File: 008131pe.db
 Dataset Pathname: pass6.3
 Presentation Format: micro
 Dataset Creation: Mon Jan 02 04:35:12 2012 by Calc Open-Cased 110302
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

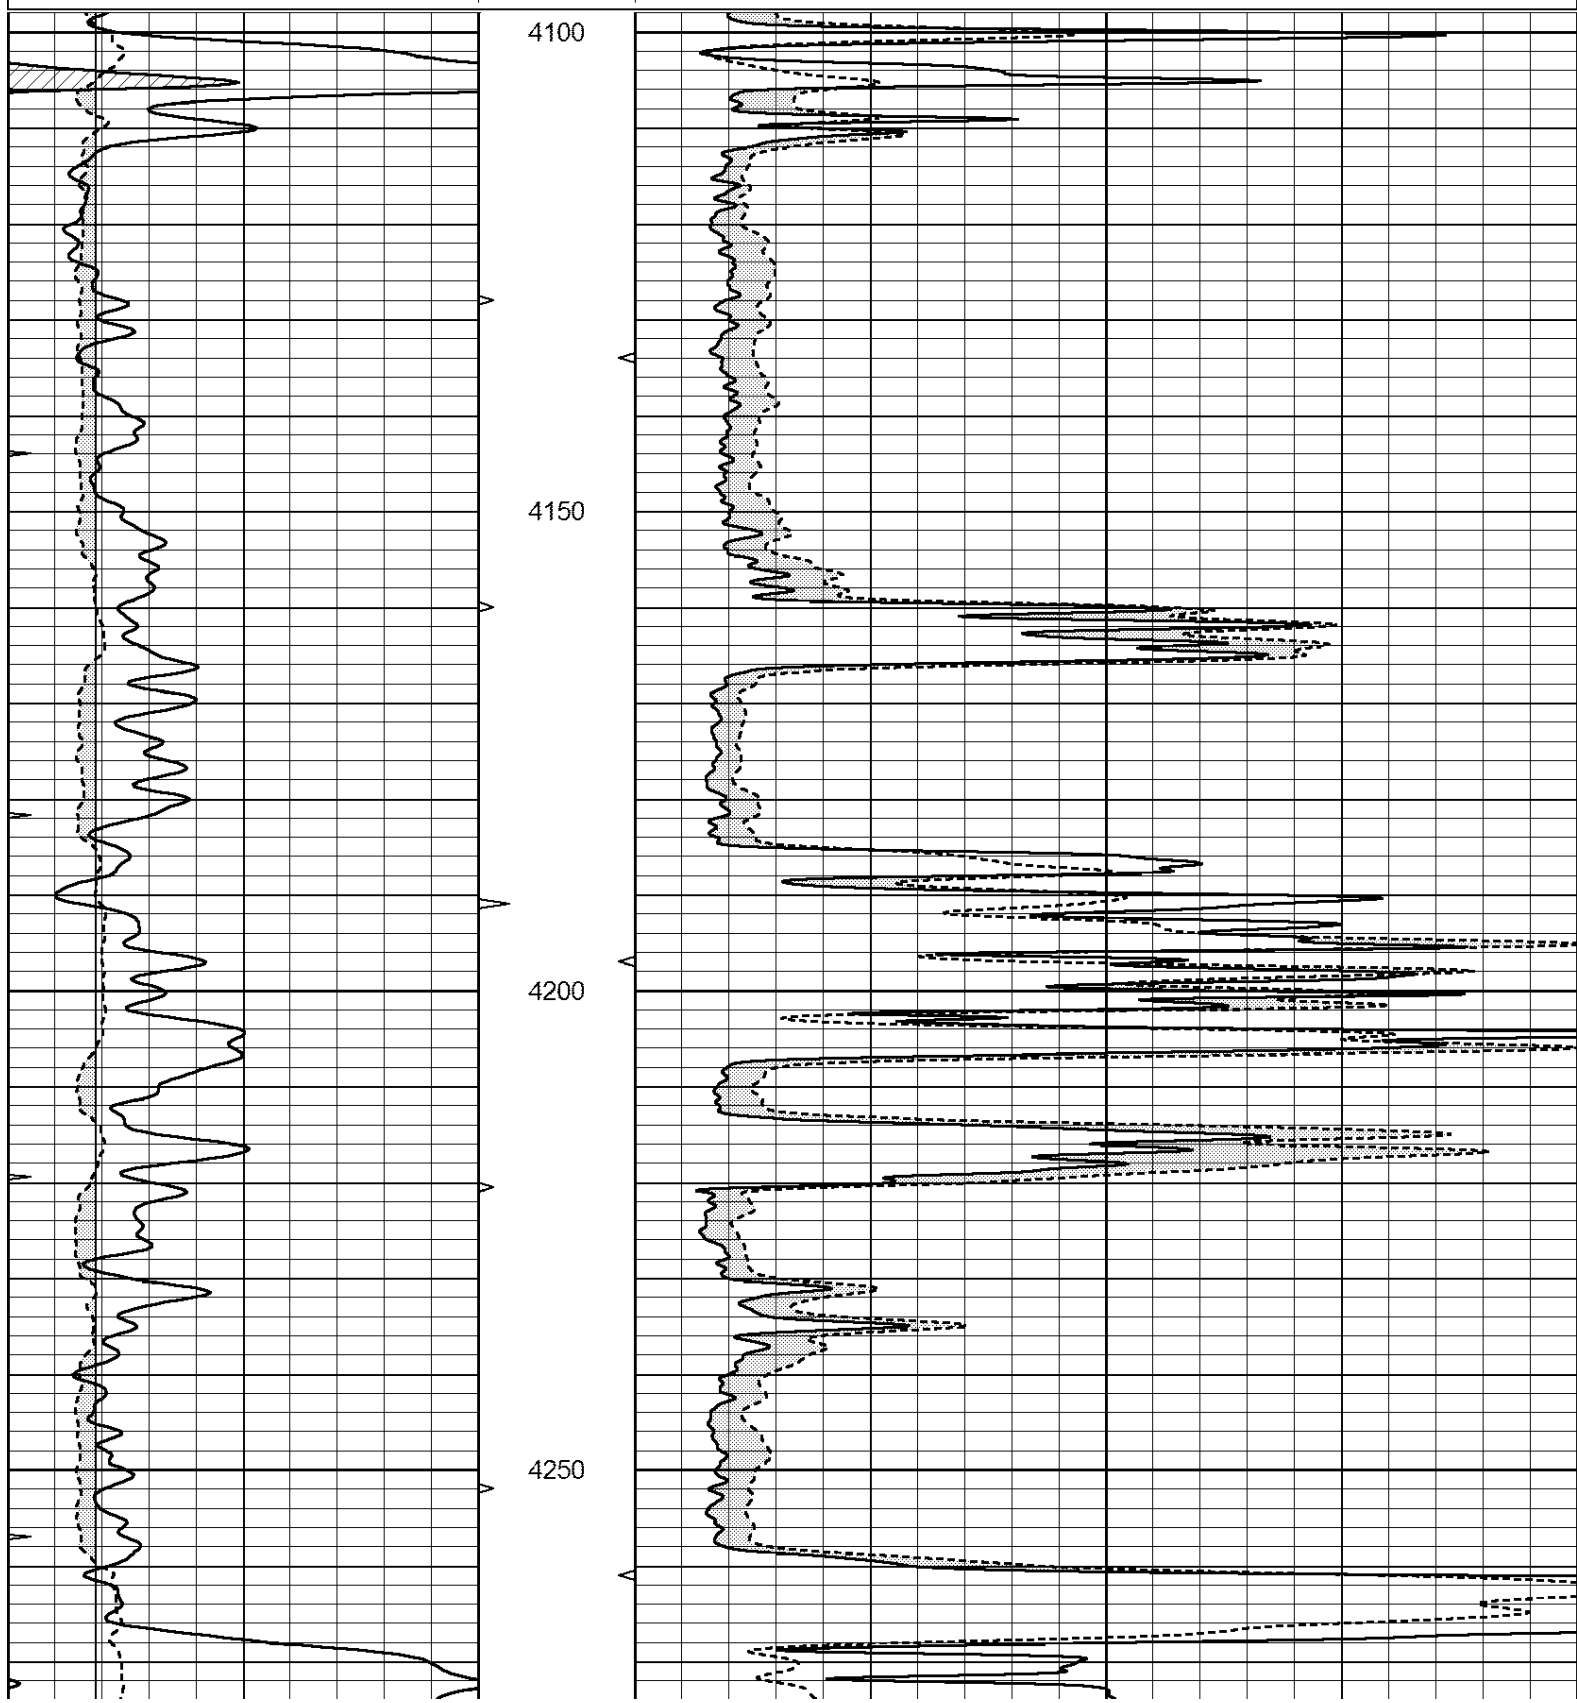

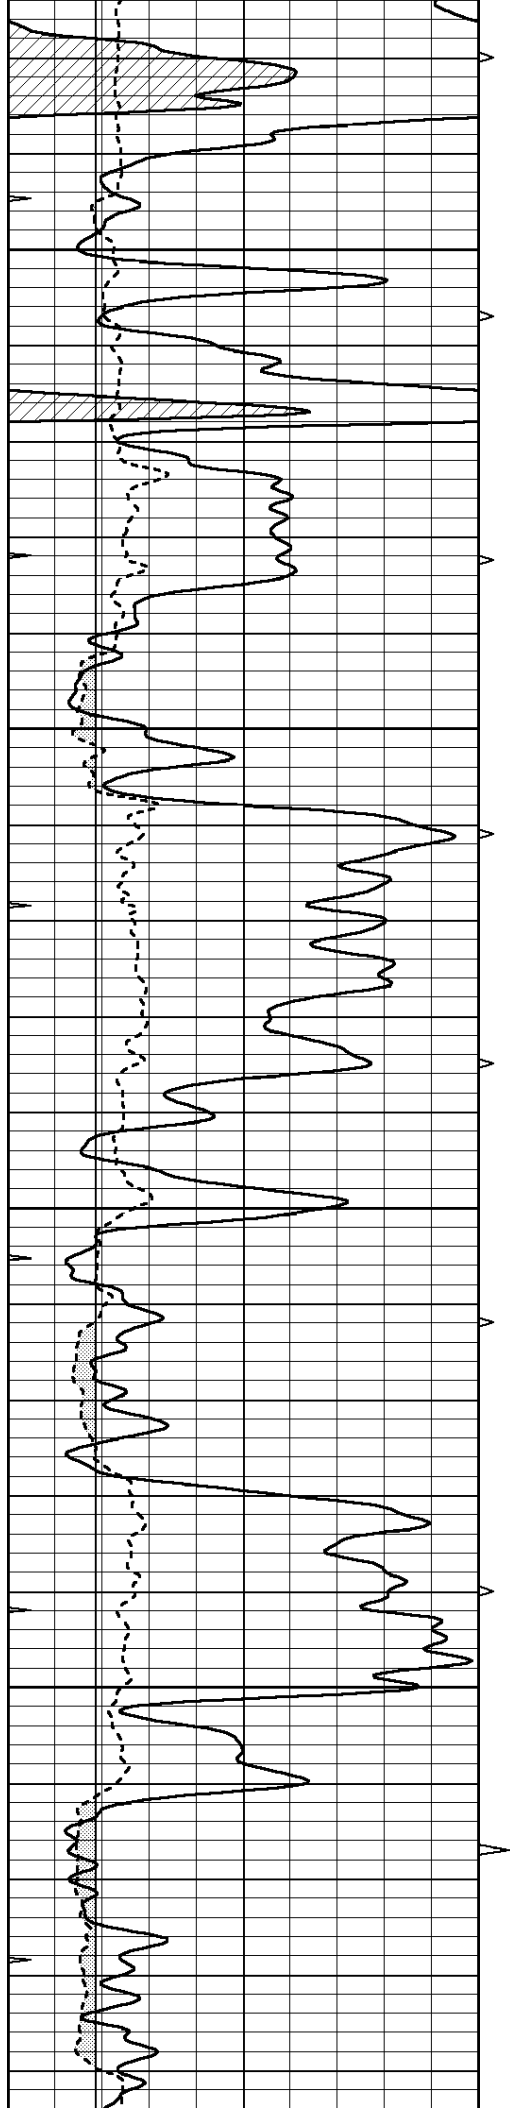



4300

4350

4400

4450

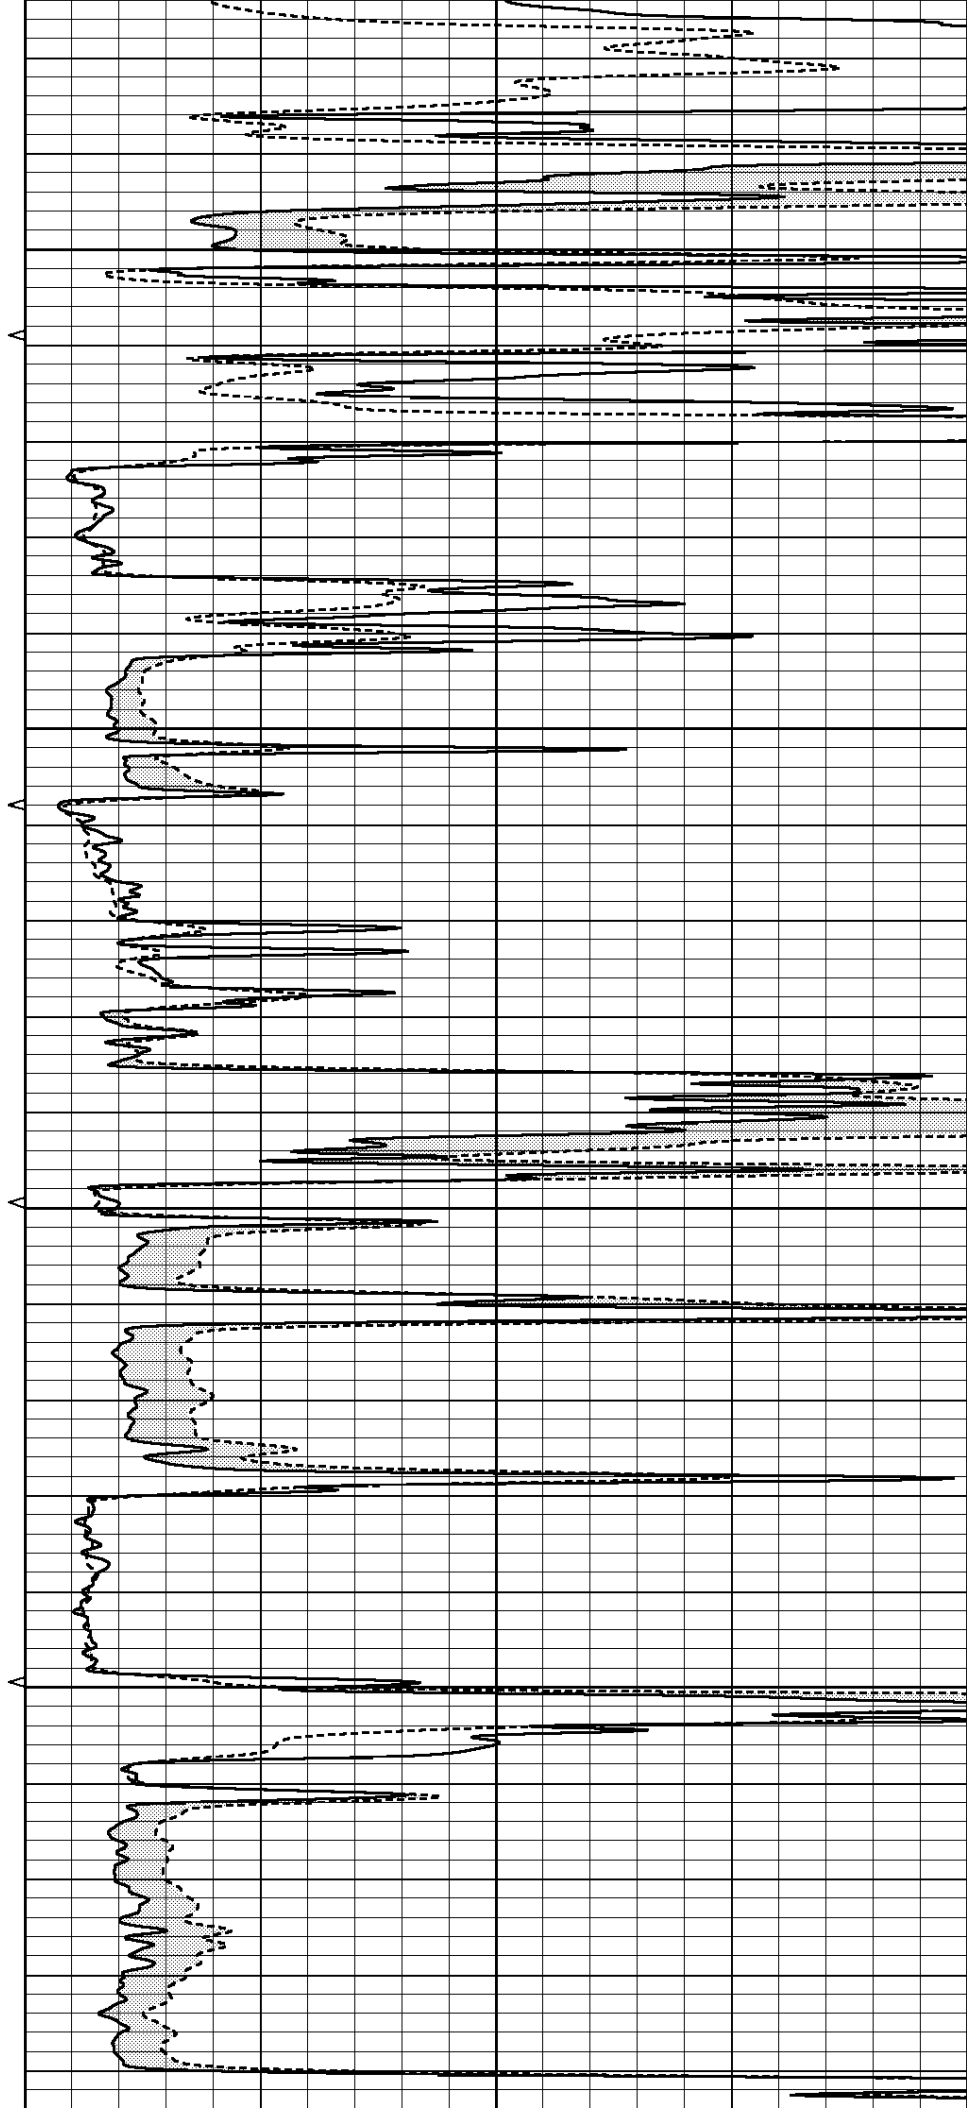

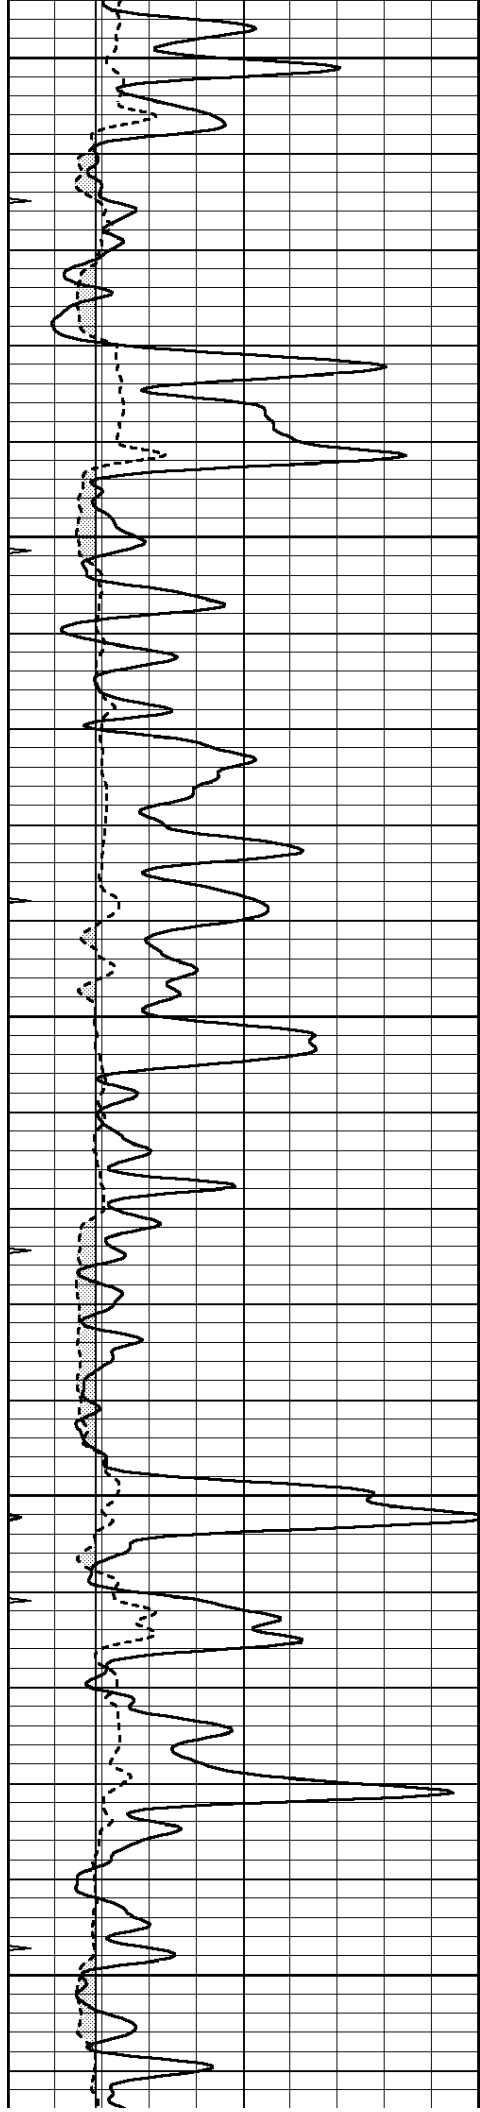


4500



4550


4600

4650

4700

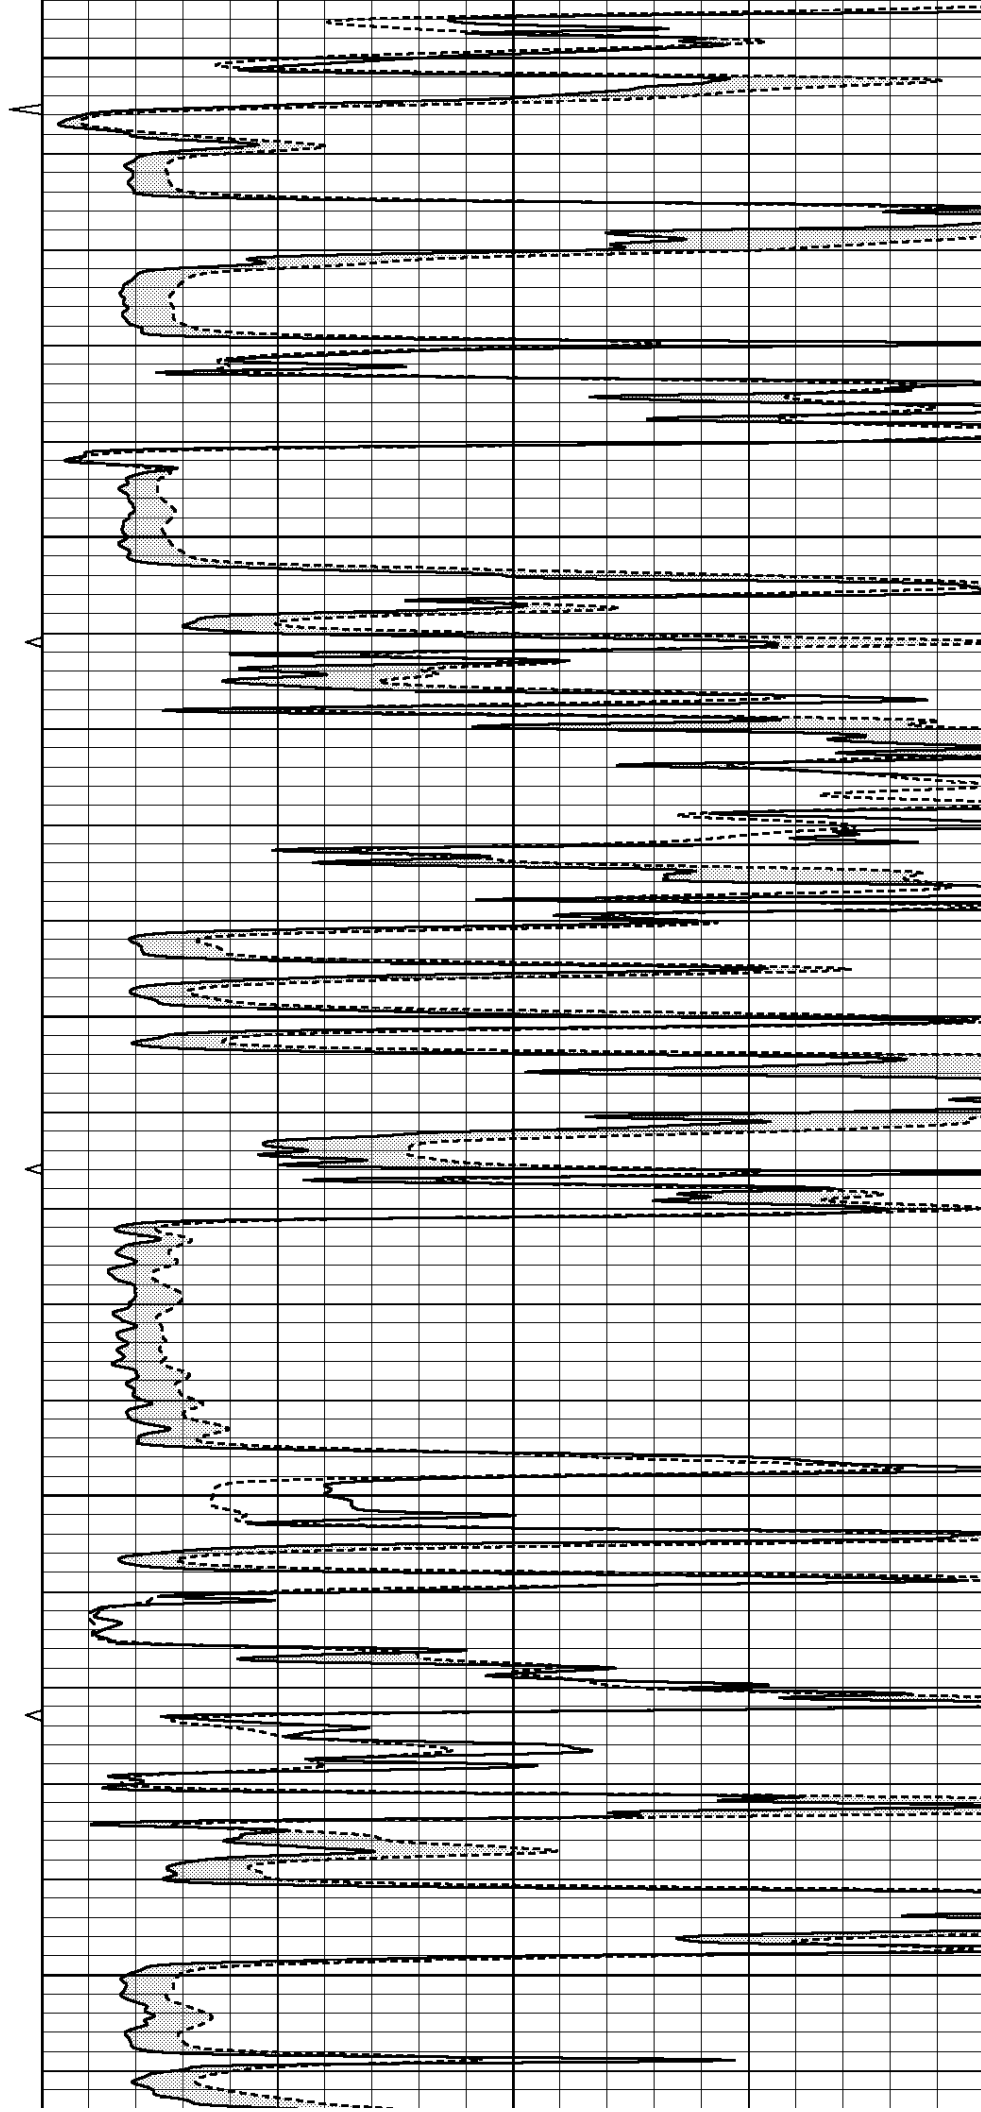

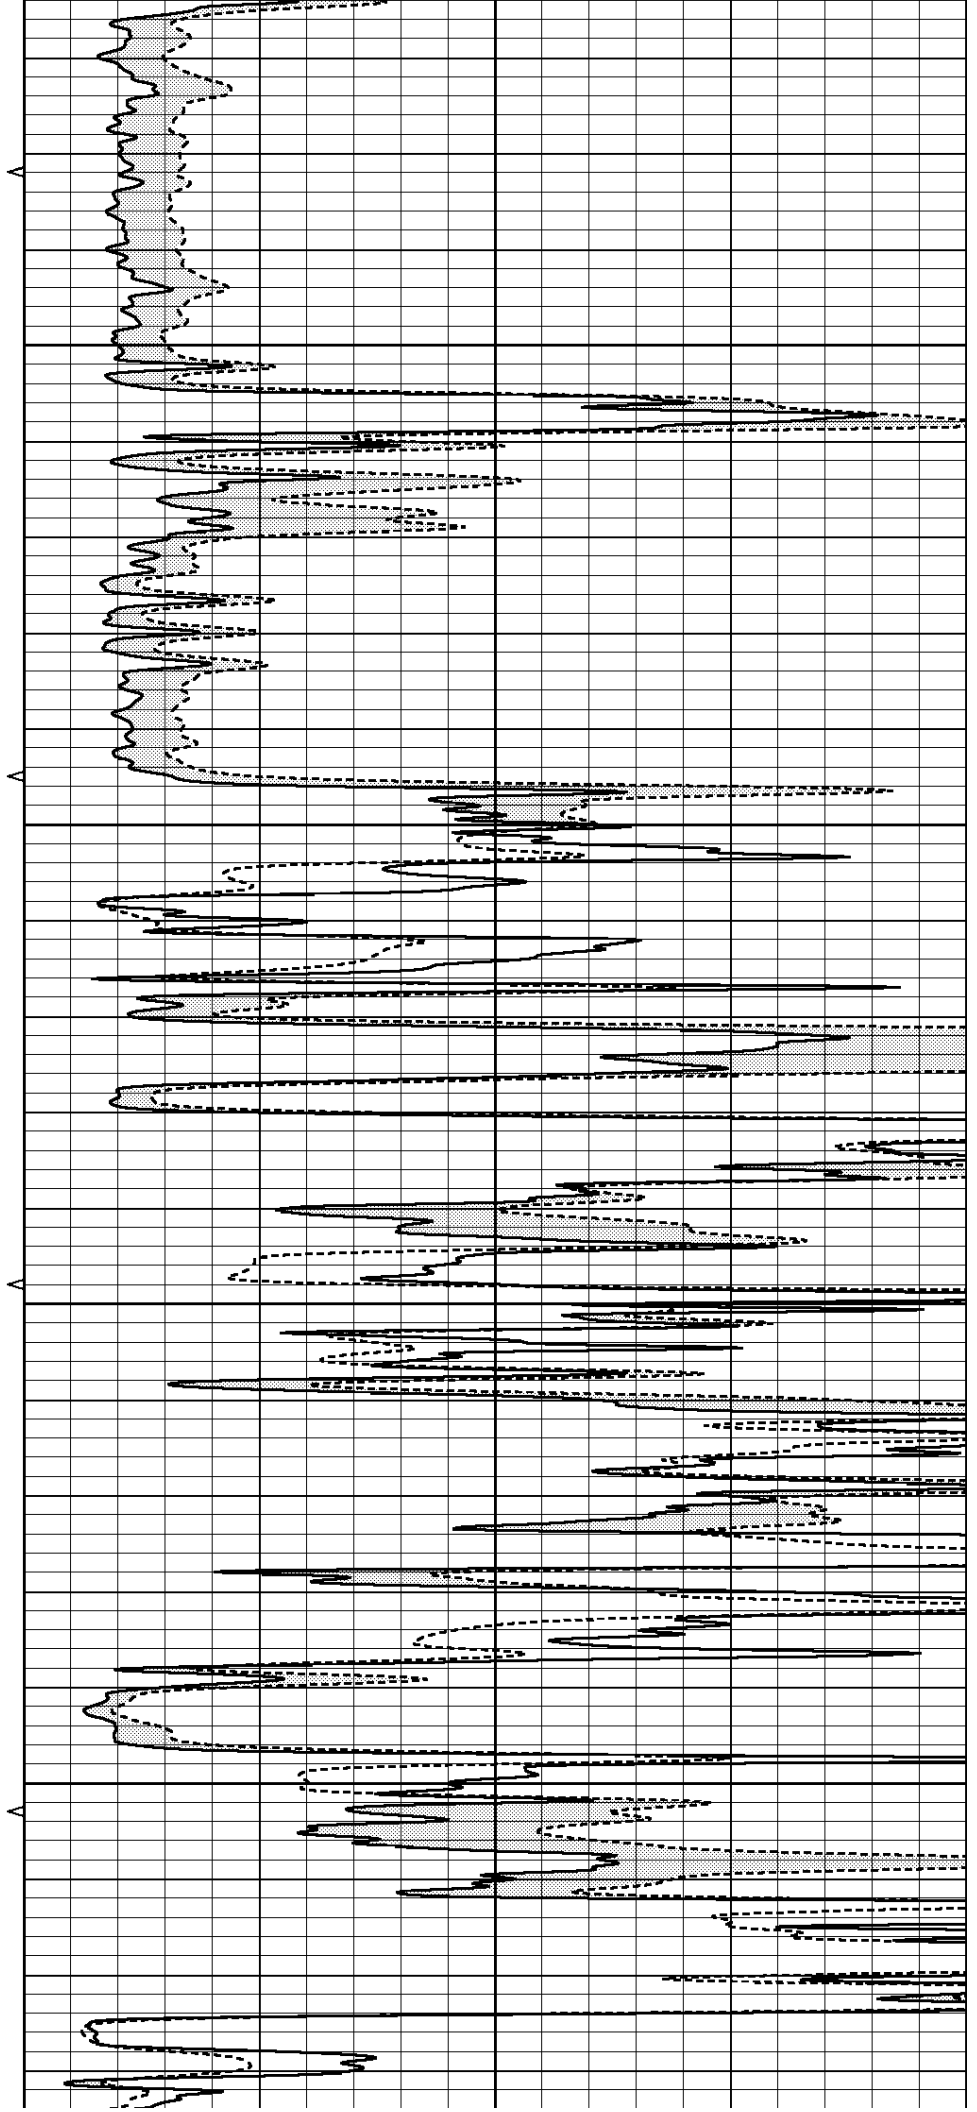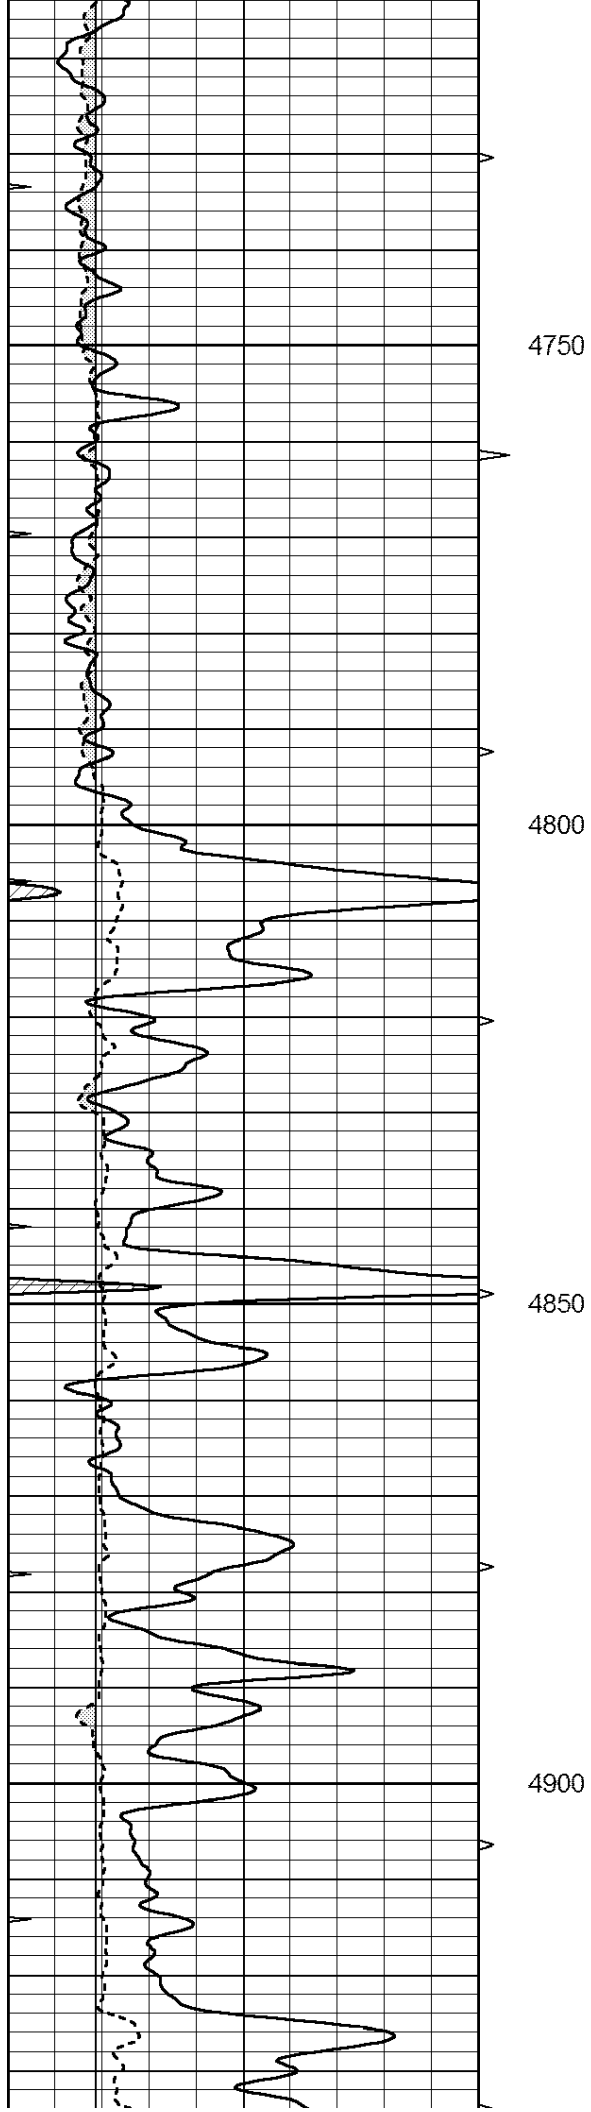

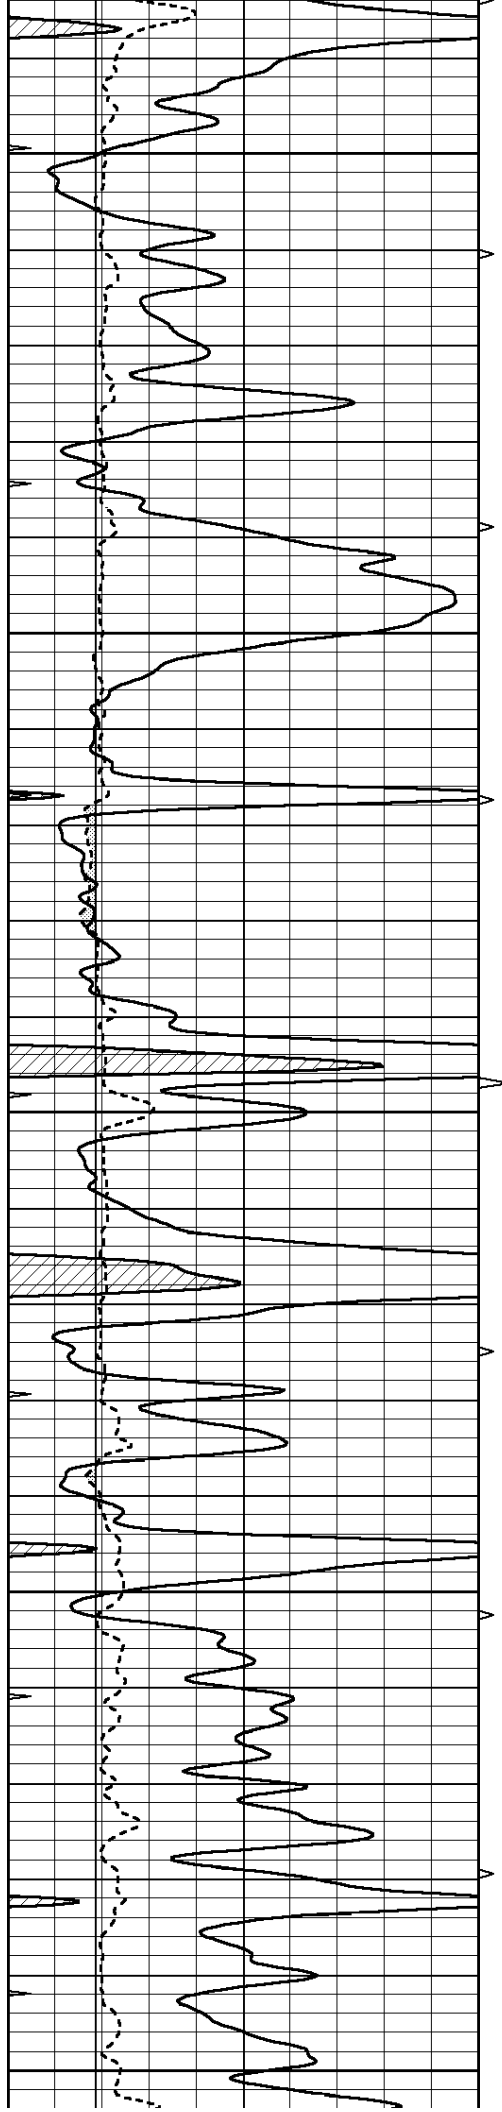


4950


5000

5050

5100

5150

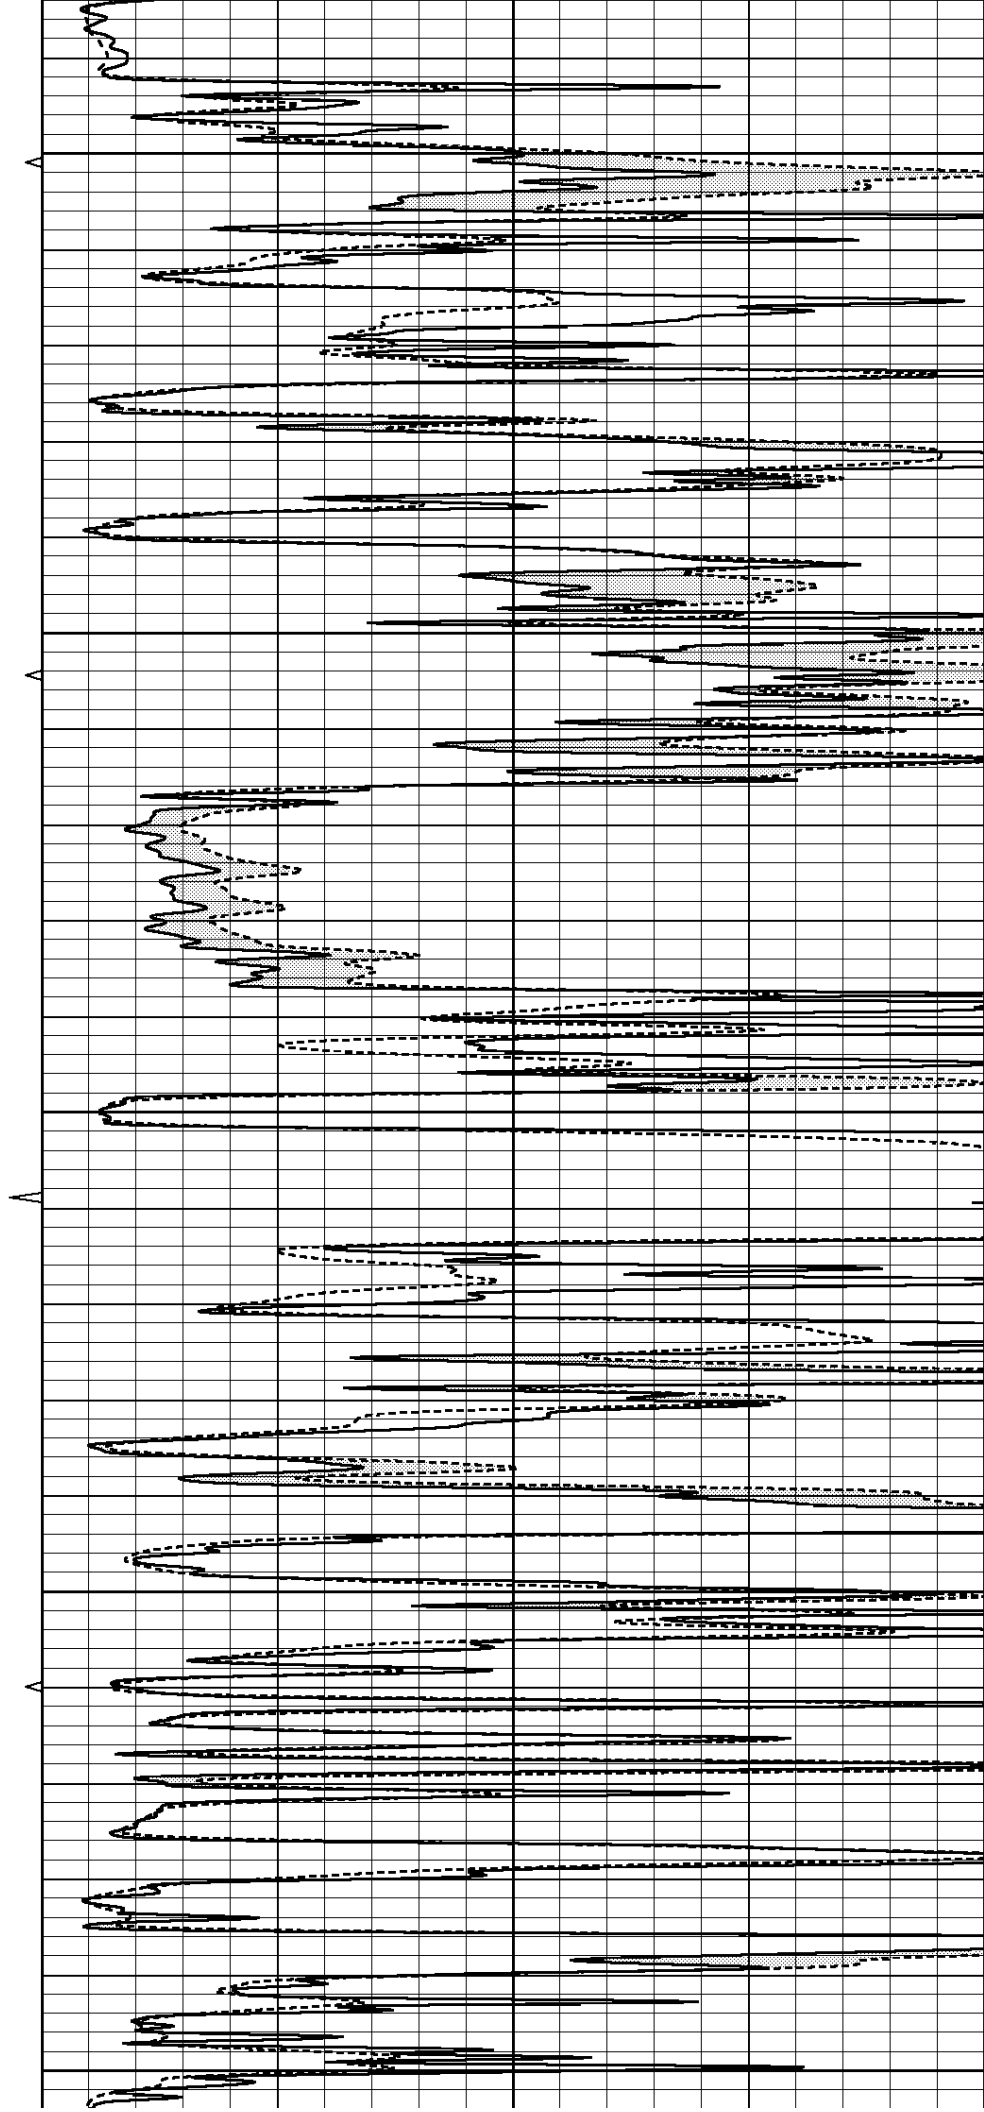

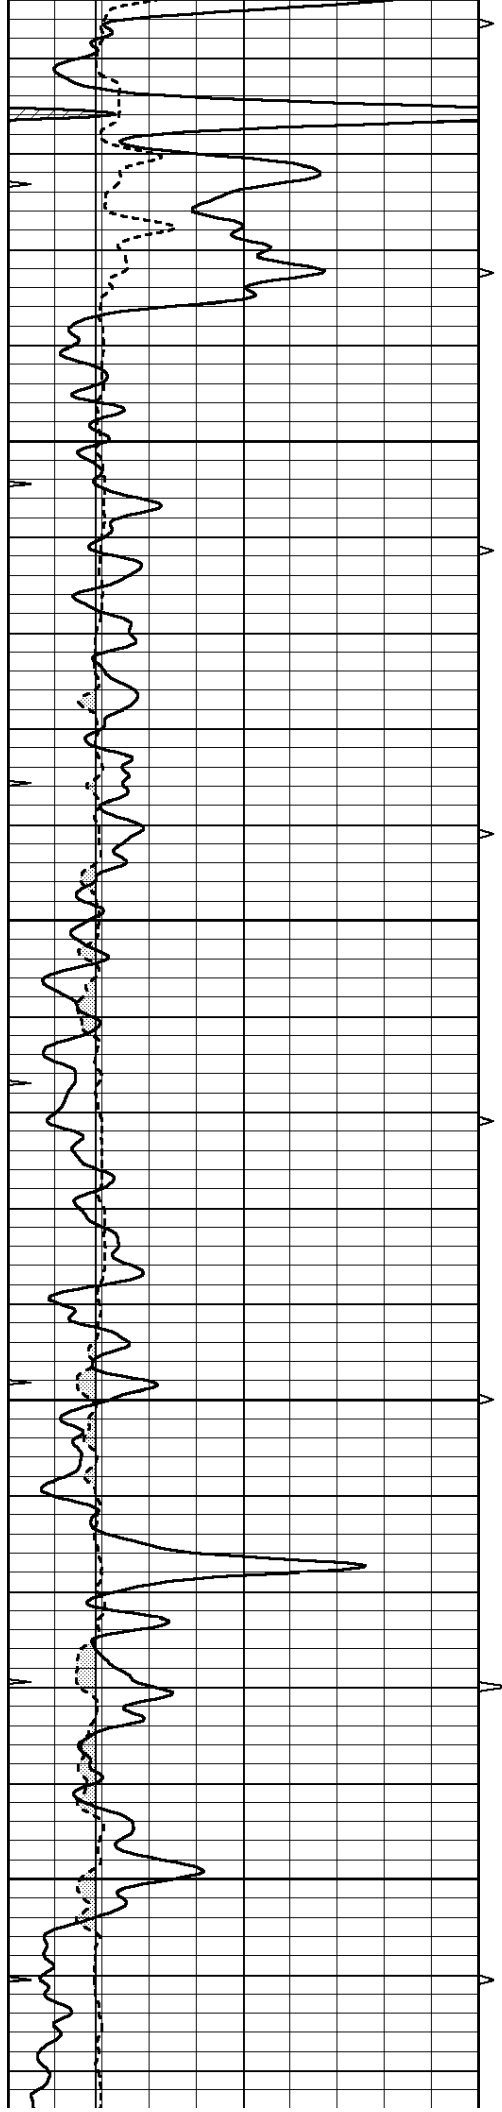



5200


5250

5300

5350

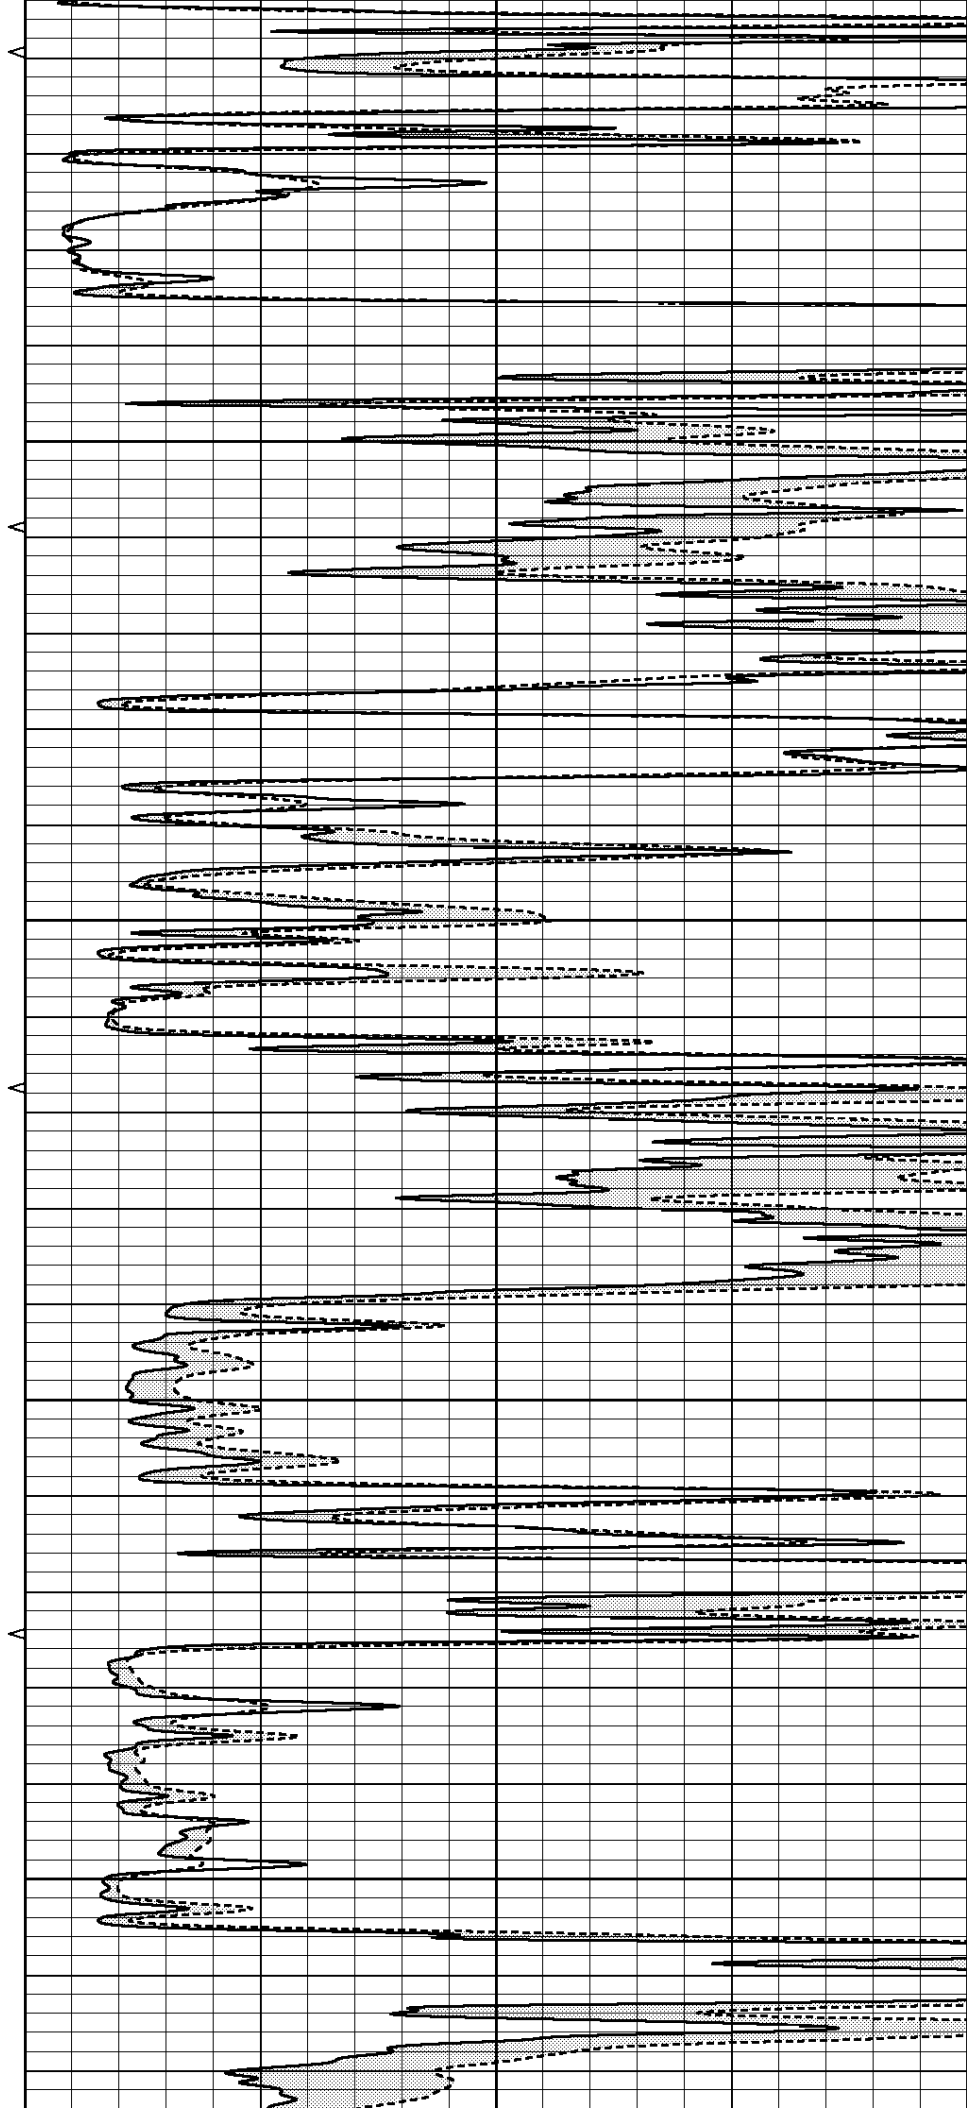


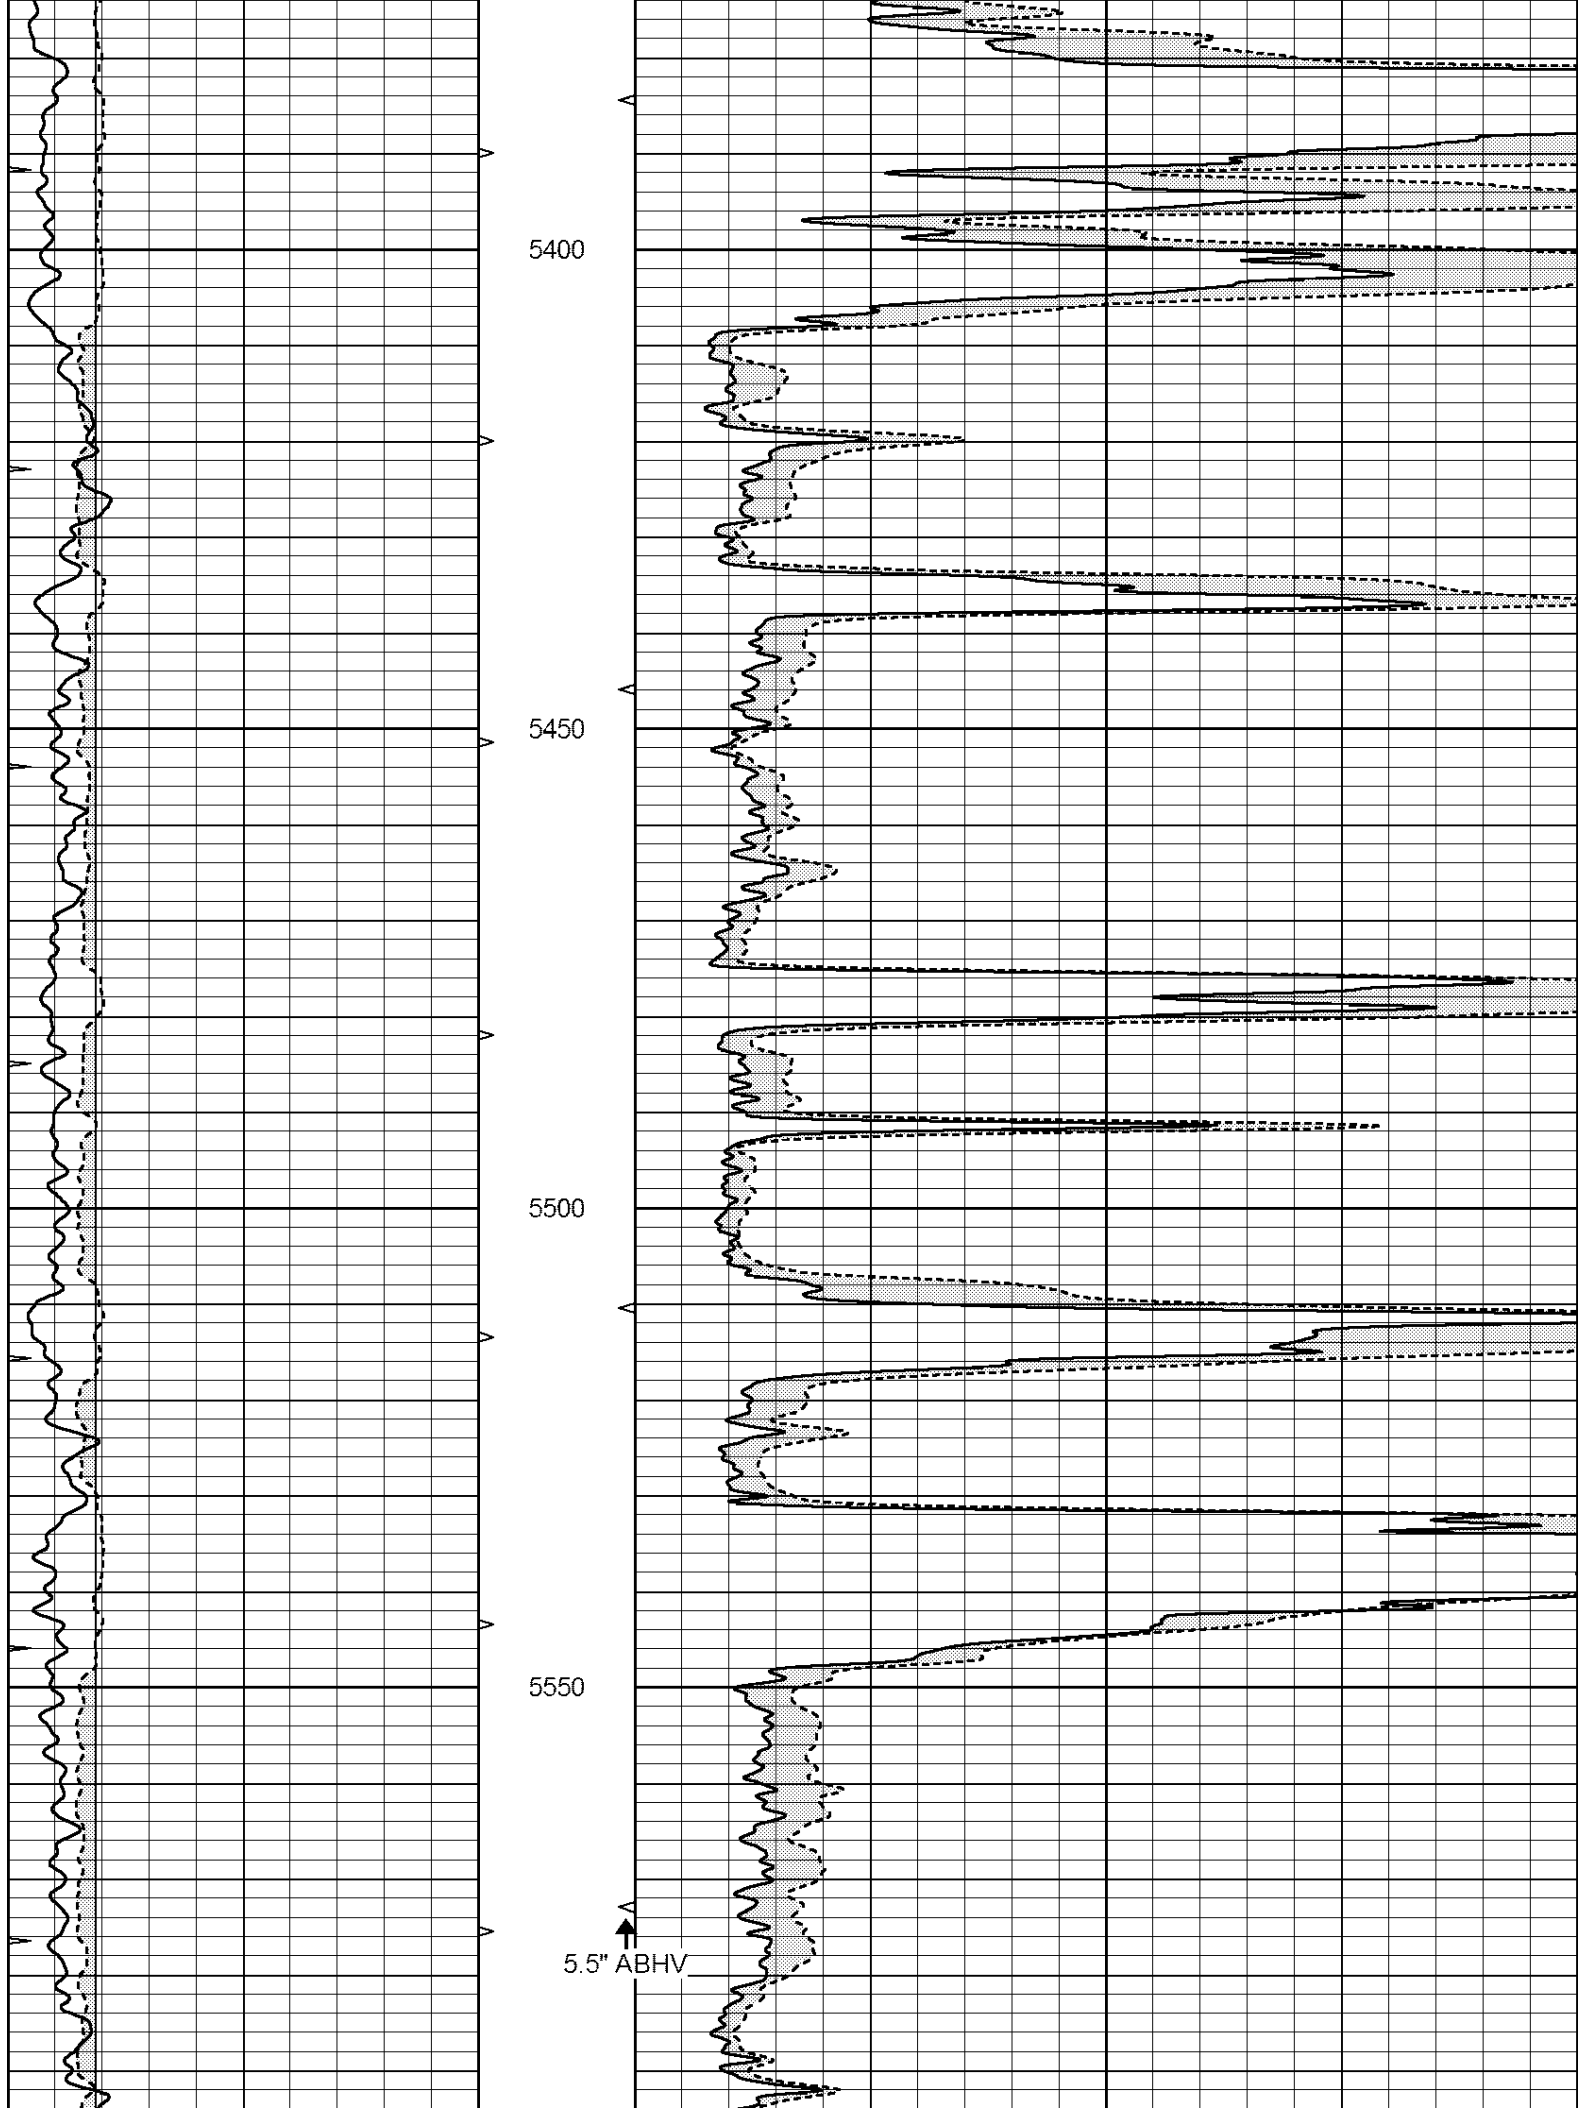


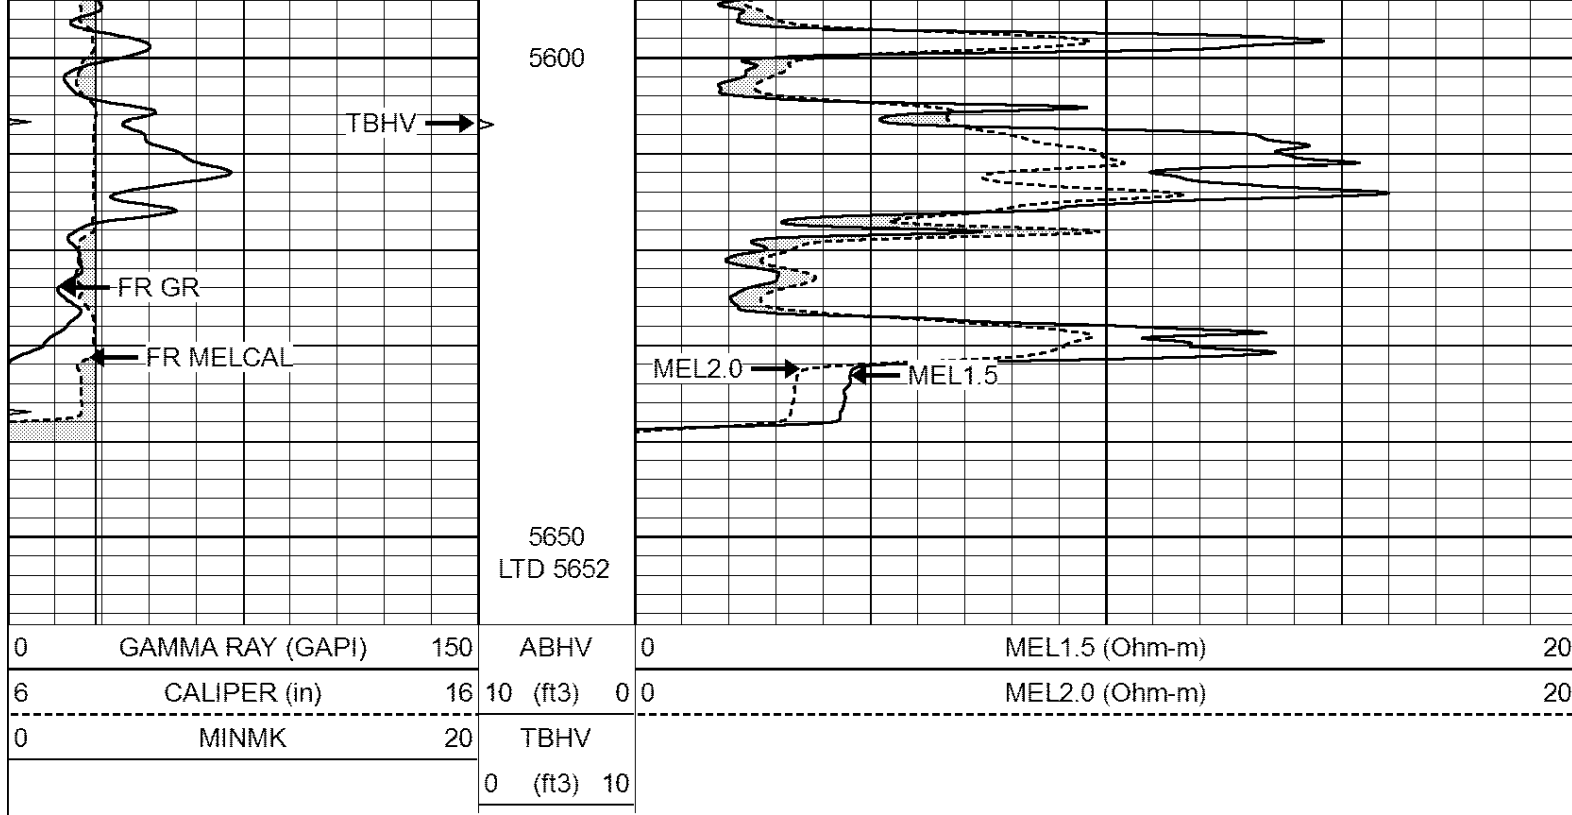


SUPERIOR
Hays,
Kansas

REPEAT SECTION

Database File: 008131pe.db
Dataset Pathname: pass5.7
Presentation Format: micro
Dataset Creation: Mon Jan 02 04:53:29 2012
Charted by: Depth in Feet scaled 1:240

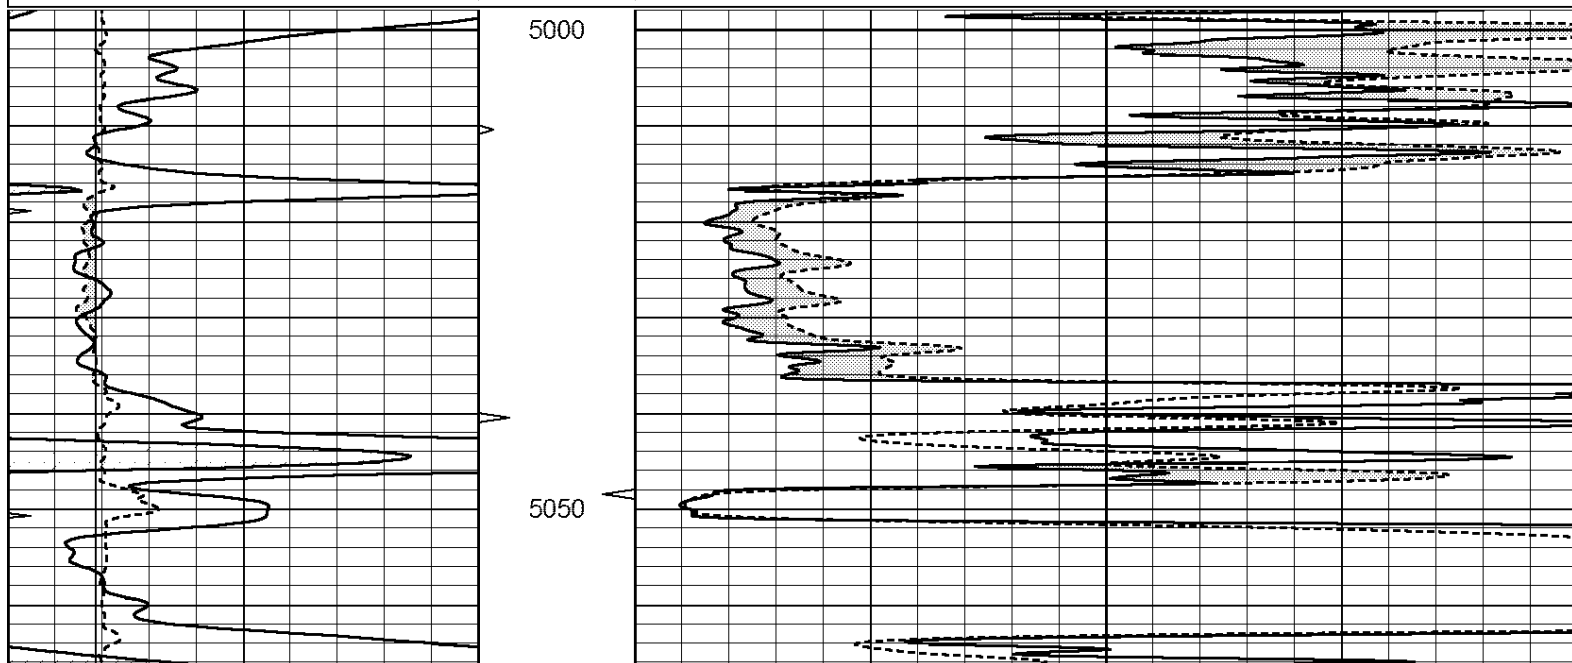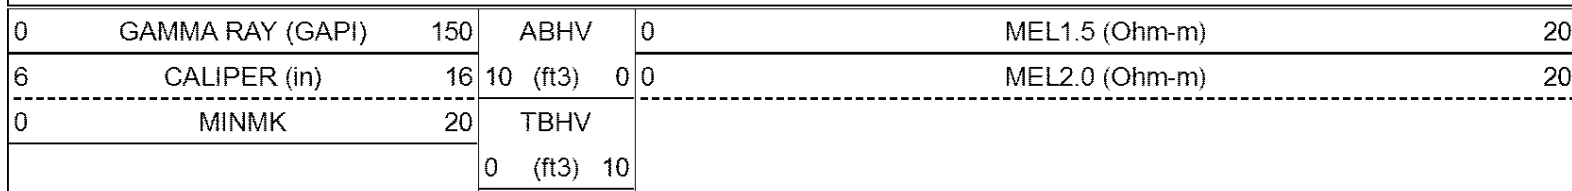

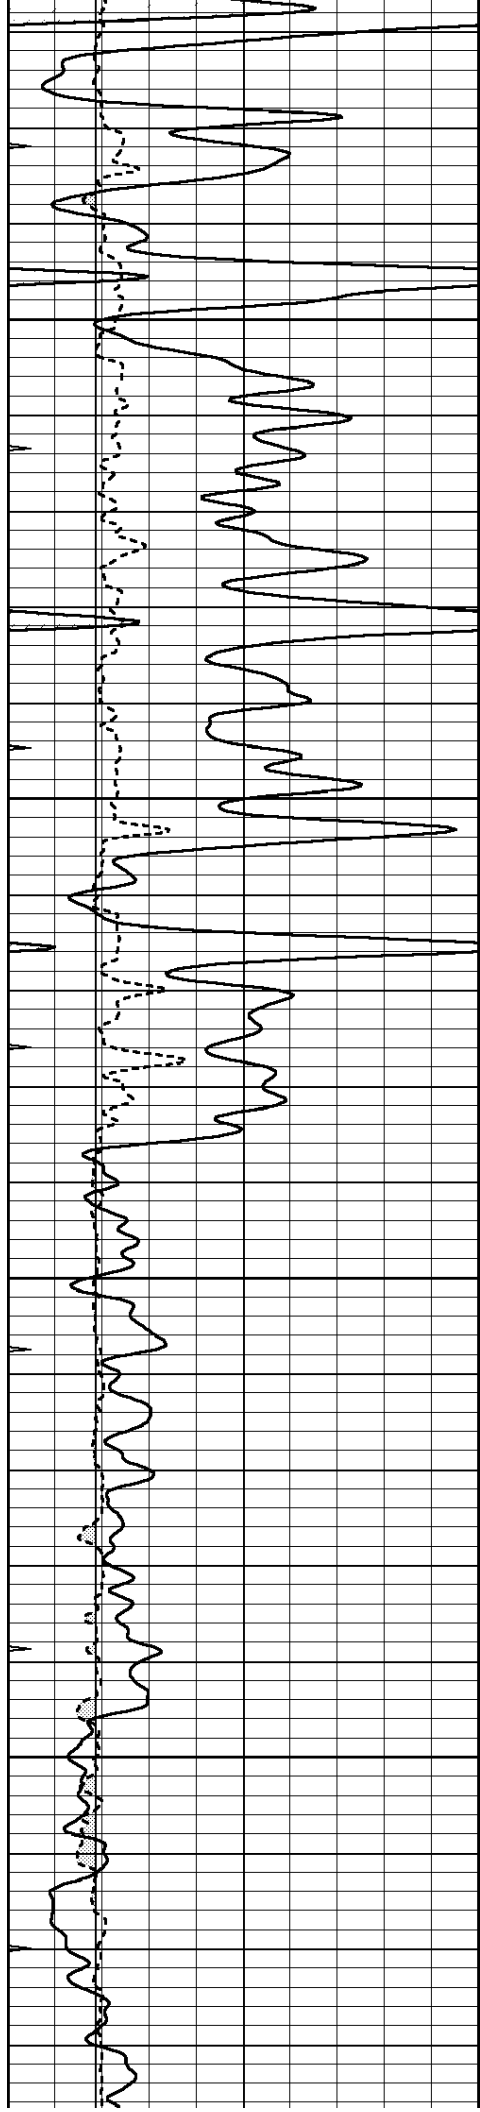




5100


5150

5200

5250

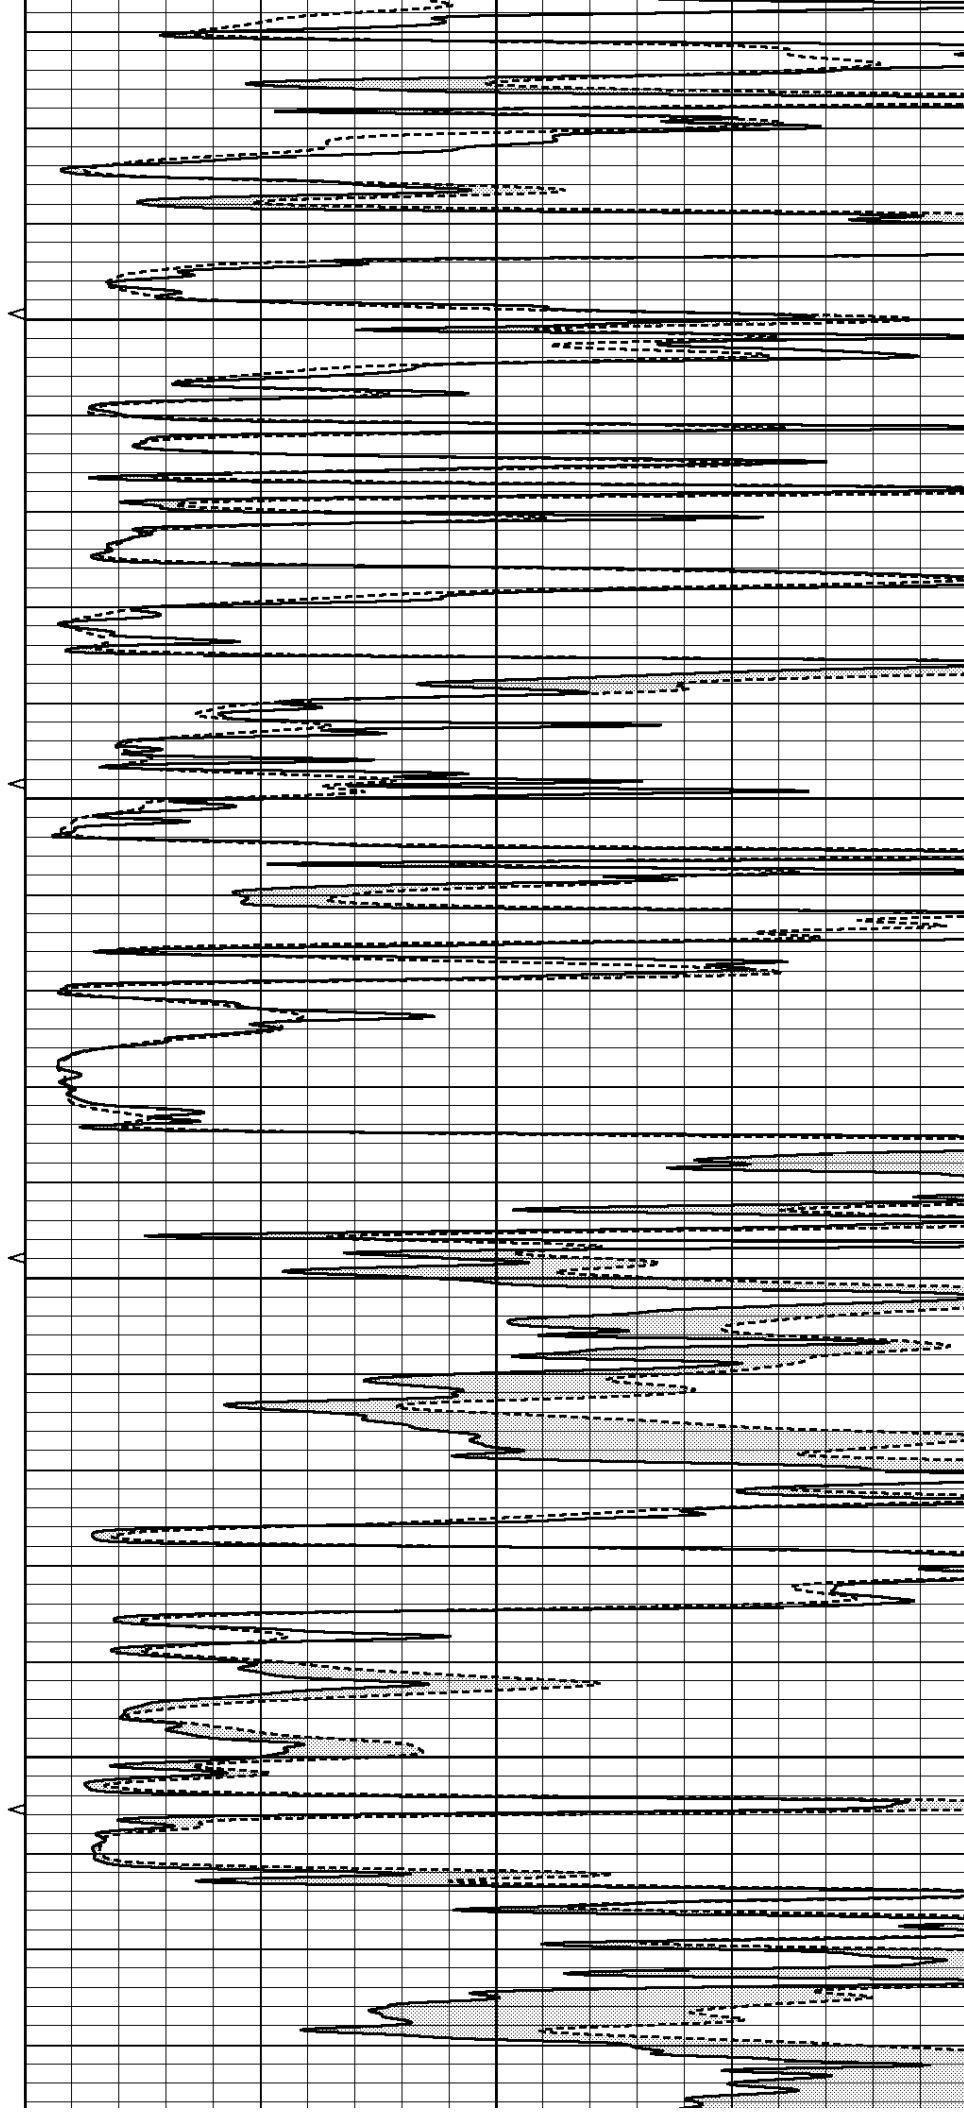

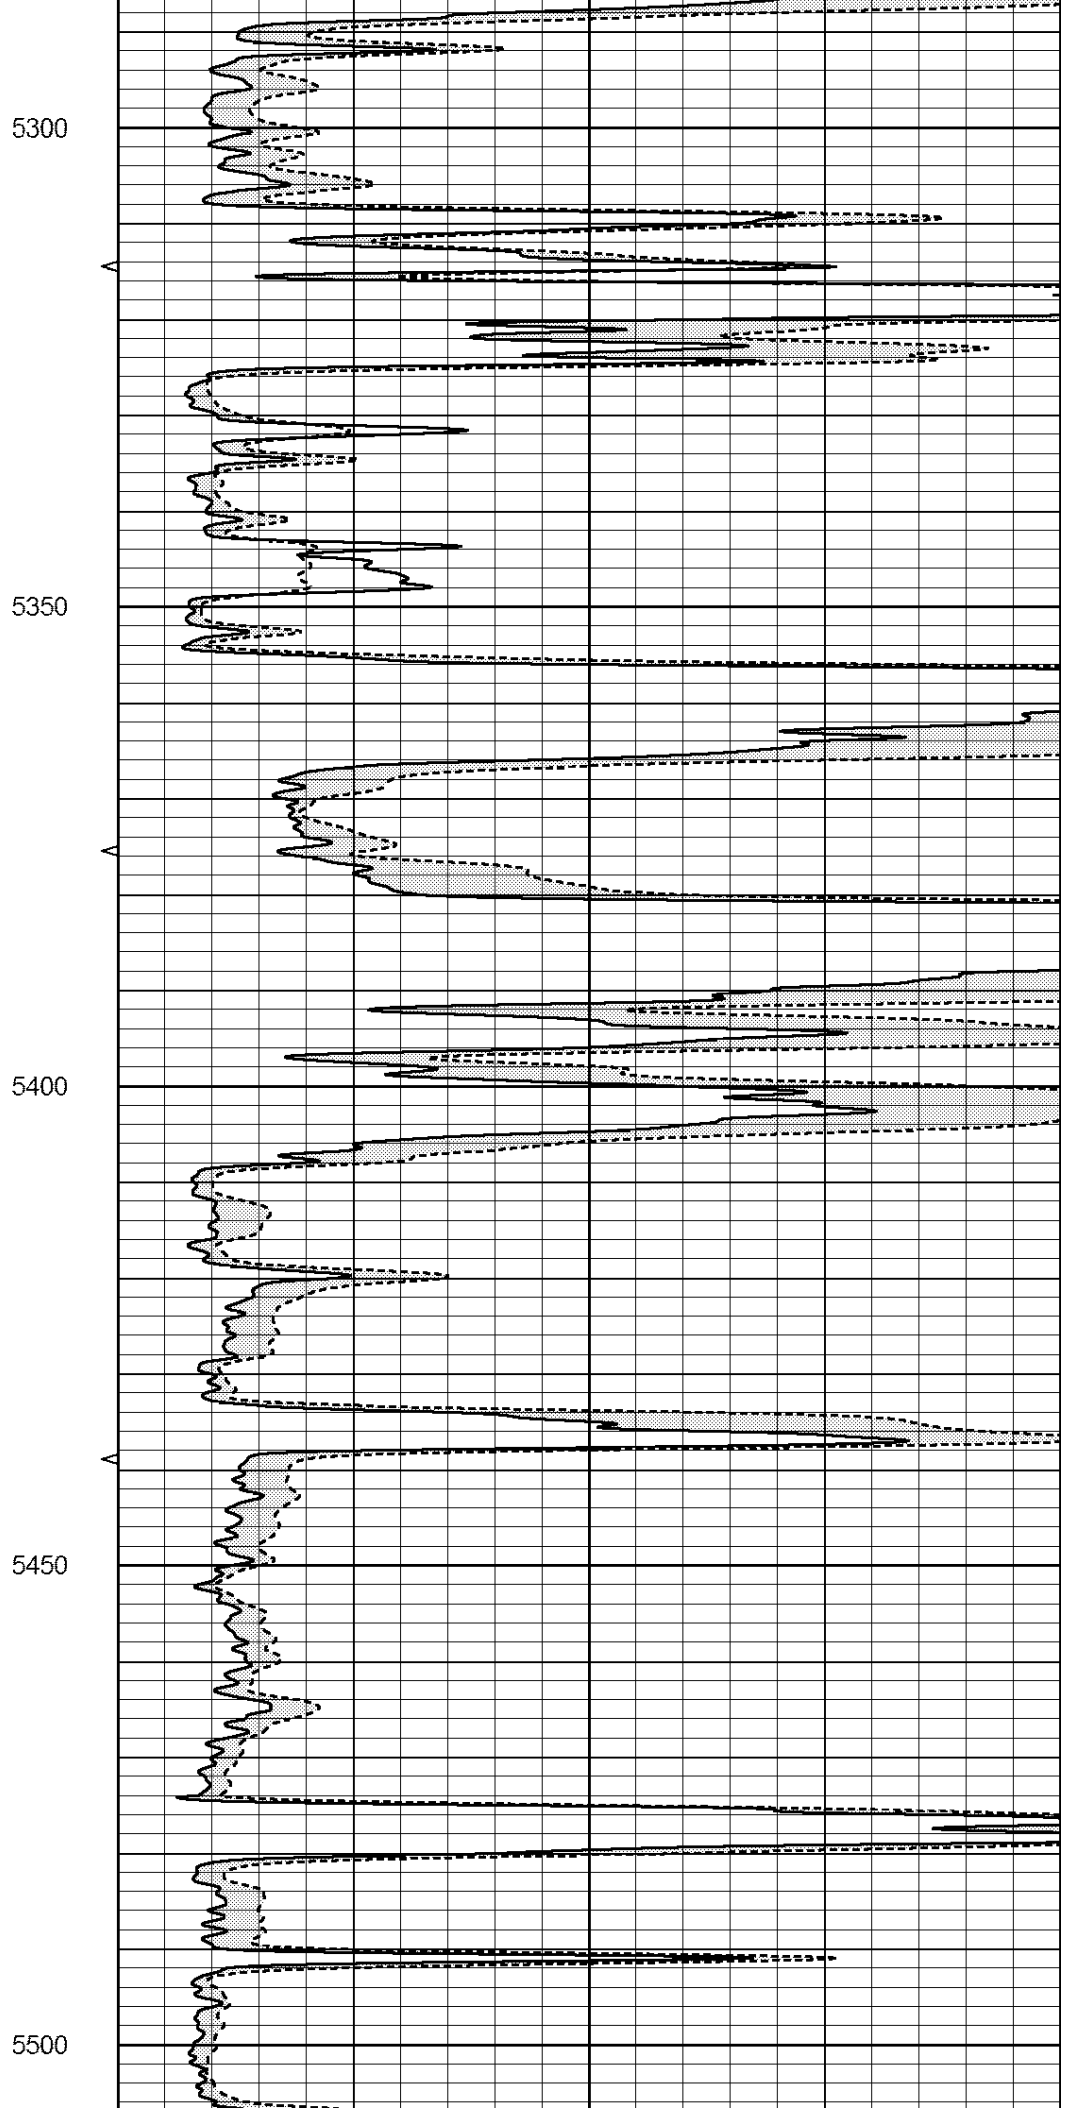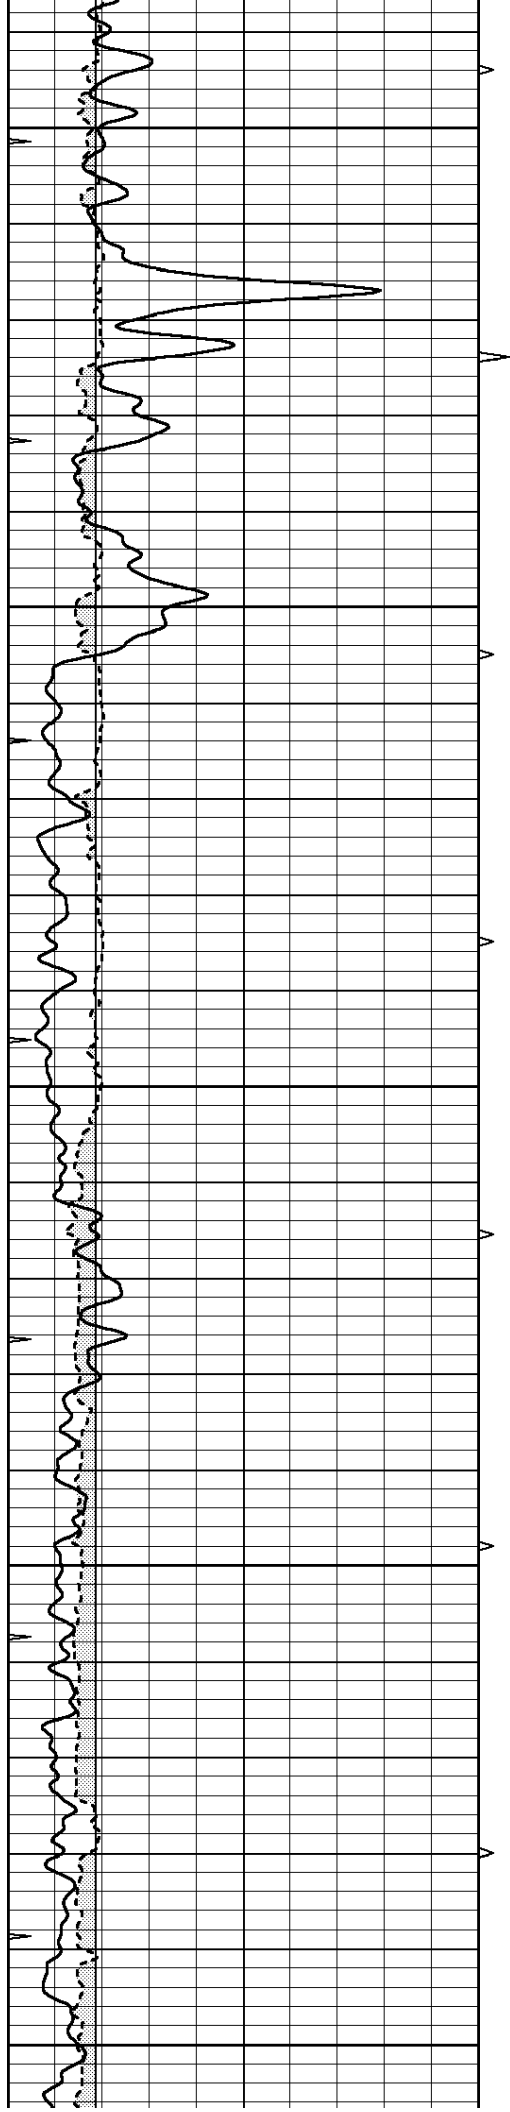

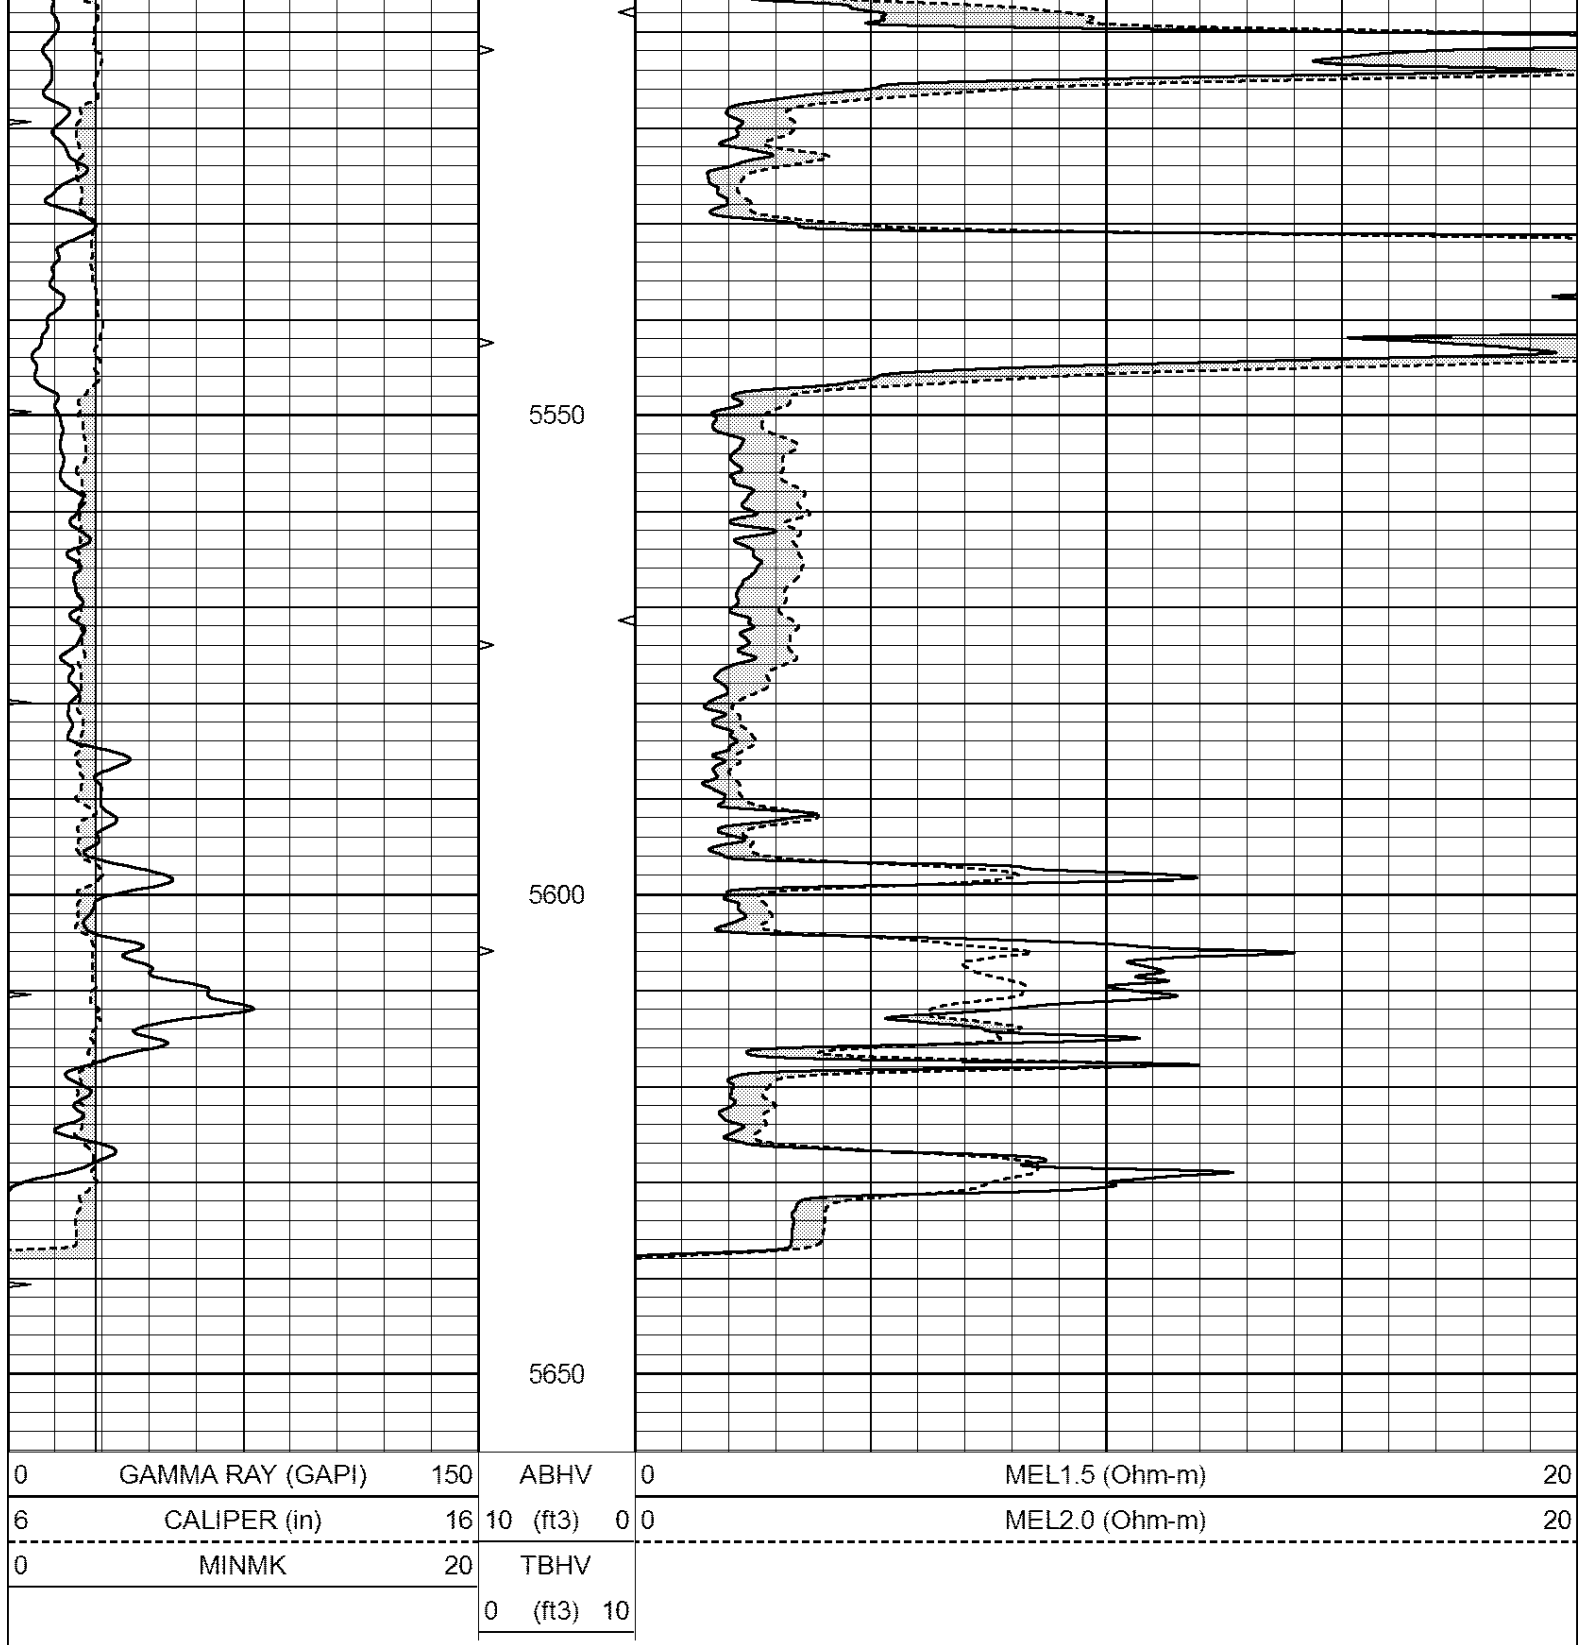

Calibration Report

Database File: 008131pe.db
Dataset Pathname: pass6.4
Dataset Creation: Mon Jan 02 04:49:21 2012

MICRO Calibration Report

Serial Number: MICRO5
Tool Model: PROBE
Performed: Mon Jan 02 03:40:17 2012

Caliper Calibration: Gain=3.118 Offset=-2.418

References	Low Cal	High Cal
Readings	7.900	14.000
	3.309	5.265
1.5" Calibration:	Gain=40.000	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.009	0.990
2" Calibration:	Gain=40.000	Offset=-0.500
	Low Cal	High Cal
References	0.000	20.000
Readings	0.000	0.929
Gamma Ray Calibration Report		
Serial Number:	GR4	
Tool Model:	OPEN	
Performed:	Mon Jan 02 03:40:13 2012	
Calibrator Value:	200.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	189.0	cps
Sensitivity:	2.2000	GAPI/cps