



**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	ANDERSON ENERGY, INC.		
Well	GRABBE #2		
Field	POOL EXTENSION		
County	ELLIS	State	KANSAS
Location:	API # : 15-051-26597-00-00 2118' FNL & 921' FWL NW - SE - SW - NW		Other Services CDL/CNL DIL
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL KELLY BUSHING 9' A.G.L. KELLY BUSHING		Elevation K.B. 2000 D.F. 1998 G.L. 1991
Date	1-17-14		
Run Number	TWO		
Depth Driller	3780		
Depth Logger	3782		
Bottom Logged Interval	3780		
Top Log Interval	2800		
Casing Driller	8 5/8 @ 1186'		
Casing Logger	1185'		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3500 PPM	
Density / Viscosity	9.0 / 57		
pH / Fluid Loss	10.5 / 5.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.80 @ 36F		
Rmf @ Meas. Temp	0.60 @ 36F		
Rmc @ Meas. Temp	0.96 @ 36F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	0.25 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	JEFF GRONEWEG		
Witnessed By	ROGER MARTIN		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: HAYS, KS - 9 MILES SOUTH TO SMOKEY HILL RIVER RD
3 MILES WEST - 1/2 MILE NORTH - EAST INTO

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

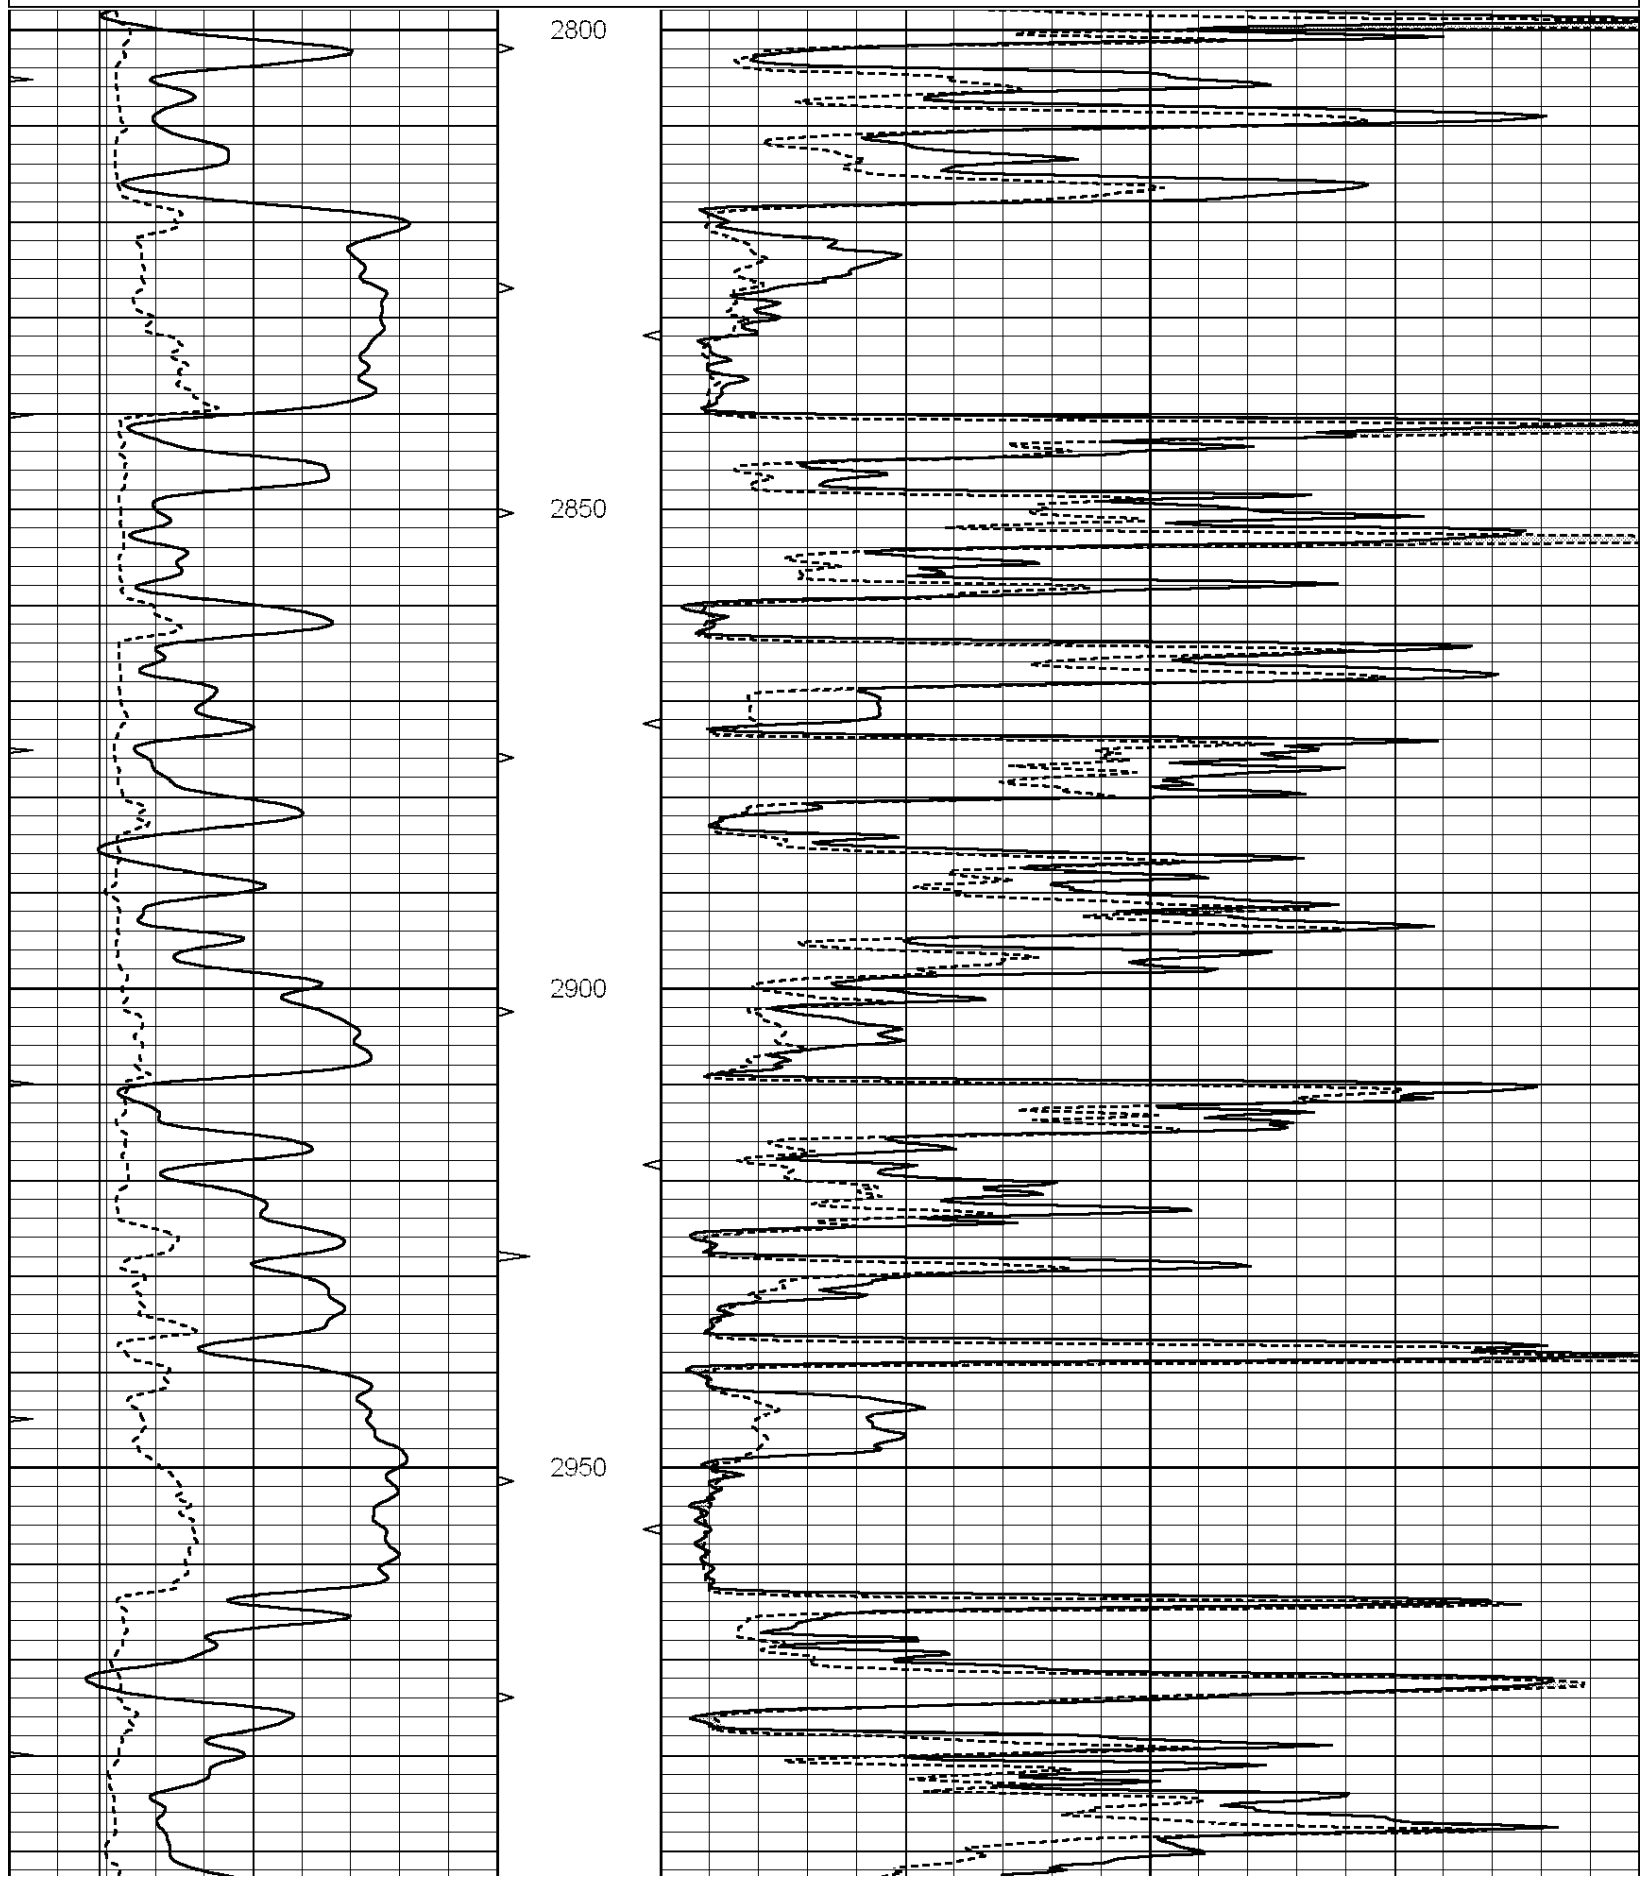

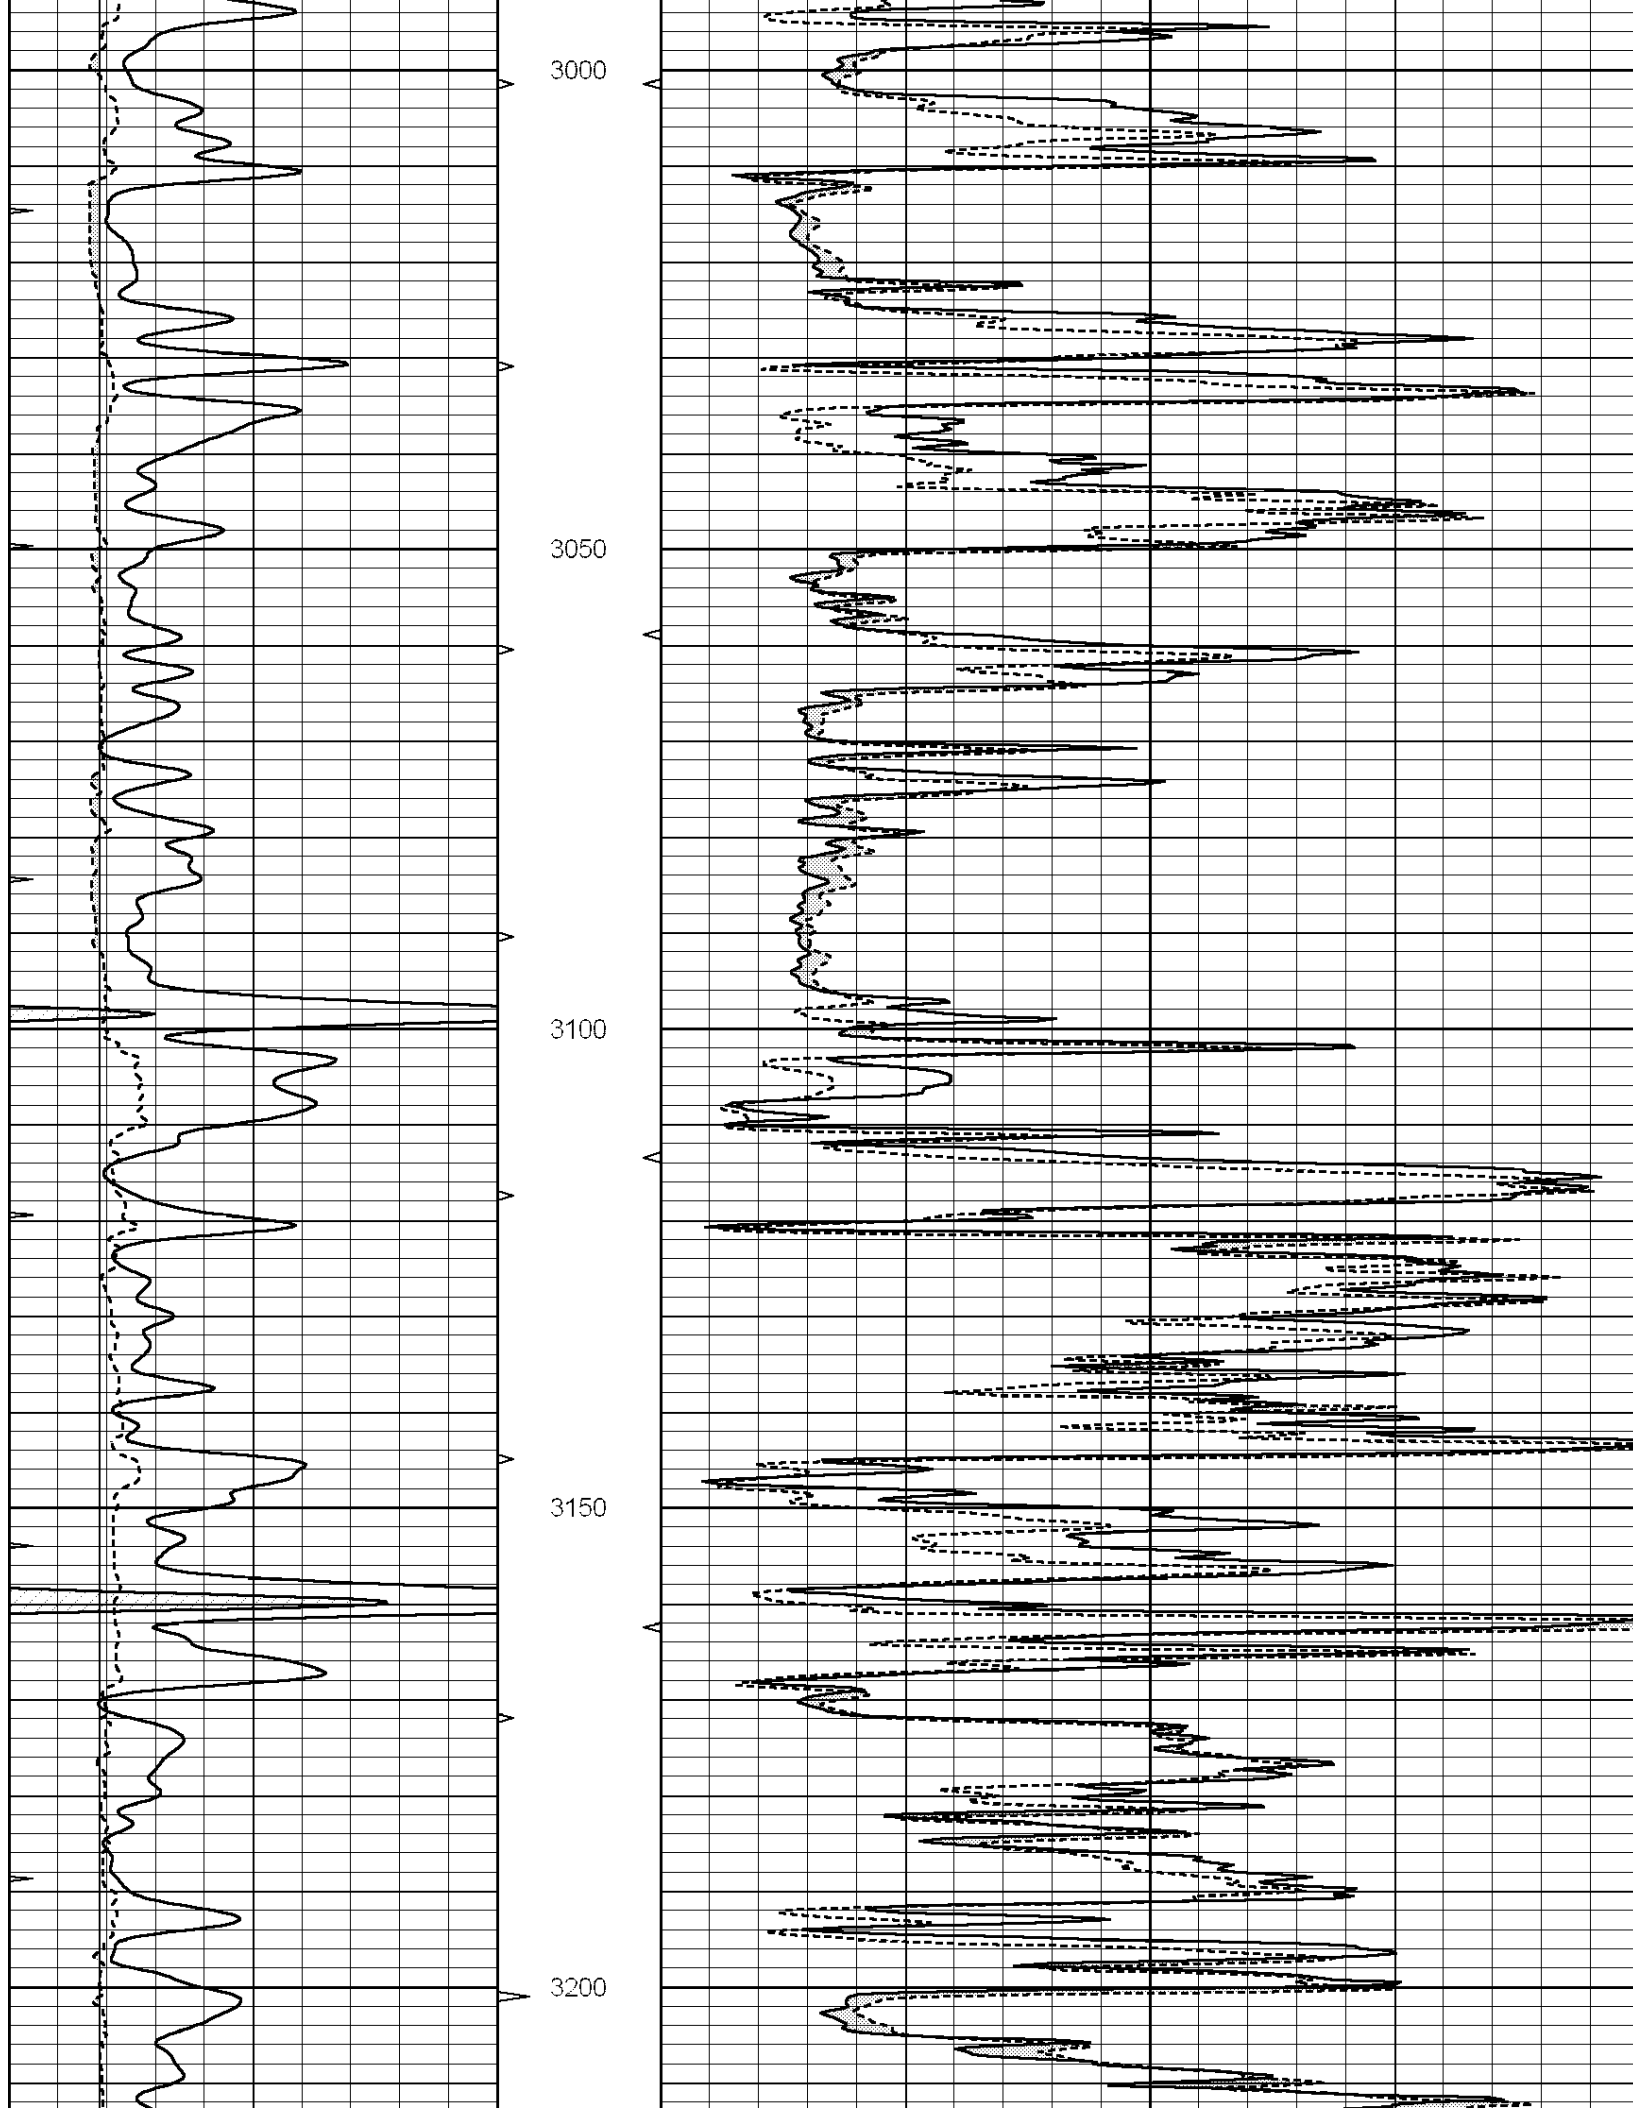

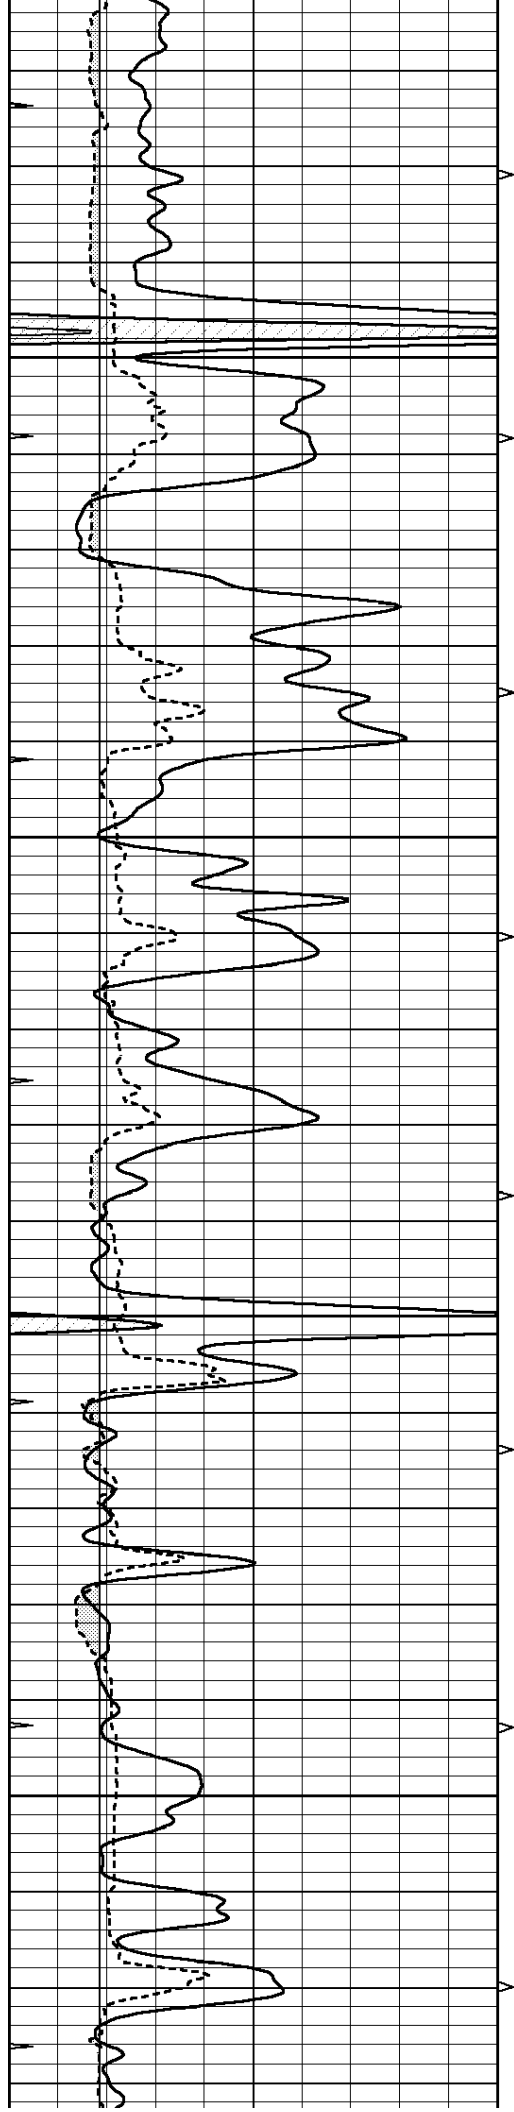




3250


3300

3350

3400

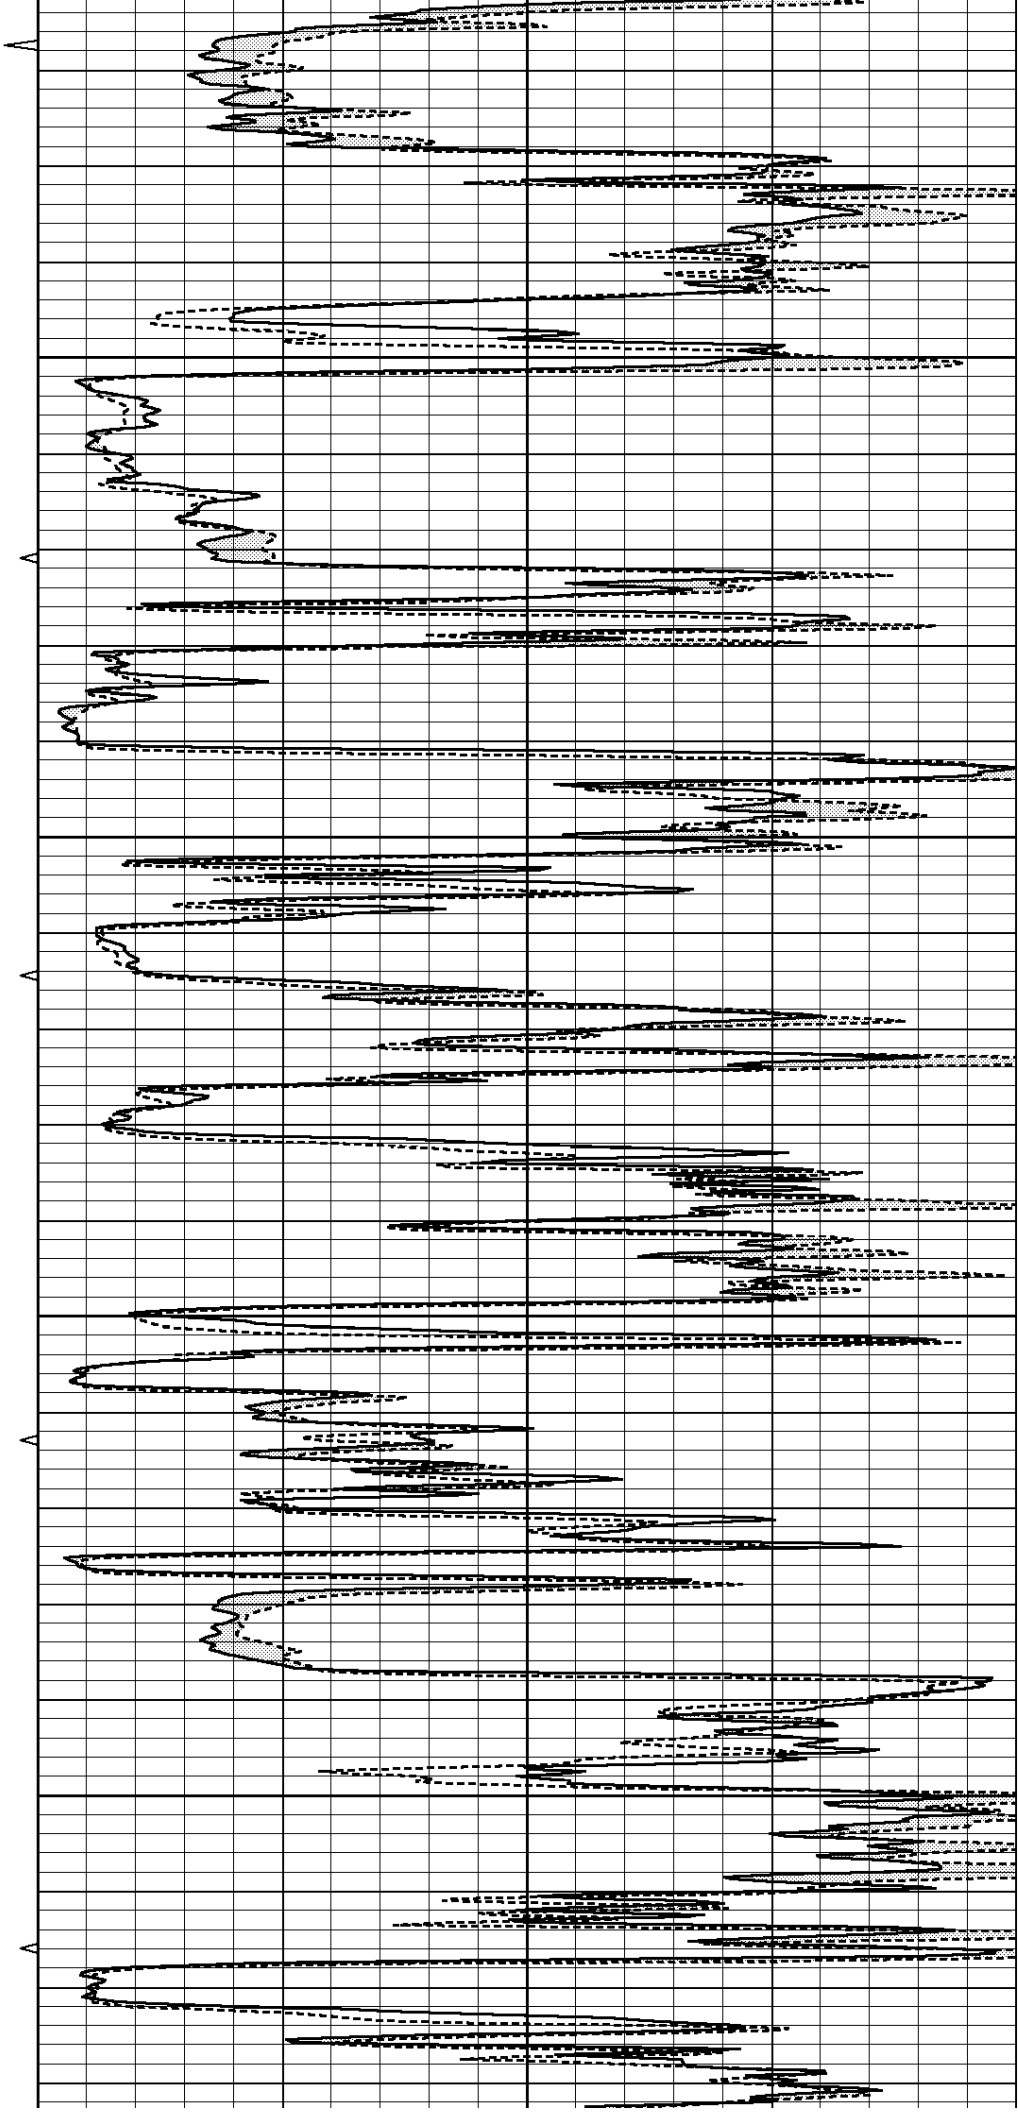

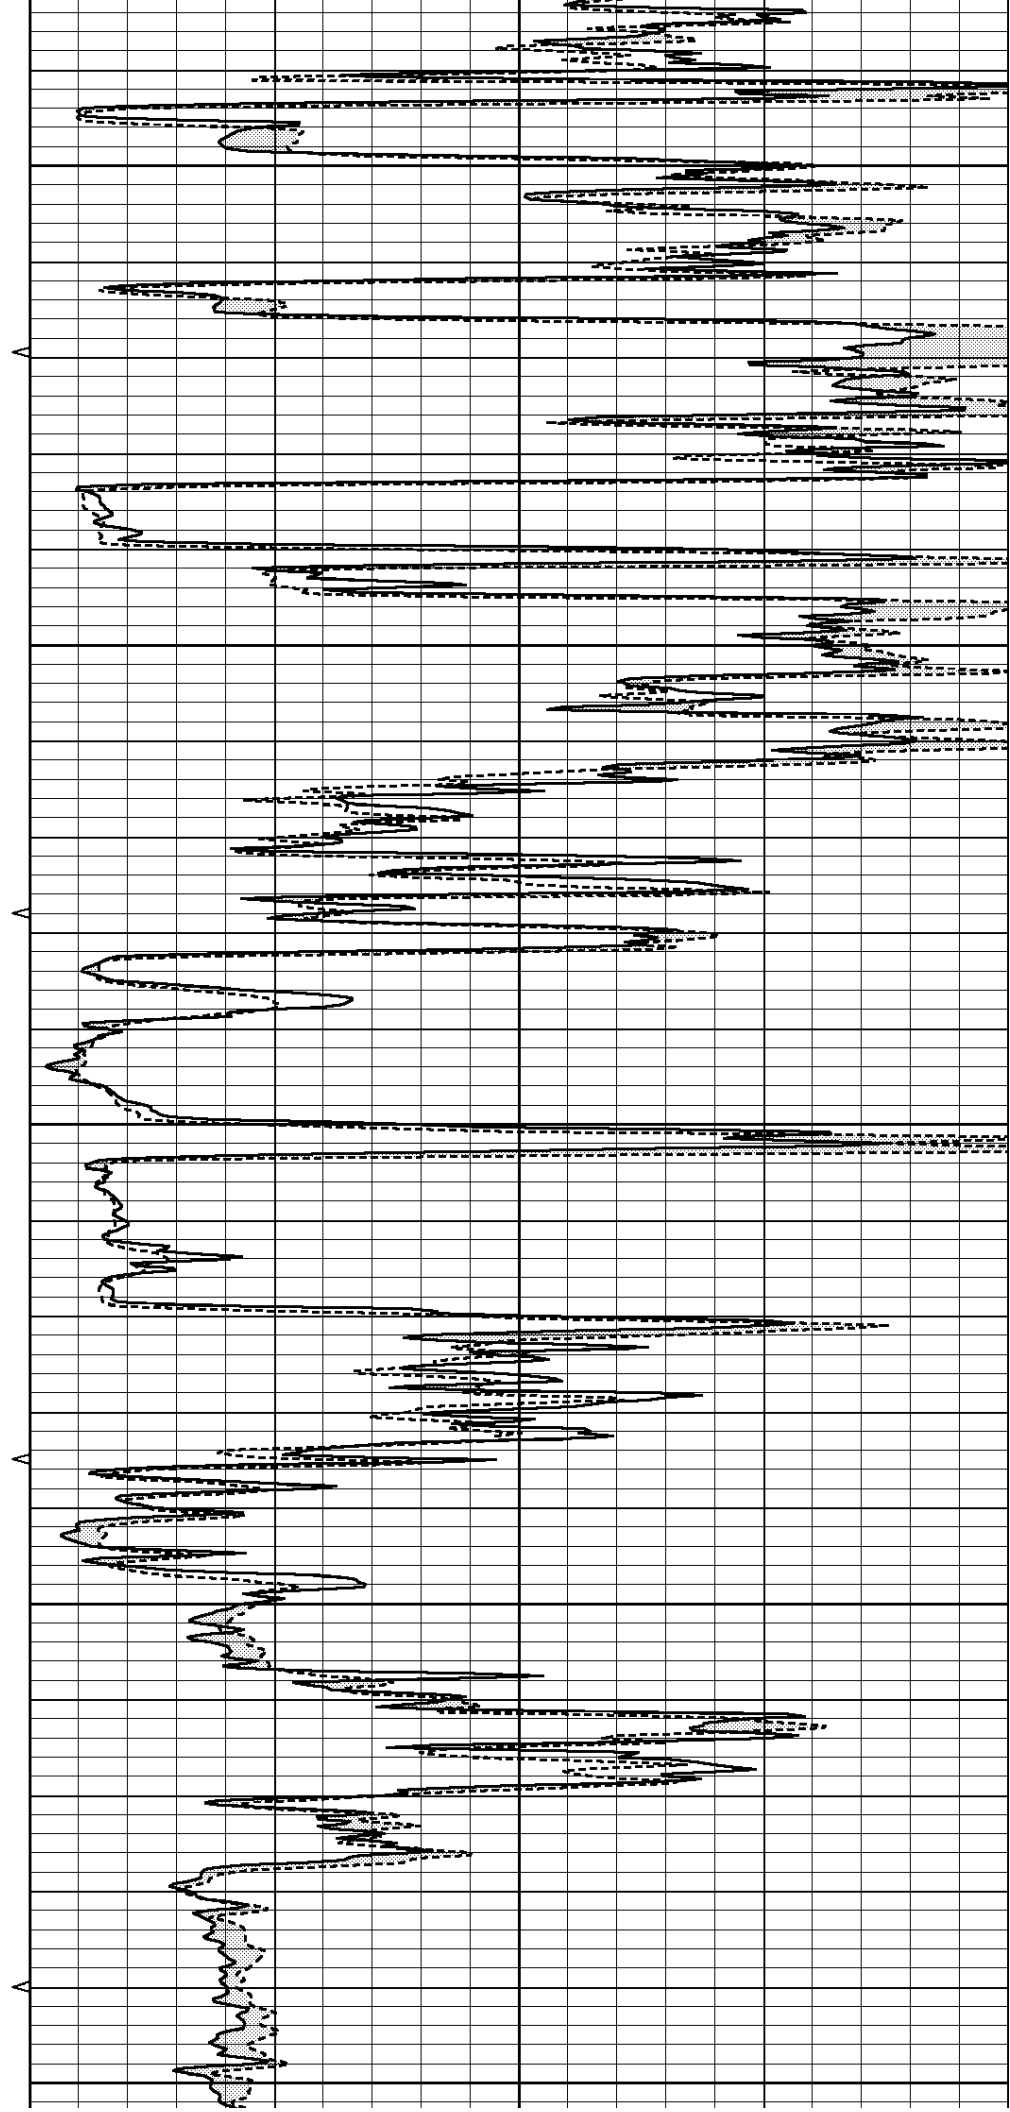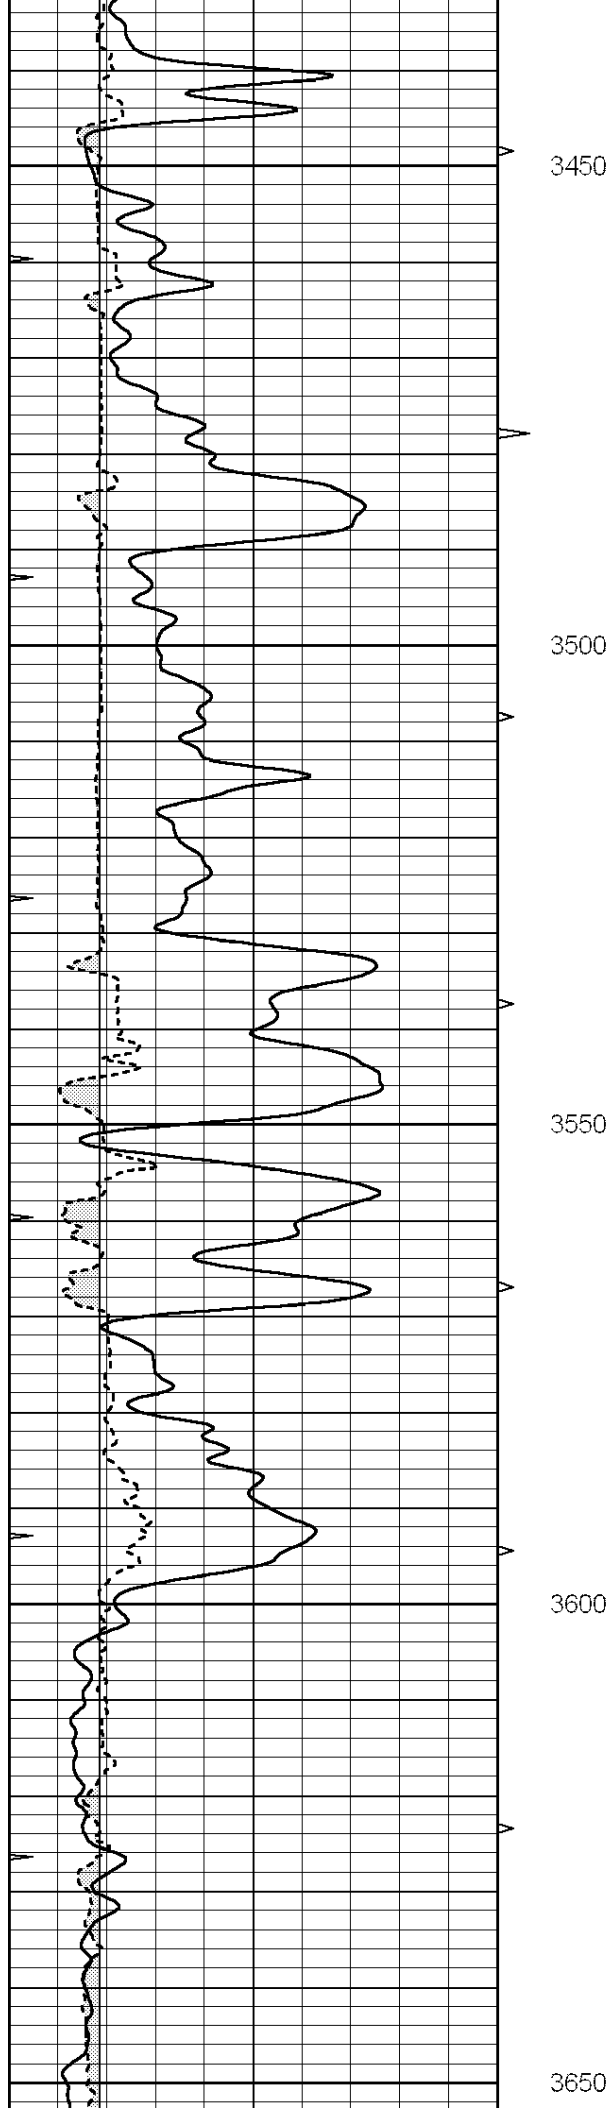


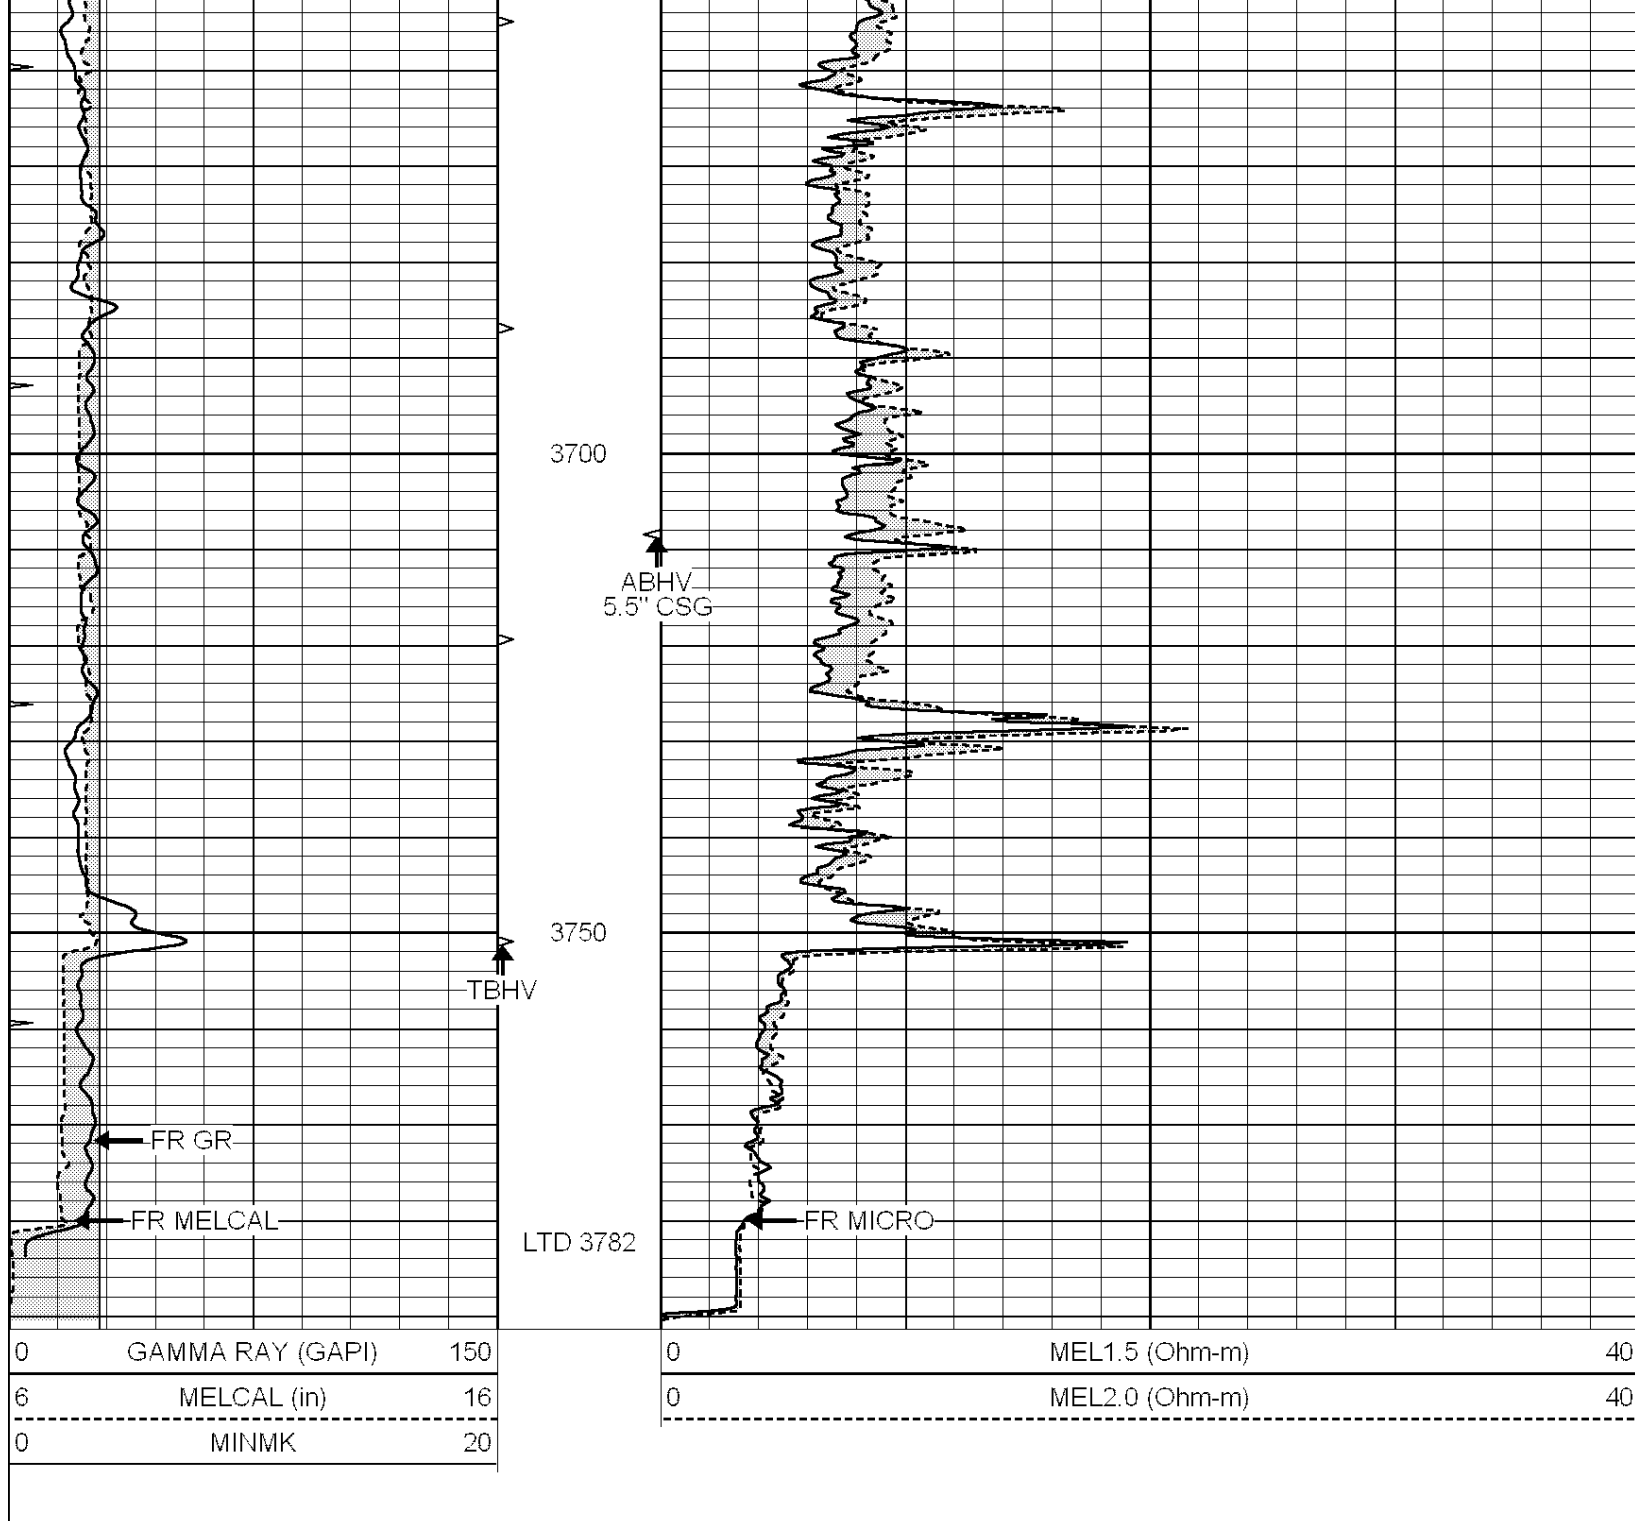

REPEAT SECTION

Database File: 22217ddn.db
 Dataset Pathname: pass4.1
 Presentation Format: _micro
 Dataset Creation: Fri Jan 17 06:34:55 2014 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0	MEL1.5 (Ohm-m)	40
6	MELCAL (in)	16	0	MEL2.0 (Ohm-m)	40
0	MINMK	20			

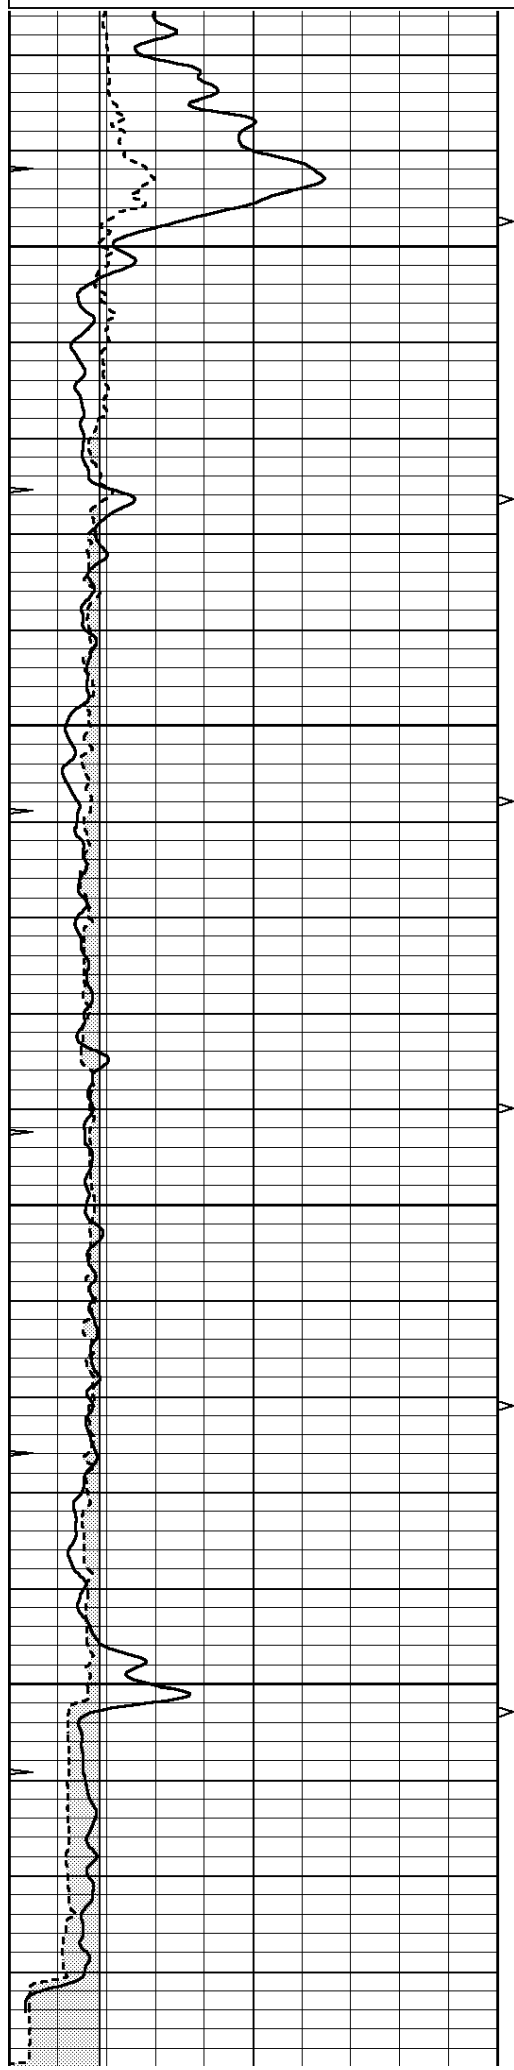


3600

3650

3700

3750

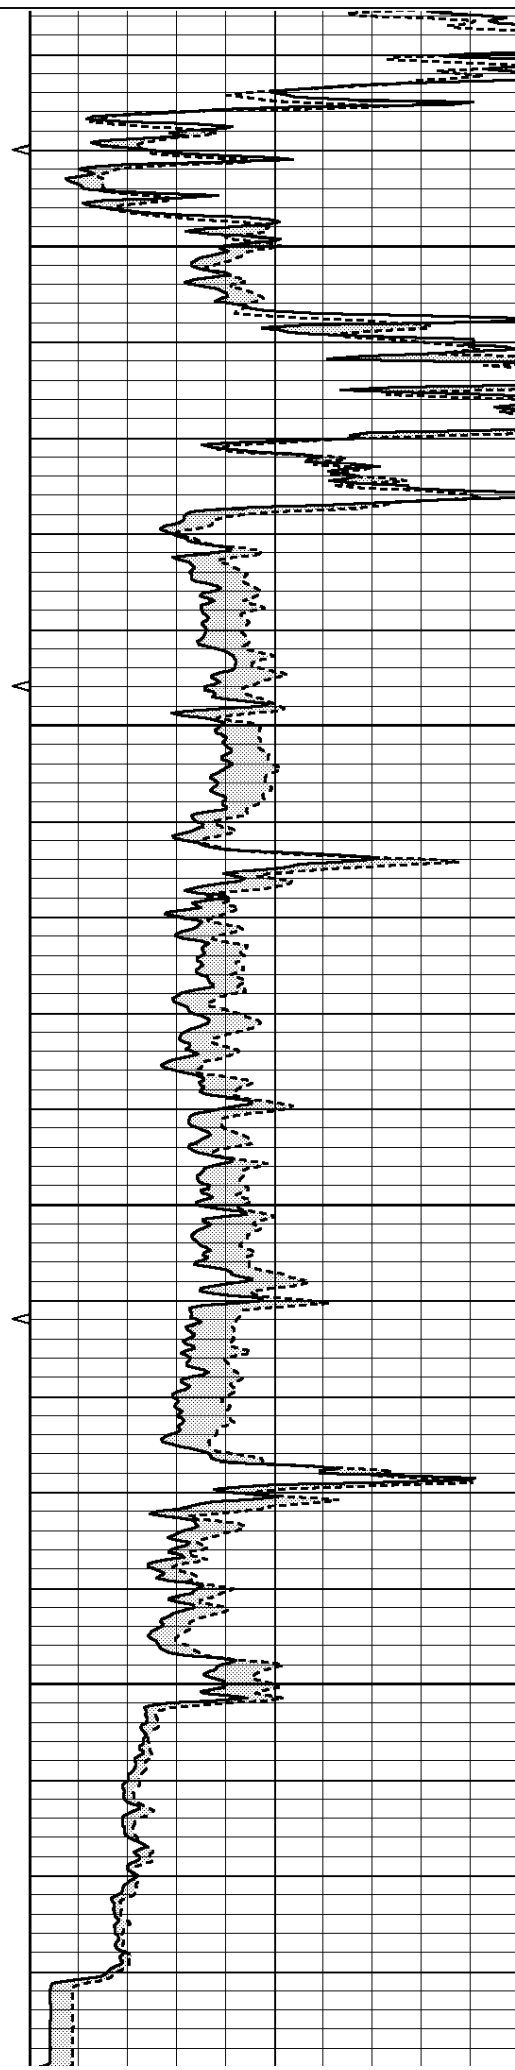

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

Calibration Report

Database File: 22217ddn.db
Dataset Pathname: pass5.1
Dataset Creation: Fri Jan 17 07:07:16 2014 by Calc Open-Cased 090629

MICRO Calibration Report

Serial Number: MICRO4
Tool Model: PROBE
Performed: Sun Jan 12 15:13:57 2014

Caliper Calibration: Gain=2.947 Offset=-9.800

	Low Cal	High Cal
References	8.600	14.000
Readings	5.934	7.767

1.5" Calibration: Gain=26.000 Offset=-0.800

	Low Cal	High Cal
References	0.000	20.000
Readings	0.013	1.547

2" Calibration: Gain=26.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.017	1.202

Gamma Ray Calibration Report

Serial Number: GR2
Tool Model: OPEN
Performed: Wed Jan 15 09:35:40 2014

Calibrator Value: 200.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	740.0	cps

Sensitivity: 0.3300 GAPI/cps