



SUPERIOR
Hays,
Kansas

MICRO LOG

Company	VINCENT OIL CORPORATION	Company	VINCENT OIL CORPORATION
Well	RIEGEL #1-9	Well	RIEGEL #1-9
Field	WILDCAT	Field	WILDCAT
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	AP1 # : 15-057-20786-0000	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	GROUND LEVEL	Elevation	2481
Log Measured From	KELLY BUSHING 13' A.G.L.		
Drilling Measured From	KELLY BUSHING		
SEC 9	TWP 28S	RGE 23W	
Run Number	3/3/12		
Depth Driller	TWO		
Depth Logger	5400		
Bottom Logged Interval	5402		
Top Log Interval	5382		
Casing Driller	4000		
Casing Logger	8 5/8"@808'		
Bit Size	608		
Type Fluid in Hole	7 7/8"		
Density / Viscosity	CHEMICAL MUD	CHLORIDES 10,800 PPM	
pH / Fluid Loss	9.1/52		
Source of Sample	10.5/7.2		
Rm @ Meas. Temp	FLOWLINE		
Rmt @ Meas. Temp	1.50@70F		
Rmc @ Meas. Temp	1.13@70F		
Source of Rmt / Rmc	1.80@70F		
Rm @ BHT	MEASUREMENT		
Time Circulation Stopped	.814@129F		
Time Logger on Bottom	5.5 HOURS		
Maximum Recorded Temperature	7:30 P.M.		
Equipment Number	129F		
Location	4010		
Recorded By	HAYS, KANSAS		
Witnessed By	JEFF LUEBBERS		
	JIM HALL		
	TOM DUDGEON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING SUPERIOR WELL SERVICE HAYS, KANSAS (785) 628-6395
DIRECTIONS
FORD, KS. 5W. ON "SADDLE RD." TO "RD. 120", 1S., E. INTO






SUPERIOR
Hays,
Kansas


MAIN SECTION

Database File: 408422pe.db
Dataset Pathname: pass6.3
Presentation Format: micro
Dataset Creation: Sun Mar 04 03:43:16 2012
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

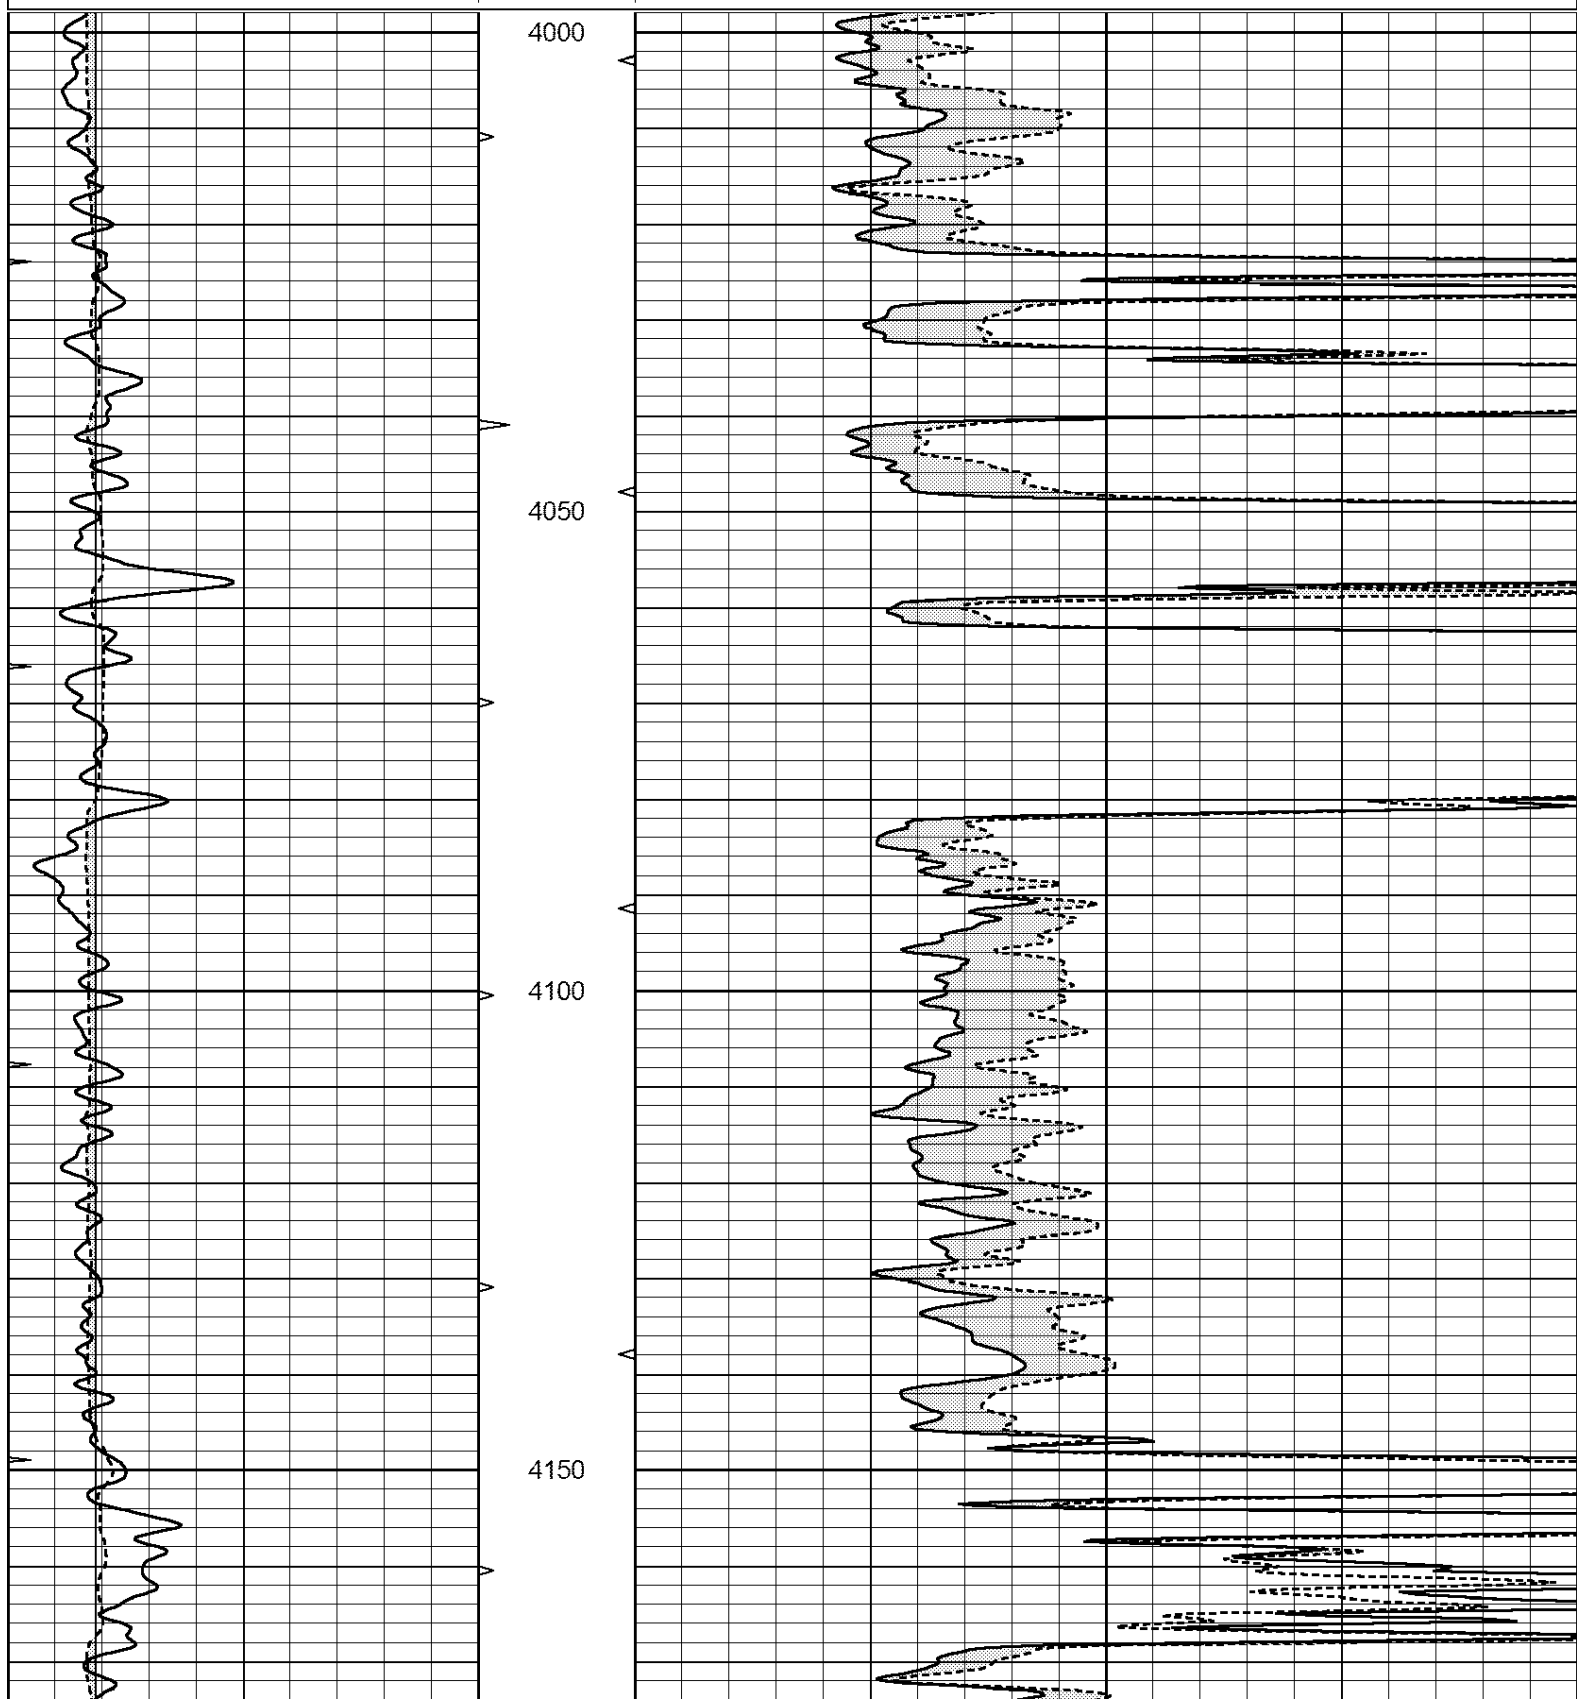

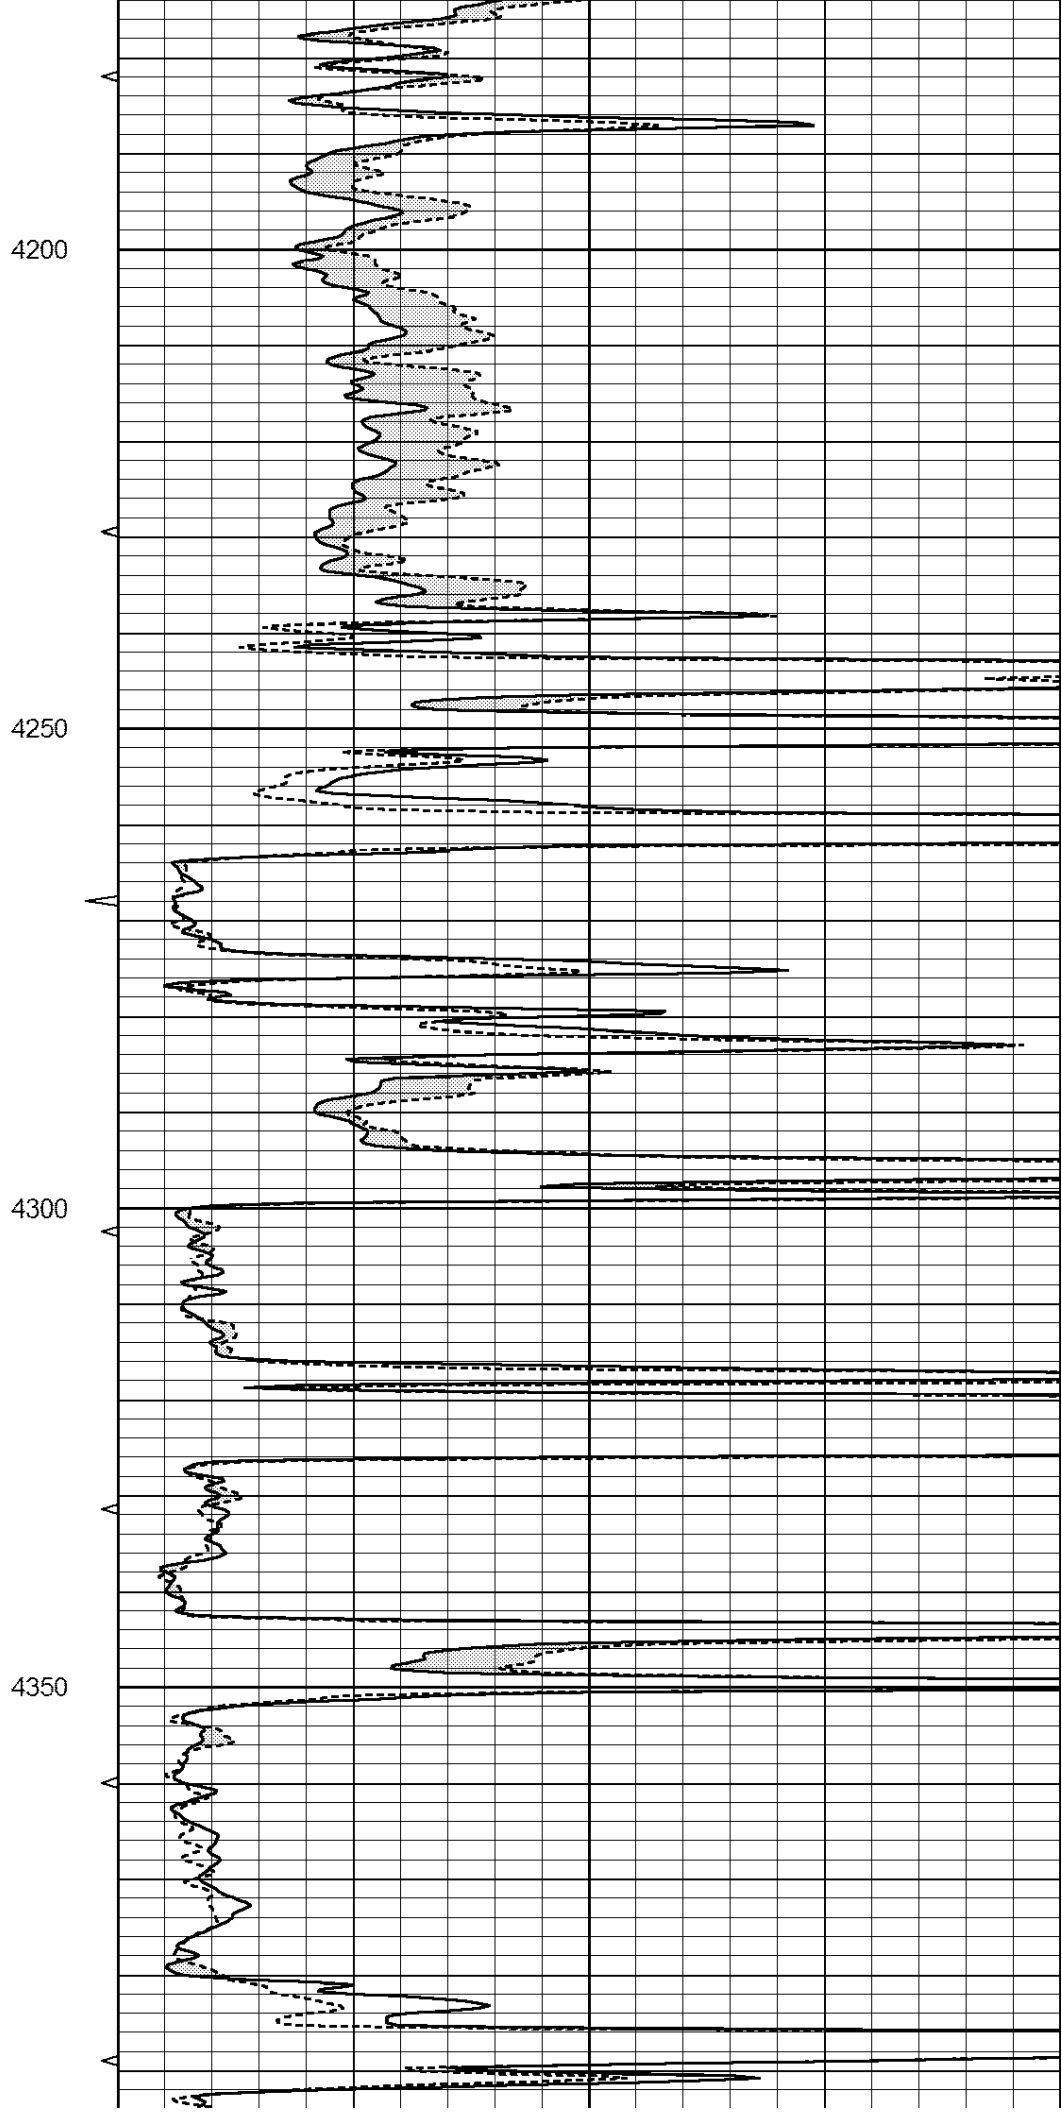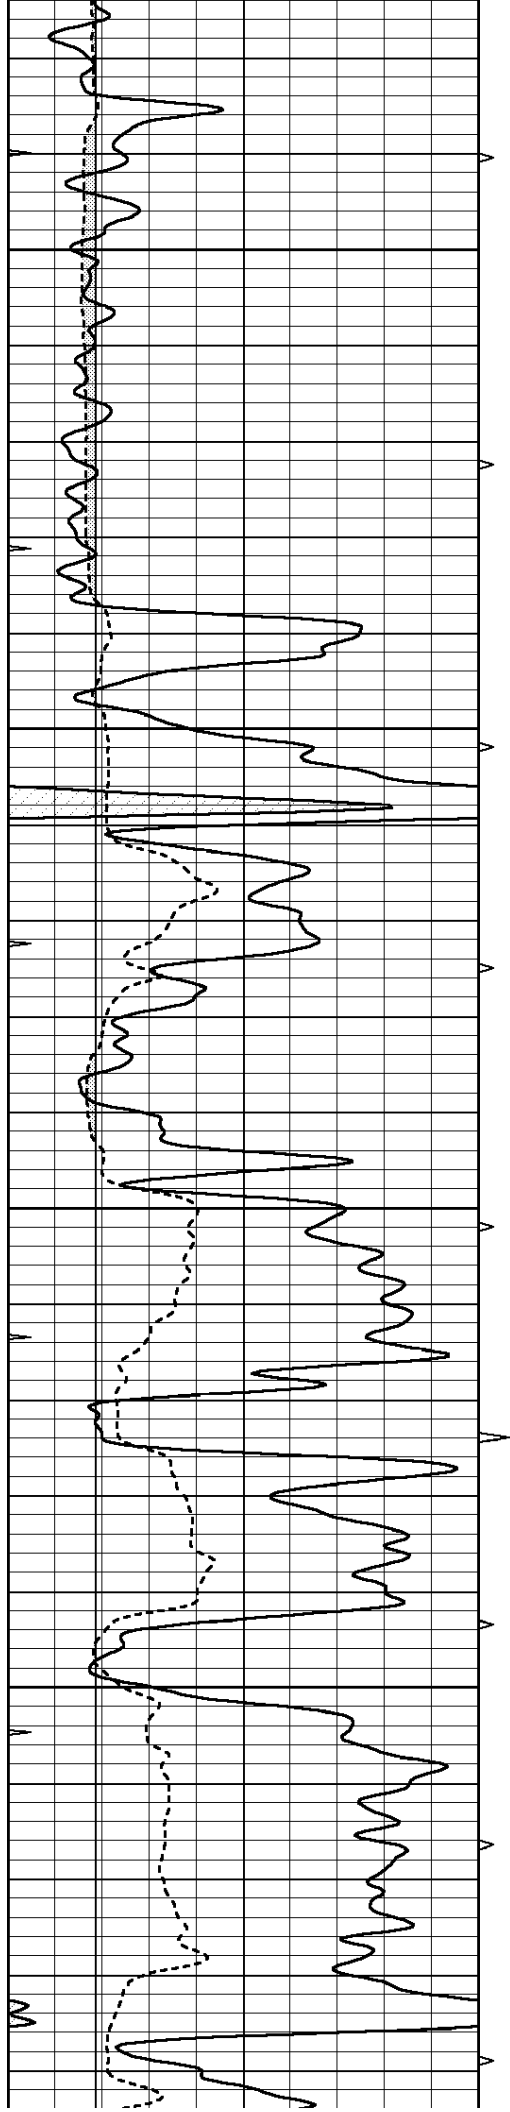

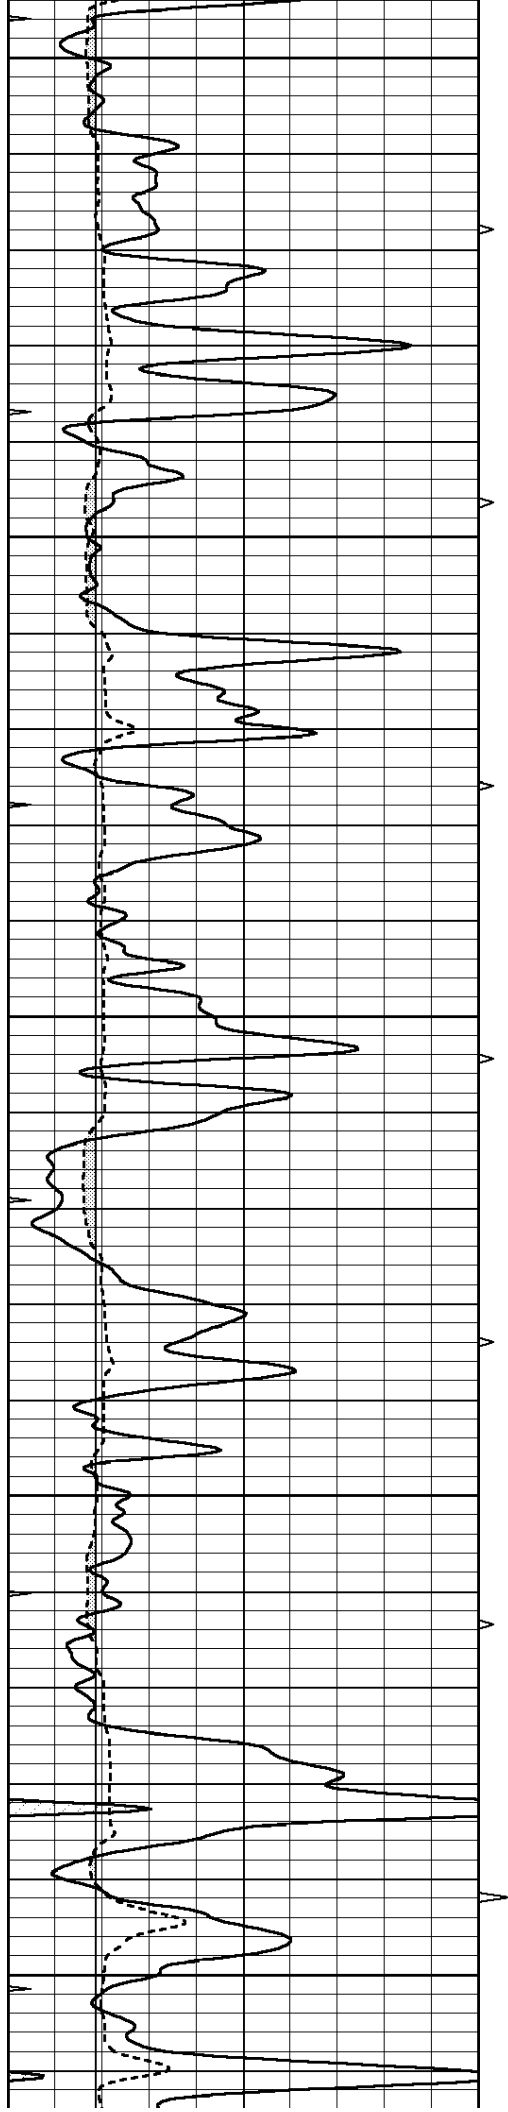


4400


4450

4500

4550

4600

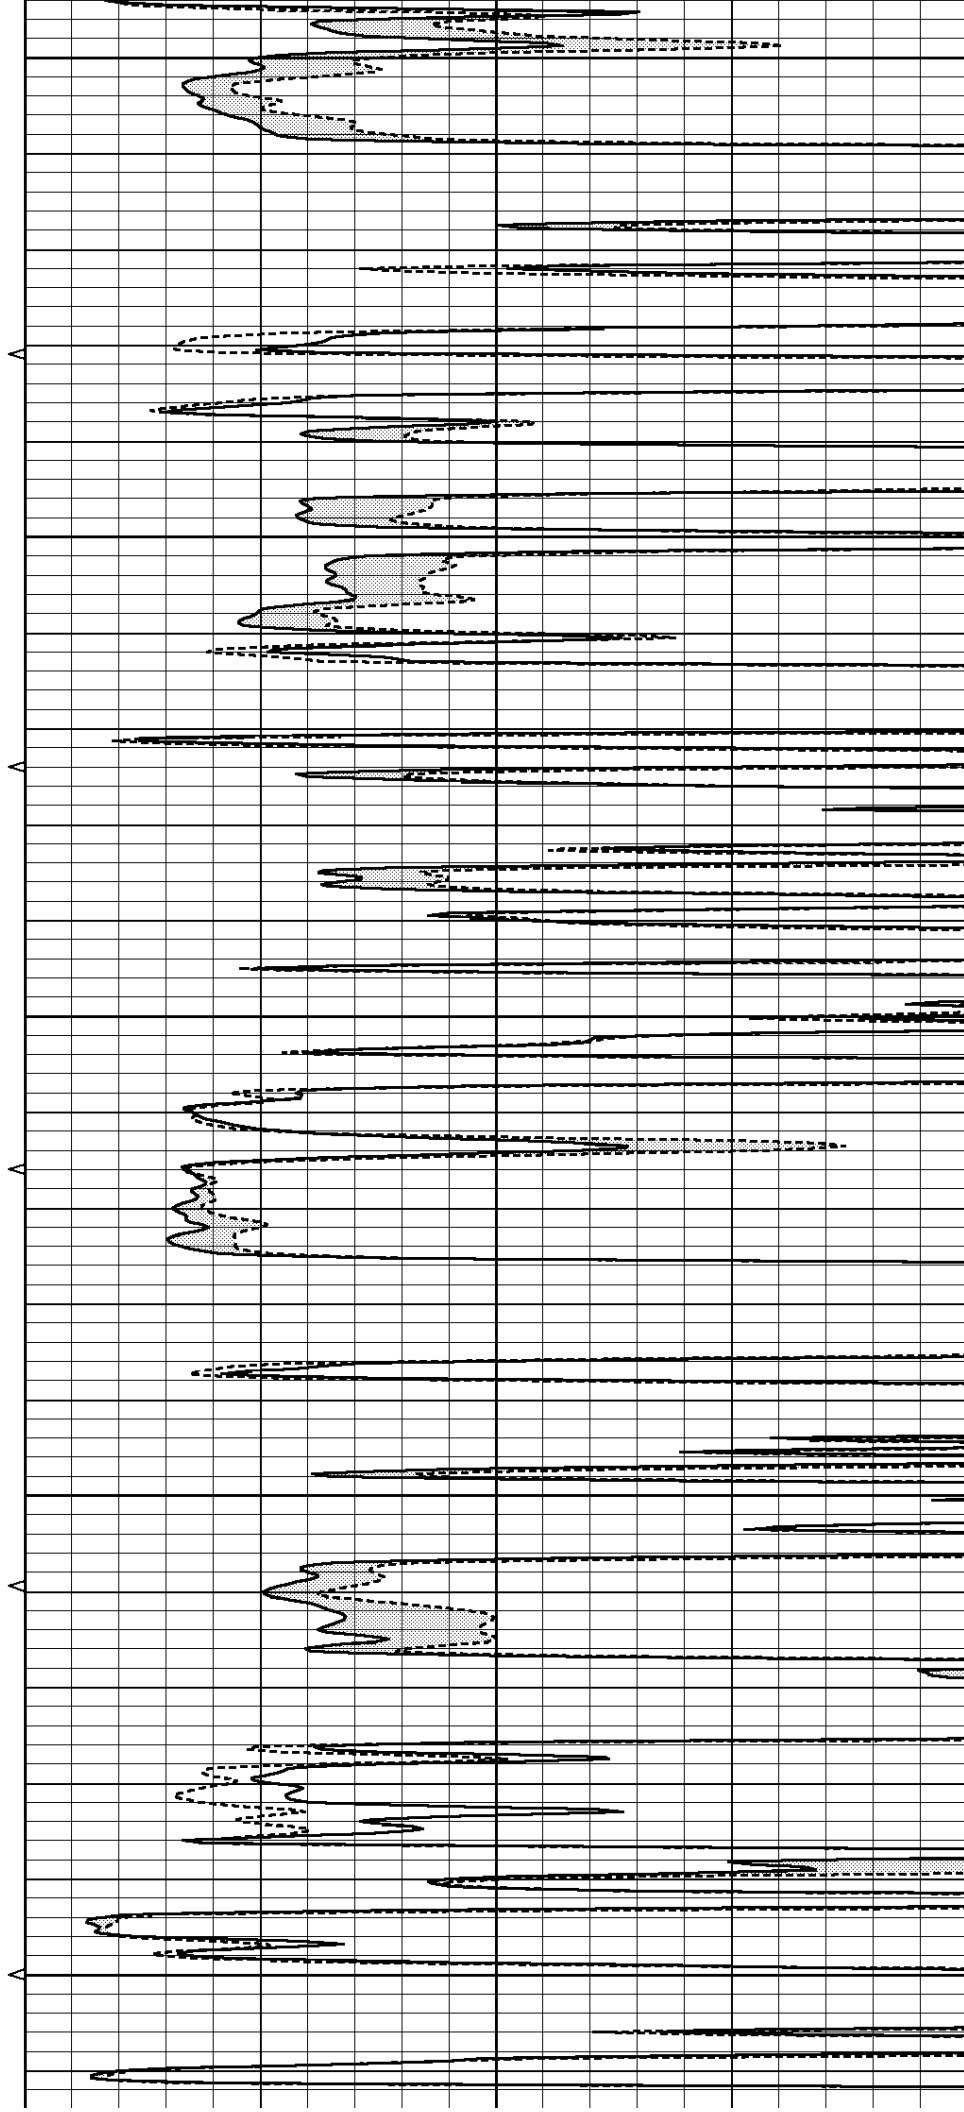

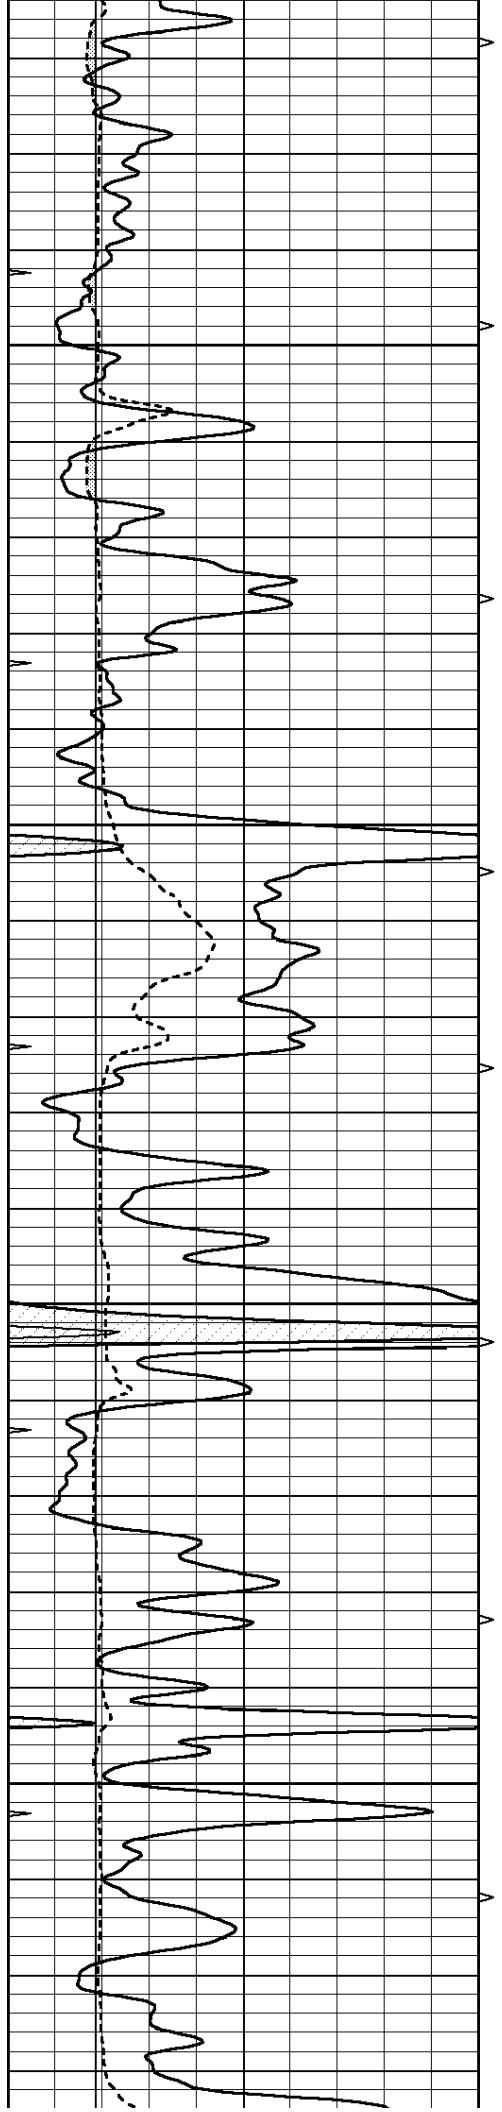




4650


4700

4750

4800

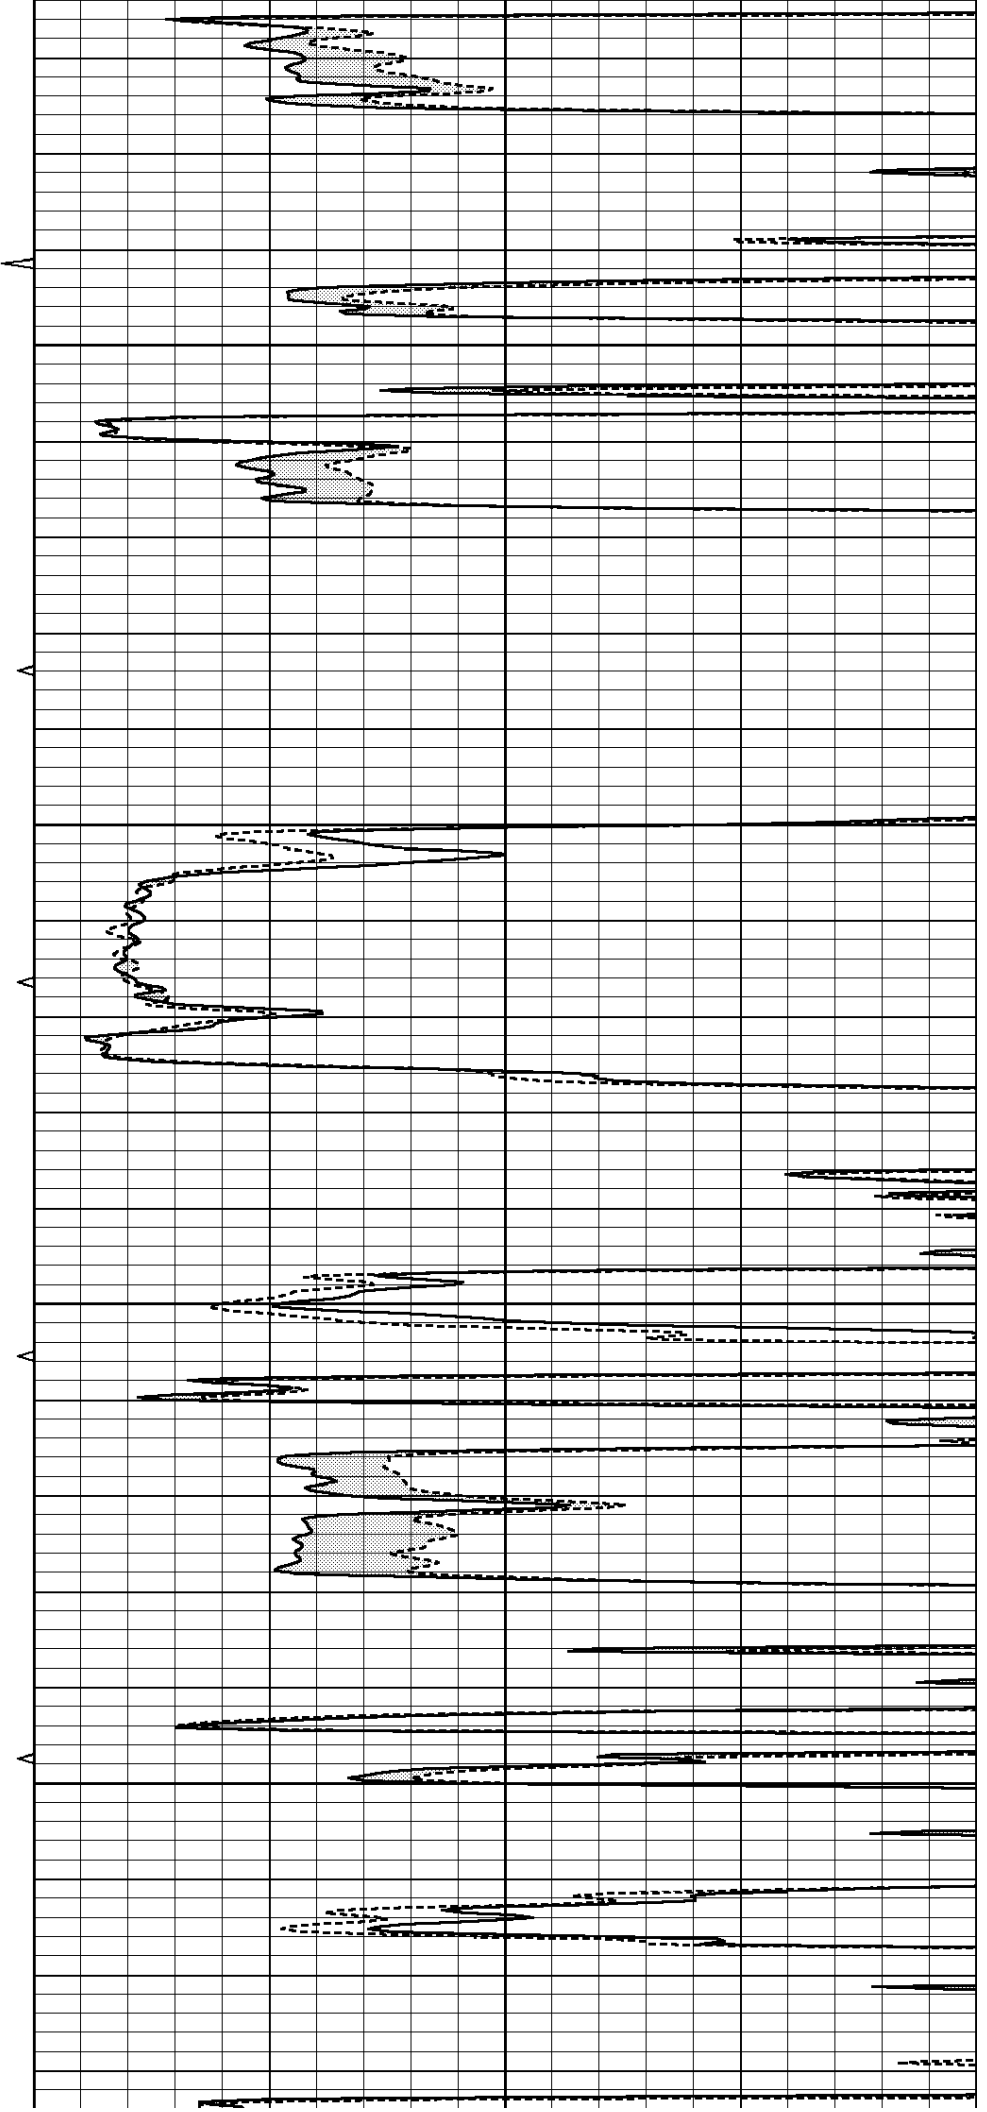

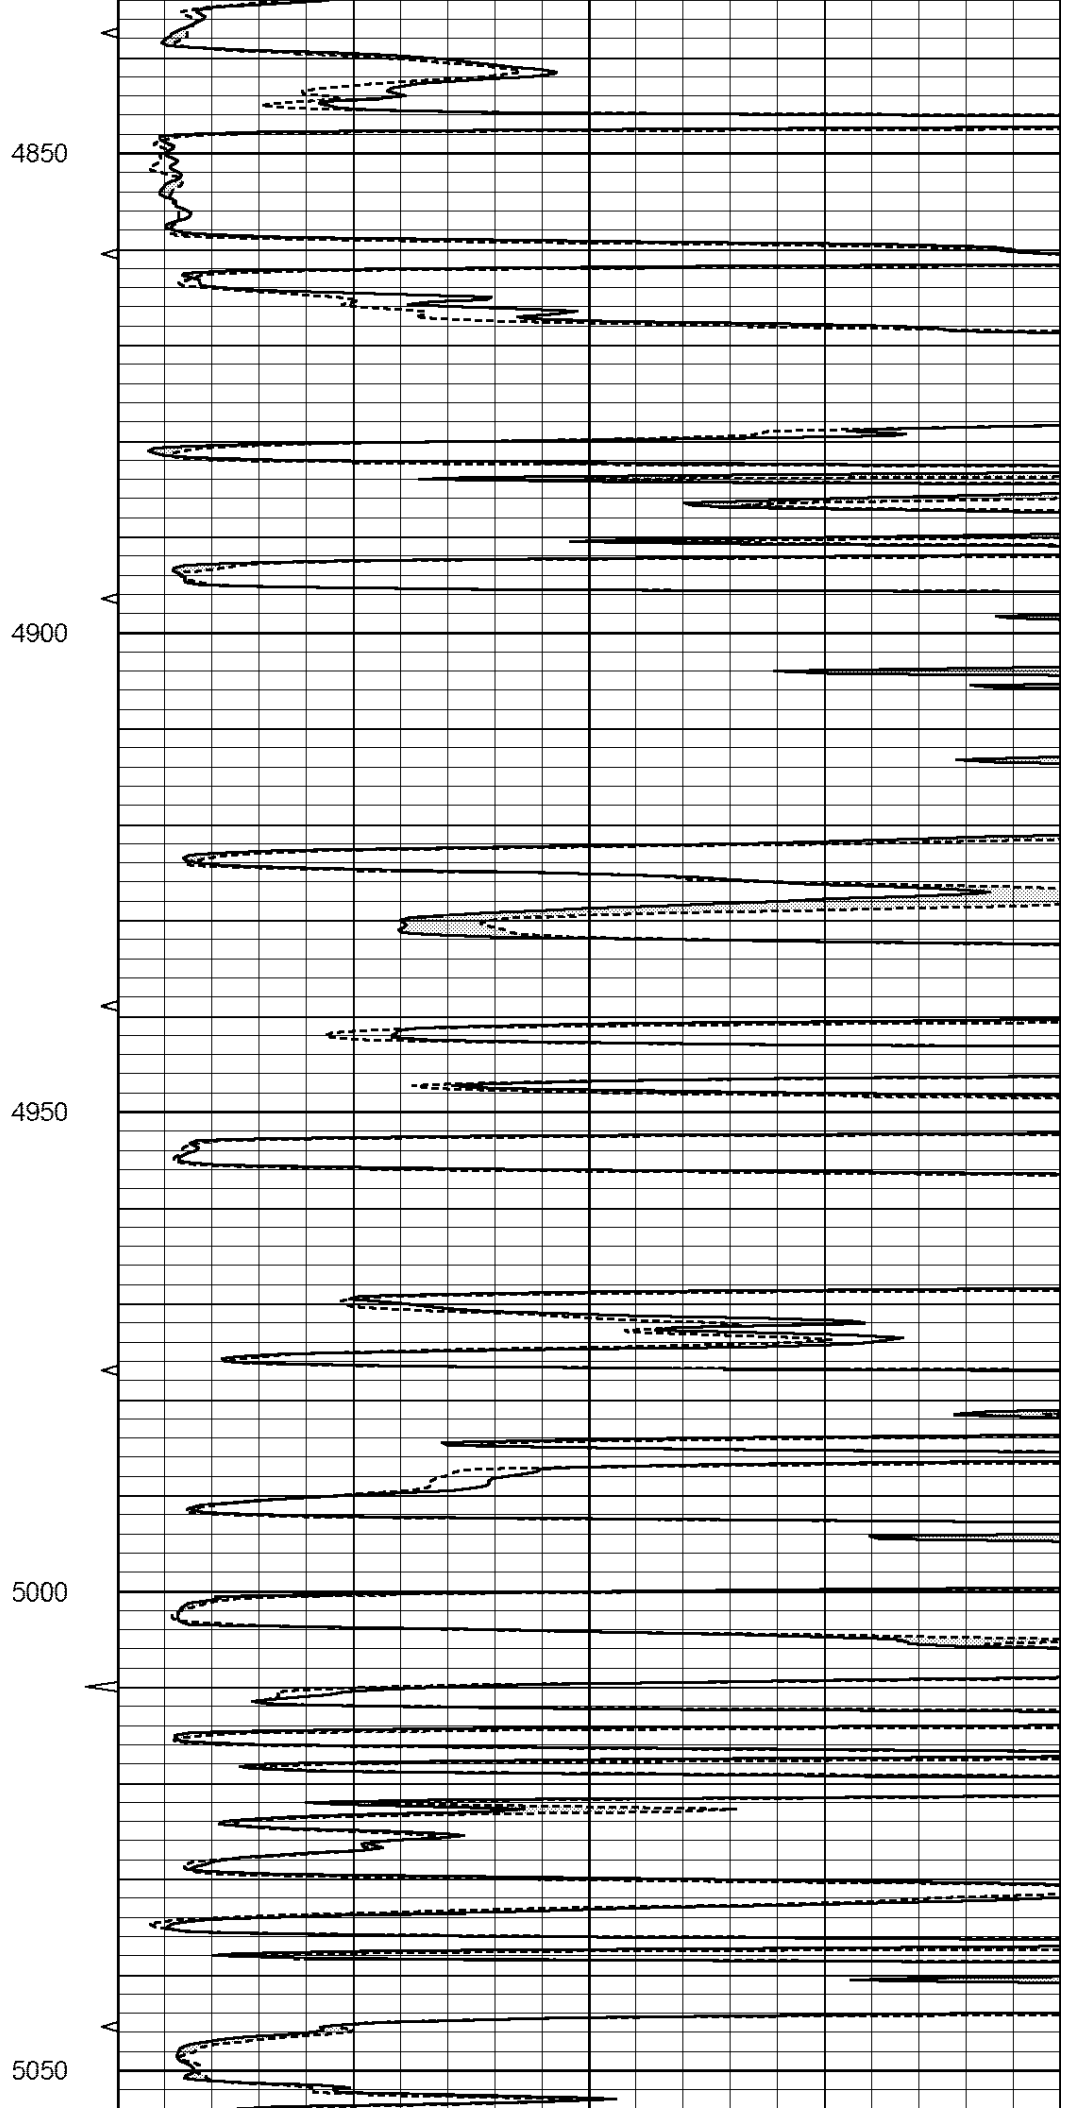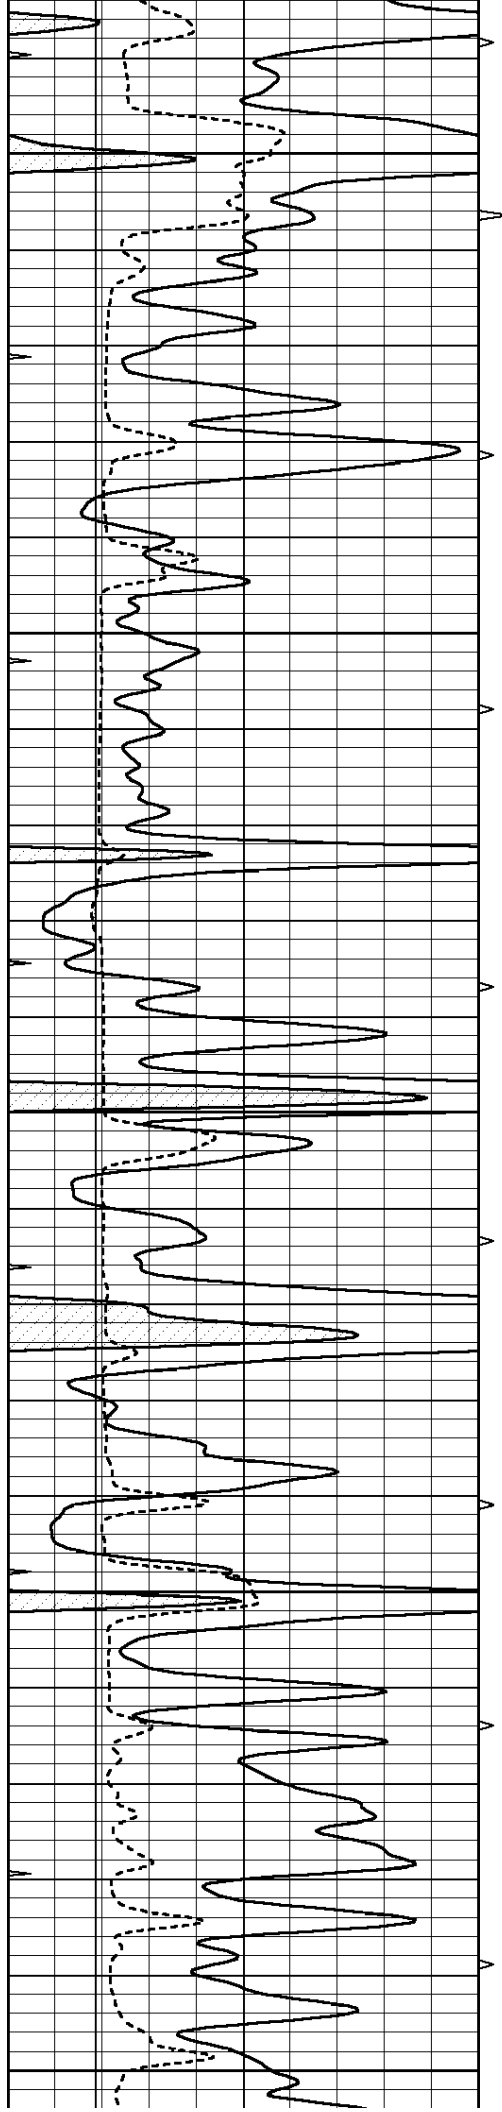

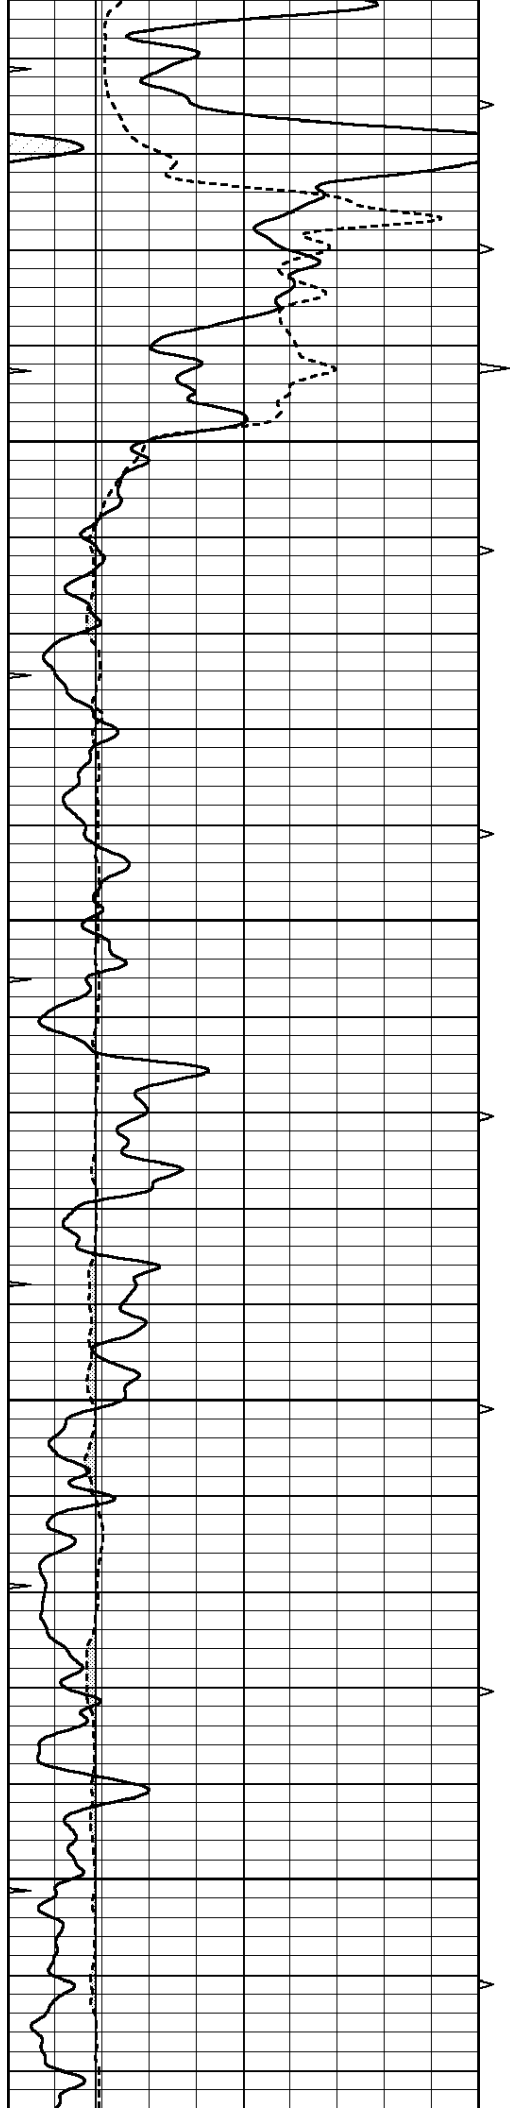



5100

5150

5200

5250

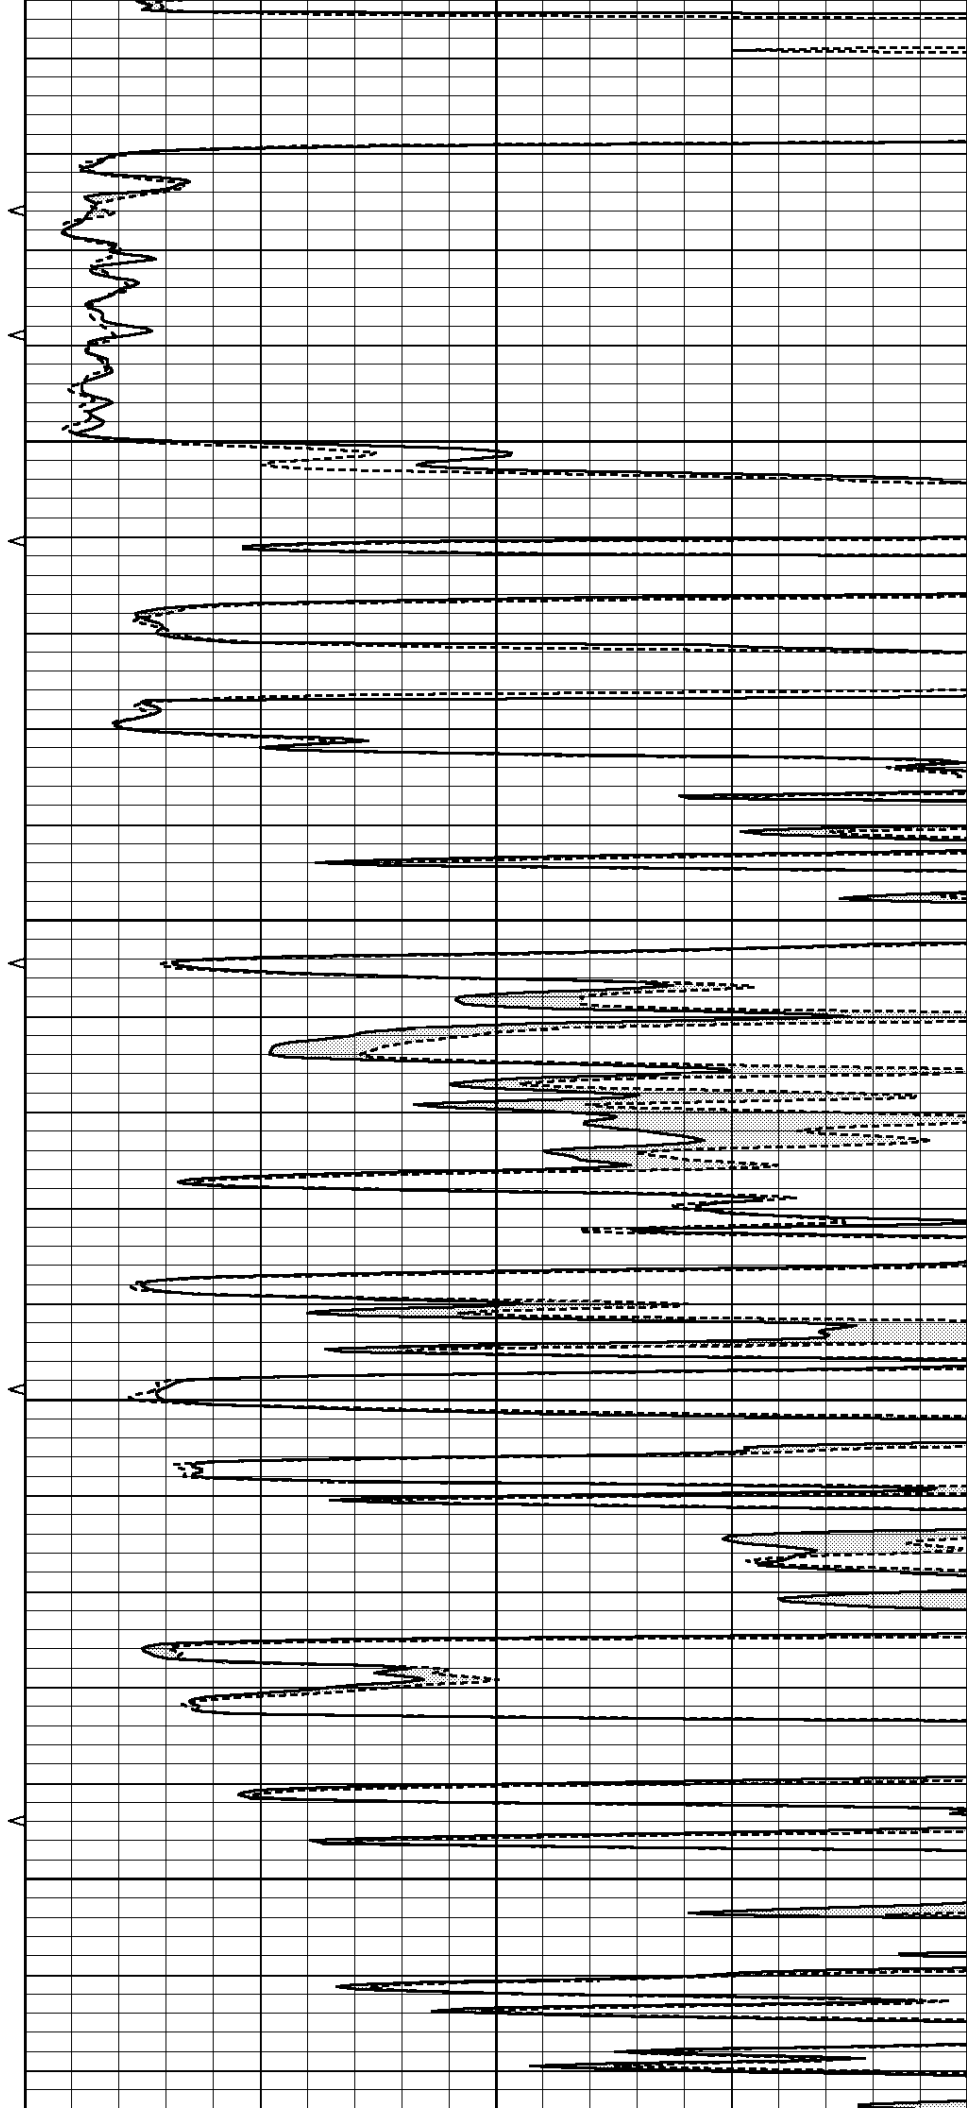


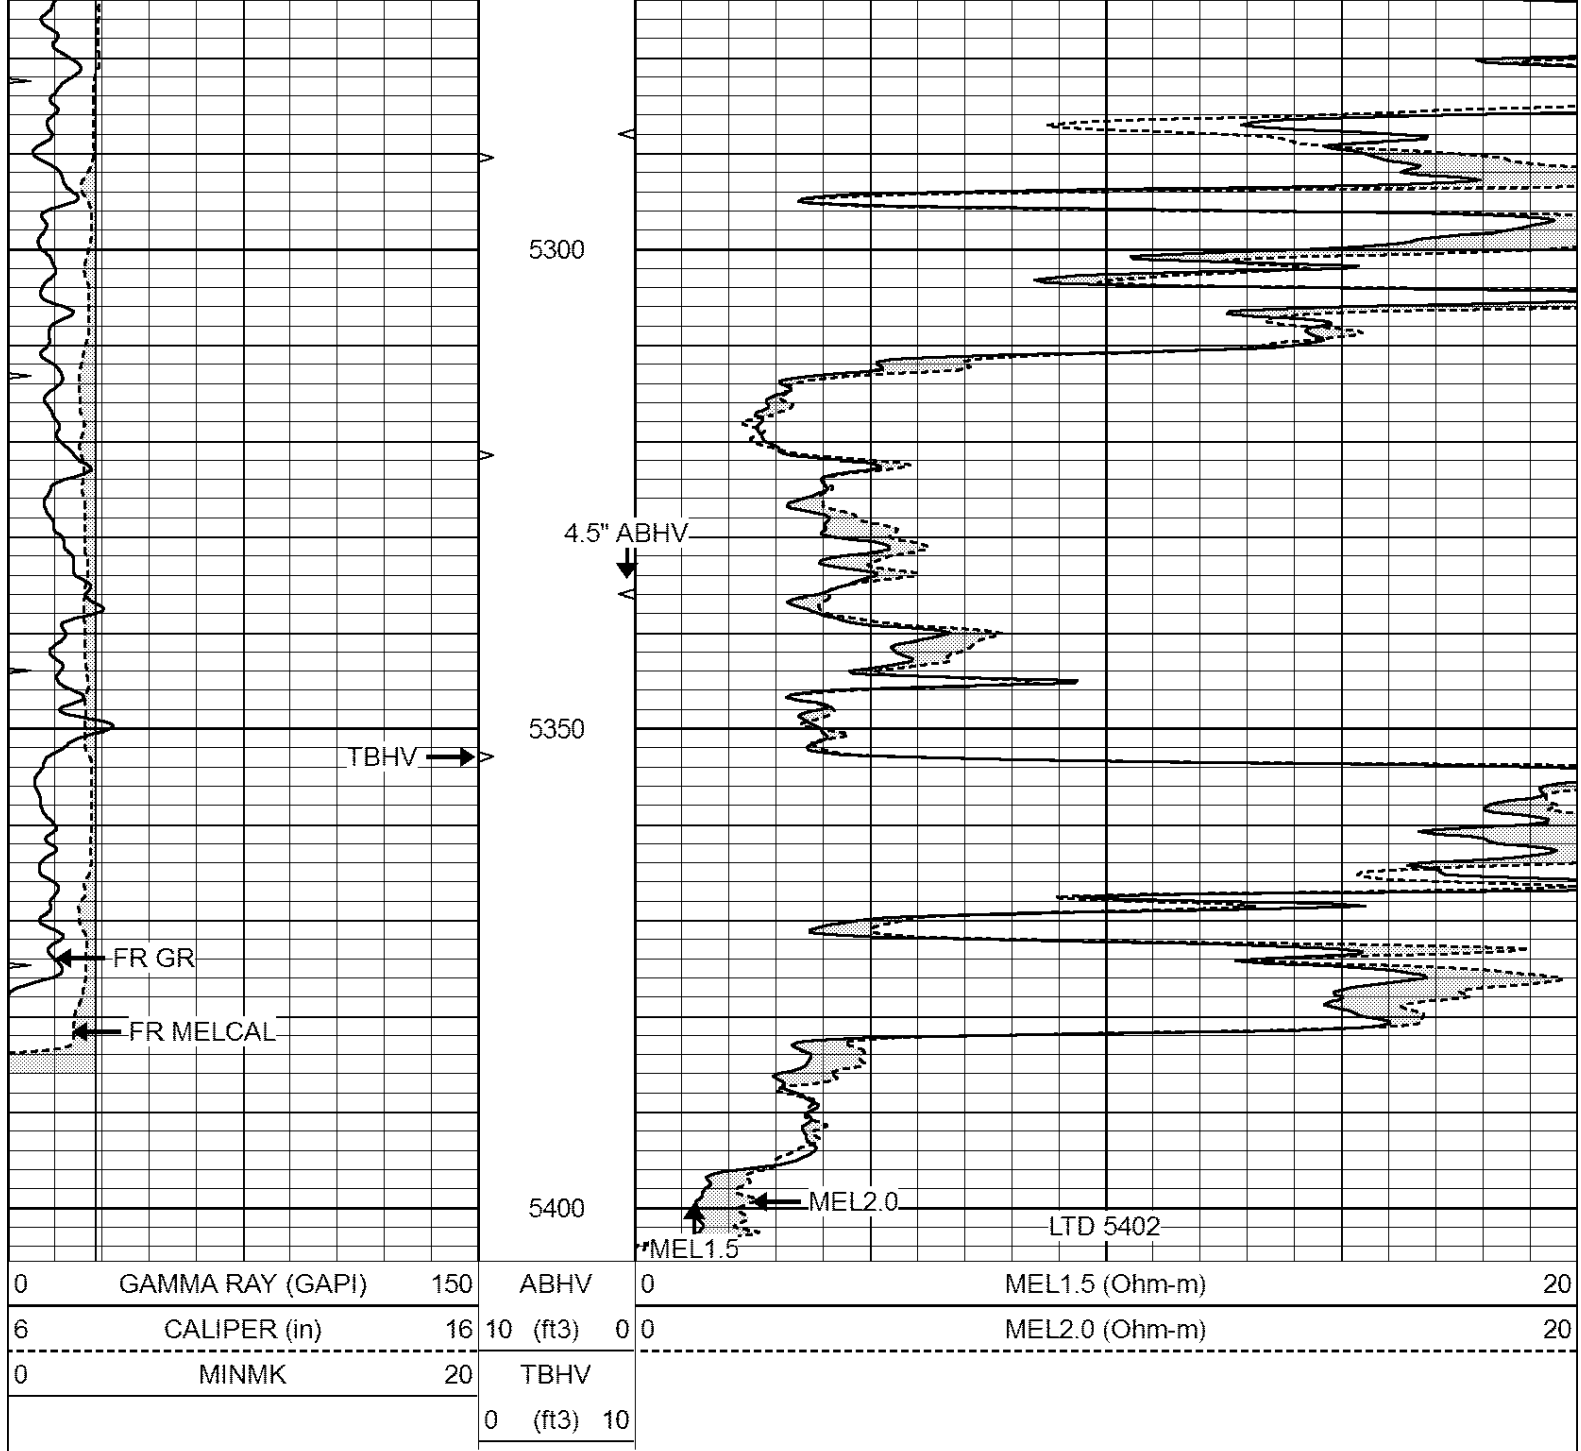




SUPERIOR
Hays,
Kansas


REPEAT SECTION

Database File: 408422pe.db
 Dataset Pathname: pass5.2
 Presentation Format: micro
 Dataset Creation: Sun Mar 04 03:55:29 2012
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	20
0	MINMK	20	TBHV			
			0 (ft3)	10		

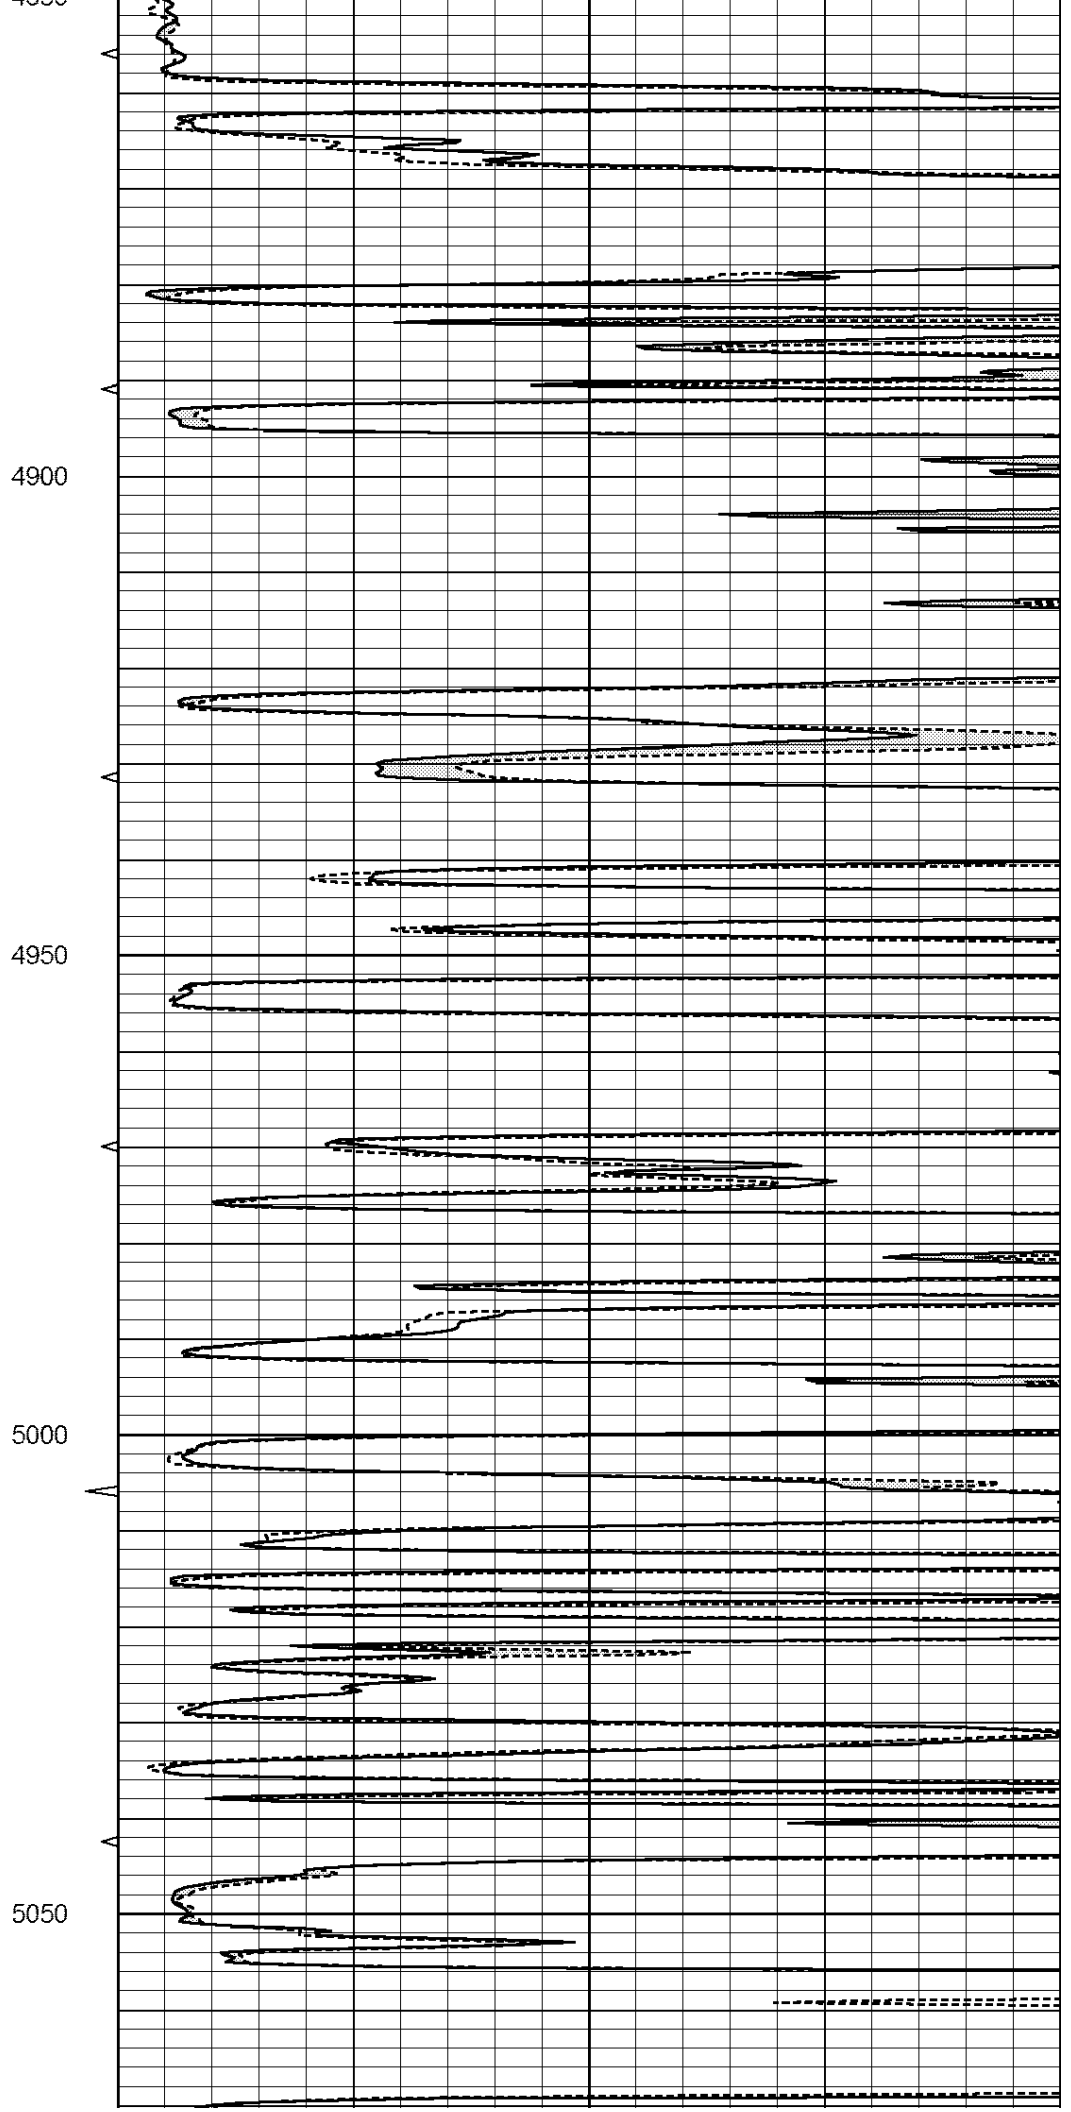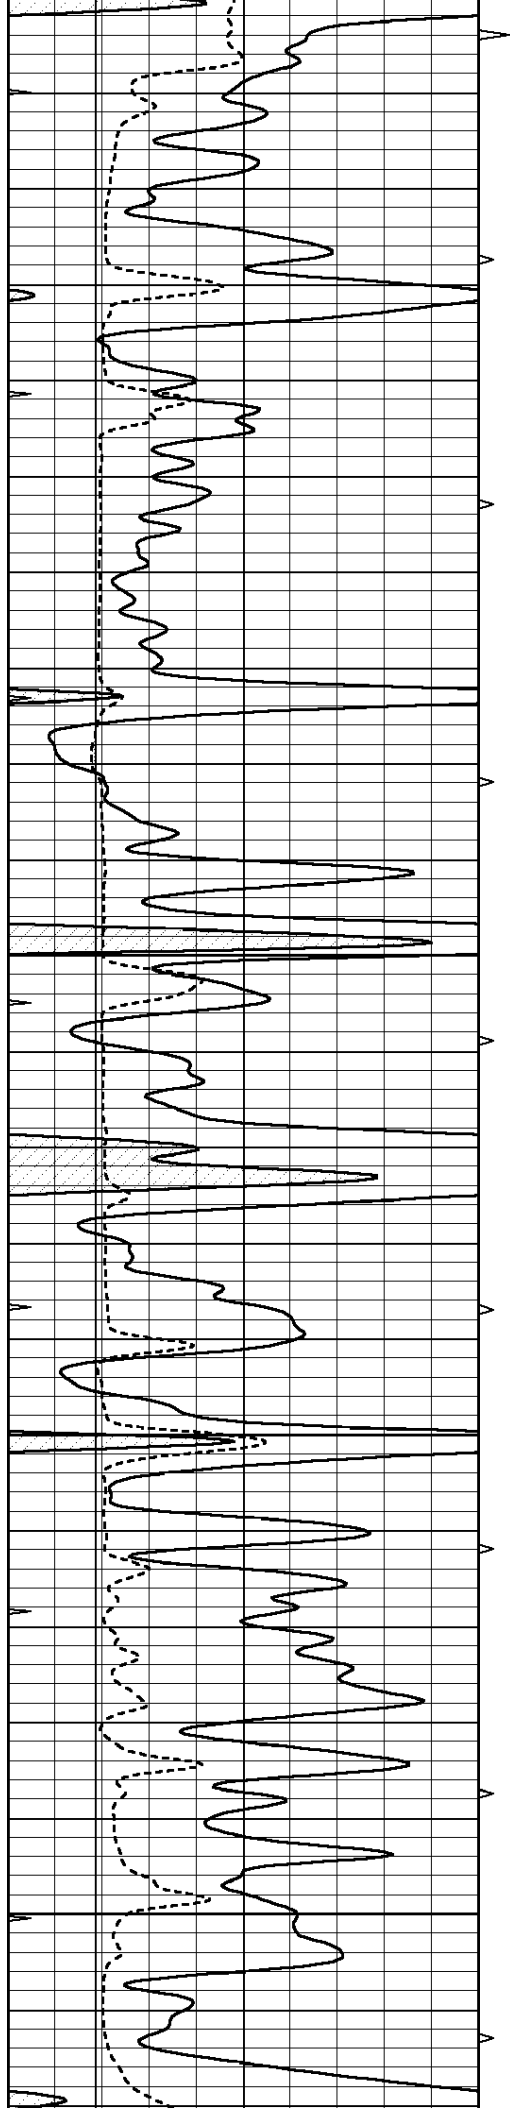

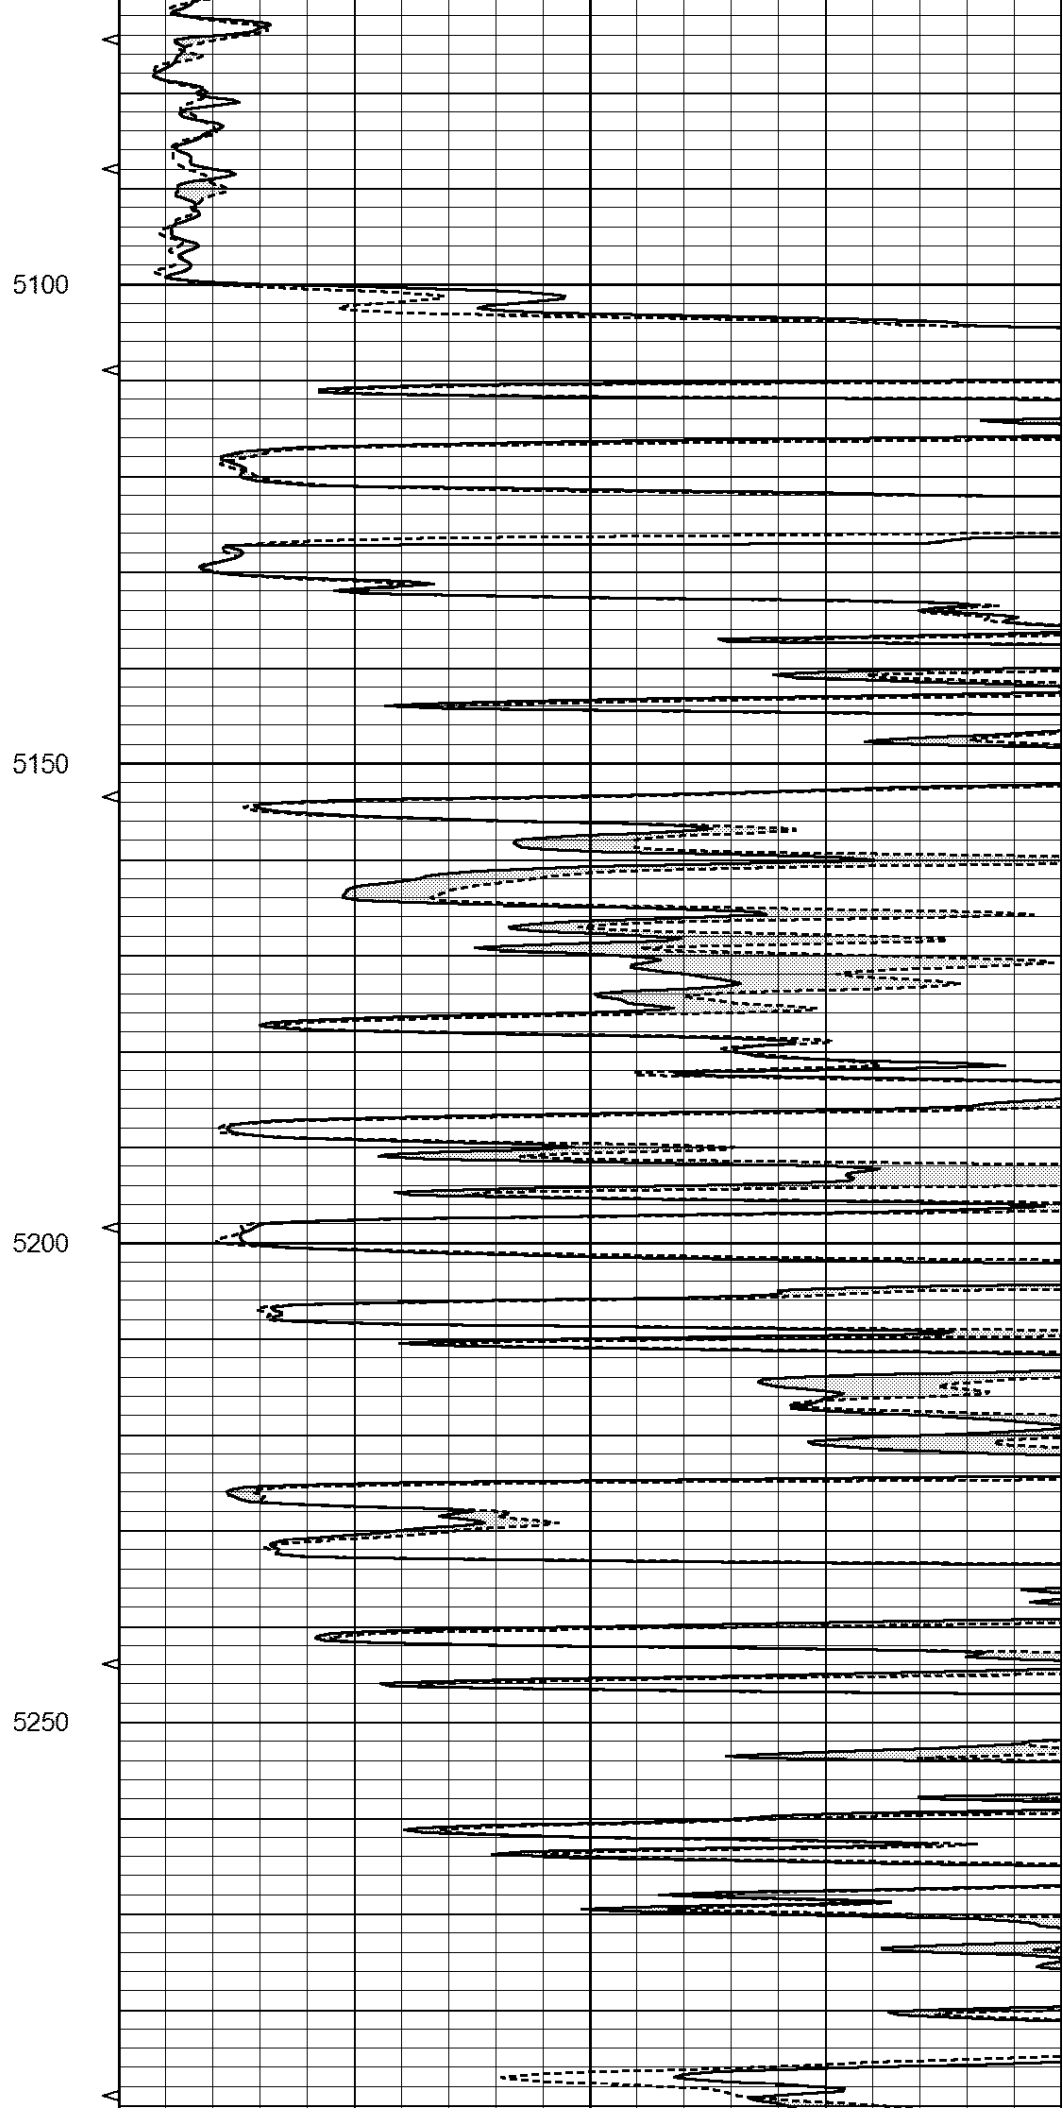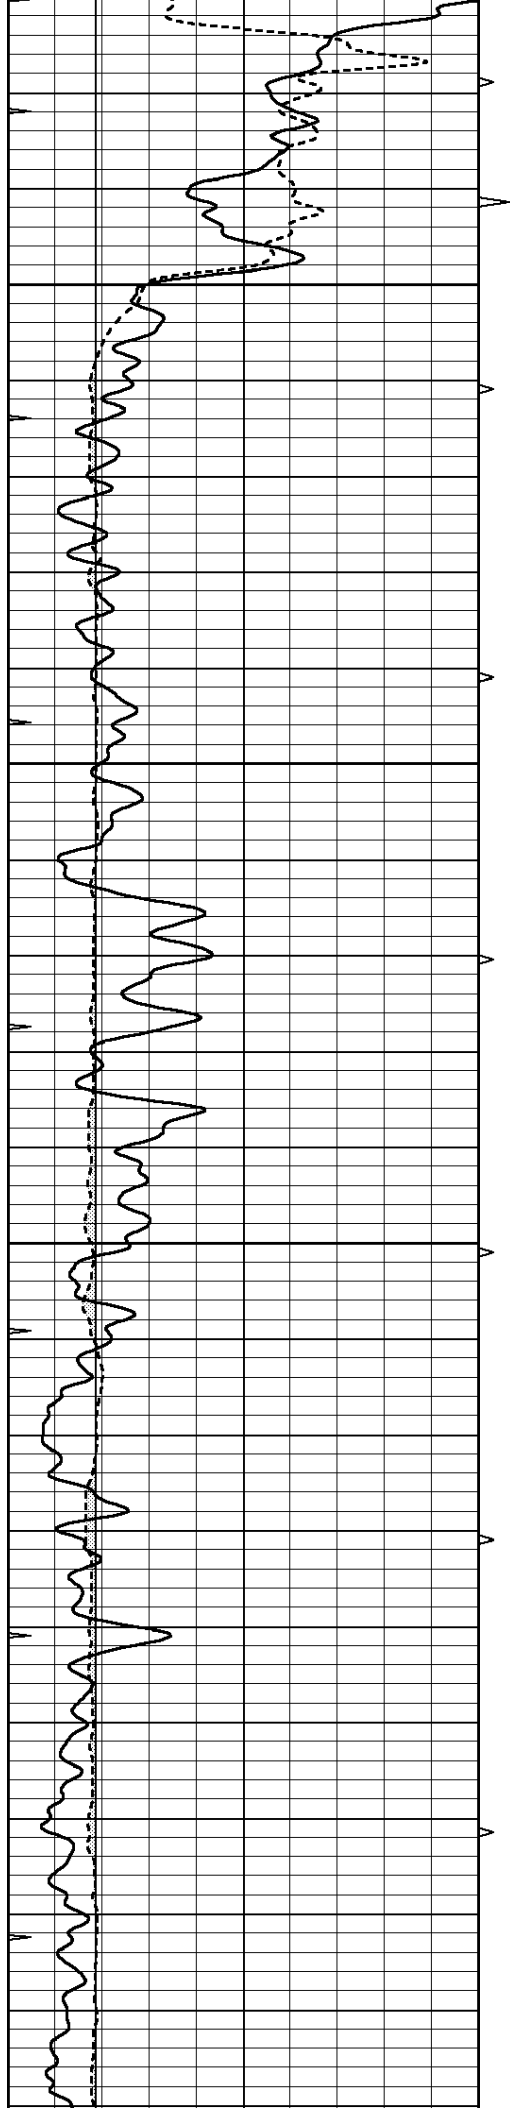

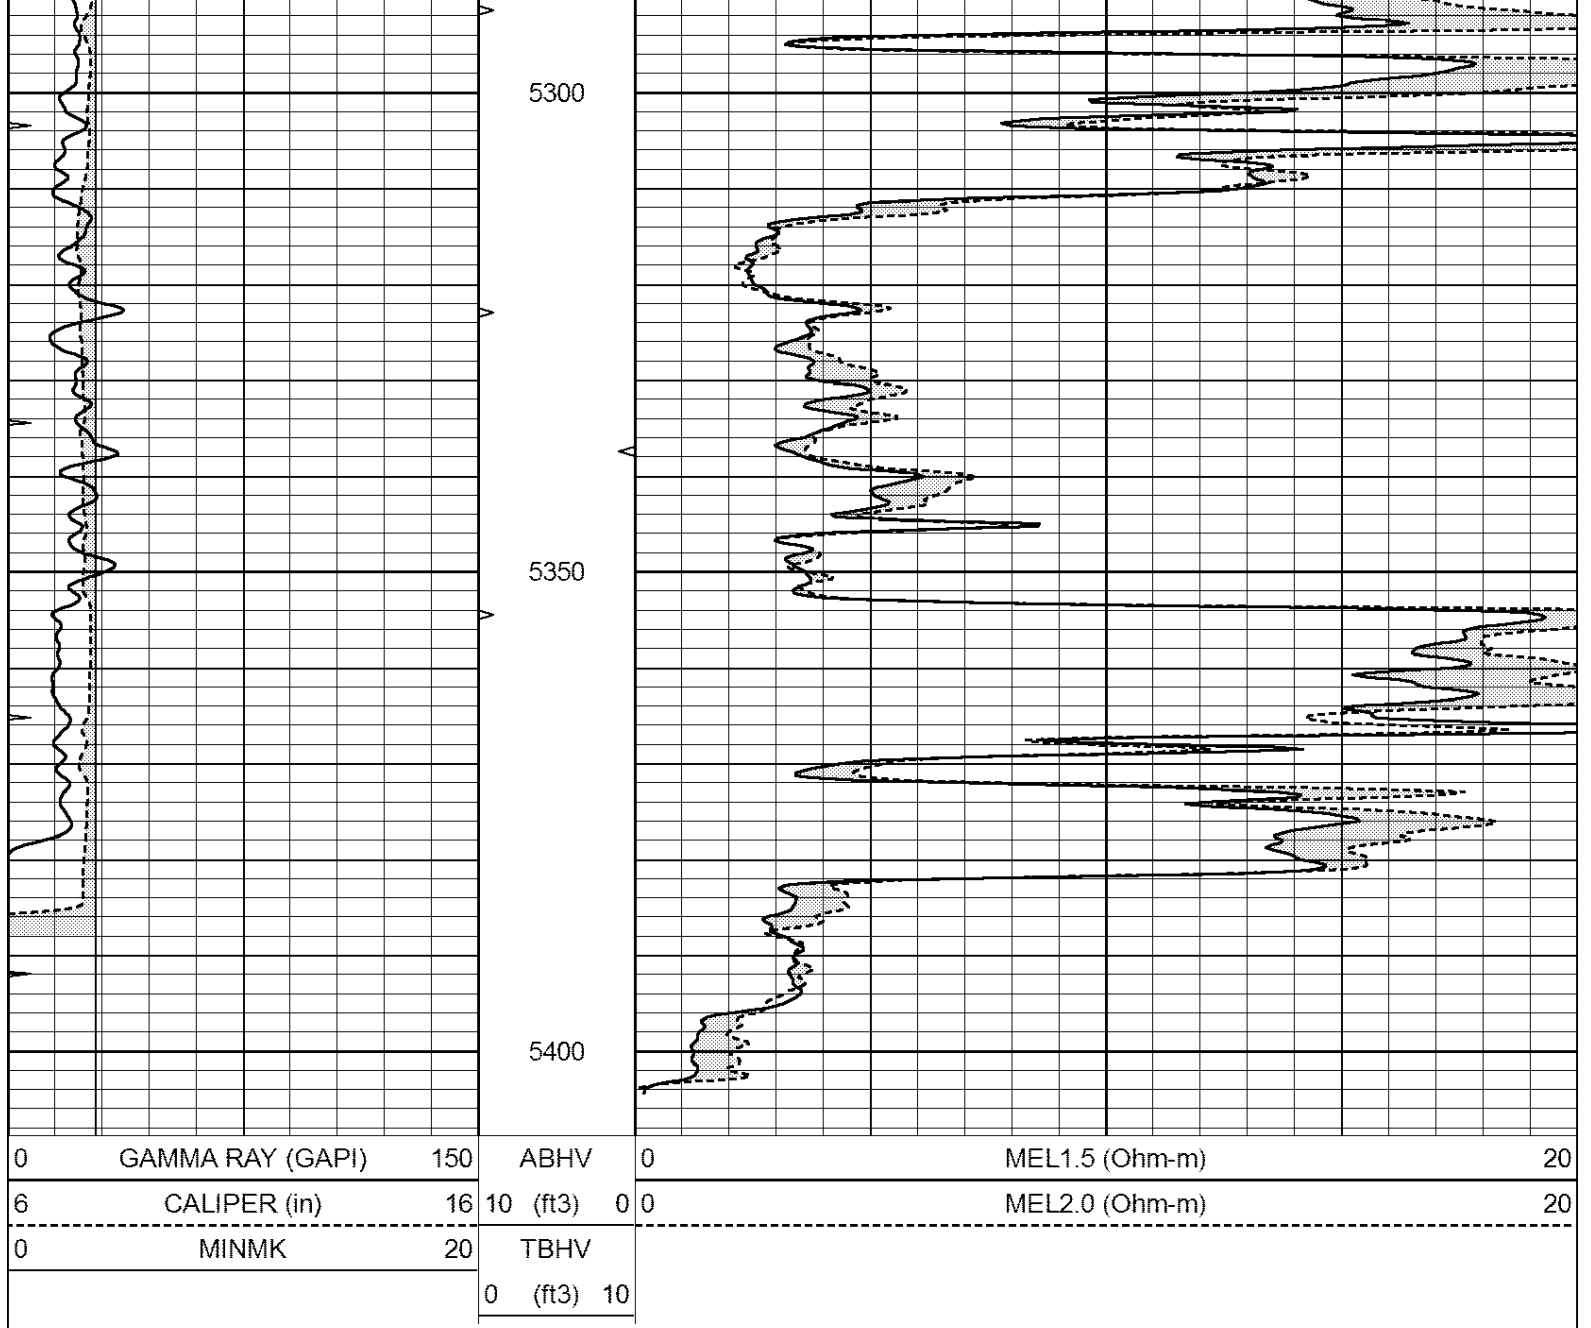

Calibration Report

Database File: 408422pe.db
 Dataset Pathname: pass6.3
 Dataset Creation: Sun Mar 04 03:43:16 2012

MICRO Calibration Report

Serial Number: 2
 Tool Model: PROBE
 Performed: Sat Mar 03 22:11:47 2012

Caliper Calibration: Gain=4.398 Offset=2.528

References	Low Cal	High Cal
Readings	7.500	15.000
	1.130	2.835

1.5" Calibration: Gain=38.000 Offset=0.500

References	Low Cal	High Cal
Readings	0.000	20.000
	0.065	1.210

2" Calibration: Gain=60.000 Offset=0.500

Z Calibration:

Gain=60.000

Offset=0.500

References
Readings

Low Cal
0.000
0.012

High Cal
20.000
1.043

Gamma Ray Calibration Report

Serial Number:
Tool Model:
Performed:

GR4
OPEN
Sat Mar 03 22:11:41 2012

Calibrator Value:

200.0

GAPI

Background Reading:
Calibrator Reading:

0.0
189.0

cps
cps

Sensitivity:

2.0000

GAPI/cps