



Dual Induction Log

DIGITAL LOG (785) 625-3858

API No.		Company Larson Engineering, Inc.	
15-101-22,345-00-00		Well Paris No.1-7	
Field Wildcat		County Lane State Kansas	
Location 2030' FNL & 1200' FWL		Other Services CNL/CDL MEL	
Sec: 7 Twp: 19S Rge: 28W		Elevation	
Permanent Datum Ground Level		K.B. 2806	
Log Measured From Kelly Bushing		D.F. 2799	
Drilling Measured From Kelly Bushing		G.L. 2799	
Date	2/27/2012		
Run Number	One		
Depth Driller	4700		
Depth Logger	4700		
Bottom Logged Interval	4699		
Top Log Interval	250		
Casing Driller	8.625 @ 261		
Casing Logger	256		
Bit Size	7.875		
Type Fluid in Hole	Chemical		
Salinity,ppm CL	3.600		
Density / Viscosity	9.1 61		
pH / Fluid Loss	9.5 6.4		
Source of Sample	Flowline		
Rm @ Meas. Temp	.6 @ 48		
Rmf @ Meas. Temp	.45 @ 48		
Rmc @ Meas. Temp	.81 @ 48		
Source of Rmf / Rmc	Charts		
Rm @ BHT	.23 @ 123		
Operating Rig Time	4 Hours		
Max Rec. Temp. F	123		
Equipment Number	17		
Location	Hays		
Recorded By	C. Desai		
Witnessed By	Vern Schrag		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Thank you for using Log-Tech, Inc.
(785) 625-3858

Dighton KS,
4 1/8 S, E Into

Database File: c:\warrior\data\larson_paris no.1-7\larsonhd.db
Dataset Pathname: dil\larstk
Presentation Format: dil2in
Dataset Creation: Mon Feb 27 05:13:21 2012
Charted by: Depth in Feet scaled 1:600




Charted by: Depth in Feet scaled 1:500




0	Gamma Ray	150
-200	SP (mV)	0



0	Shallow Resistivity	50
0	Deep Resistivity	50
1000	Conductivity	0
15000	Line Tension	0



50	Shallow Resistivity	500
50	Deep Resistivity	500



LSPD
0
0

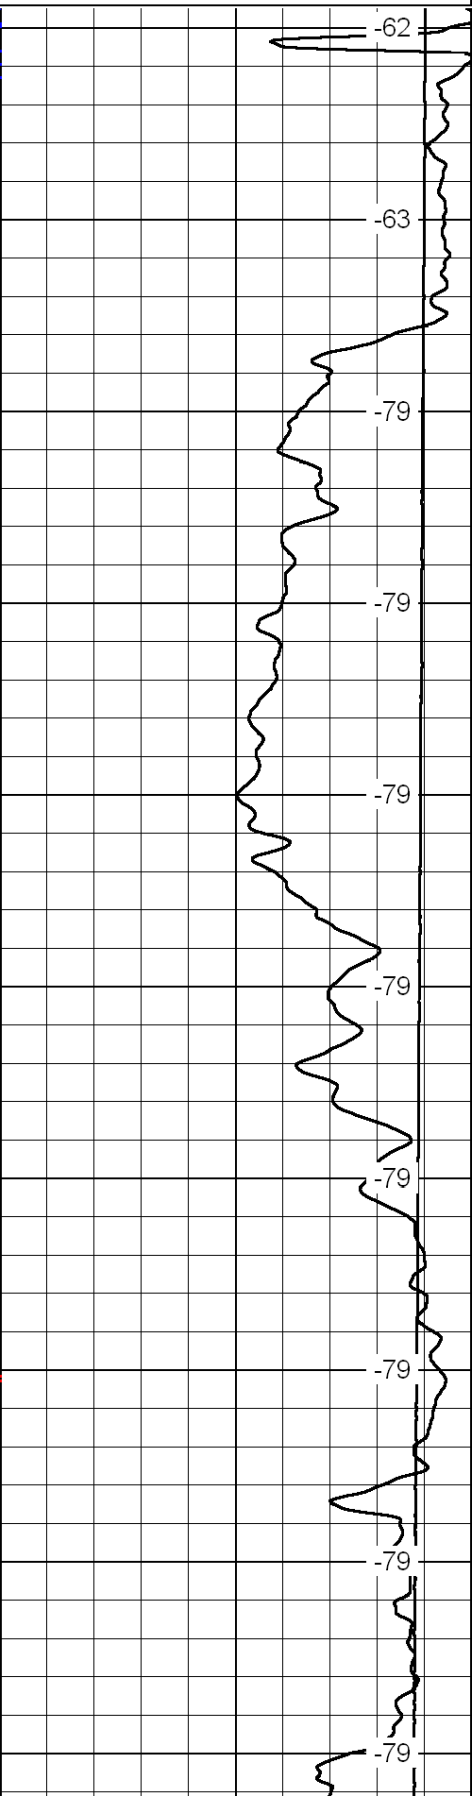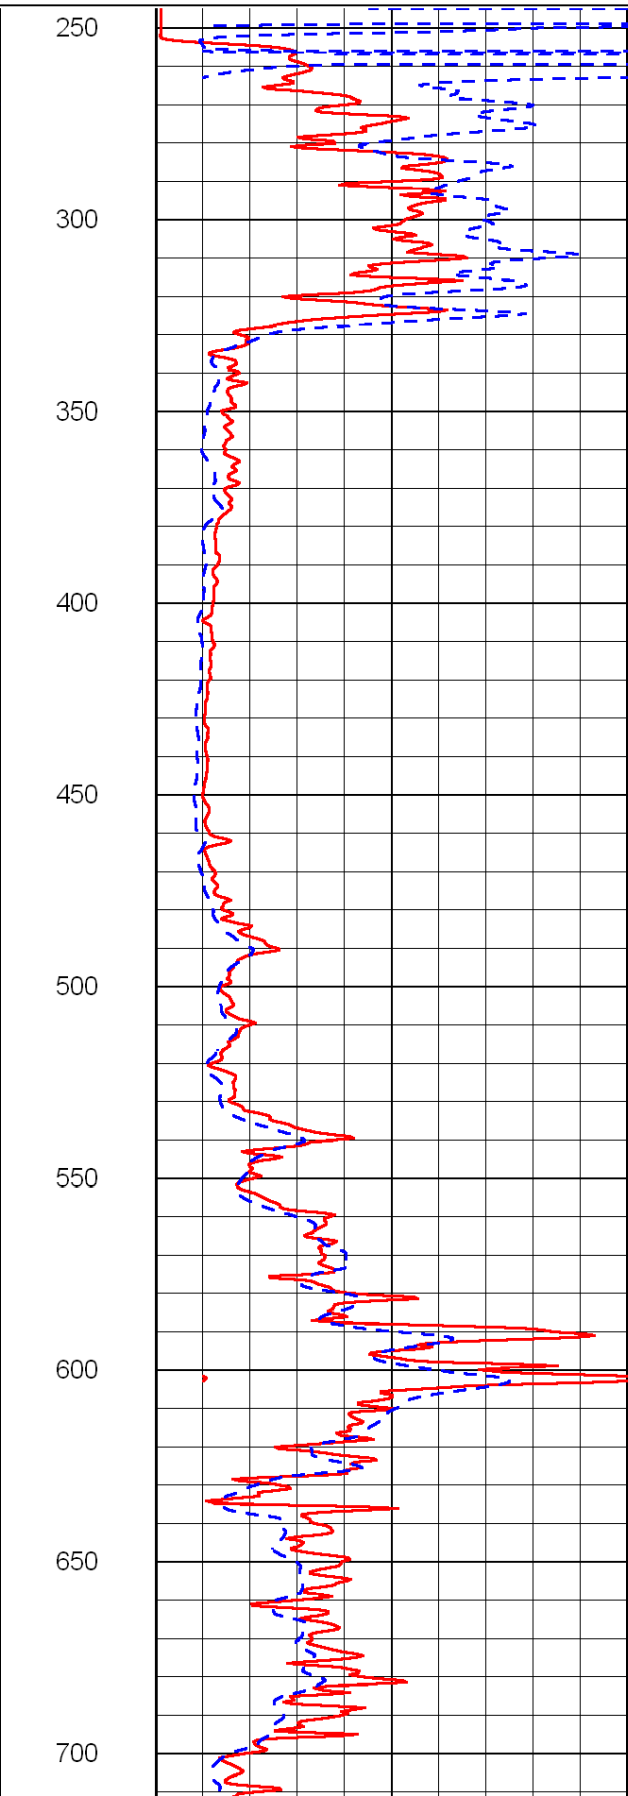
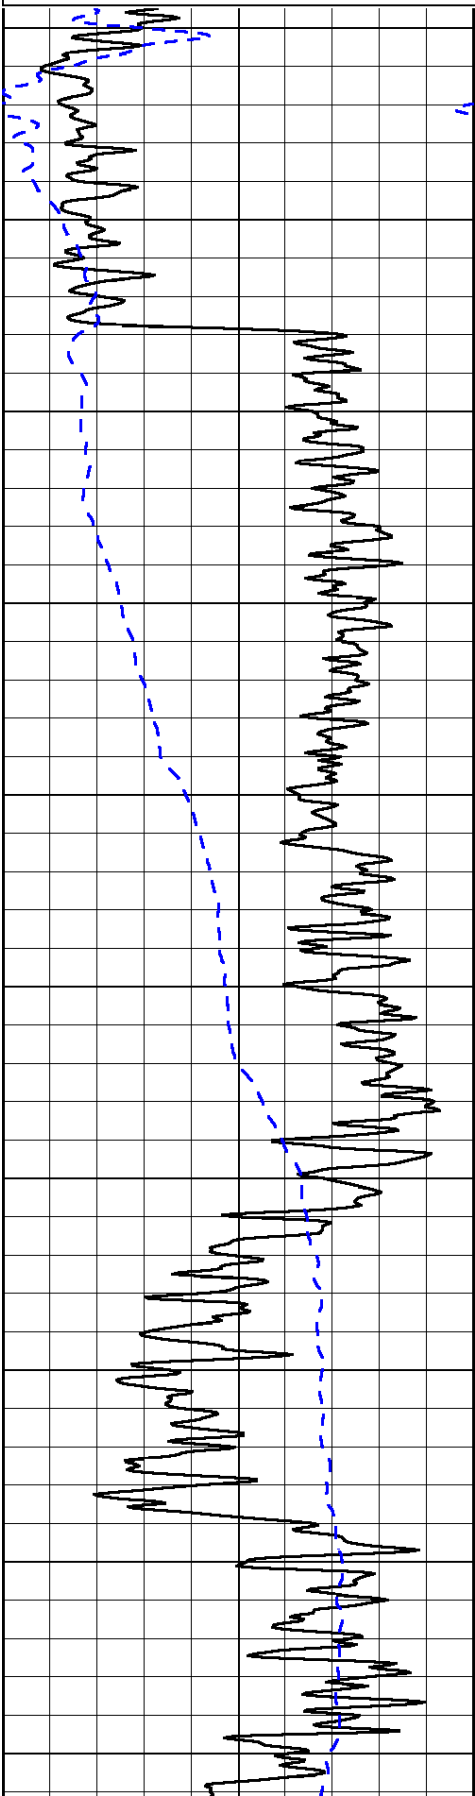


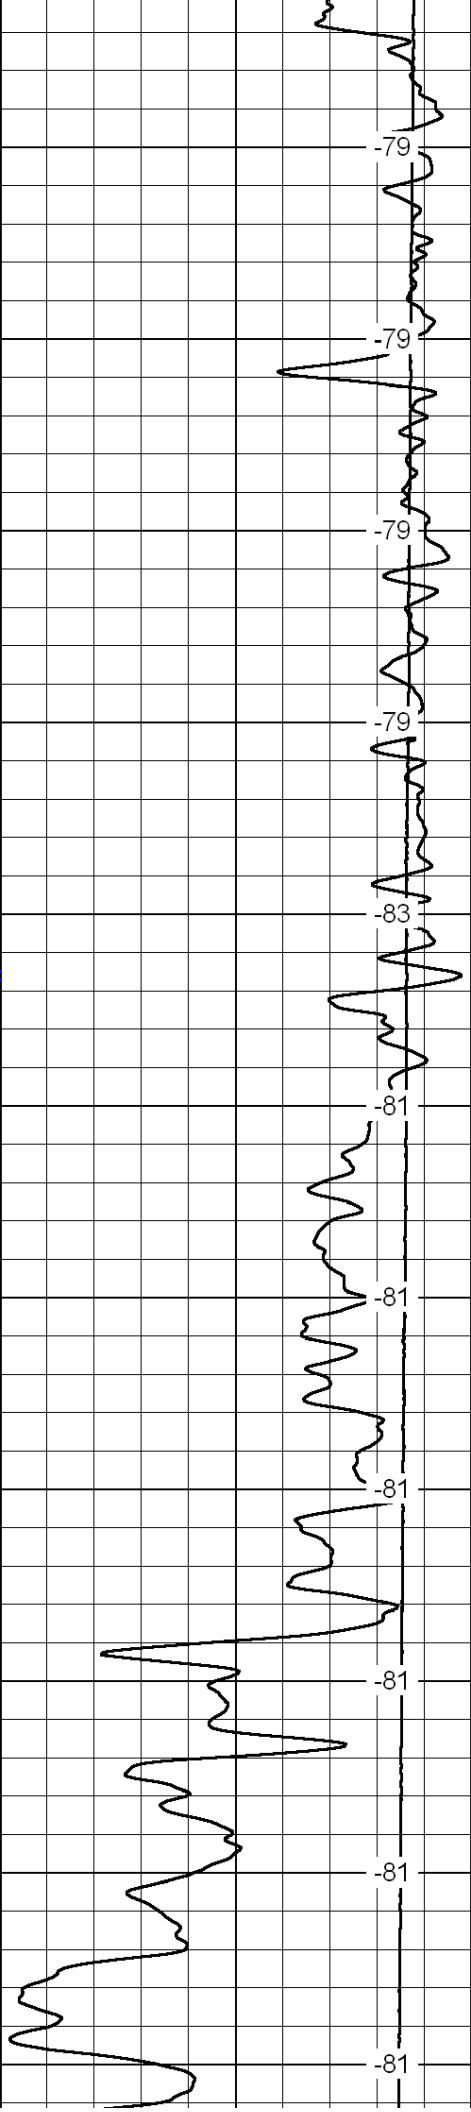
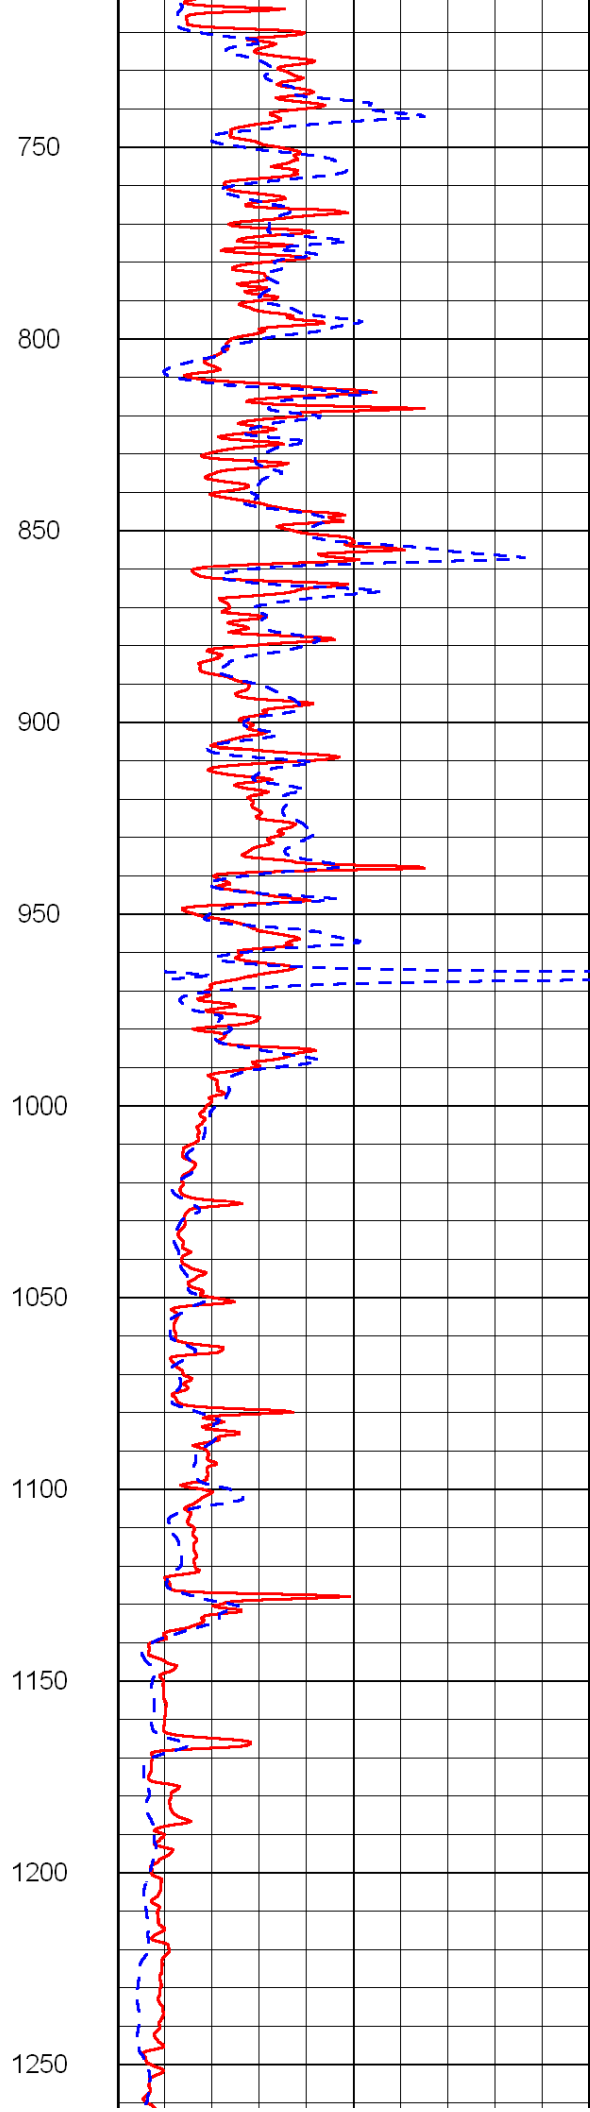
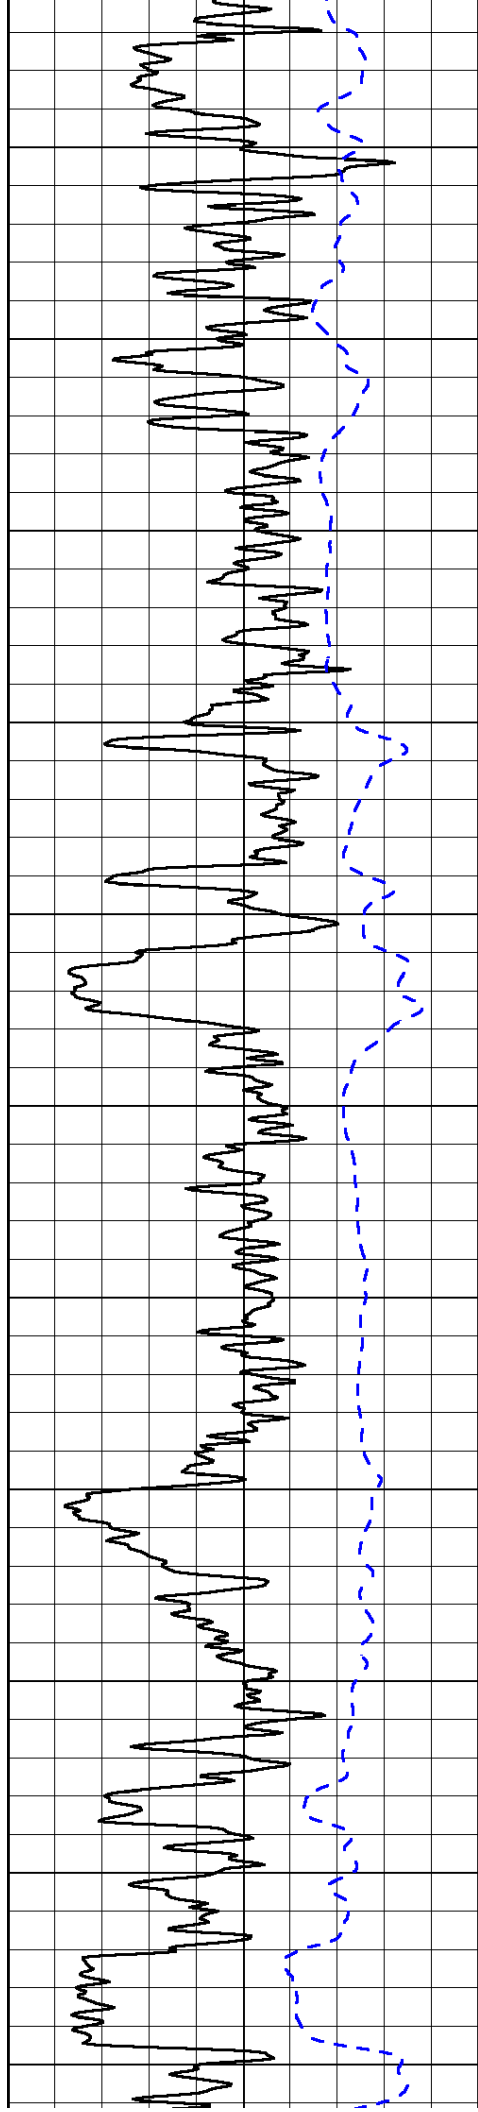



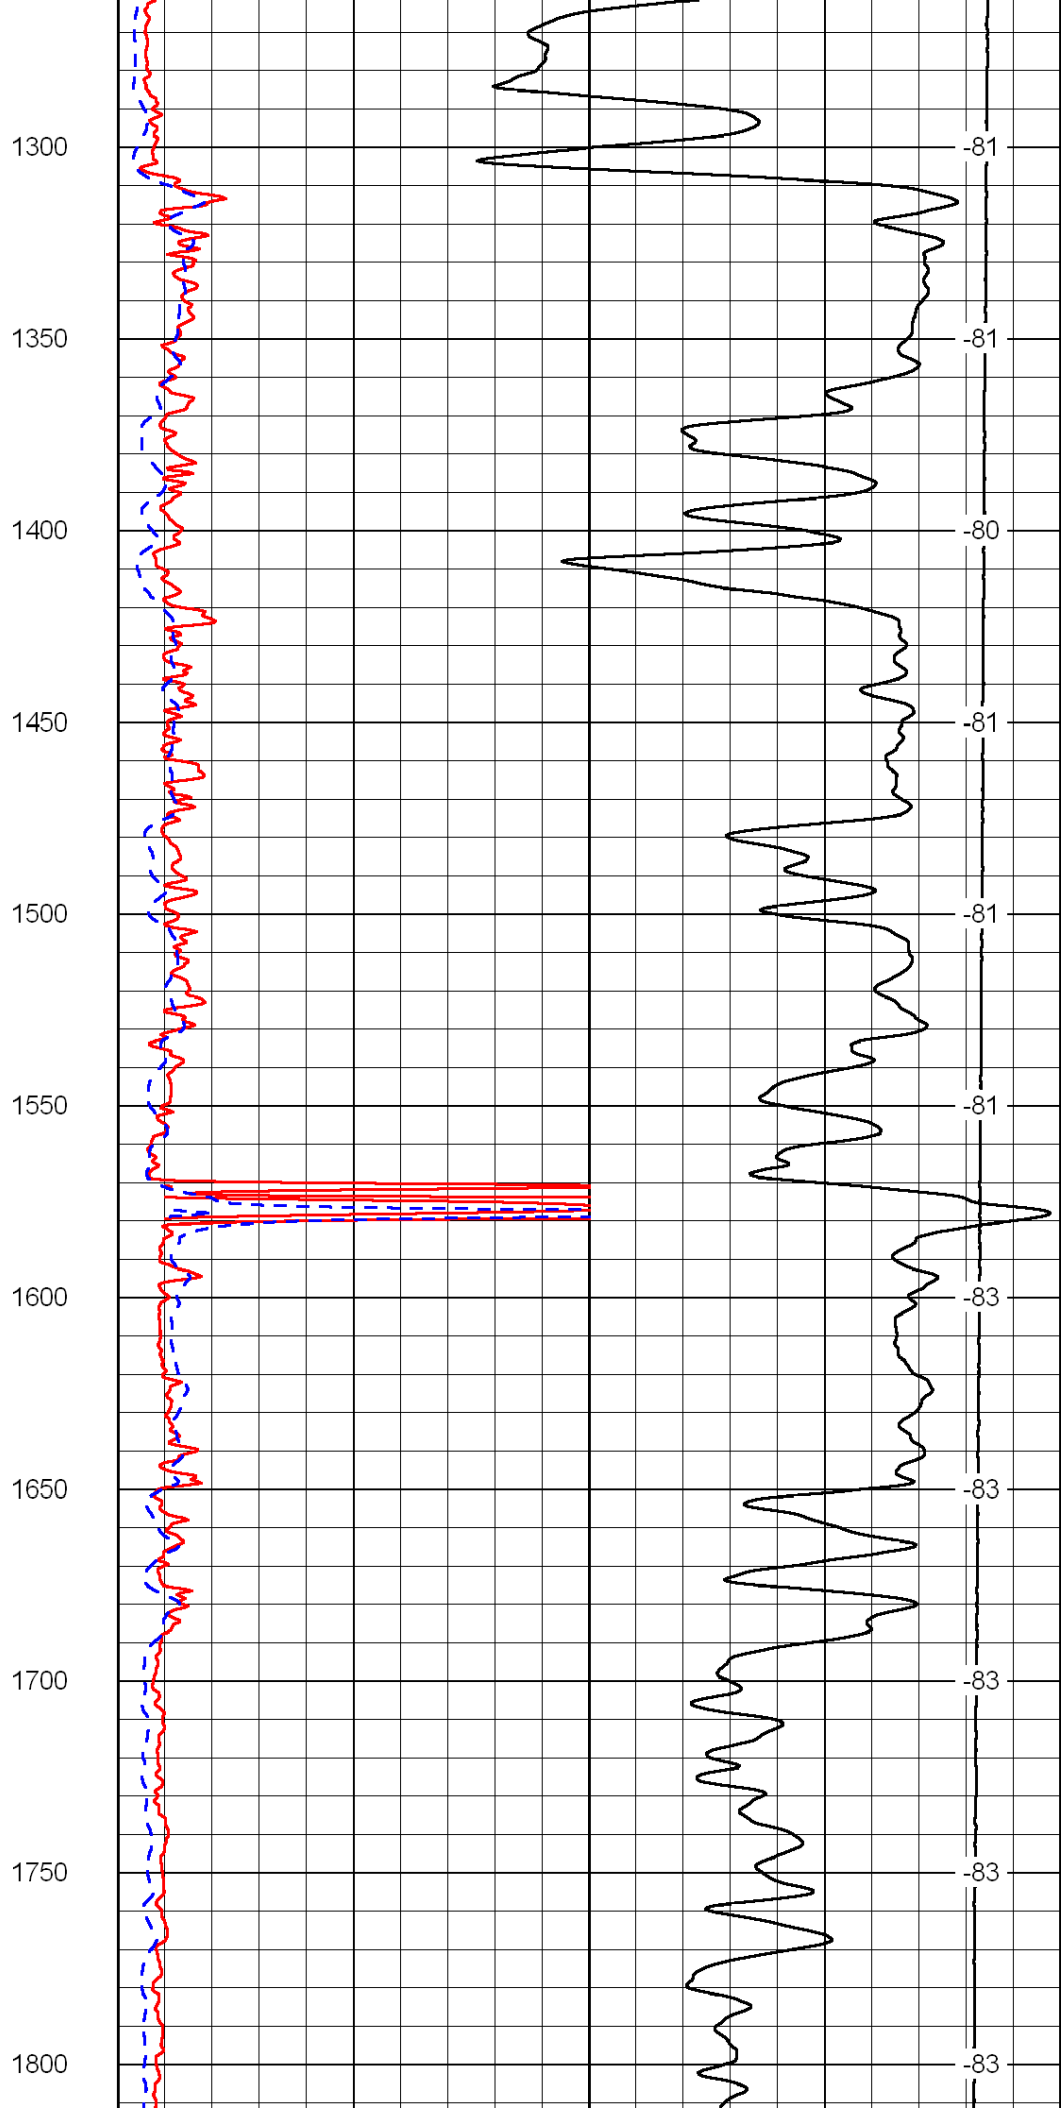
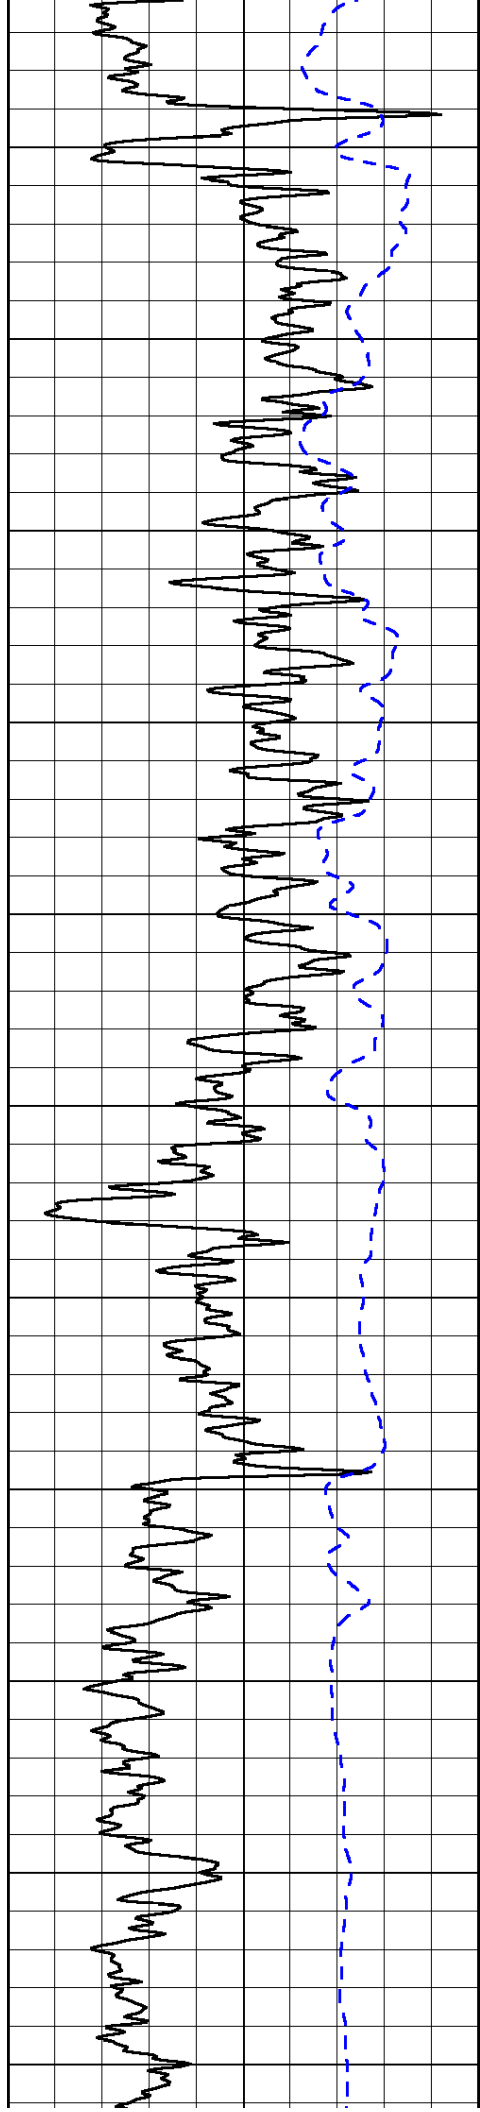


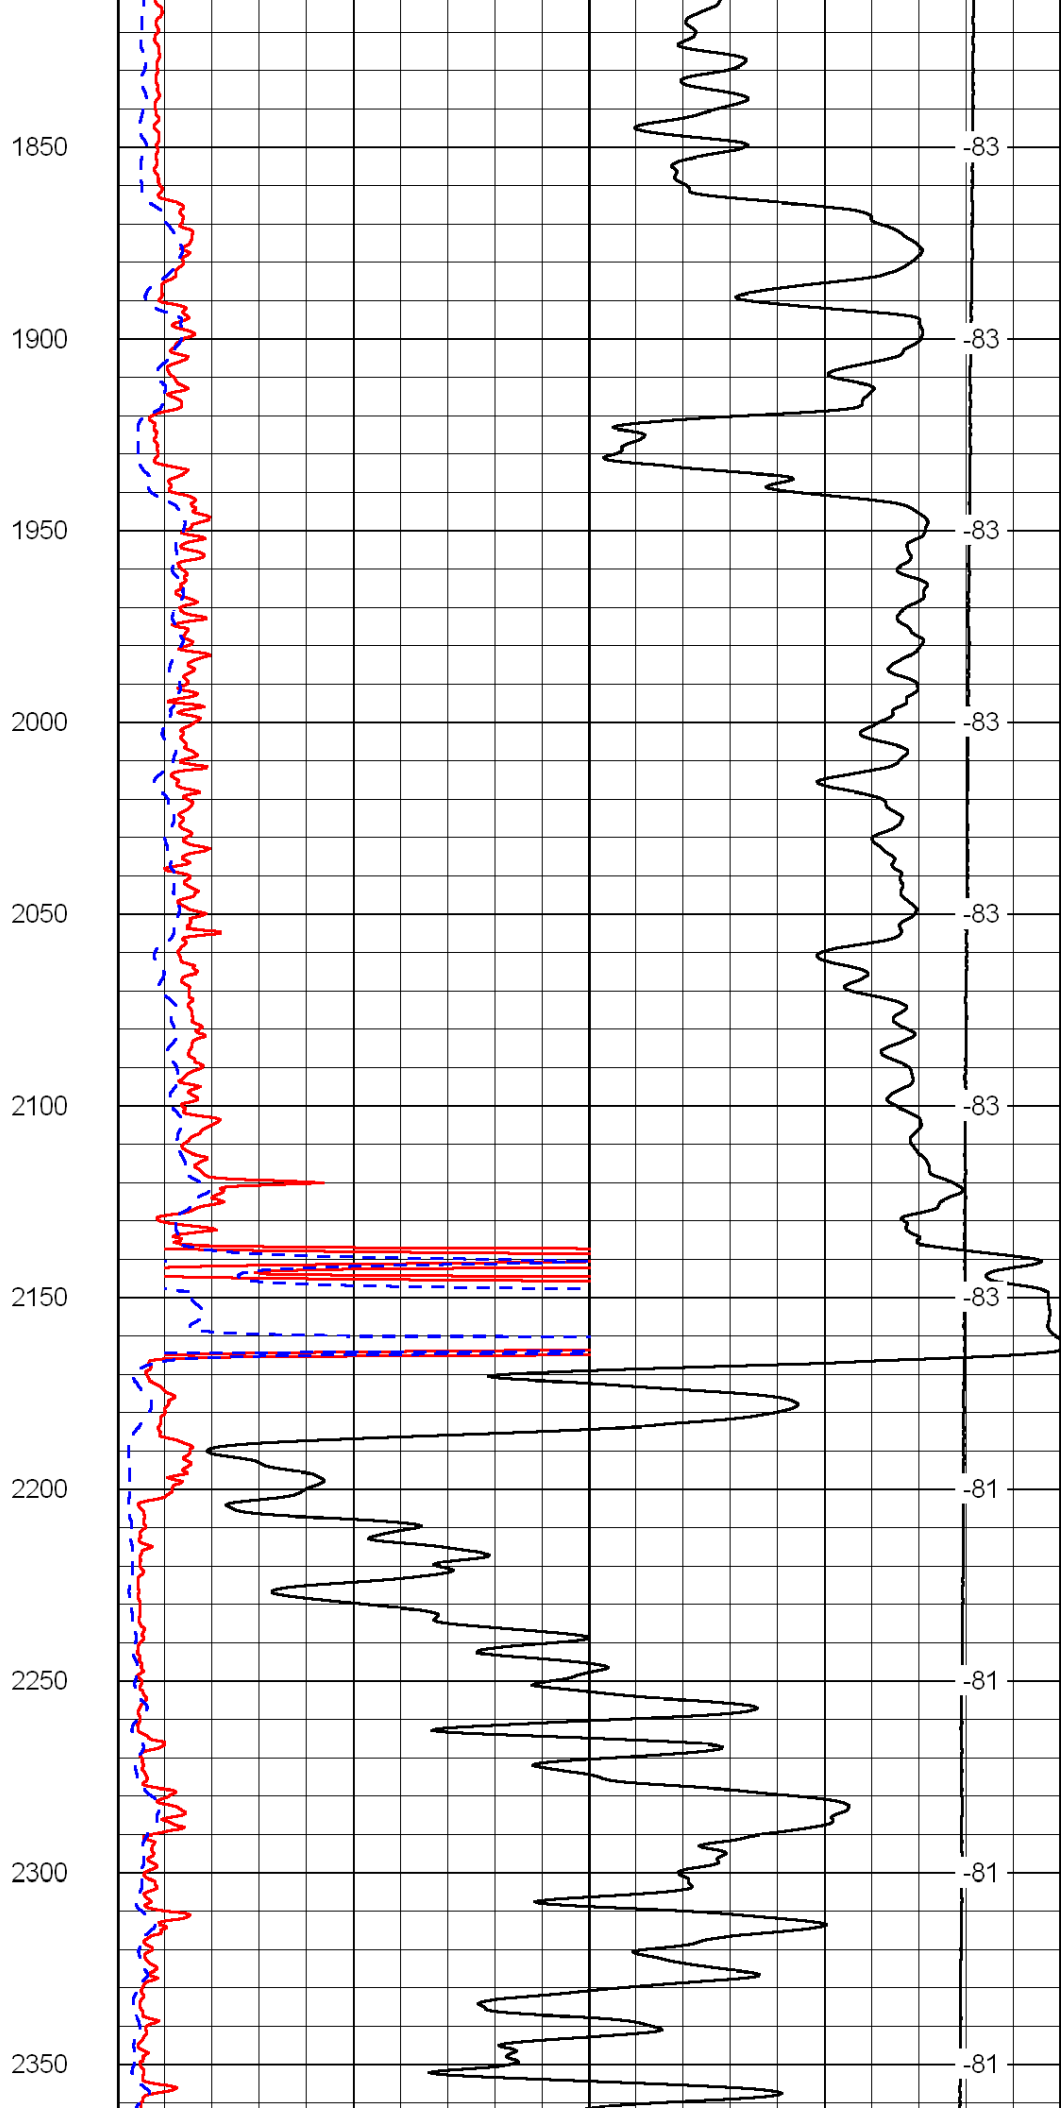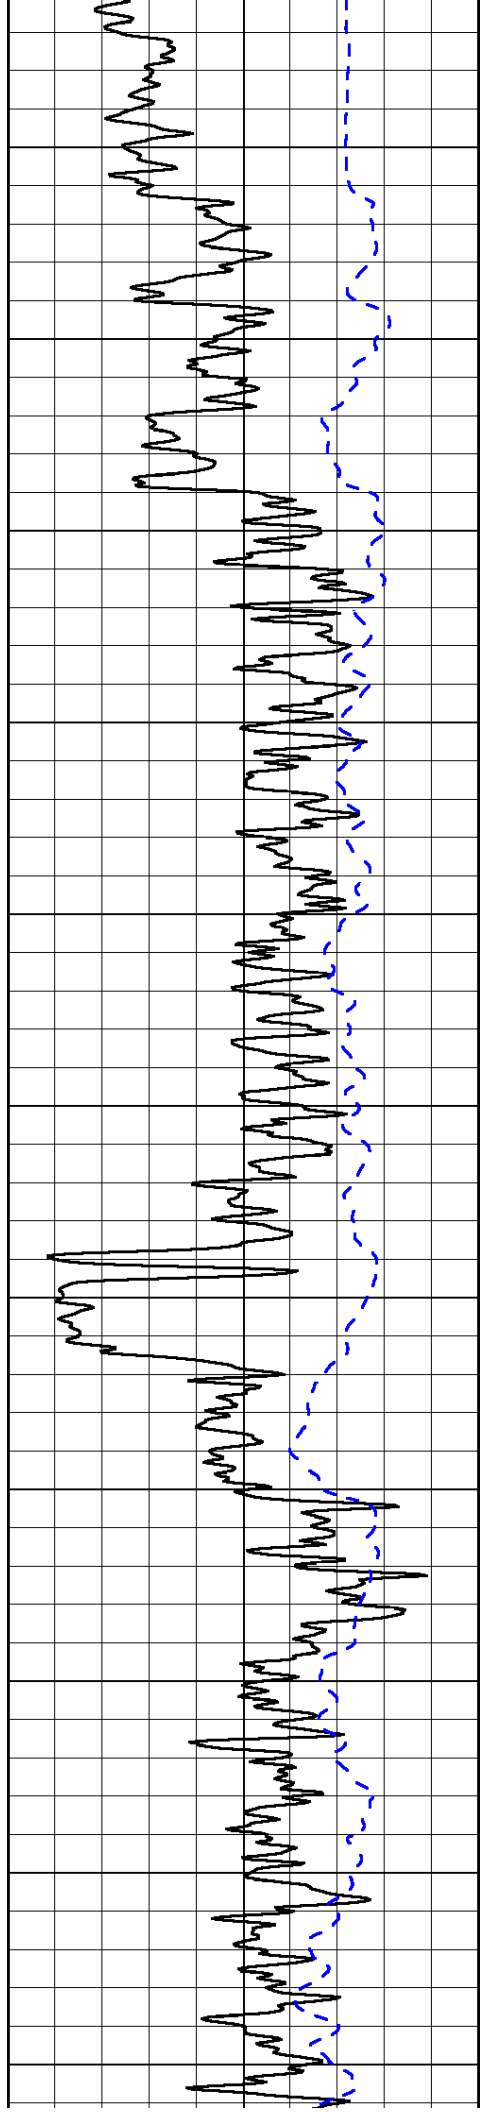


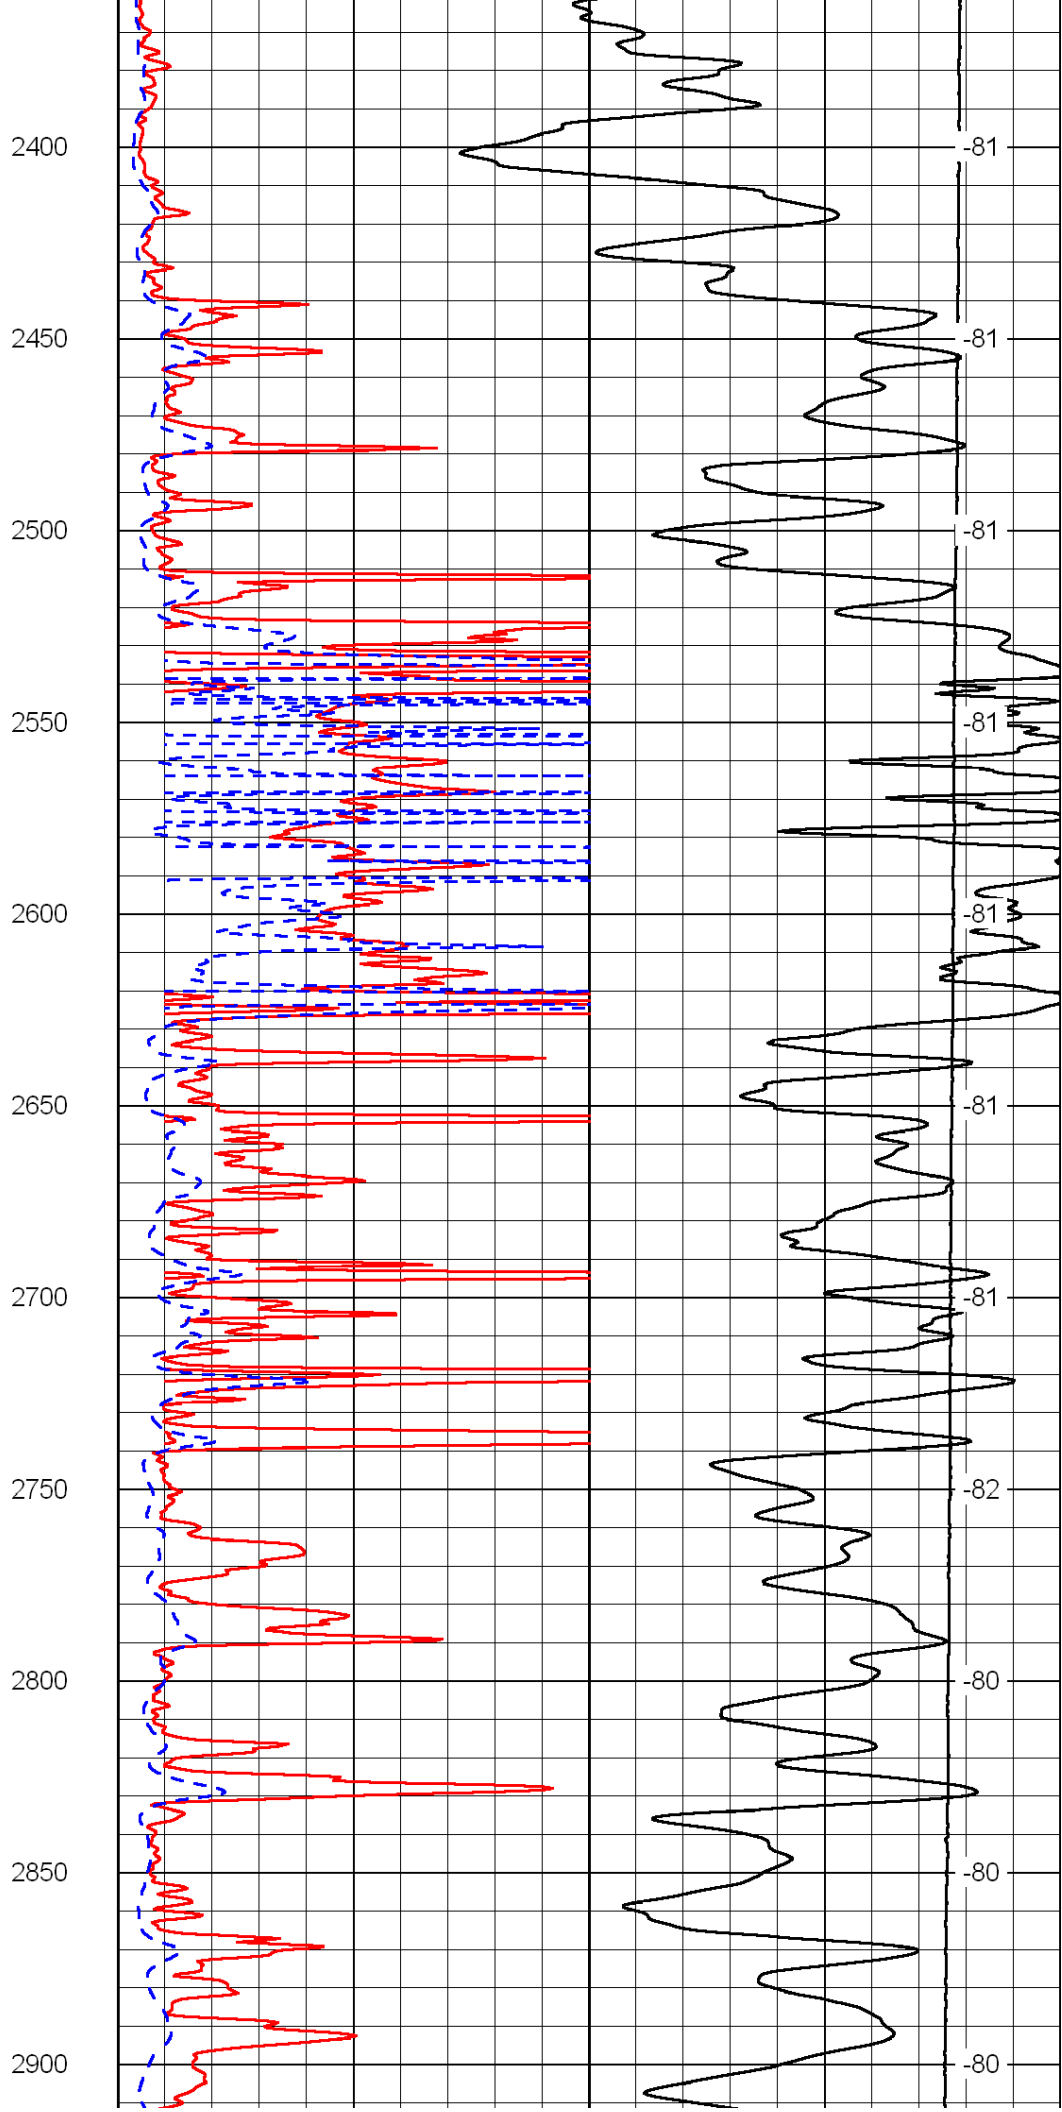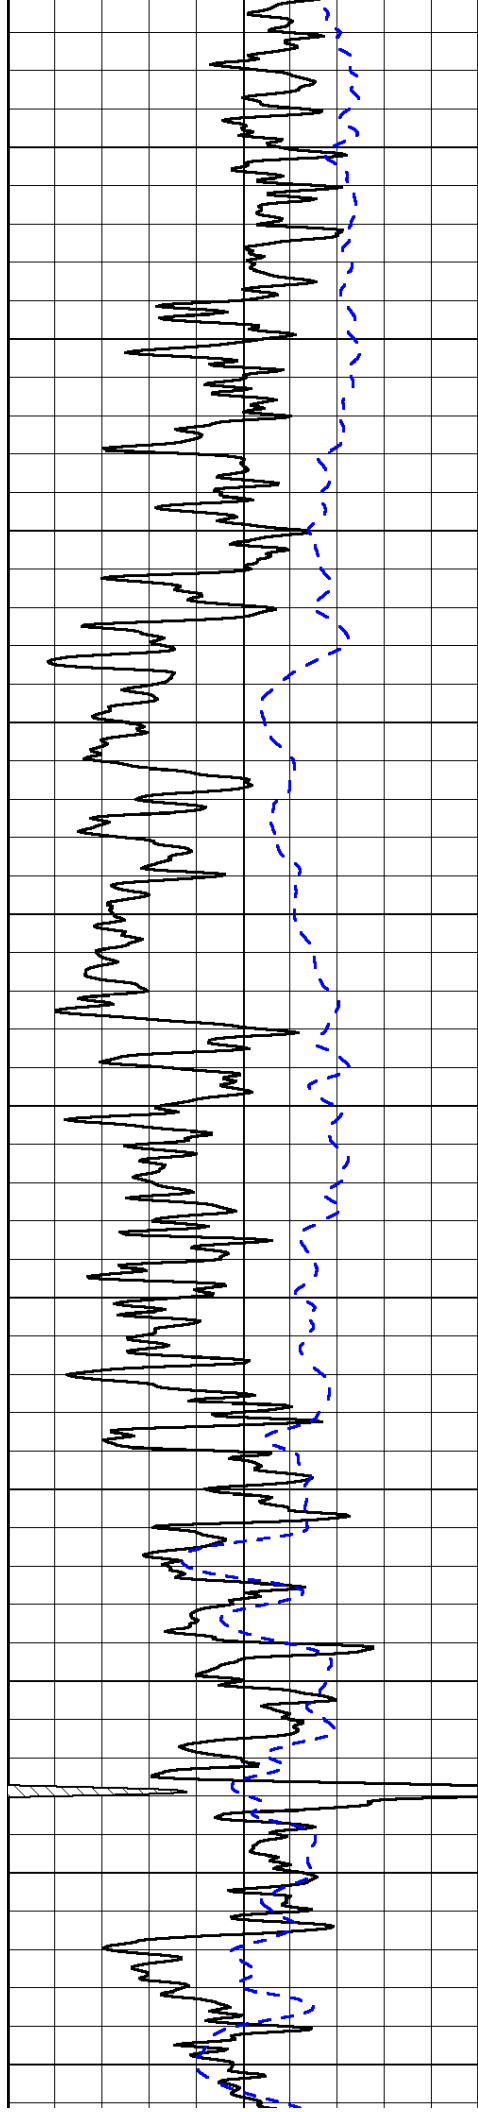

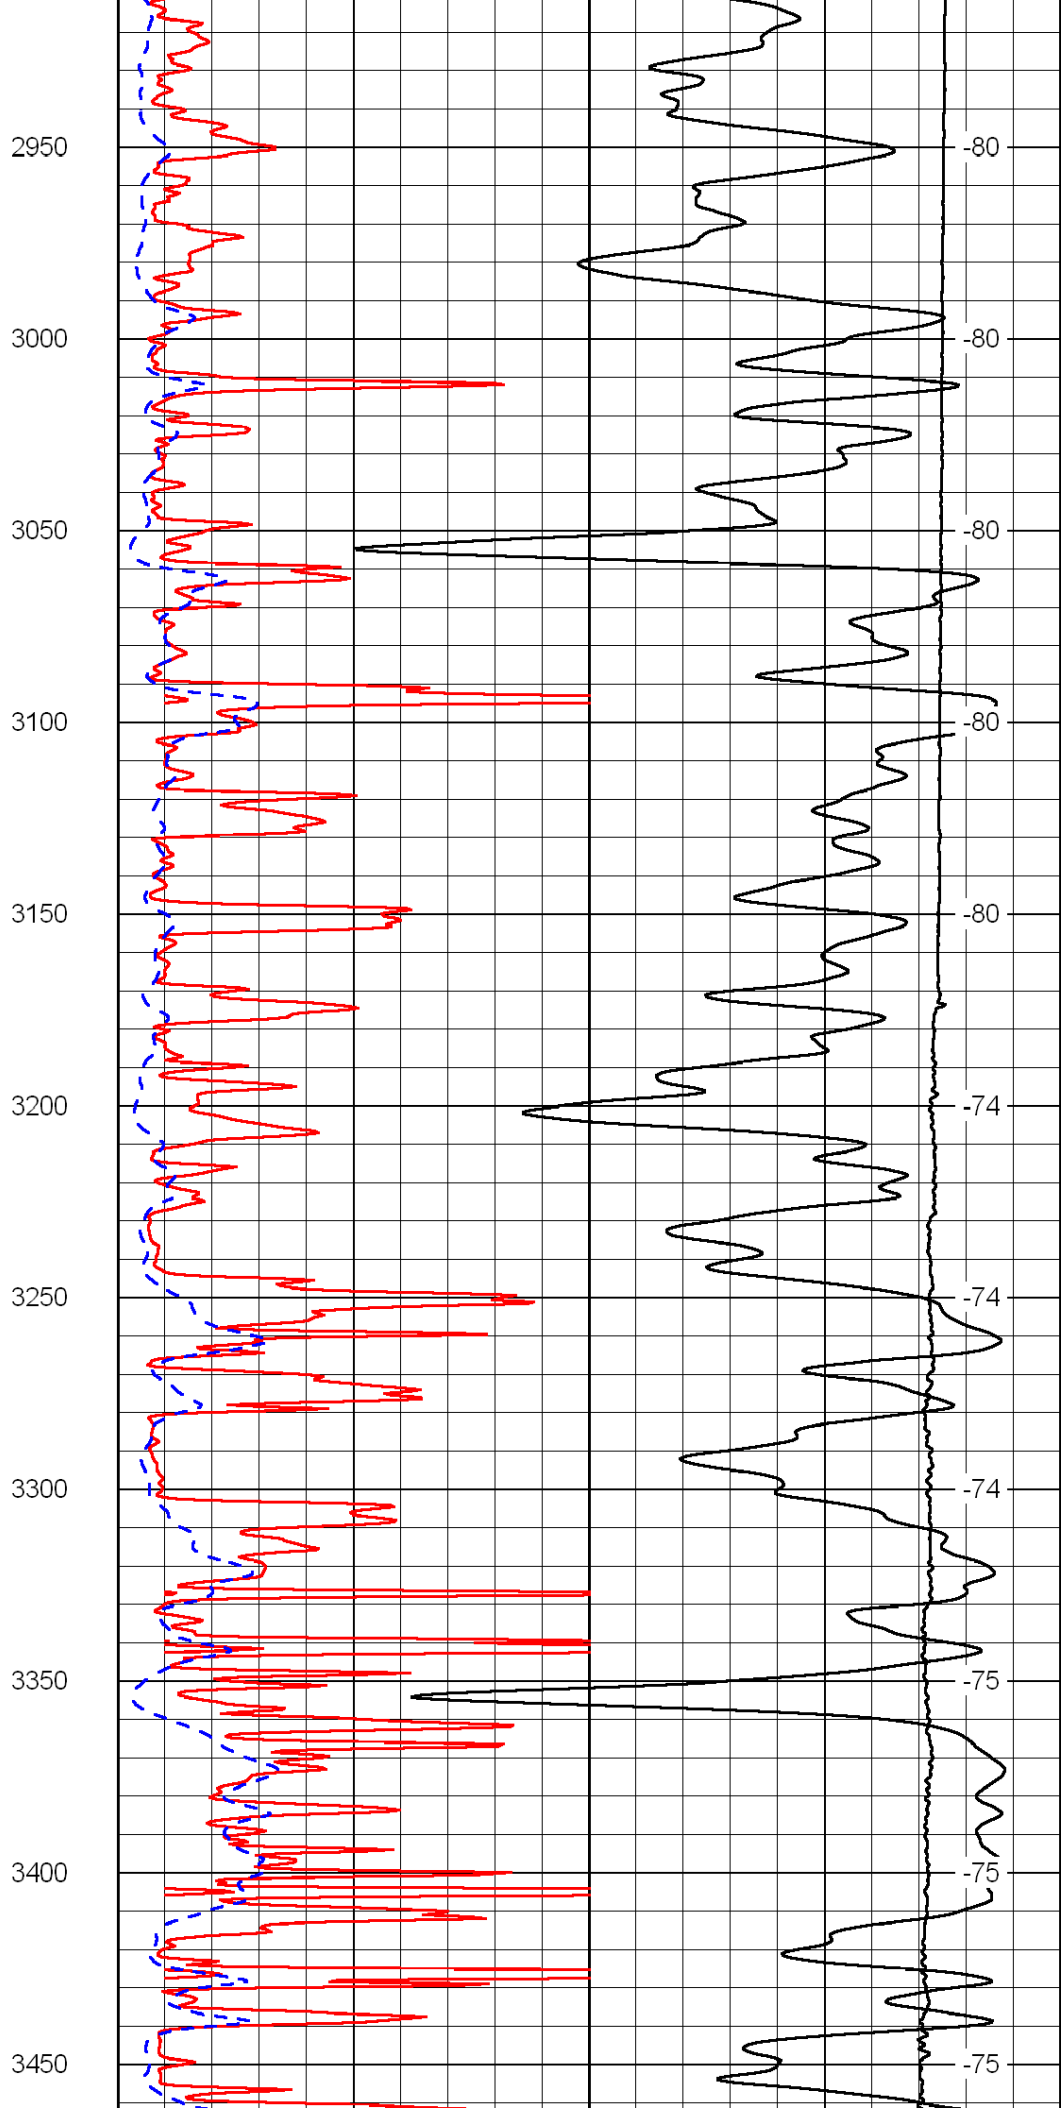
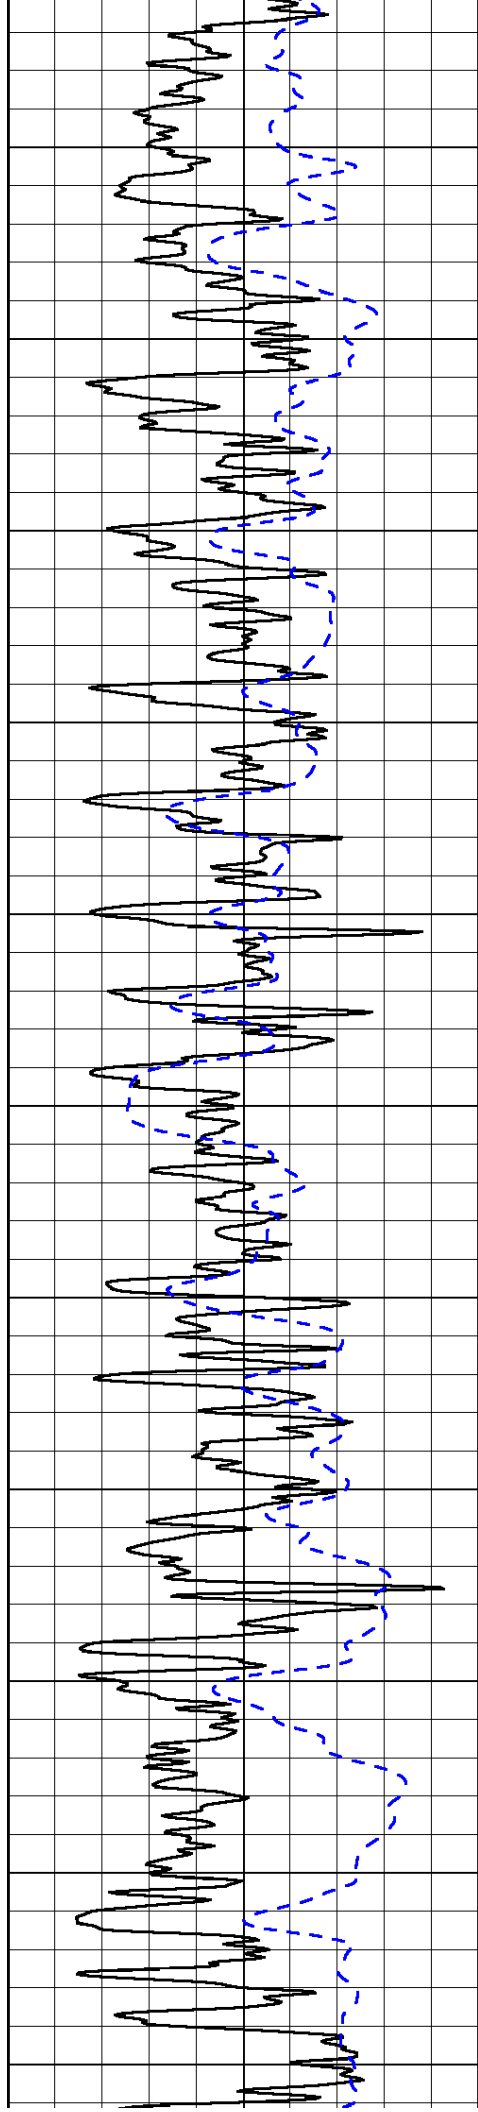



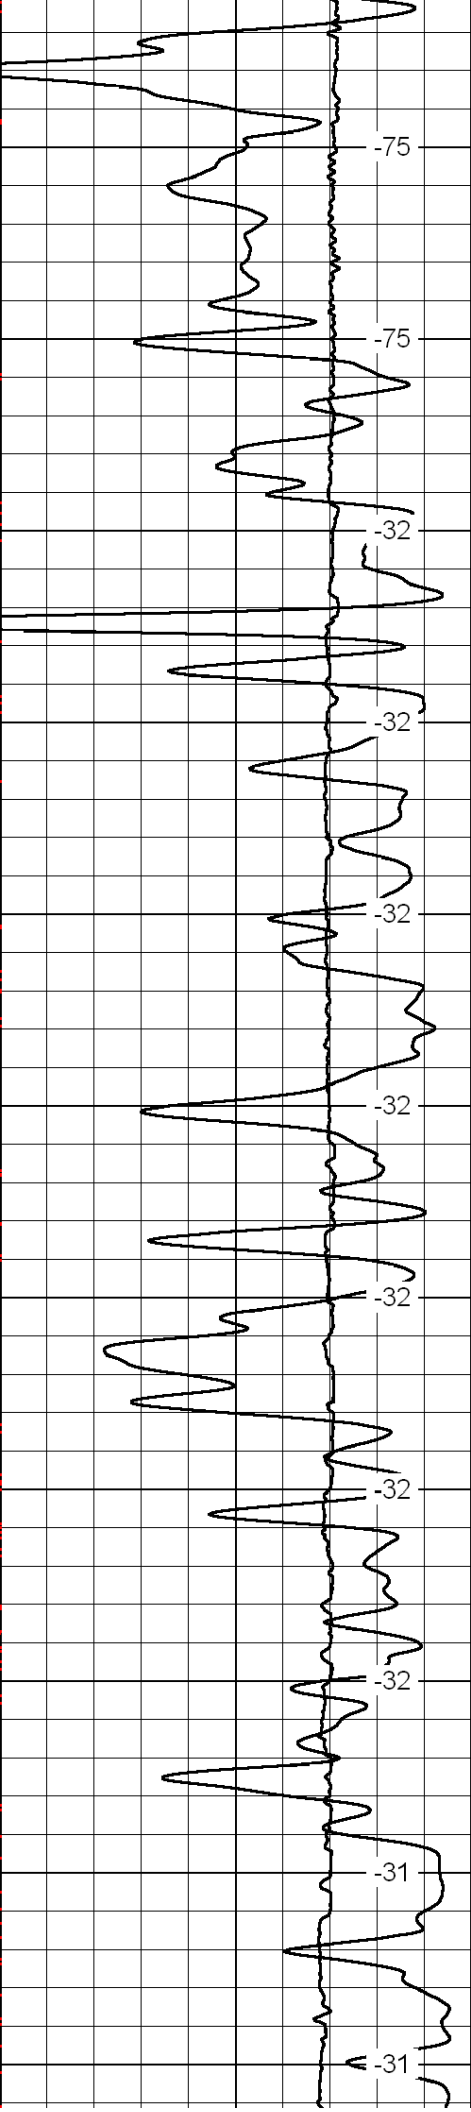
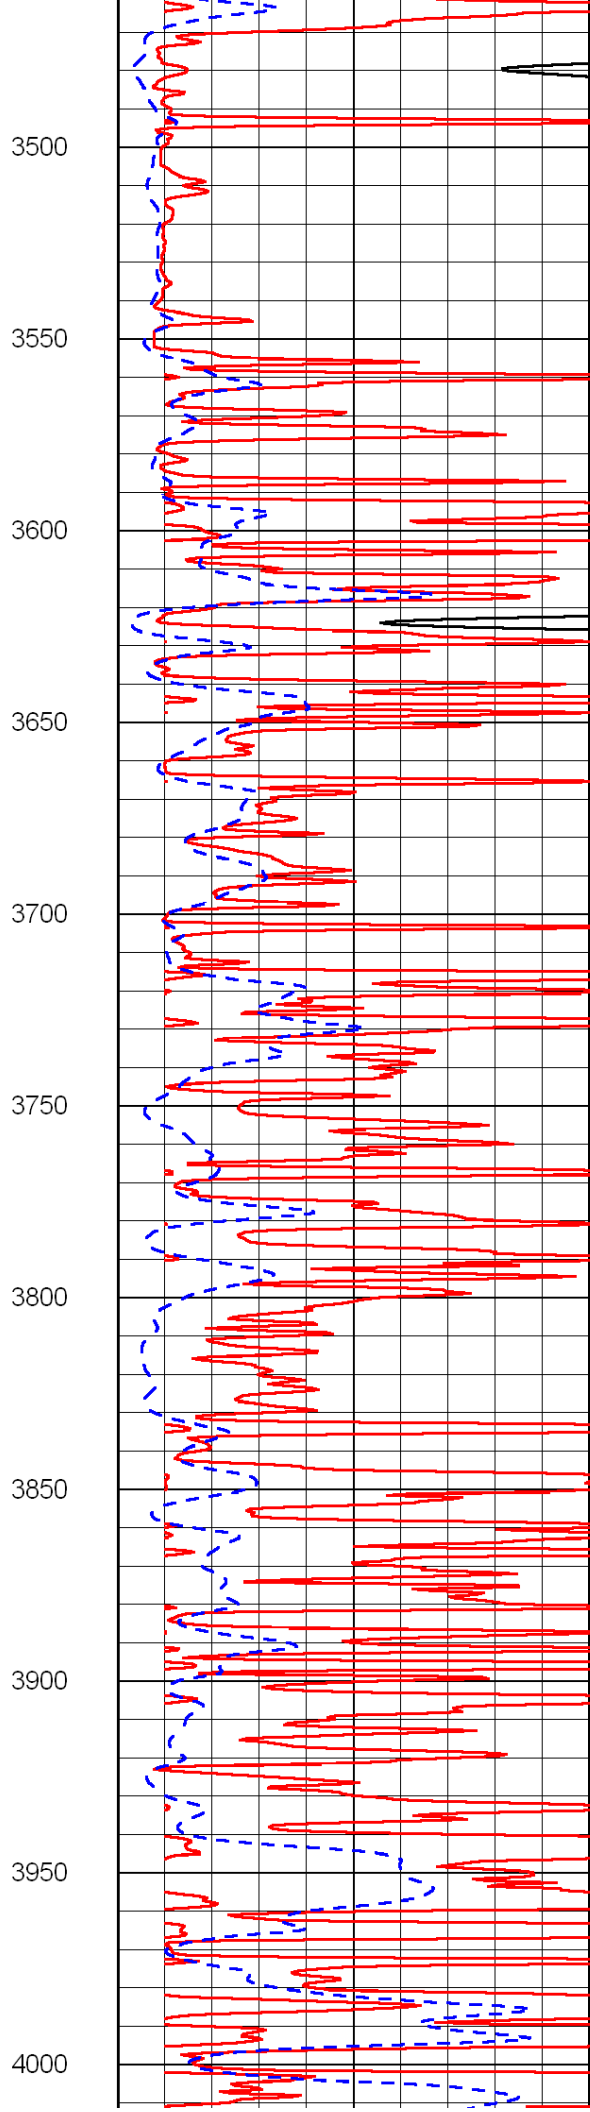
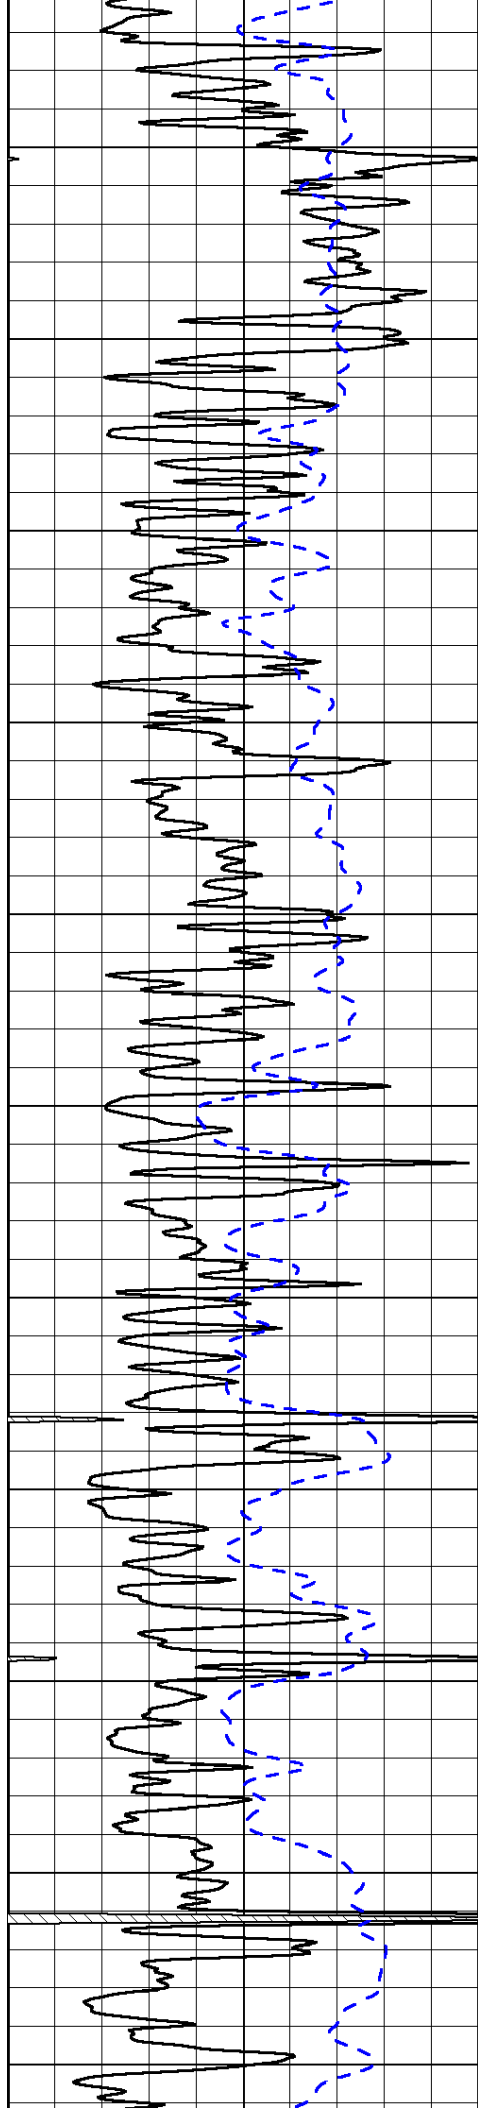


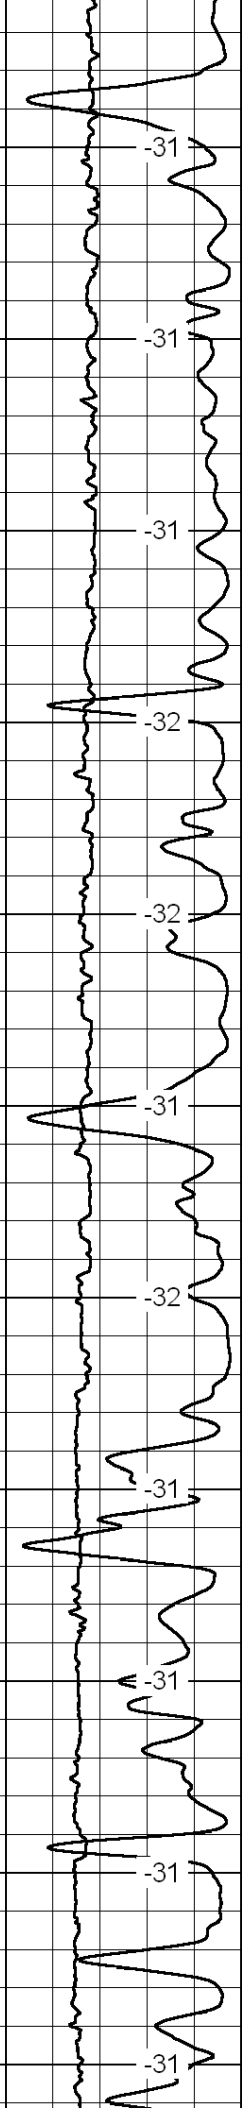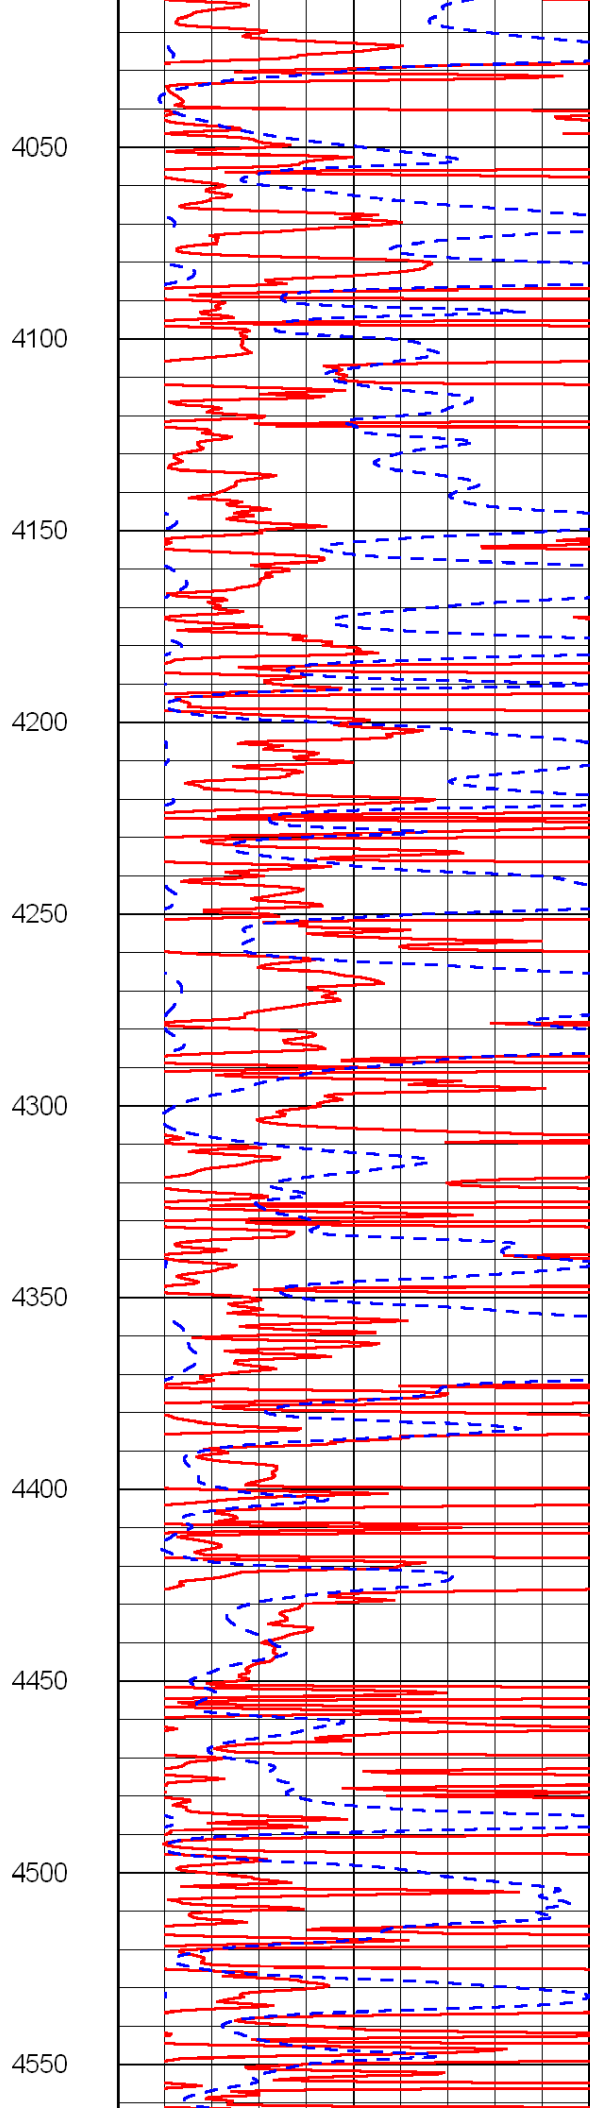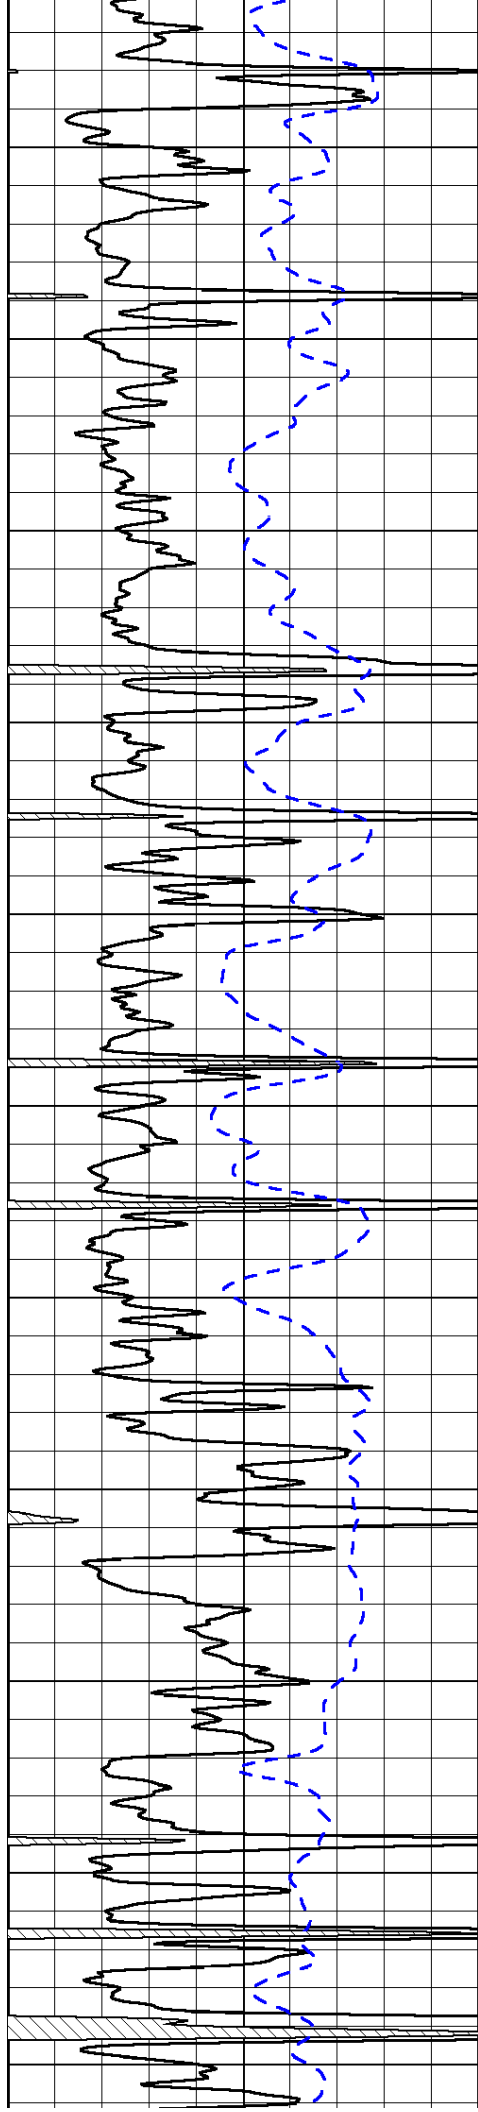

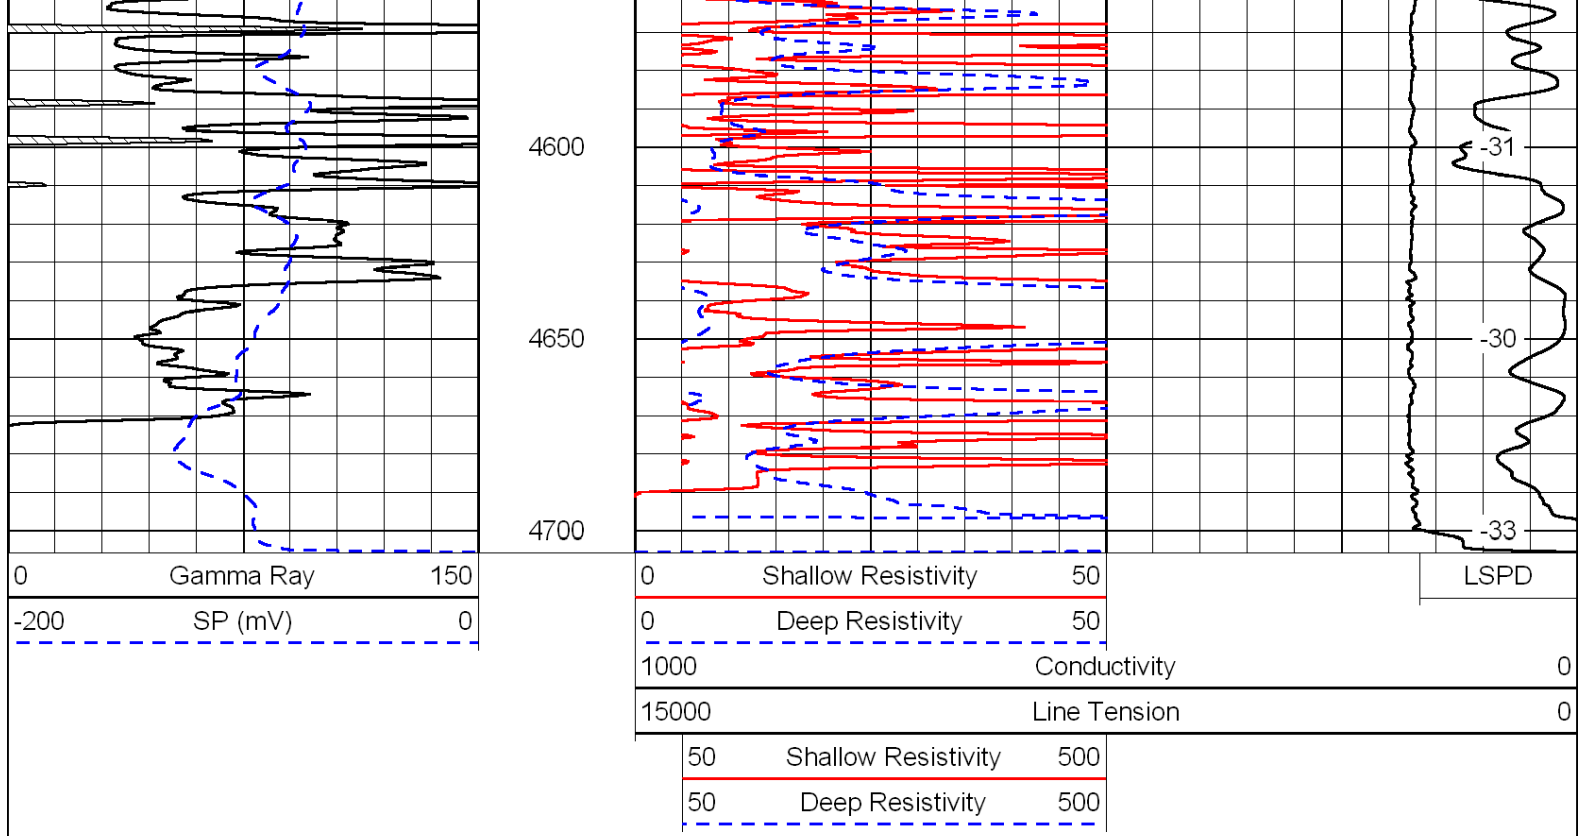


Database File: c:\warrior\data\larson_paris no.1-7\larsonhd.db
Dataset Pathname: dil\larstk
Presentation Format: dil
Dataset Creation: Mon Feb 27 05:13:21 2012
Charted by: Depth in Feet scaled 1:240

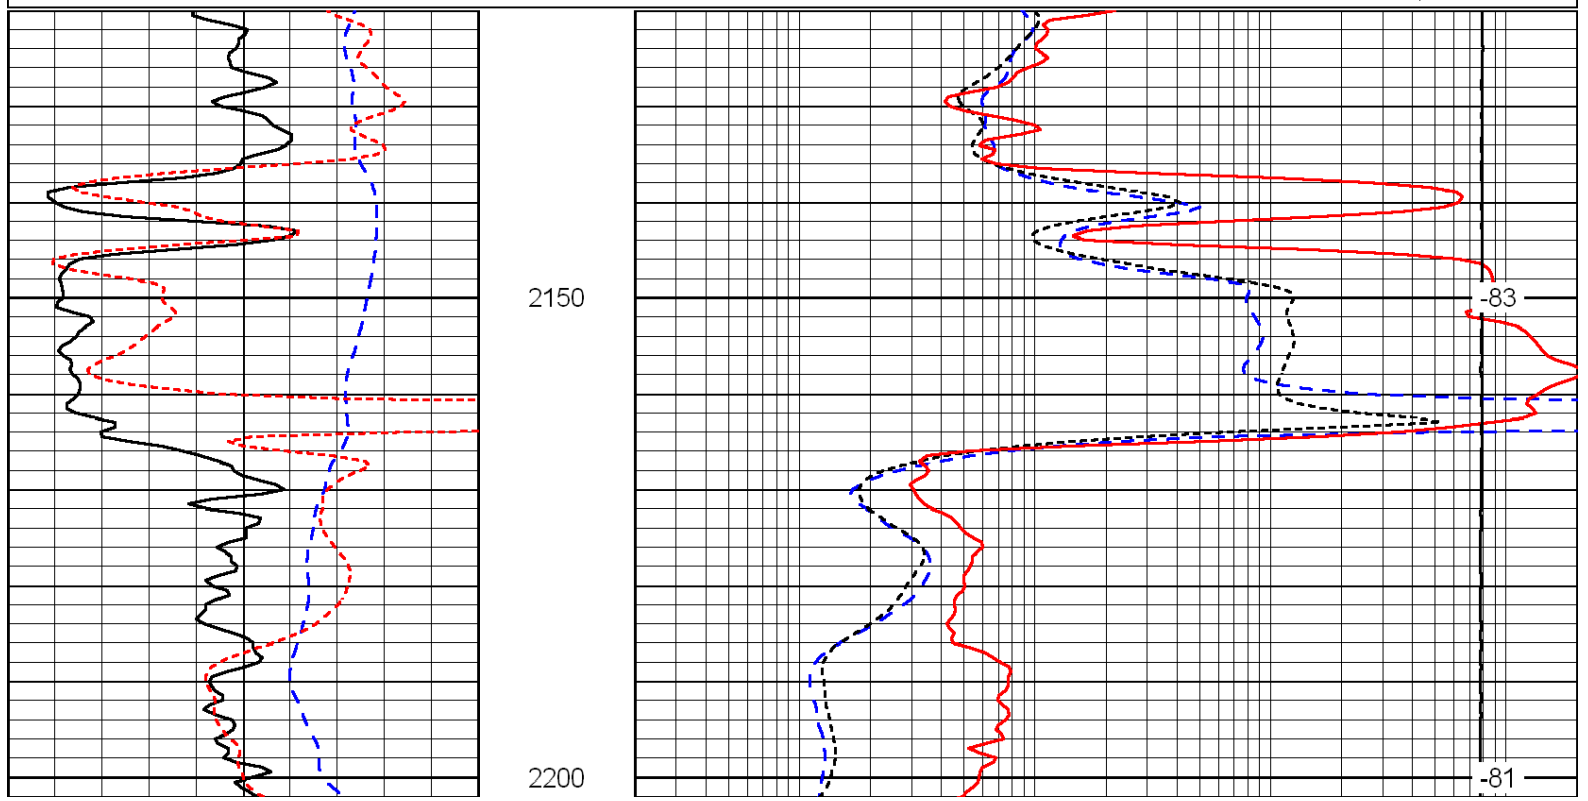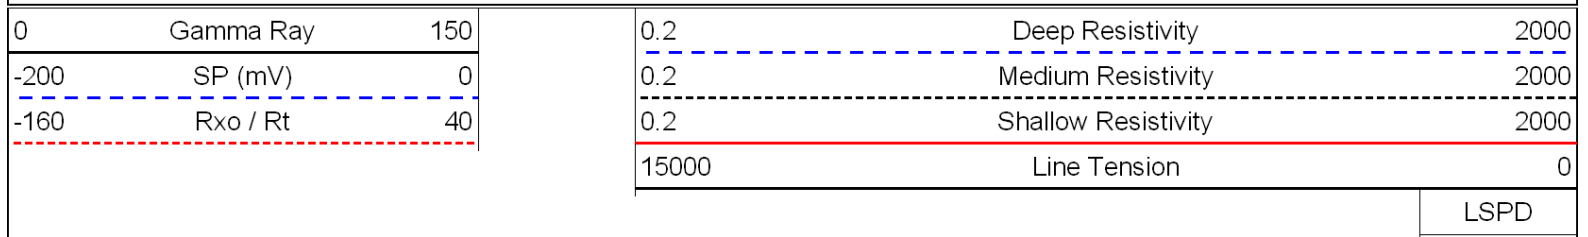

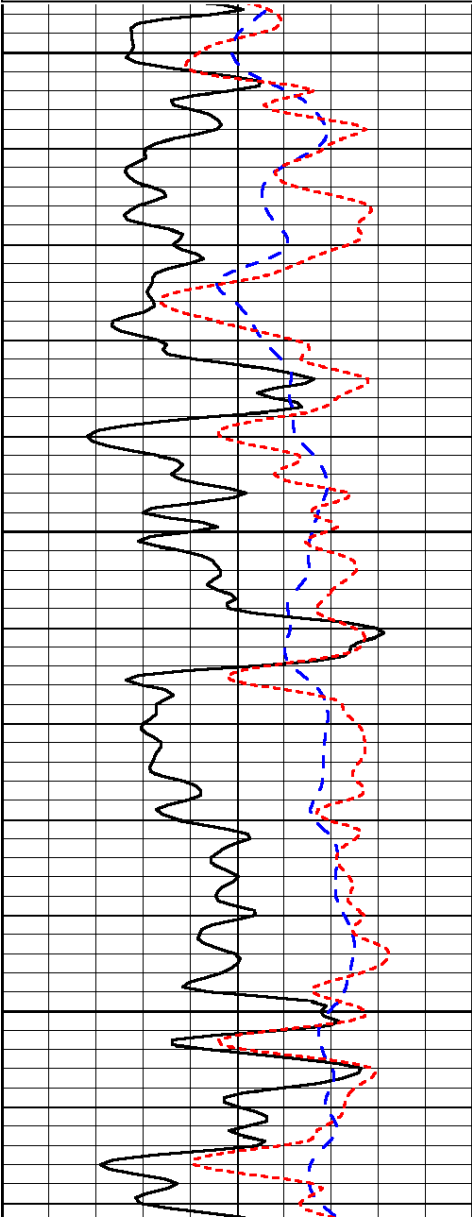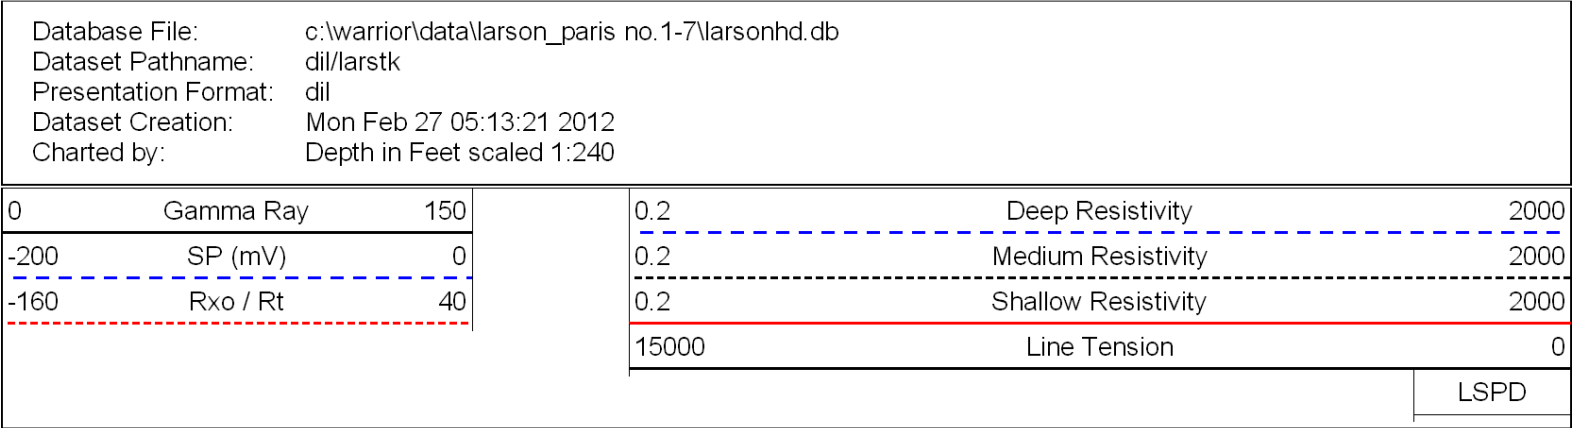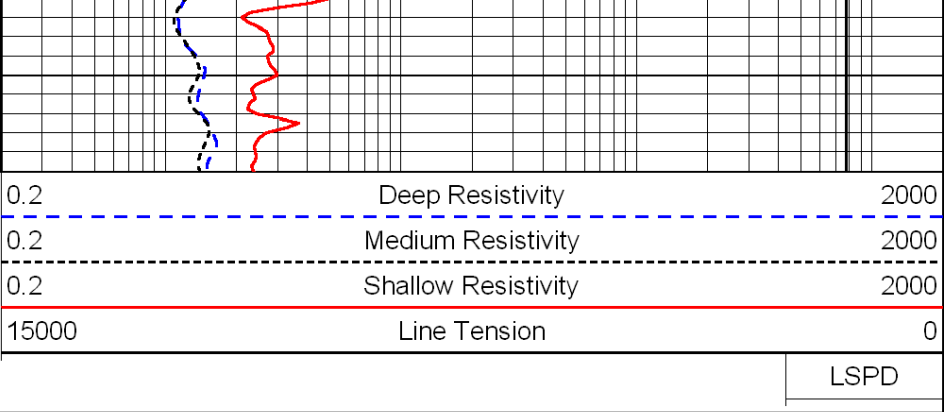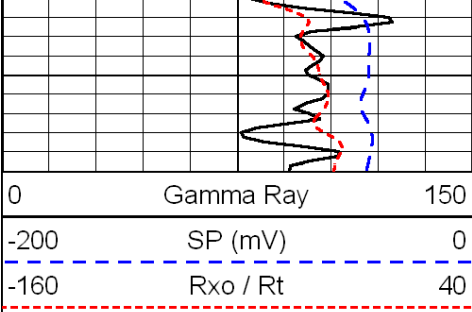

3600

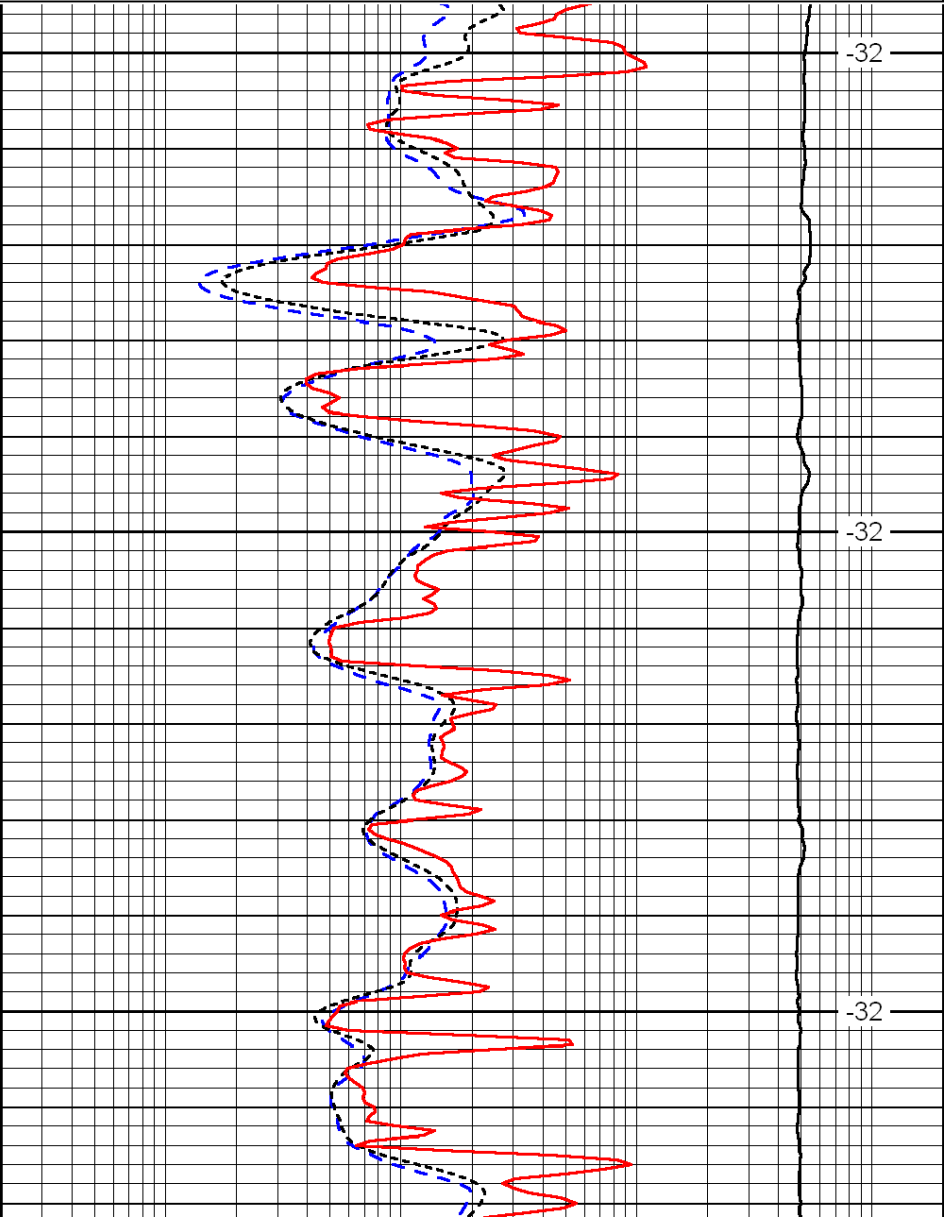


3650

3700

-32

-32

-32

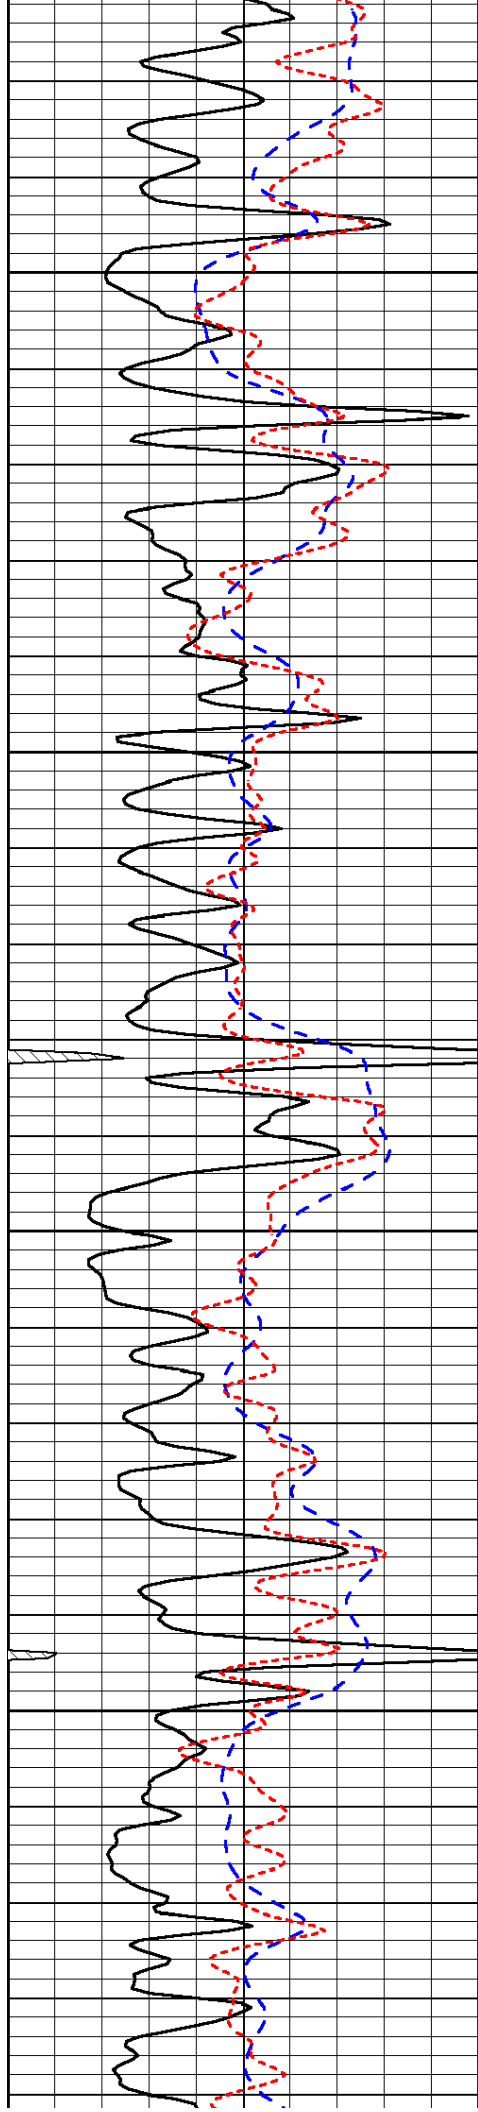


3750

3800

3850

3900

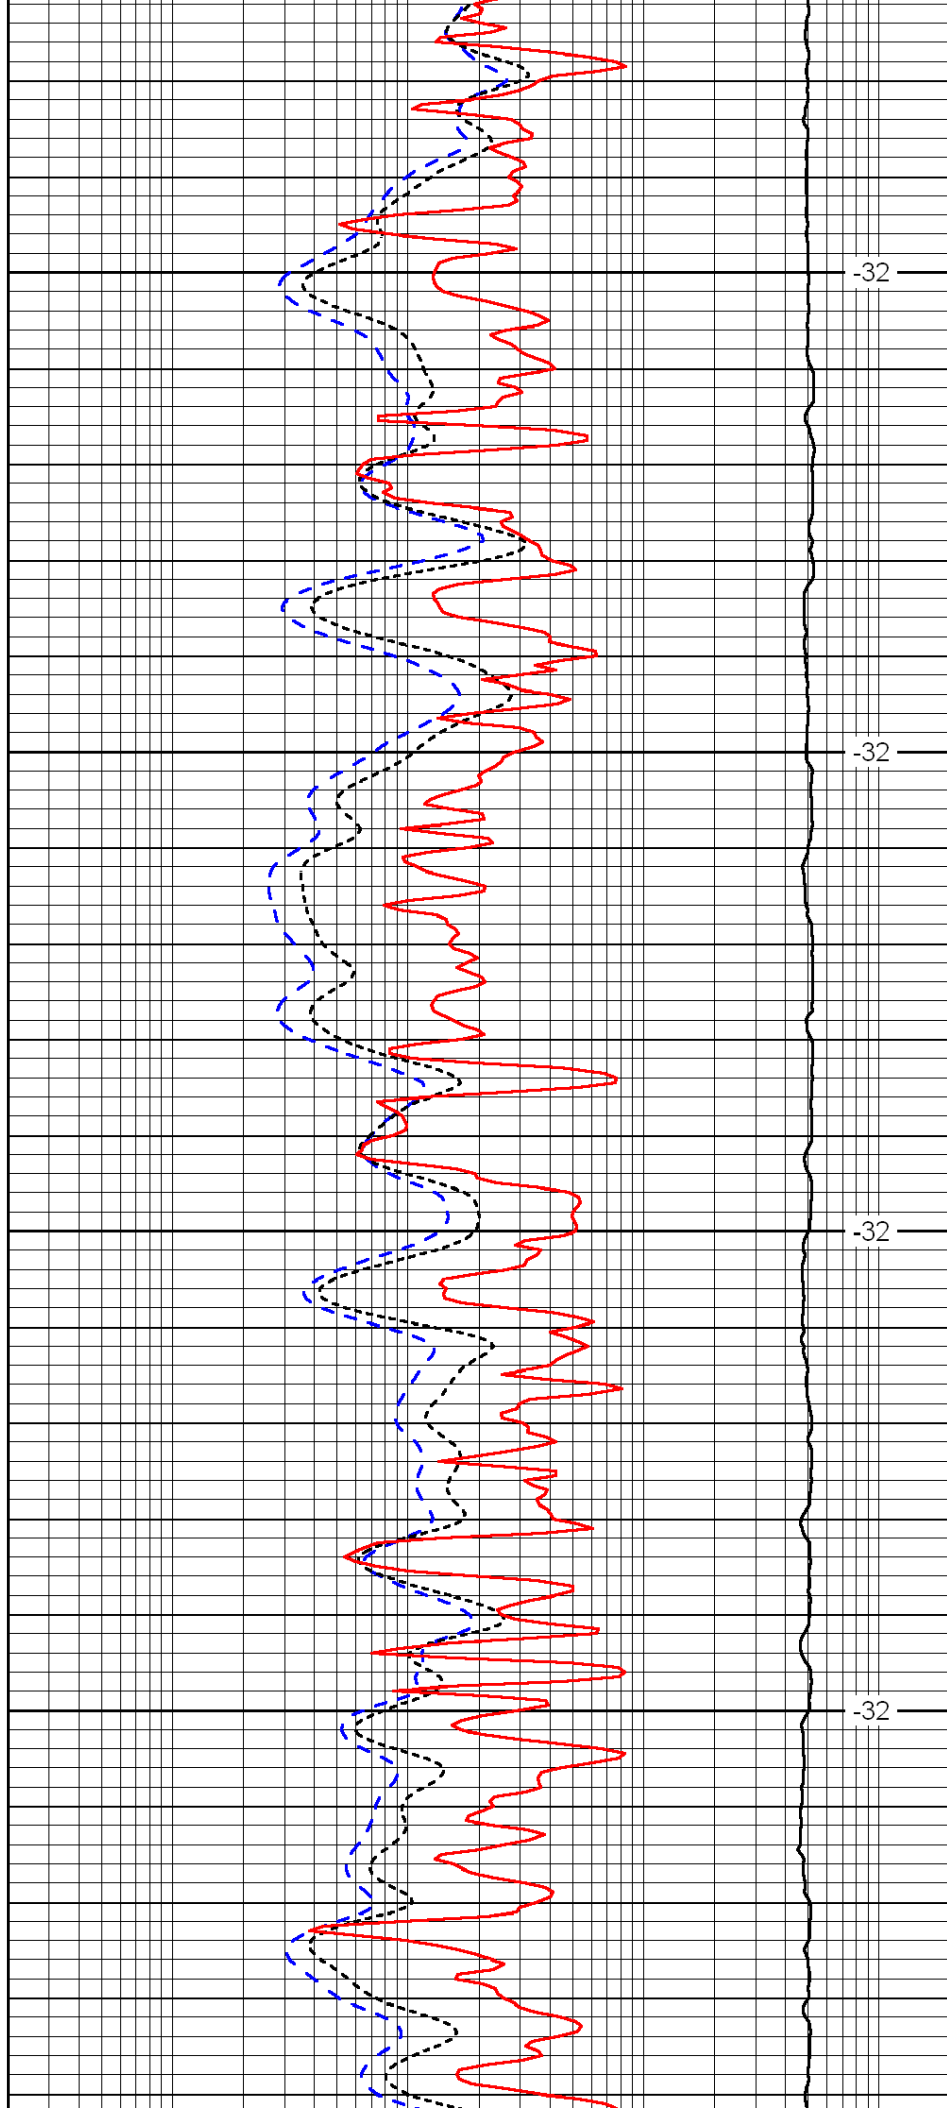


-32

-32

-32

-32

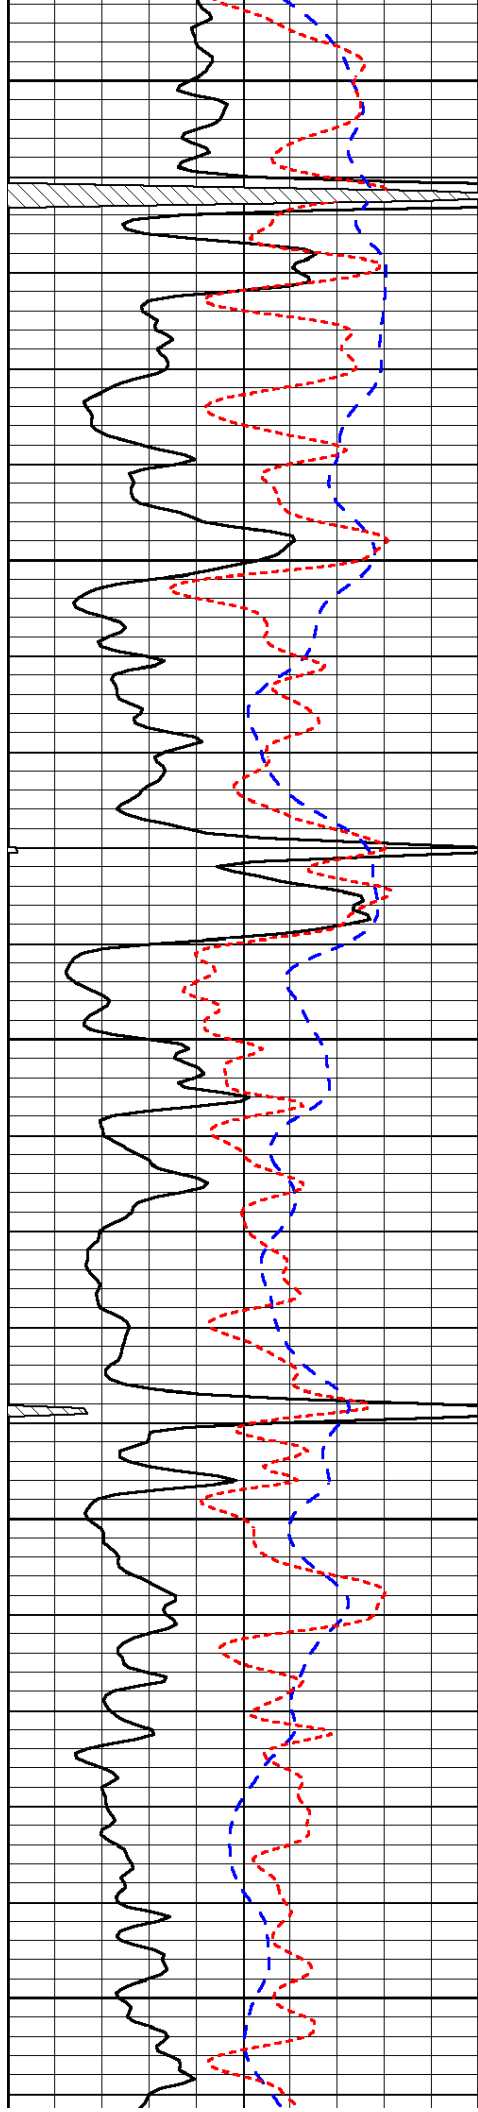


3950

4000

4050

4100

4150

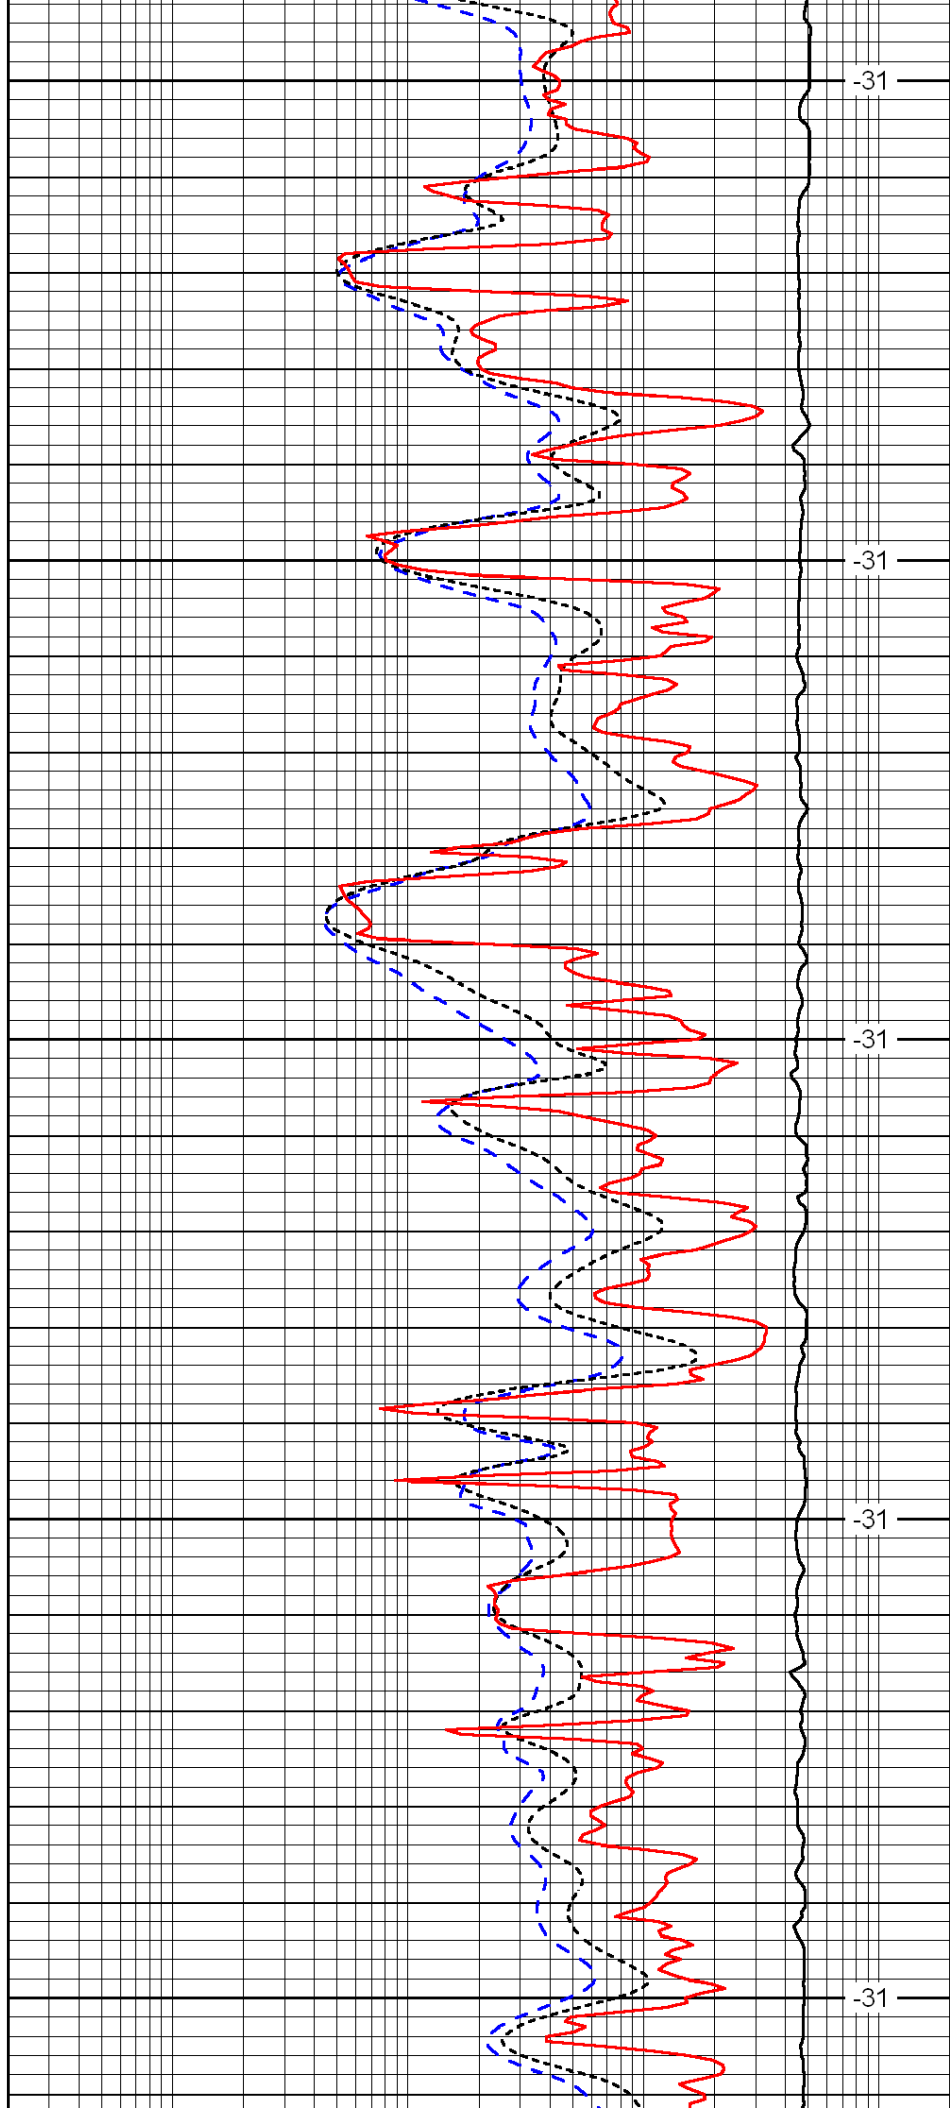


-31

-31

-31

-31

-31

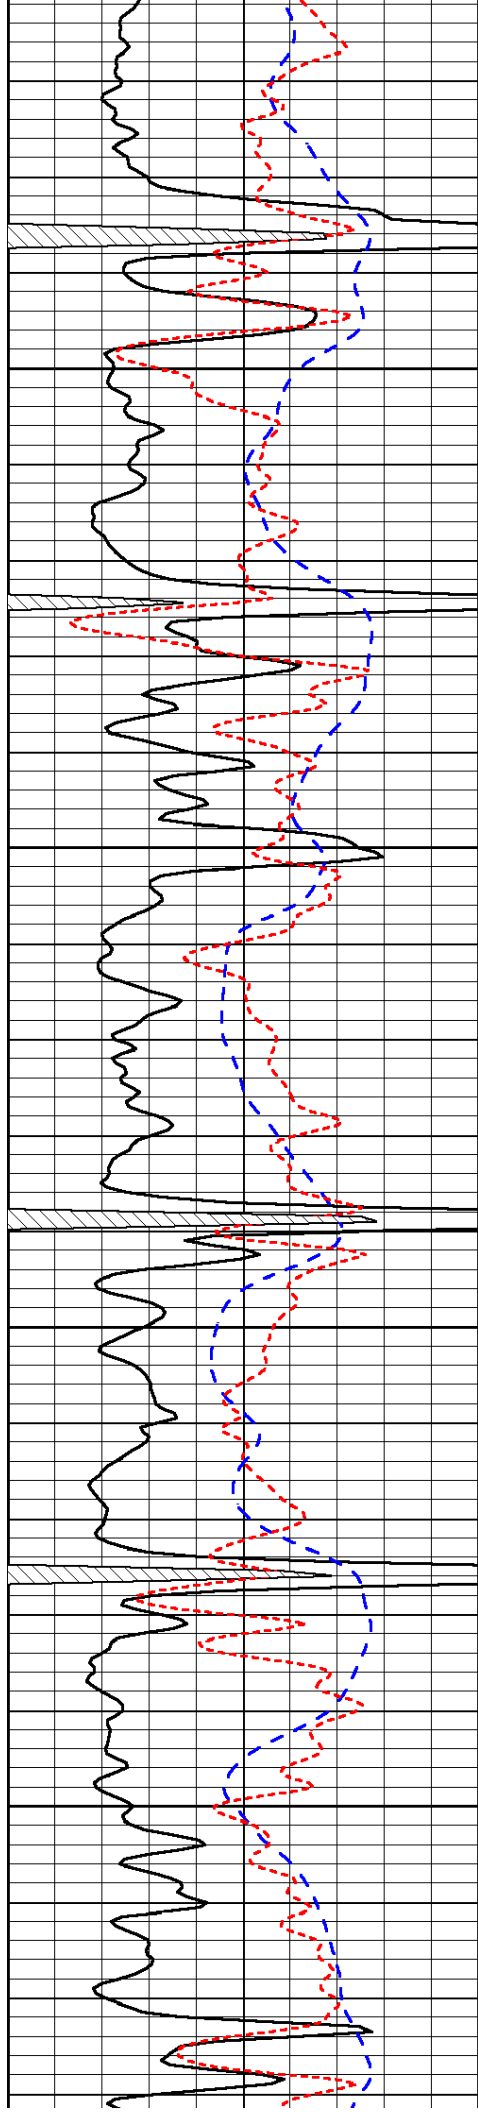


4200

4250

4300

4350

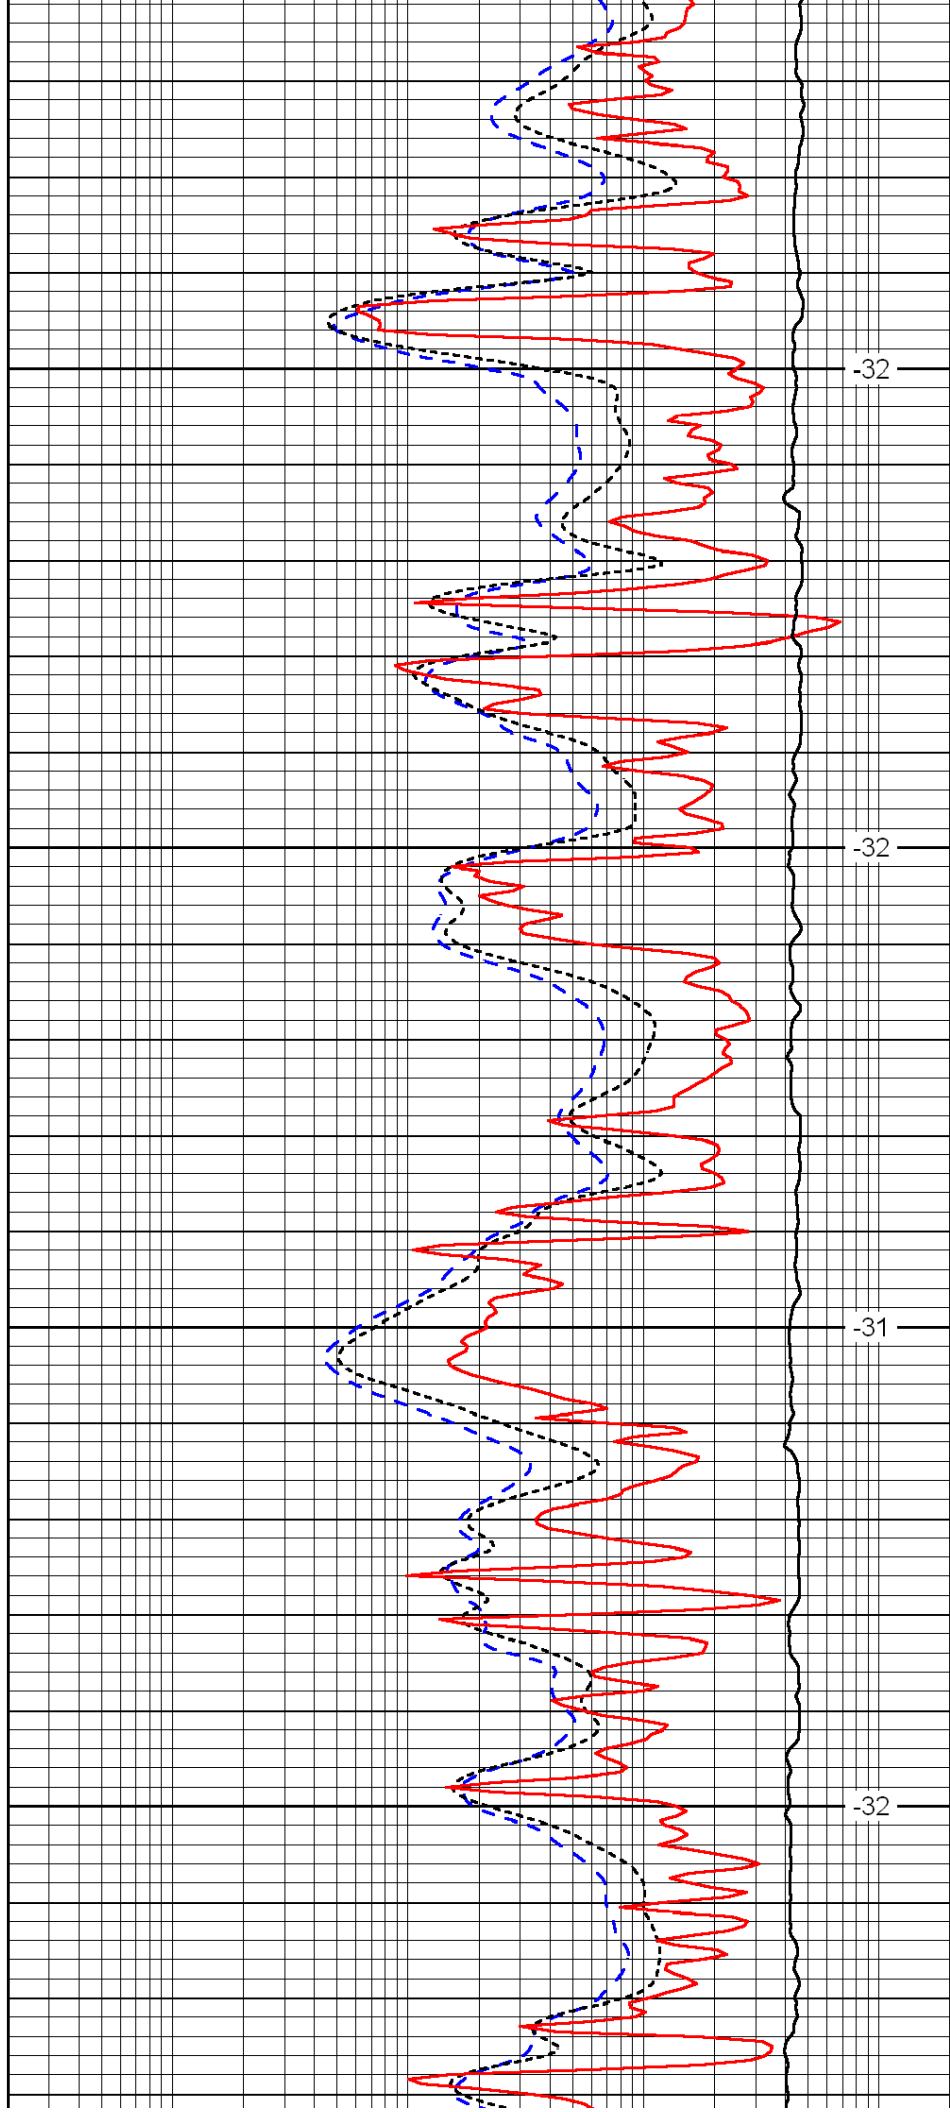


-32

-32

-31

-32

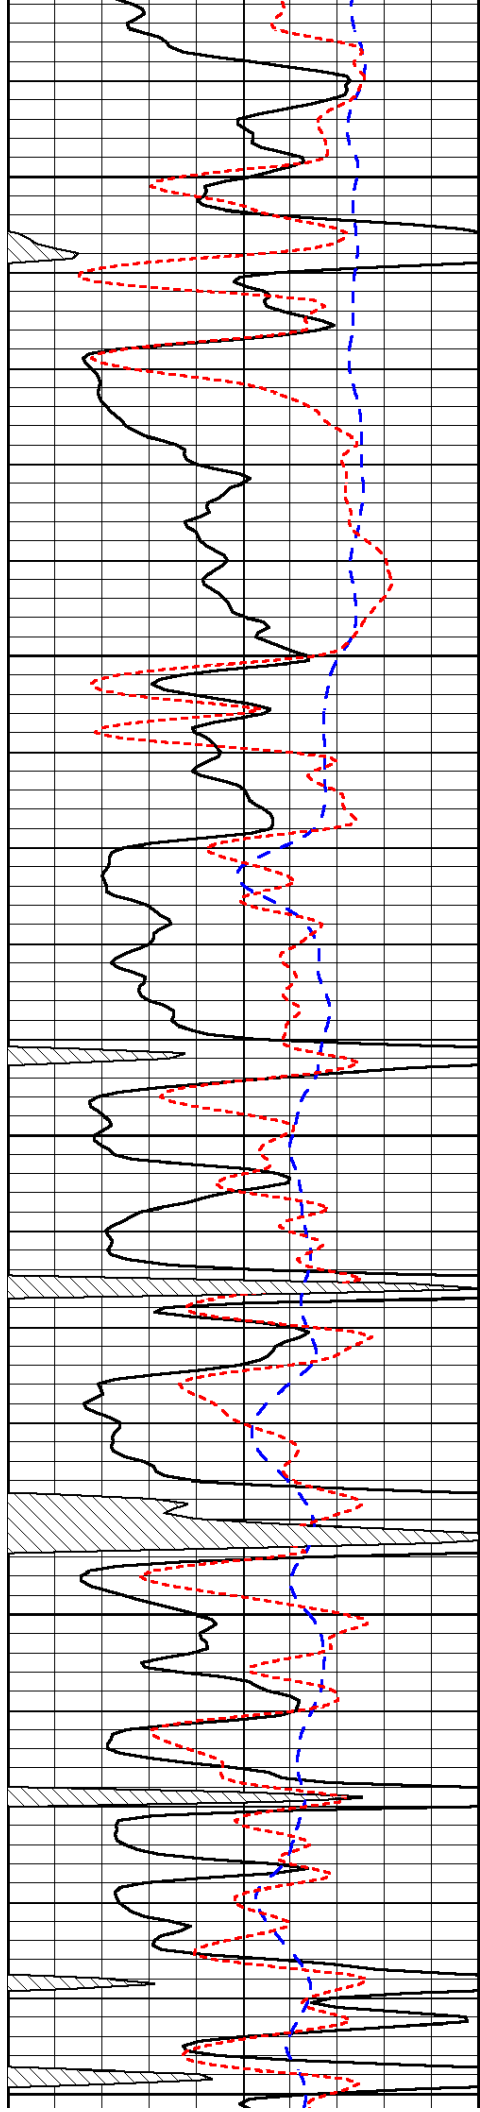


4400

4450

4500

4550

4600

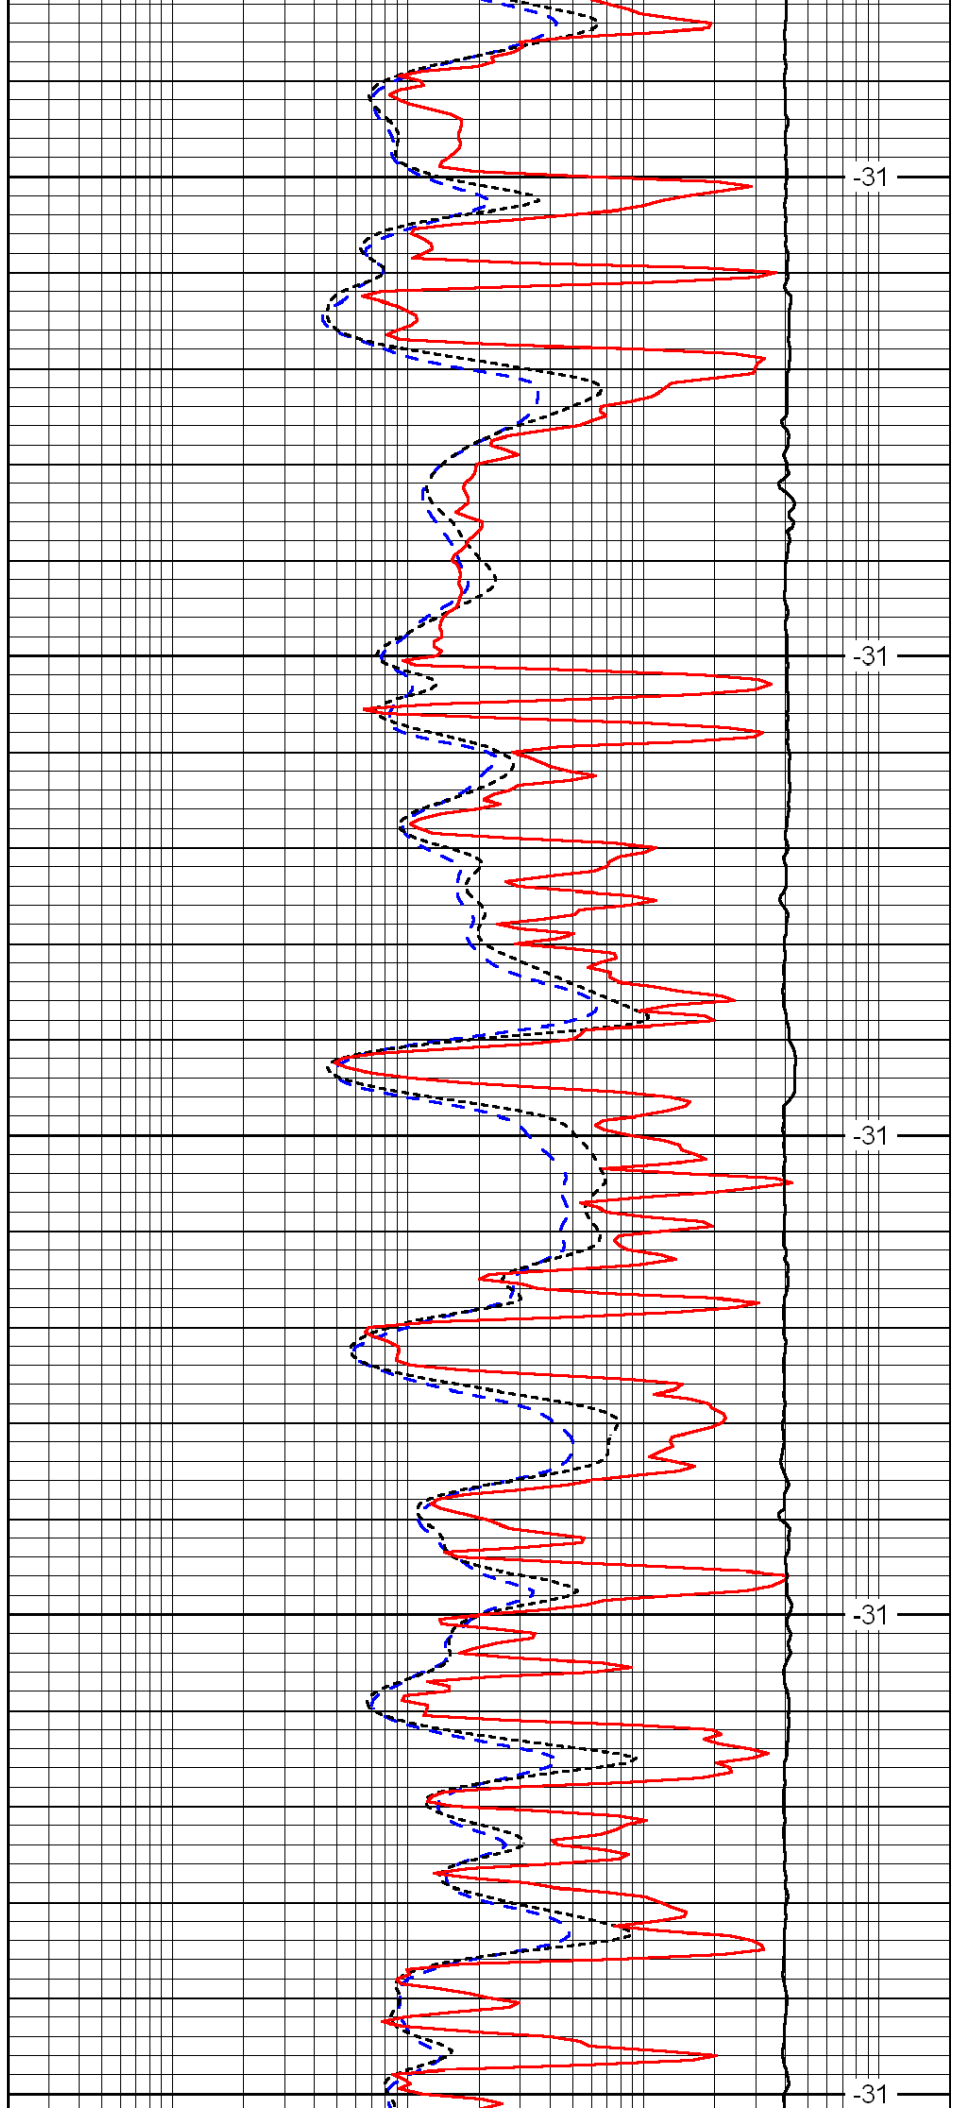


-31

-31


-31

-31

-31

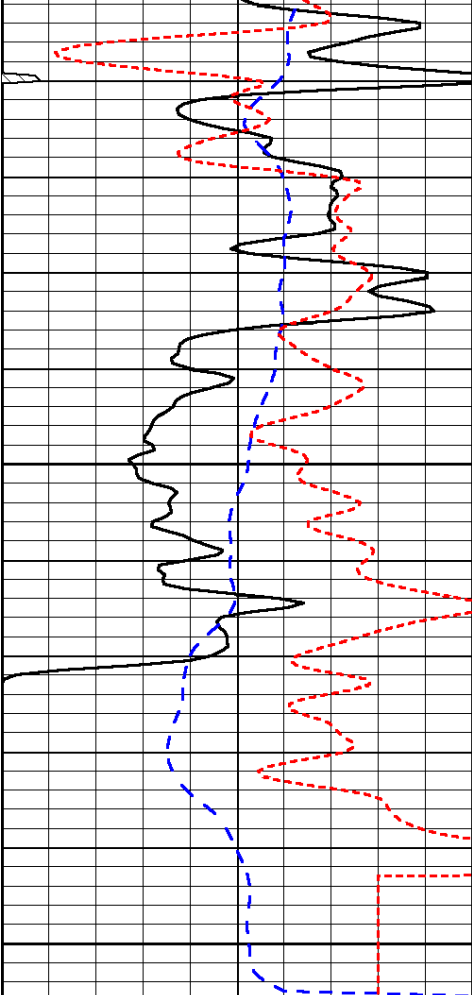

0	Gamma Ray	150
-200	SP (mV)	0
-160	Rxo / Rt	40

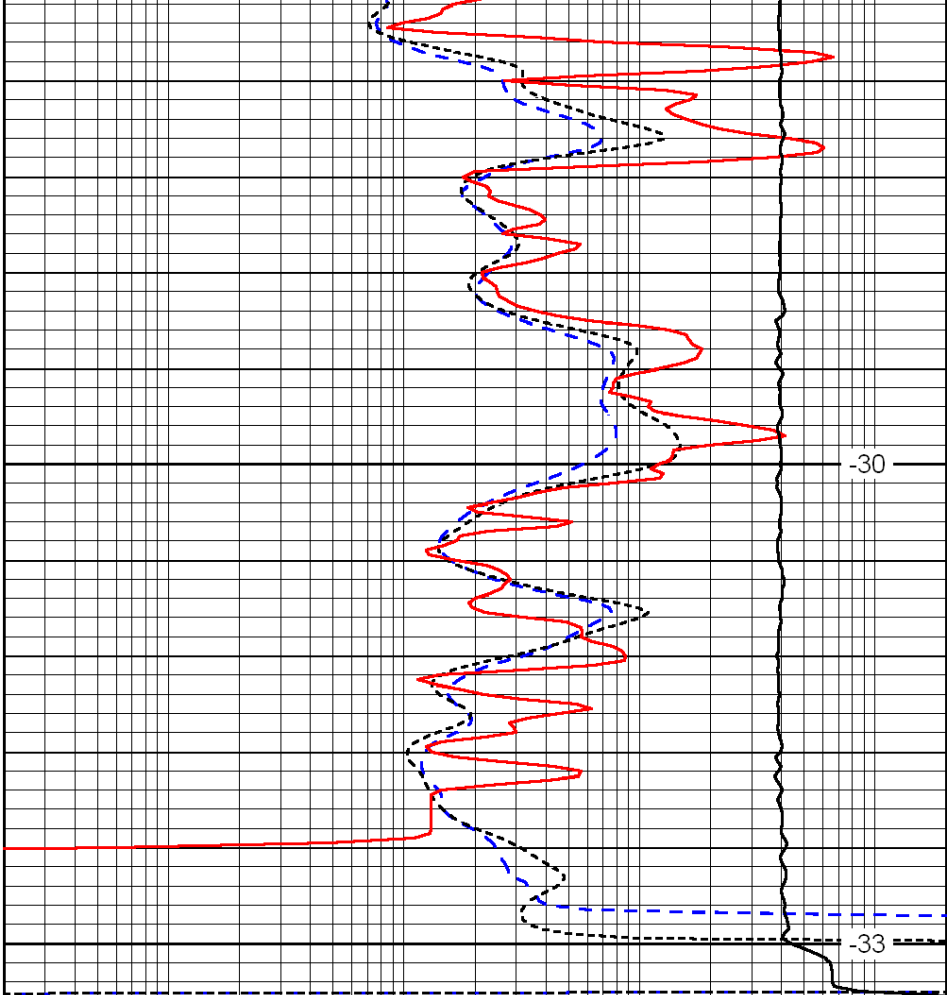

0.2	Deep Resistivity	2000
0.2	Medium Resistivity	2000
0.2	Shallow Resistivity	2000
15000	Line Tension	0

LSPD