



COMPENSATED DENSITY
SIDEWALL NEUTRON LOG


Company BAYSWATER EXPLORATION & PRODUCTION, LLC			
Well	KRULL # 32-13A		
Field	MOUND CITY		
County	LINN		
State	KANSAS		
Location:	AP # : 15-107-2464-0000	Other Services	
	SE NW SW SW	DIL	
	800' FSL & 450' FWL		
SEC 32	T1MP 21S	R0E 24E	
GL	GL	Elevation 826' est	K.B. ---
Log Measured From	GL	D.L. 826' est	
Drilling Measured From	GL		
Date	10-31-2012		
Run Number	ONE		
Depth Driller	465		
Bottom Logged Interval	463		
Top Log Interval	SURFACE		
Casing Driller	7" @ 21'		
Casing Logger	7" @ 21'		
Bit Size	6.75"		
Type Fluid in Hole	MUD		
Density / Viscosity			
pH / Fluid Loss			
Source of Sample			
Run @ Meas. Temp			
Run @ Meas. Temp			
Run @ Meas. Temp			
Source of Run / Run			
Run @ BHT			
Time Circulation Stopped			
Time Logger on Bottom			
Maximum Recorded Temperature			
Equipment Number	OW2		
Location	HOHINY OK		
Recorded By	LOWERY		
Witnessed By	MR BRUGEMAN		

All interpretations are based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

OW2-8254
MATRIX LIMESTONE 2.71 g/cc
ABHV COMPUTED WITH 2 7/8" CASING


CREW : JOHNSON



5" CDL/SWN SECTION

Database File:	ow2-8254 bayswater.db
Dataset Pathname:	CDL/pass1.4
Presentation Format:	neu4
Dataset Creation:	Wed Oct 31 08:51:26 2012 by Calc SOC 120430
Charted by:	Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	TBHV	30	Density Porosity (pu)	-10	
4	Bit size (in)	14	ABHV	30	Neutron Porosity (pu)	-10	
4	Neutron Caliper (in)	14			-0.5	Correction (g/cc)	0.5
4	Density Caliper (in)	14			5000	Line Tension (lb)	0

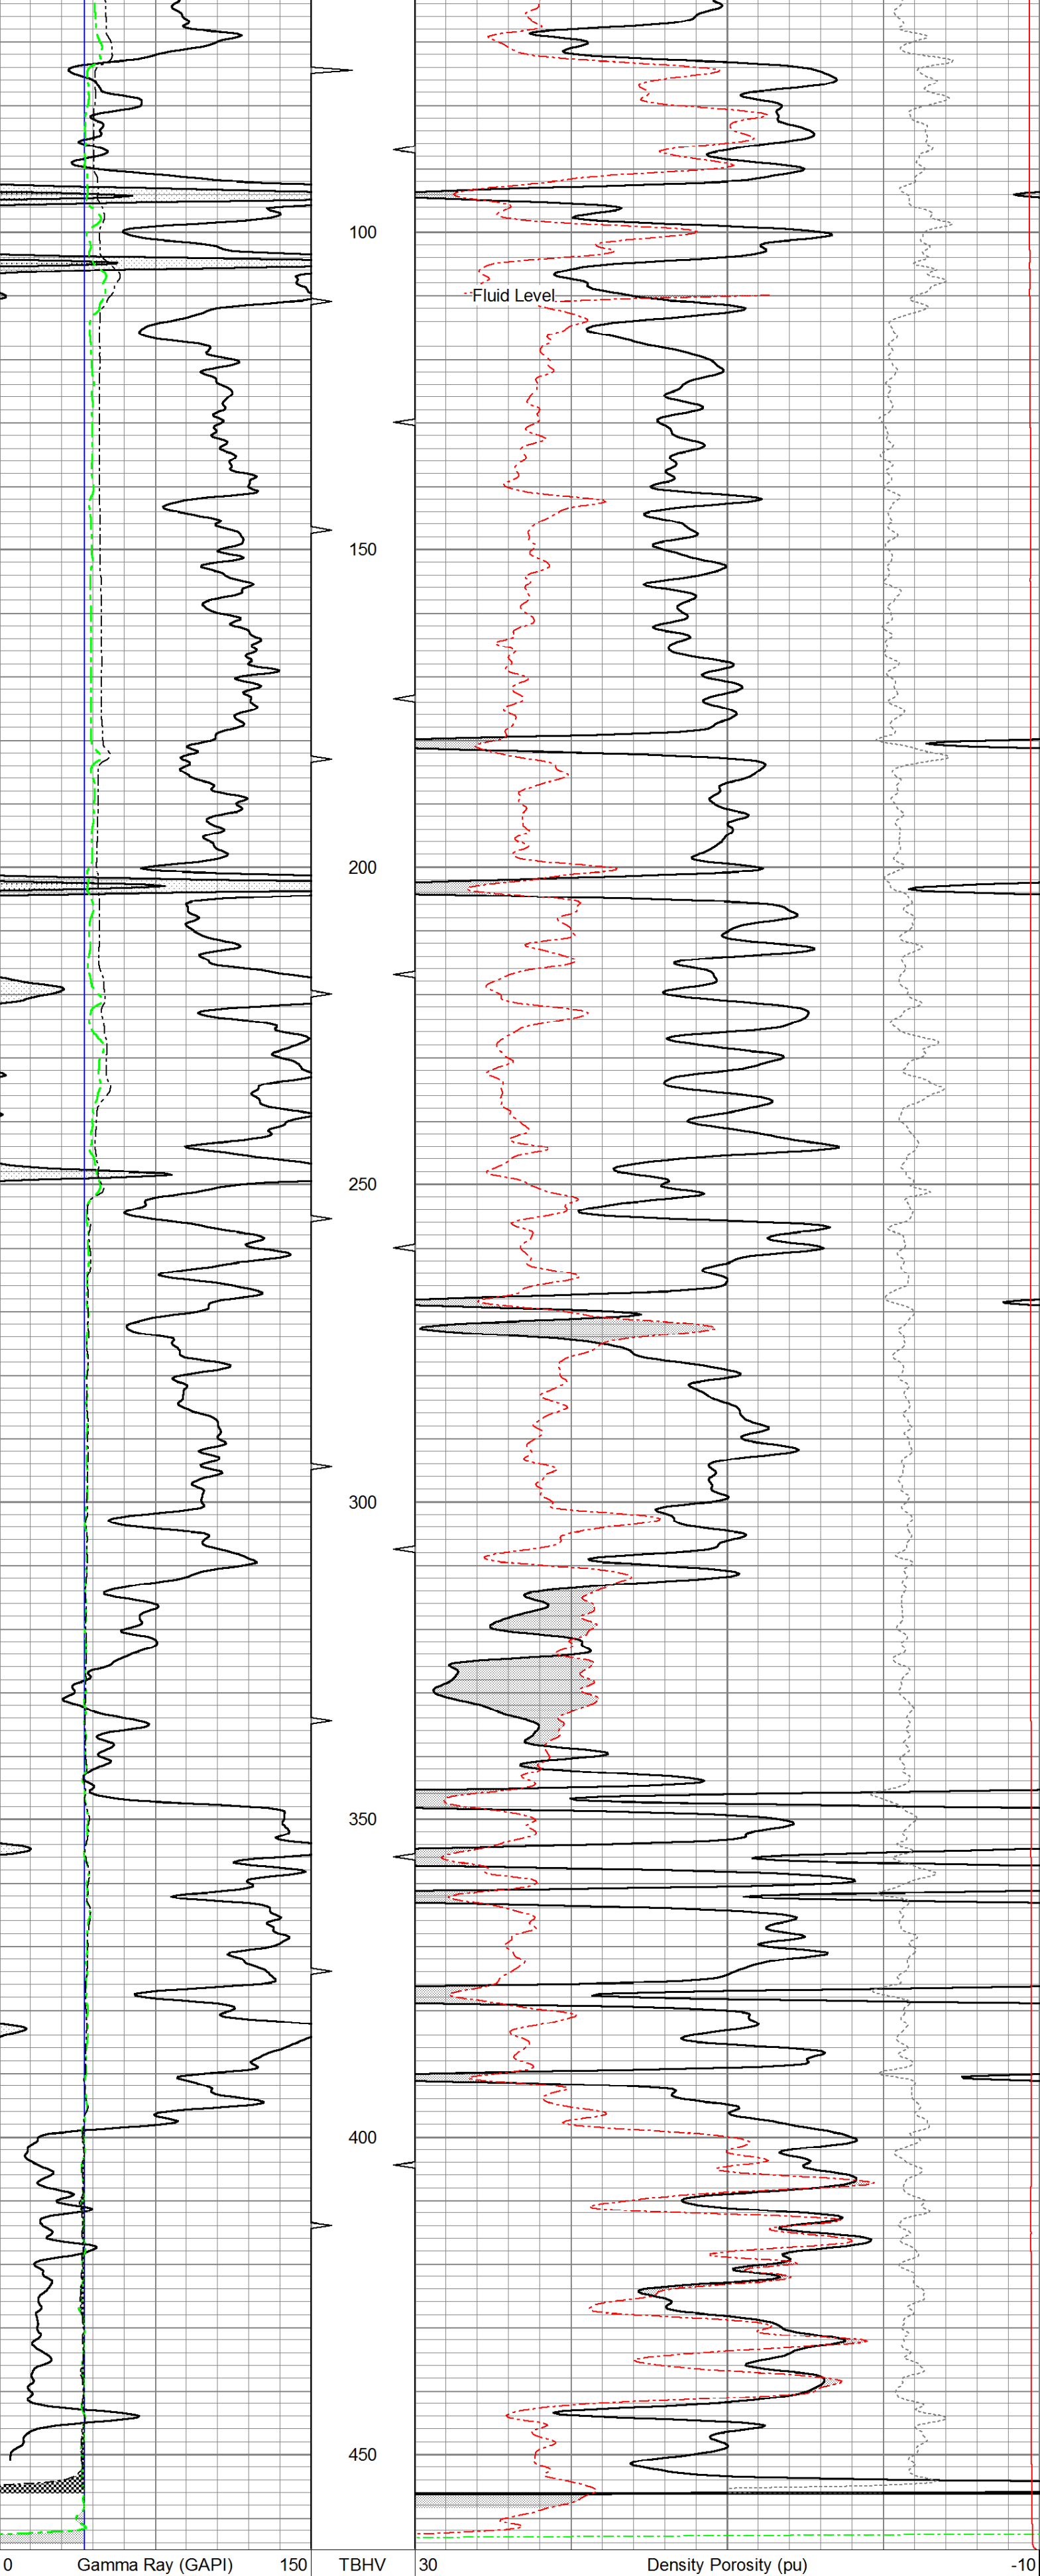


4	Bit size (in)	14	ABHV	30	Neutron Porosity (pu)		-10
4	Neutron Caliper (in)	14			-0.5	Correction (g/cc)	0.5
4	Density Caliper (in)	14			5000	Line Tension (lb)	0



5" CDL SECTION

Database File:	ow2-8254 bayswater.db
Dataset Pathname:	CDL/pass1.3
Presentation Format:	bulk4
Dataset Creation:	Wed Oct 31 08:51:21 2012 by Calc SOC 120430
Charted by:	Depth in Feet scaled 1:240

4	Bit size (in)	14	ABHV	30	Density porosity (pu)			-10
4	Density Caliper (in)	14			-0.5	Correction (g/cc)	0.5	
4	Neutron Caliper (in)	14			5000	Line Tension (lb)	0	

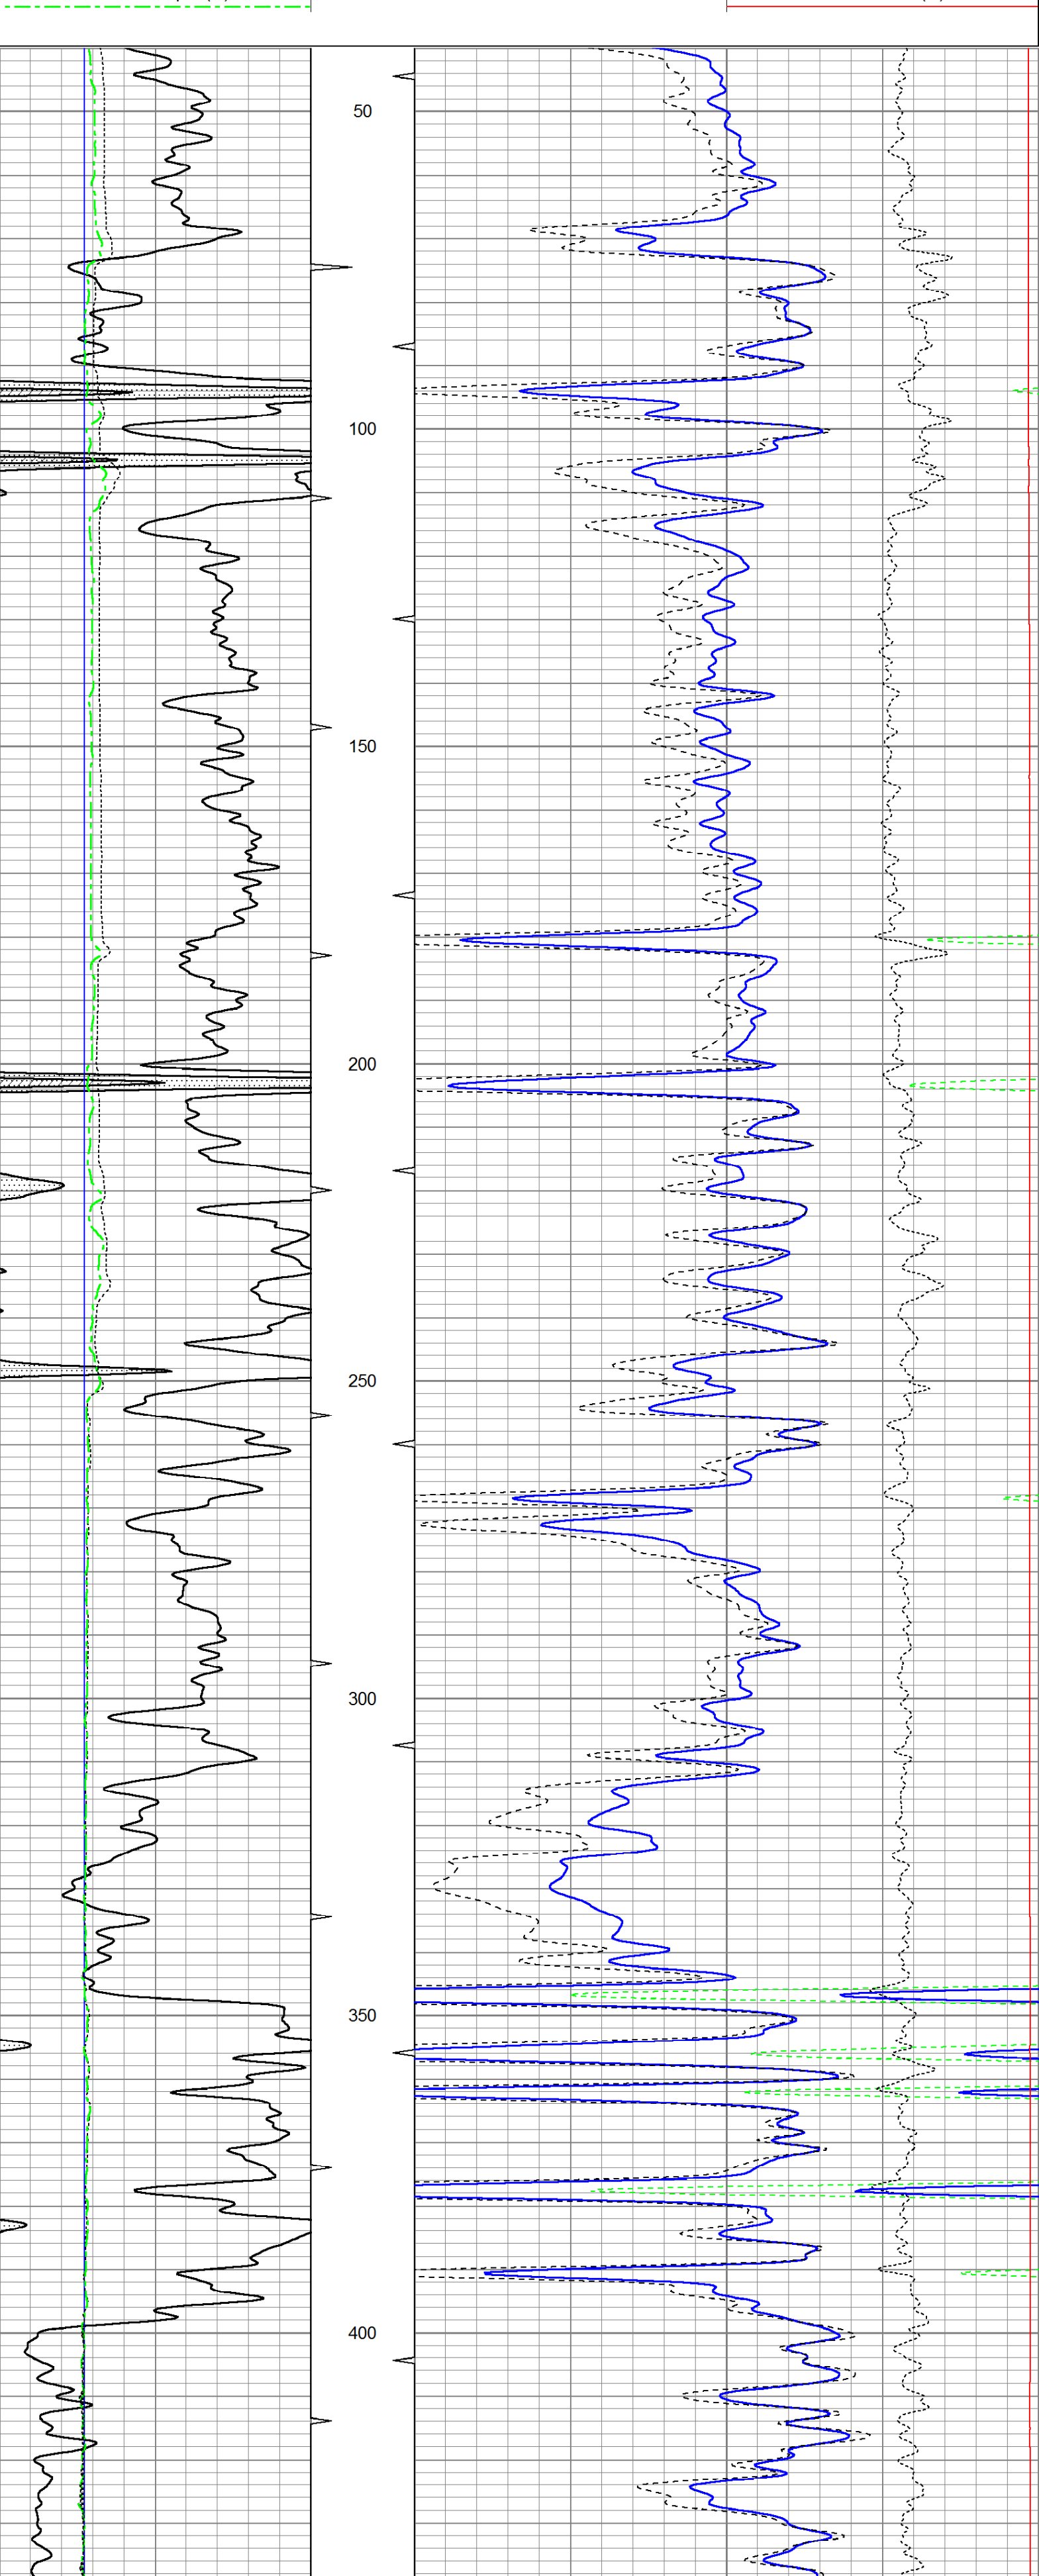

	450	
--	-----	---

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
GR	16.06		CableHead Isolation Sub	1.42	3.00	20.00
			Gamma-Oilex3006 (3006) Gamma Ray Section	2.81	3.50	75.00
LSD DCAL SSD	10.44		Density-Oilex3006 (280) Density Section	6.29	4.00	200.00
	10.15					
	9.98					
SCAL NEU SWN	2.54		Neutron-Sidewall3015 (3015) Sidewall Neutron Section	7.81	4.00	150.00
	2.15					
	2.15					

Dataset: ow2-8254 bayswater.db; field/well/CDL/pass1
Total Length: 18.33 ft
Total Weight: 445.00 lb
O.D.: 4.00 in