NABORS COMPLETION & PRODUCTION SERVICES CO.

MICRO LOG

Company	BLUERIDGE PETROLEUM CORP.
Well	SCHOEN TRUST #1-15
Field	SCHOEN
County	GRAHAM
State	KANSAS

Company BLUERIDGE PETROLEUM CORPORATION
Well SCHOEN TRUST #1-15
Field SCHOEN
County GRAHAM State KANSAS
Location: API # : 15-065-23873-0000
465' FSL & 470' FWL
NE - SW - SW - SW
SEC 15 TWP 6S RGE 25W

Other Services
CDL/CNL
DIL/SONIC

Elevation
K.B. 2584
D.F. 2582
G.L. 2575

Permanent Datum GROUND LEVEL Elevation 2575
Log Measured From KELLY BUSHING 9' A.G.L.'
Drilling Measured From KELLY BUSHING

Date	11/15/12		
Run Number	TWO		
Depth Driller	3950		
Depth Logger	3954		
Bottom Logged Interval	3932		
Top Log Interval	3300		
Casing Driller	8 5/8"@347'		
Casing Logger	346		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 1,000 PPM	
Density / Viscosity	9.1/49		
pH / Fluid Loss	10.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	1.70@90F		
Rmf @ Meas. Temp	1.28@90F		
Rmc @ Meas. Temp	2.04@90F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	1.32@116F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	1:15 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KURT TALBOTT	JON ALLEN	

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
HILL CITY, KS., (4 WAY STOP) 10W. ON HWY 24 TO "RD. 170" (GODDARD RANCH SIGN) 9N. TO "RD. Z", 4W. TO "RD. 130", 2N., 1/4E., N. INTO


NABORS COMPLETION & PRODUCTION SERVICES CO.


MAIN SECTION


SERVICES CO.


Database File:	010013ddn.db
Dataset Pathname:	pass6.4
Presentation Format:	micro
Dataset Creation:	Thu Nov 15 16:00:04 2012
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150	ABHV		0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10 (ft3) 0		0	MEL2.0 (Ohm-m) 40
0	MINMK 20	TBHV			
		0 (ft3) 10			

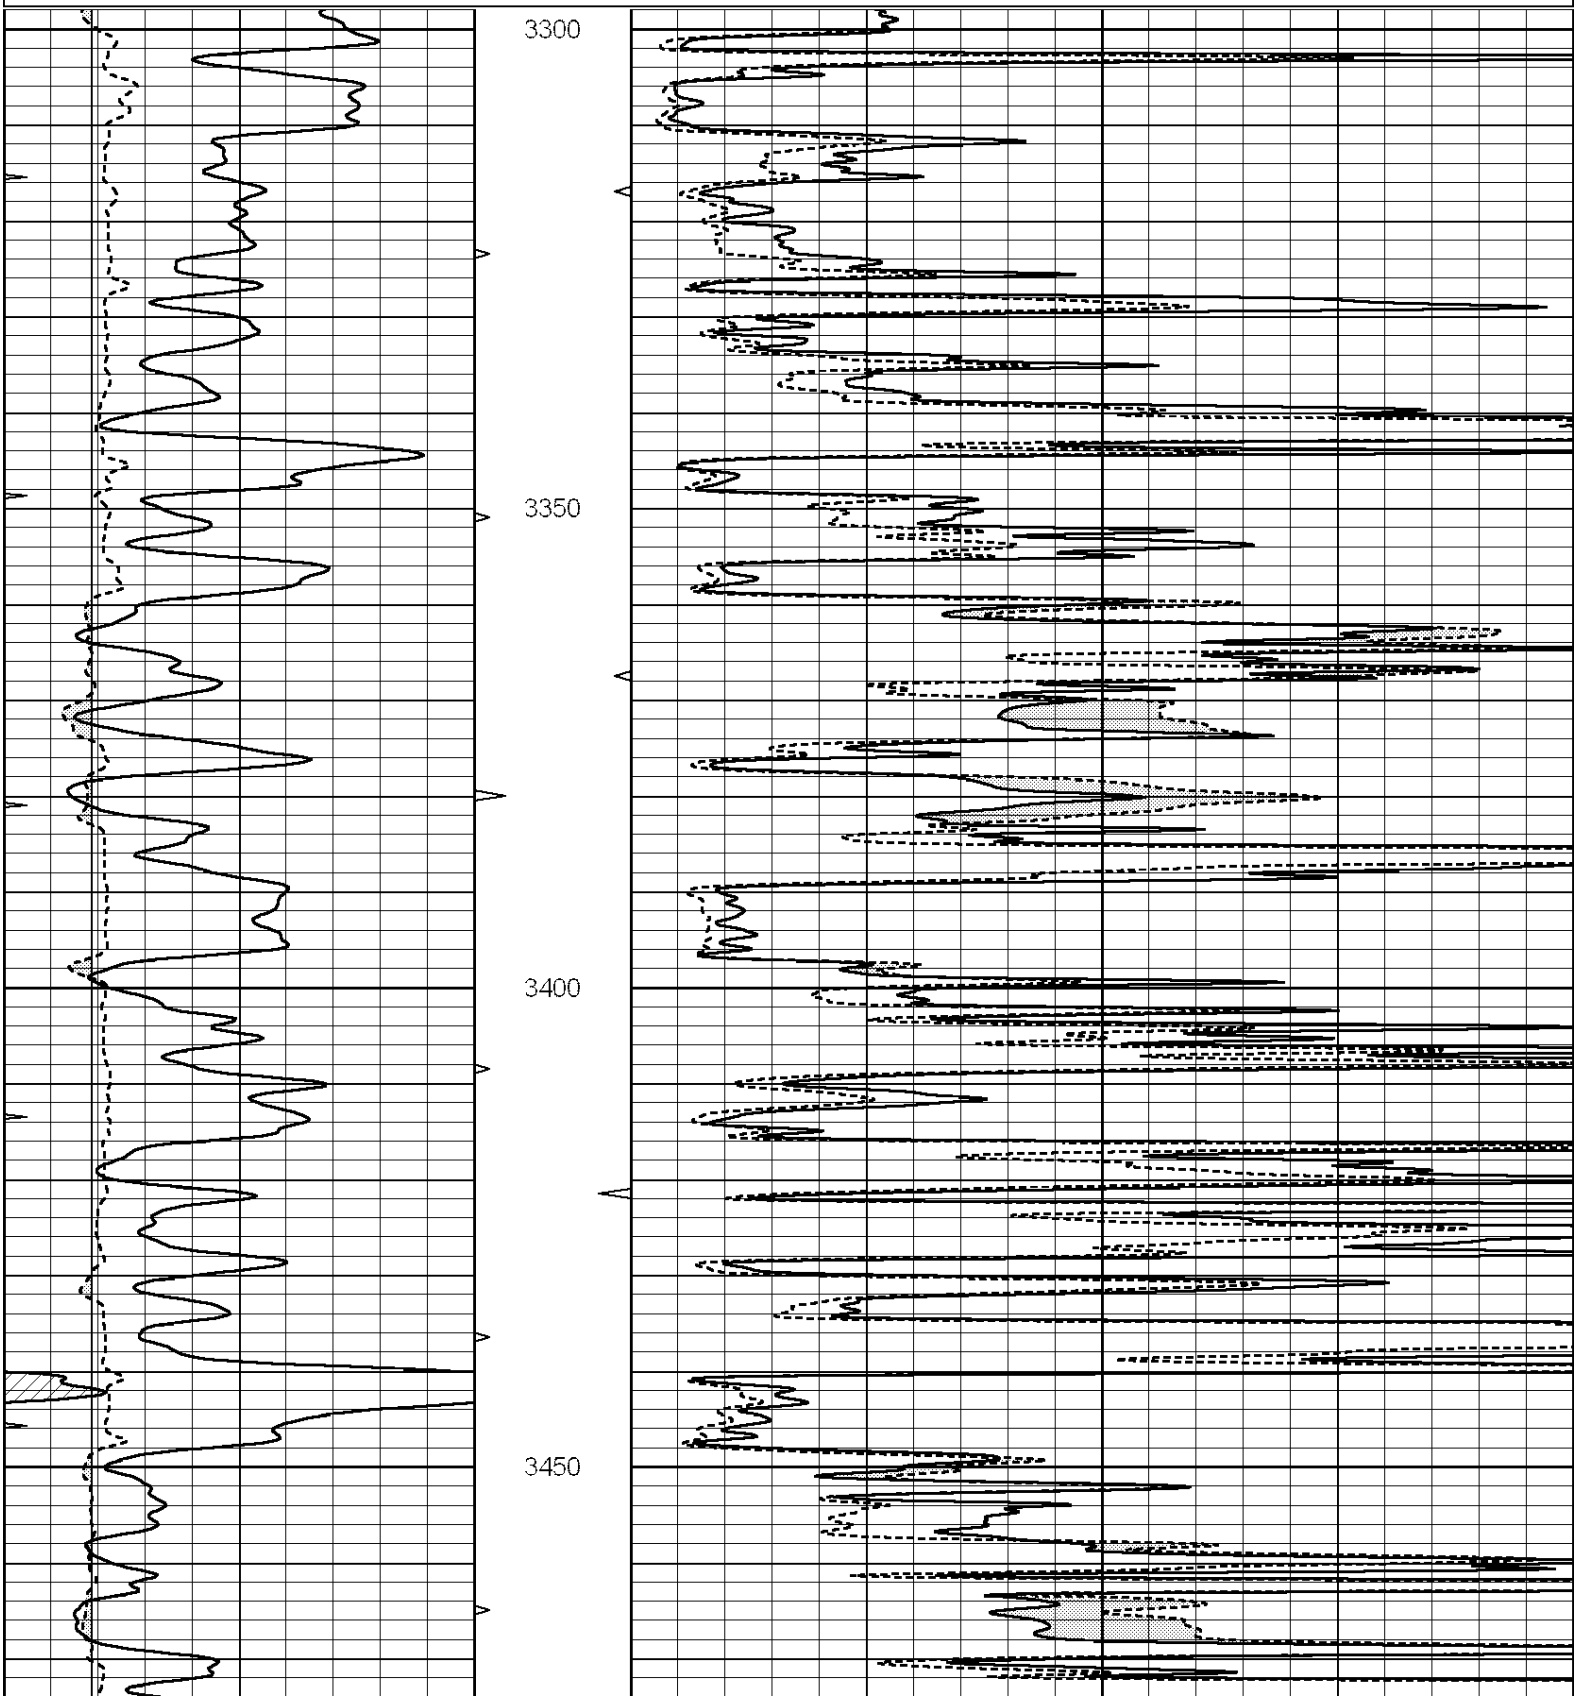

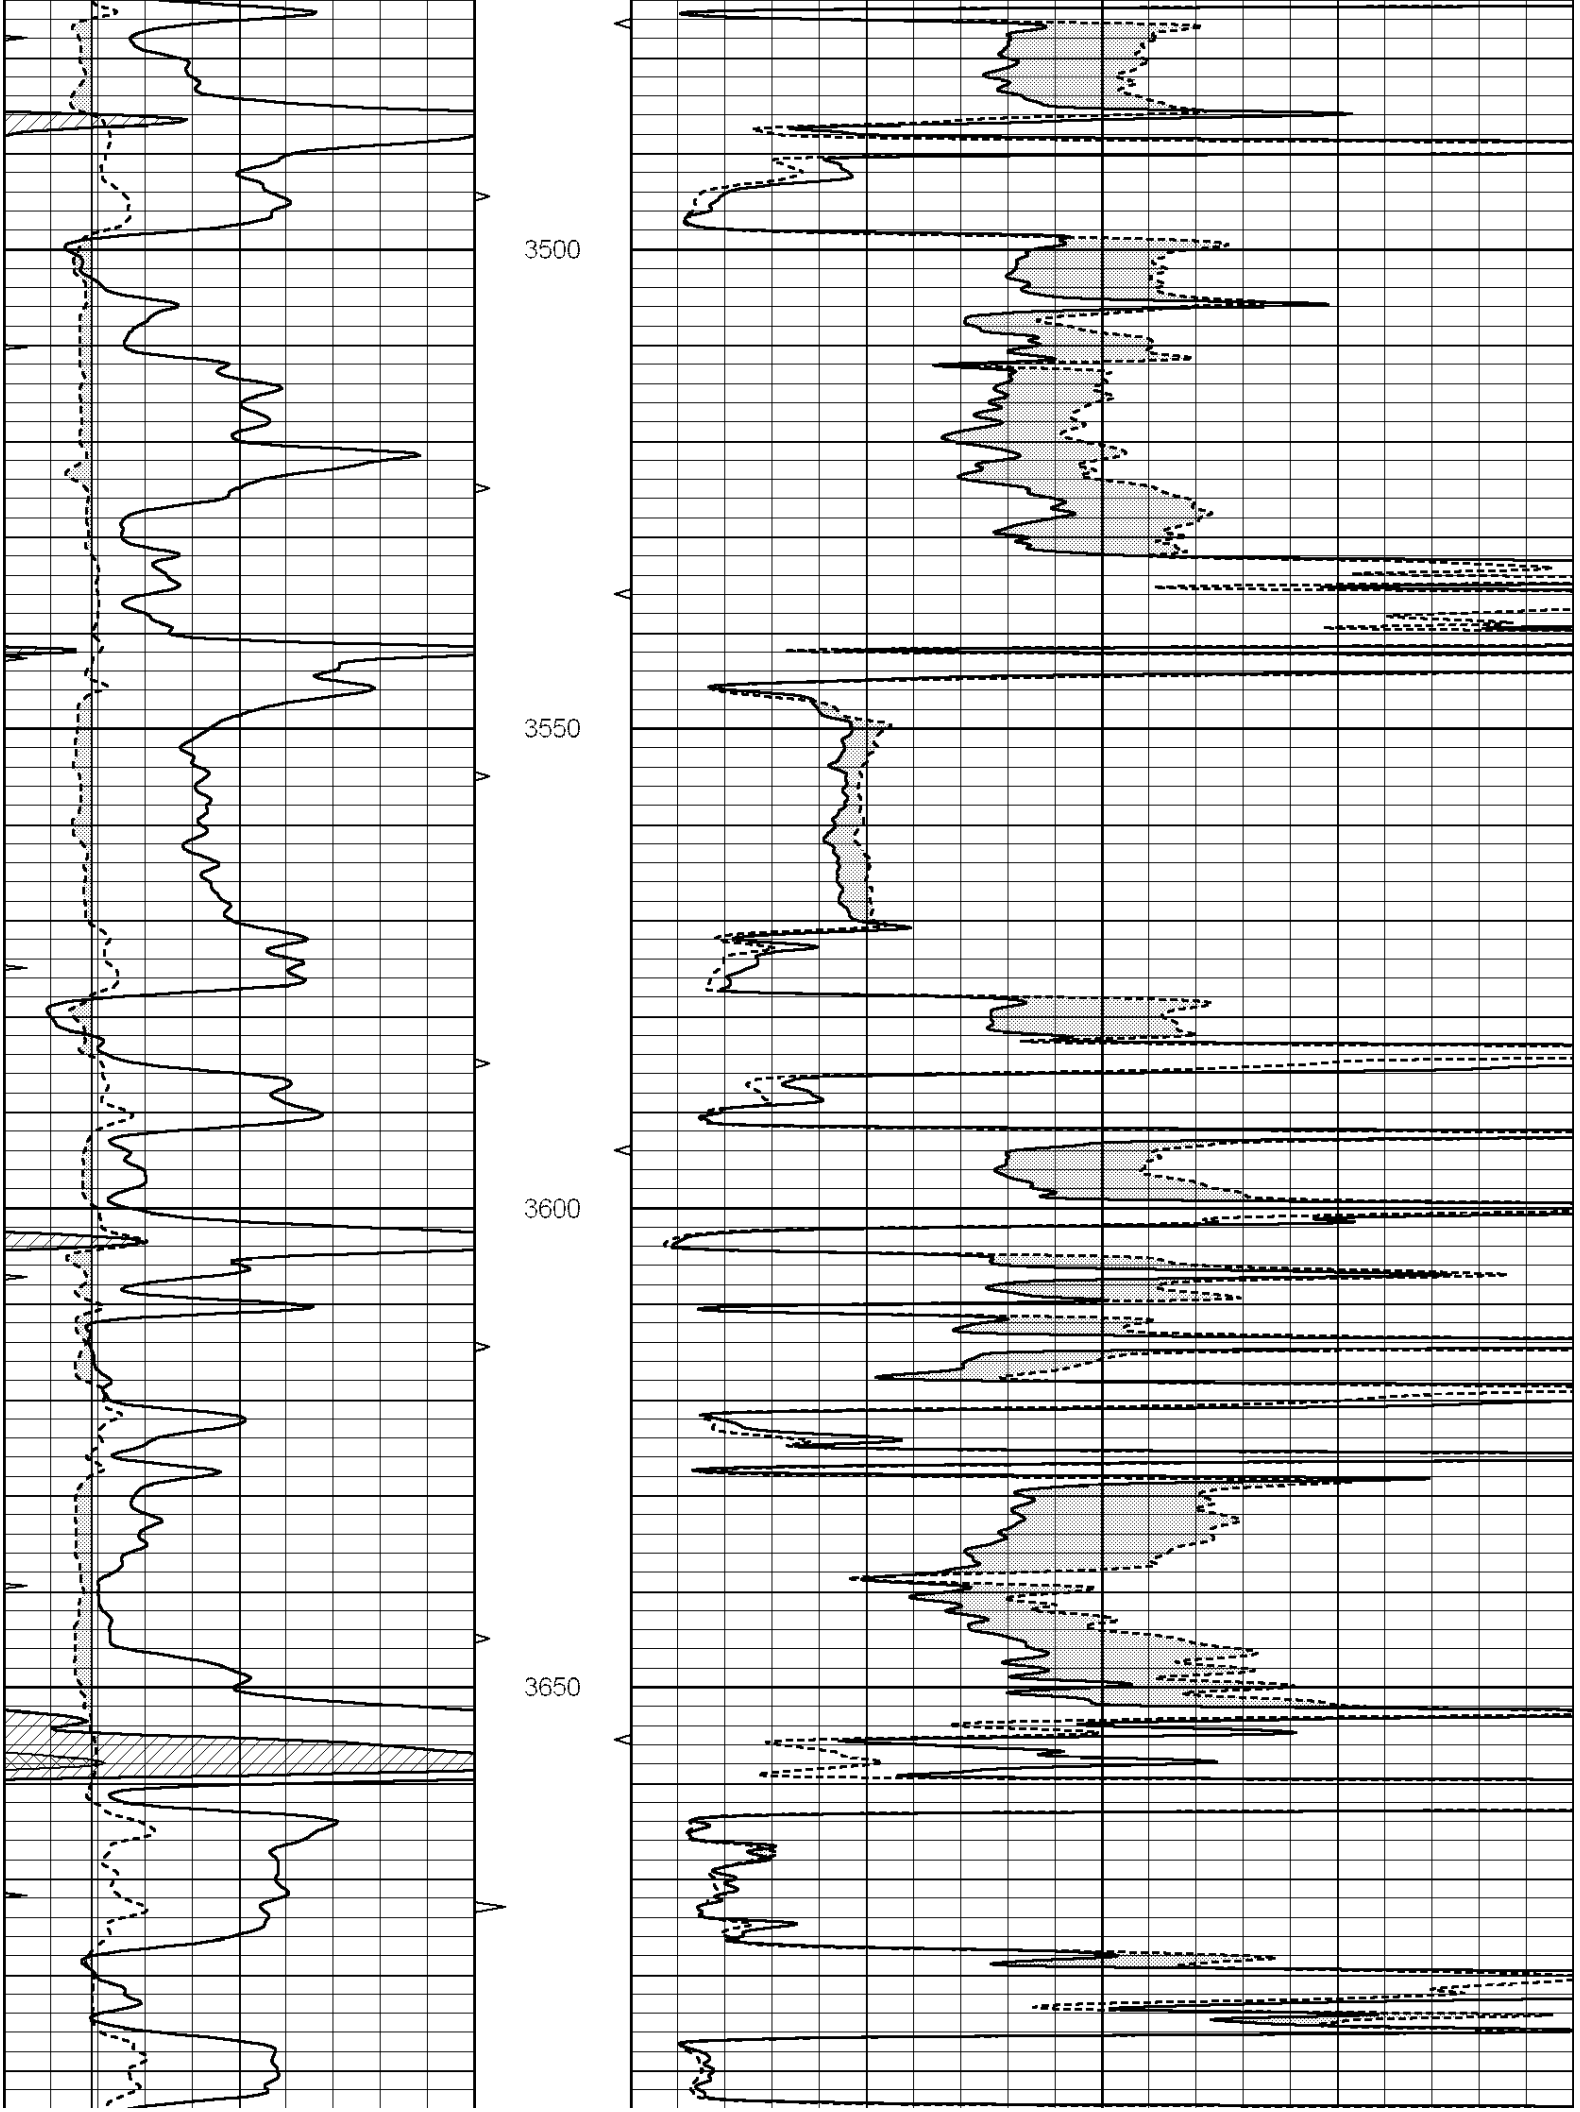
3500
3550
3600
3650

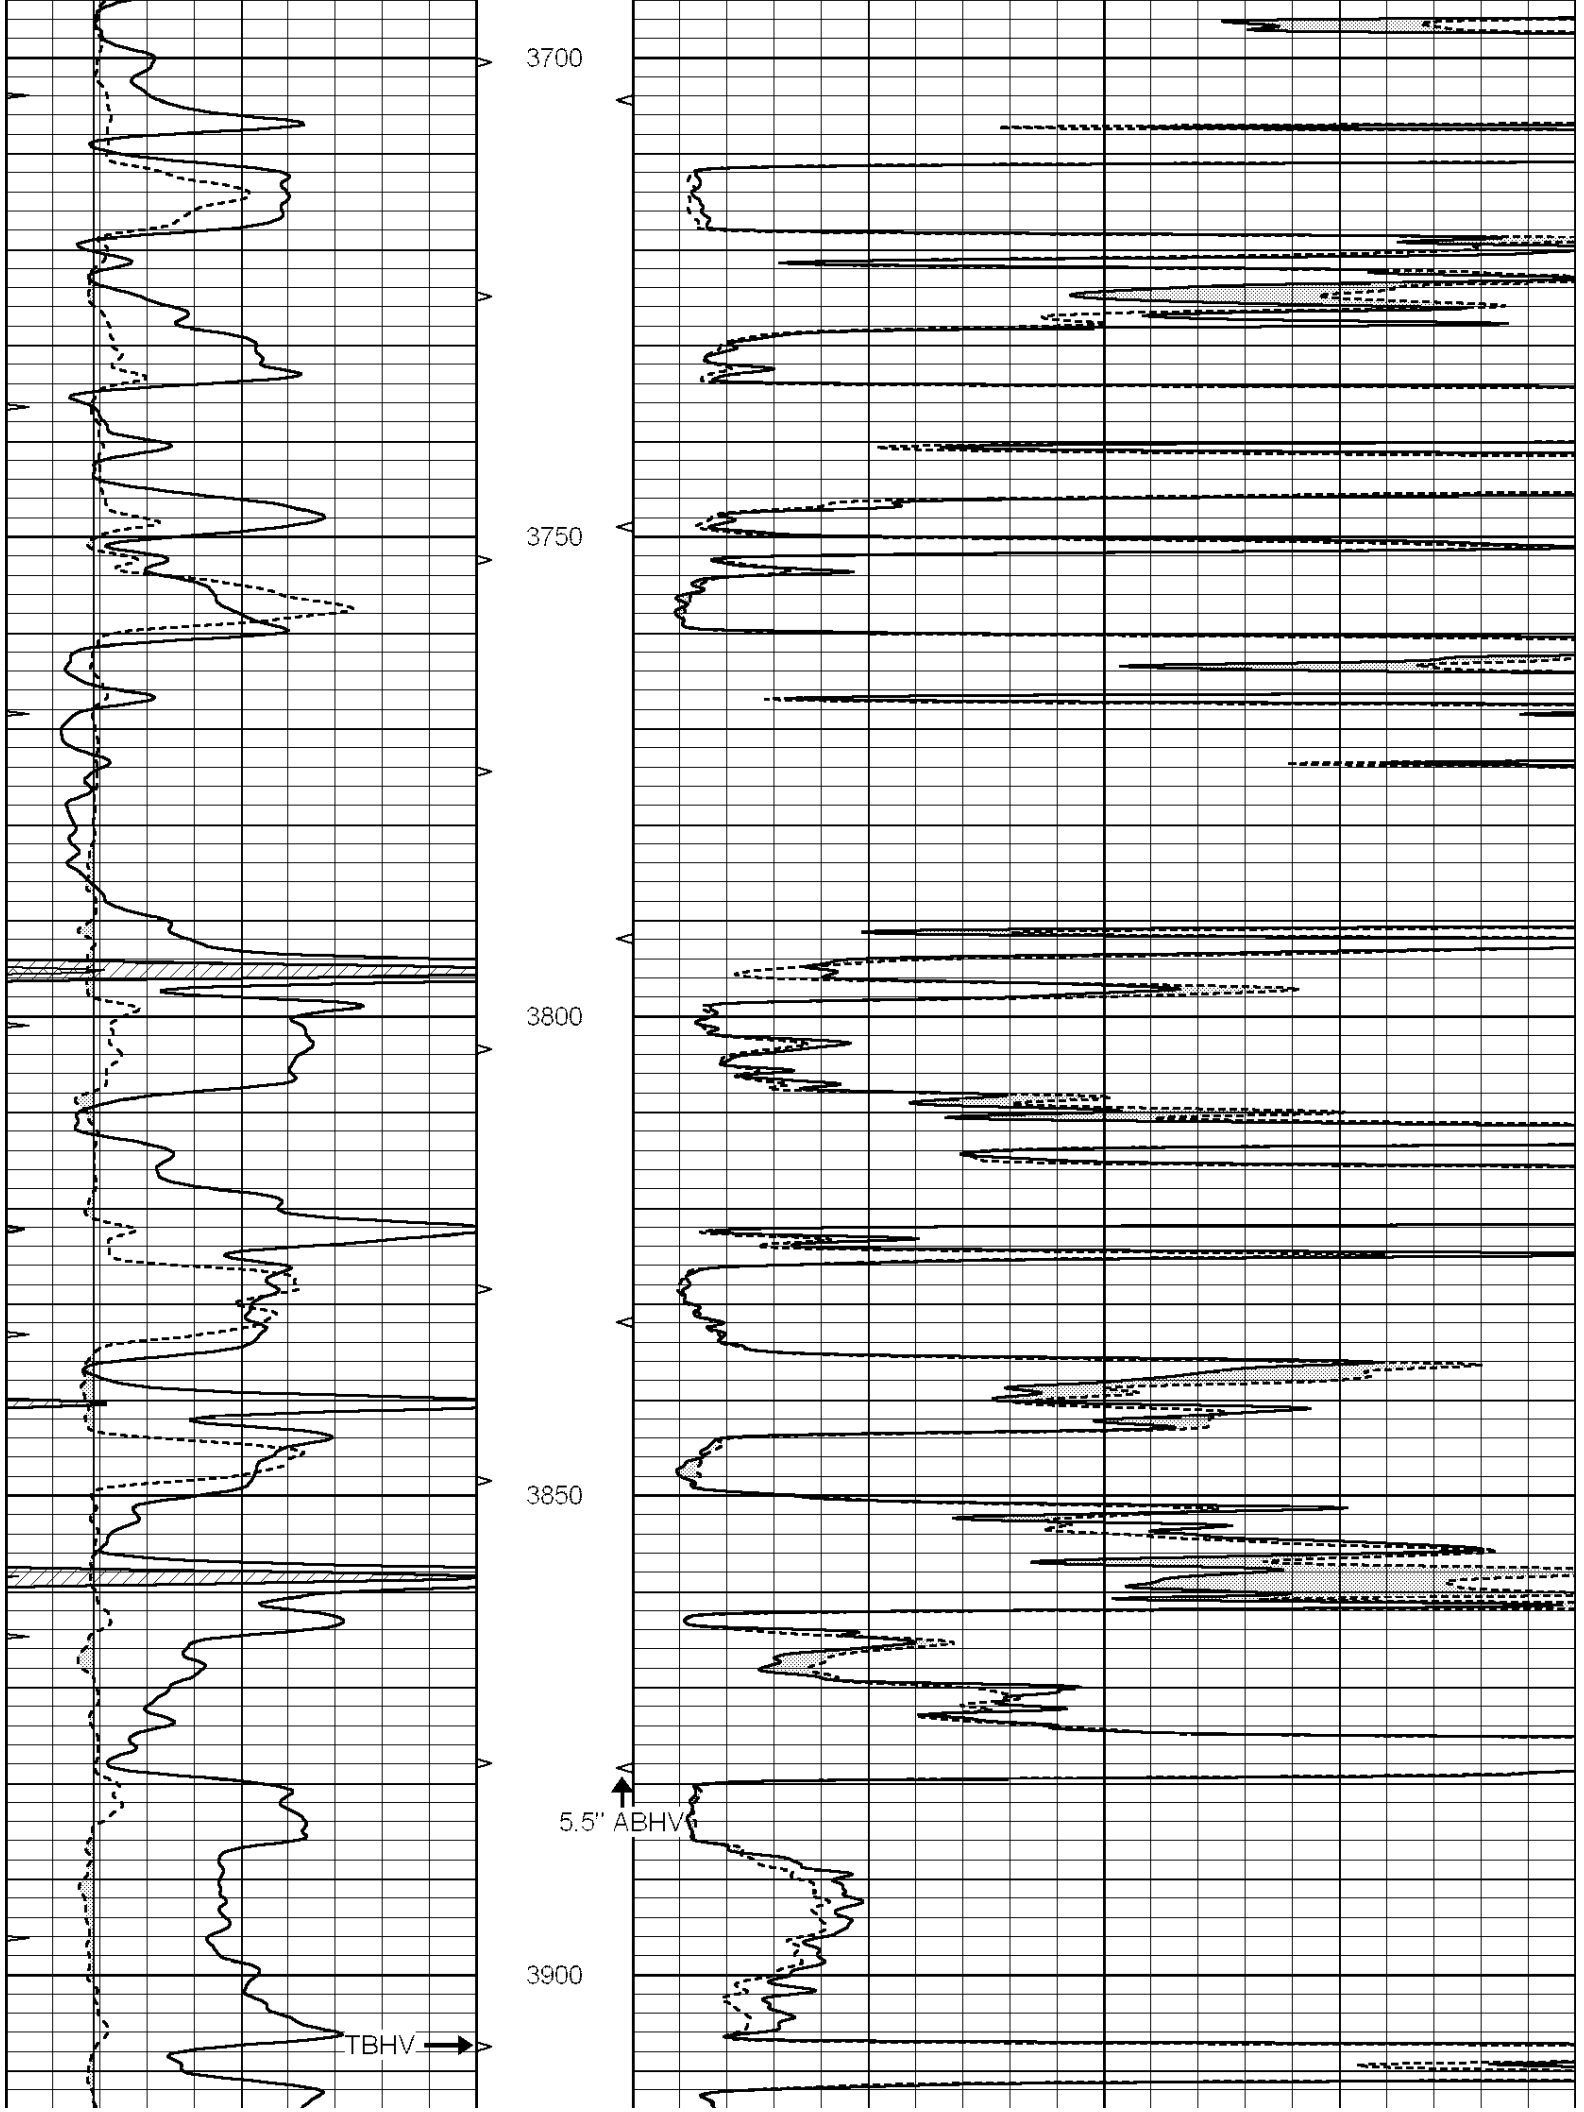
3700
3750
3800
3850
5.5" ABHV
3900
TBHV

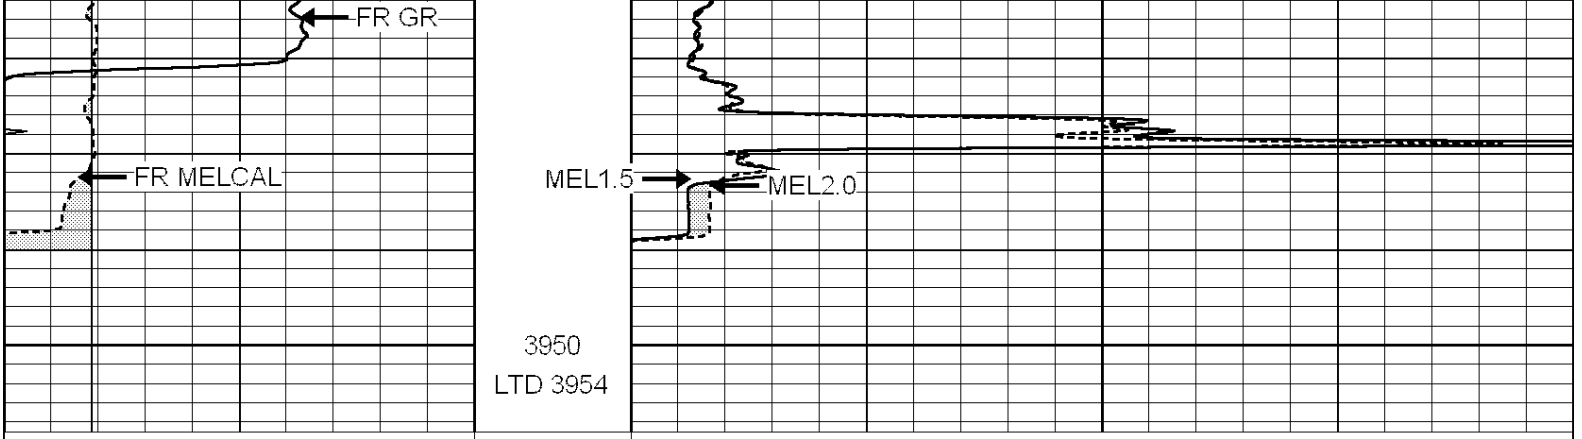


0	GAMMA RAY (GAPI) 150		ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10	(ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK 20		TBHV		
		0	(ft3) 10		


NABORS
COMPLETION & PRODUCTION SERVICES CO.

REPEAT SECTION

Database File:	010013ddn.db
Dataset Pathname:	pass5.4
Presentation Format:	micro
Dataset Creation:	Thu Nov 15 15:29:29 2012
Charted by:	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI) 150		ABHV	0	MEL1.5 (Ohm-m) 40
6	CALIPER (in) 16	10	(ft3) 0	0	MEL2.0 (Ohm-m) 40
0	MINMK 20		TBHV		
		0	(ft3) 10		

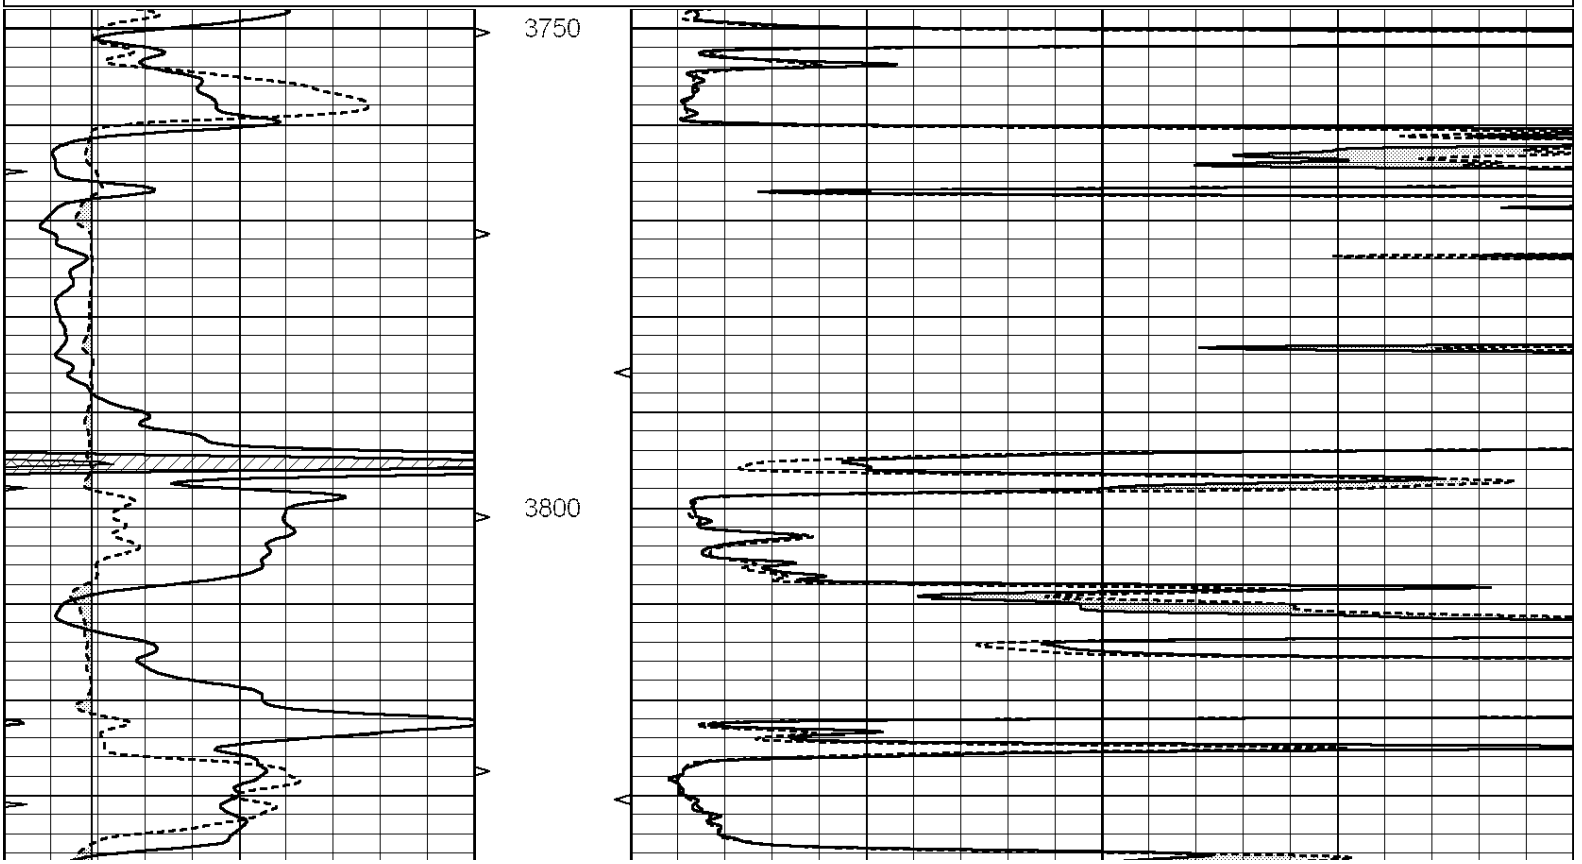

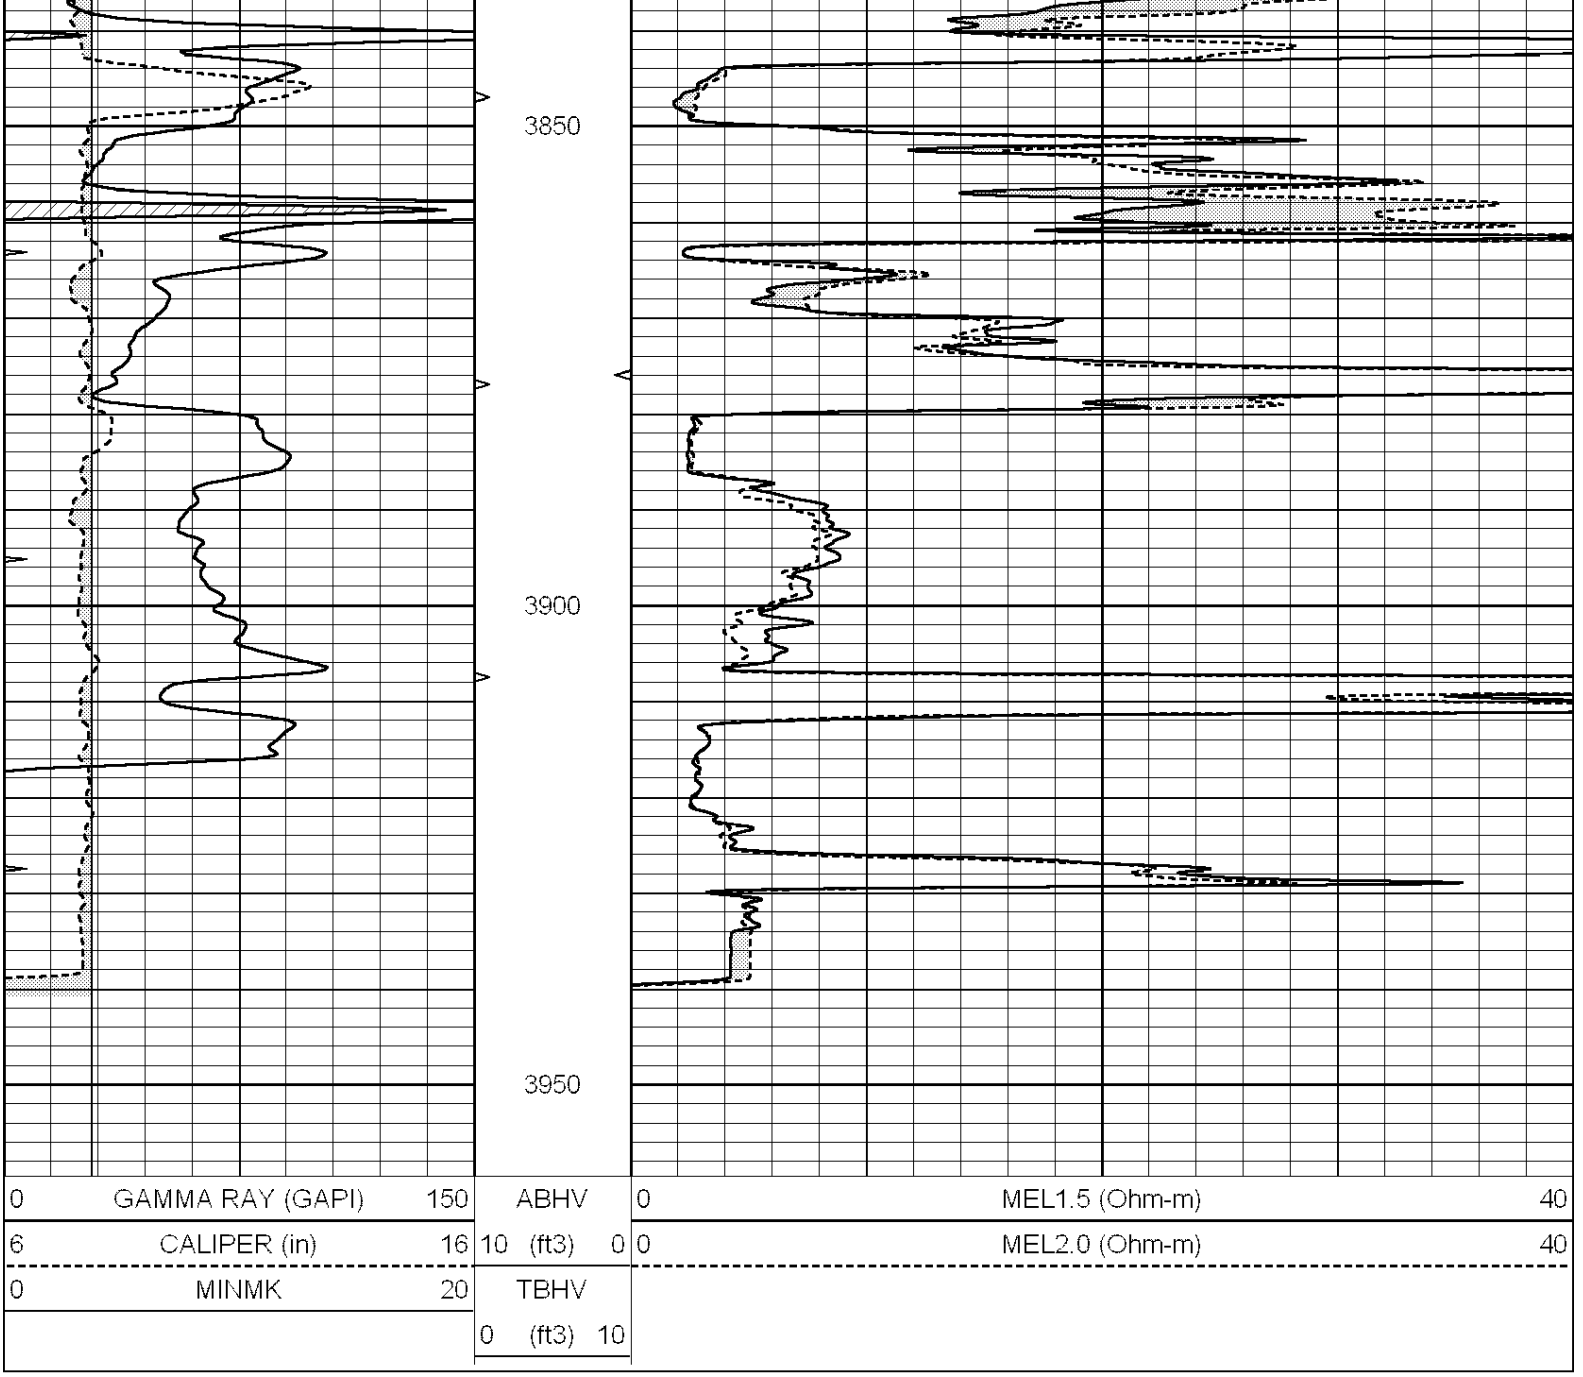

Calibration Report

Database File: 010013ddn.db
Dataset Pathname: pass6.4
Dataset Creation: Thu Nov 15 16:00:04 2012

MICRO Calibration Report

Serial Number:	MICRO5	
Tool Model:	PROBE	
Performed:	Thu Nov 15 15:17:49 2012	
Caliper Calibration:	Gain=3.850	Offset=-7.485
	Low Cal	High Cal
References	8.300	16.000
Readings	4.100	6.100
1.5" Calibration:	Gain=36.000	Offset=-1.500
	Low Cal	High Cal
References	0.000	20.000
Readings	-0.002	0.981

2" Calibration:	Gain=44.000	Offset=-1.600
	Low Cal	High Cal
References	0.000	20.000
Readings	0.002	0.898

Gamma Ray Calibration Report

Serial Number:	GR4	
Tool Model:	OPEN	
Performed:	Thu Nov 15 15:17:45 2012	
Calibrator Value:	200.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	189.0	cps
Sensitivity:	1.6000	GAPI/cps