



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	BLUERIDGE PETROLEUM CORP.	Company	BLUERIDGE PETROLEUM CORP.
Well	PEMBER #1-27	Well	PEMBER #1-27
Field		Field	
County	NESS	County	NESS
State	KANSAS	State	KANSAS
Location:	API # : 15-135-25605 1440' FSL & 1811' FEL	Other Services CDL/CNL DIL/MEL	
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL KELLY BUSHING 5' A.G.L. KELLY BUSHING	Elevation K.B. 2517 D.F. G.L. 2512	
Date	6-8-13		
Run Number	TWO		
Depth Driller	4525		
Depth Logger	4520		
Bottom Logged Interval	4502		
Top Log Interval	3600		
Casing Driller	222		
Casing Logger	218		
Bit Size	7.875		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.4 / 50		
pH / Fluid Loss	10.0 / 8.2		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	0.90 @ 93F		
Rmf @ Meas. Temp	0.68 @ 93F		
Rmc @ Meas. Temp	1.08 @ 93F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.700 @ 120F		
Time Circulation Stopped	3 HOURS		
Time Logger on Bottom	11:30 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	860		
Location	HAYS, KS.		
Recorded By	RUPP		
Witnessed By	KURT TALBOTT		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

NABORS COMPLETION & PRODUCTION SERVICES
785-628-6395
THANK YOU FOR YOUR BUSINESS
DIRECTIONS: NESS CITY, 14W, N INTO.



NABORS


**COMPLETION
& PRODUCTION**


MAIN SECTION

Database File: 010189ddn.db
 Dataset Pathname: pass7.A
 Presentation Format: _micro
 Dataset Creation: Thu May 09 03:40:21 2013
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

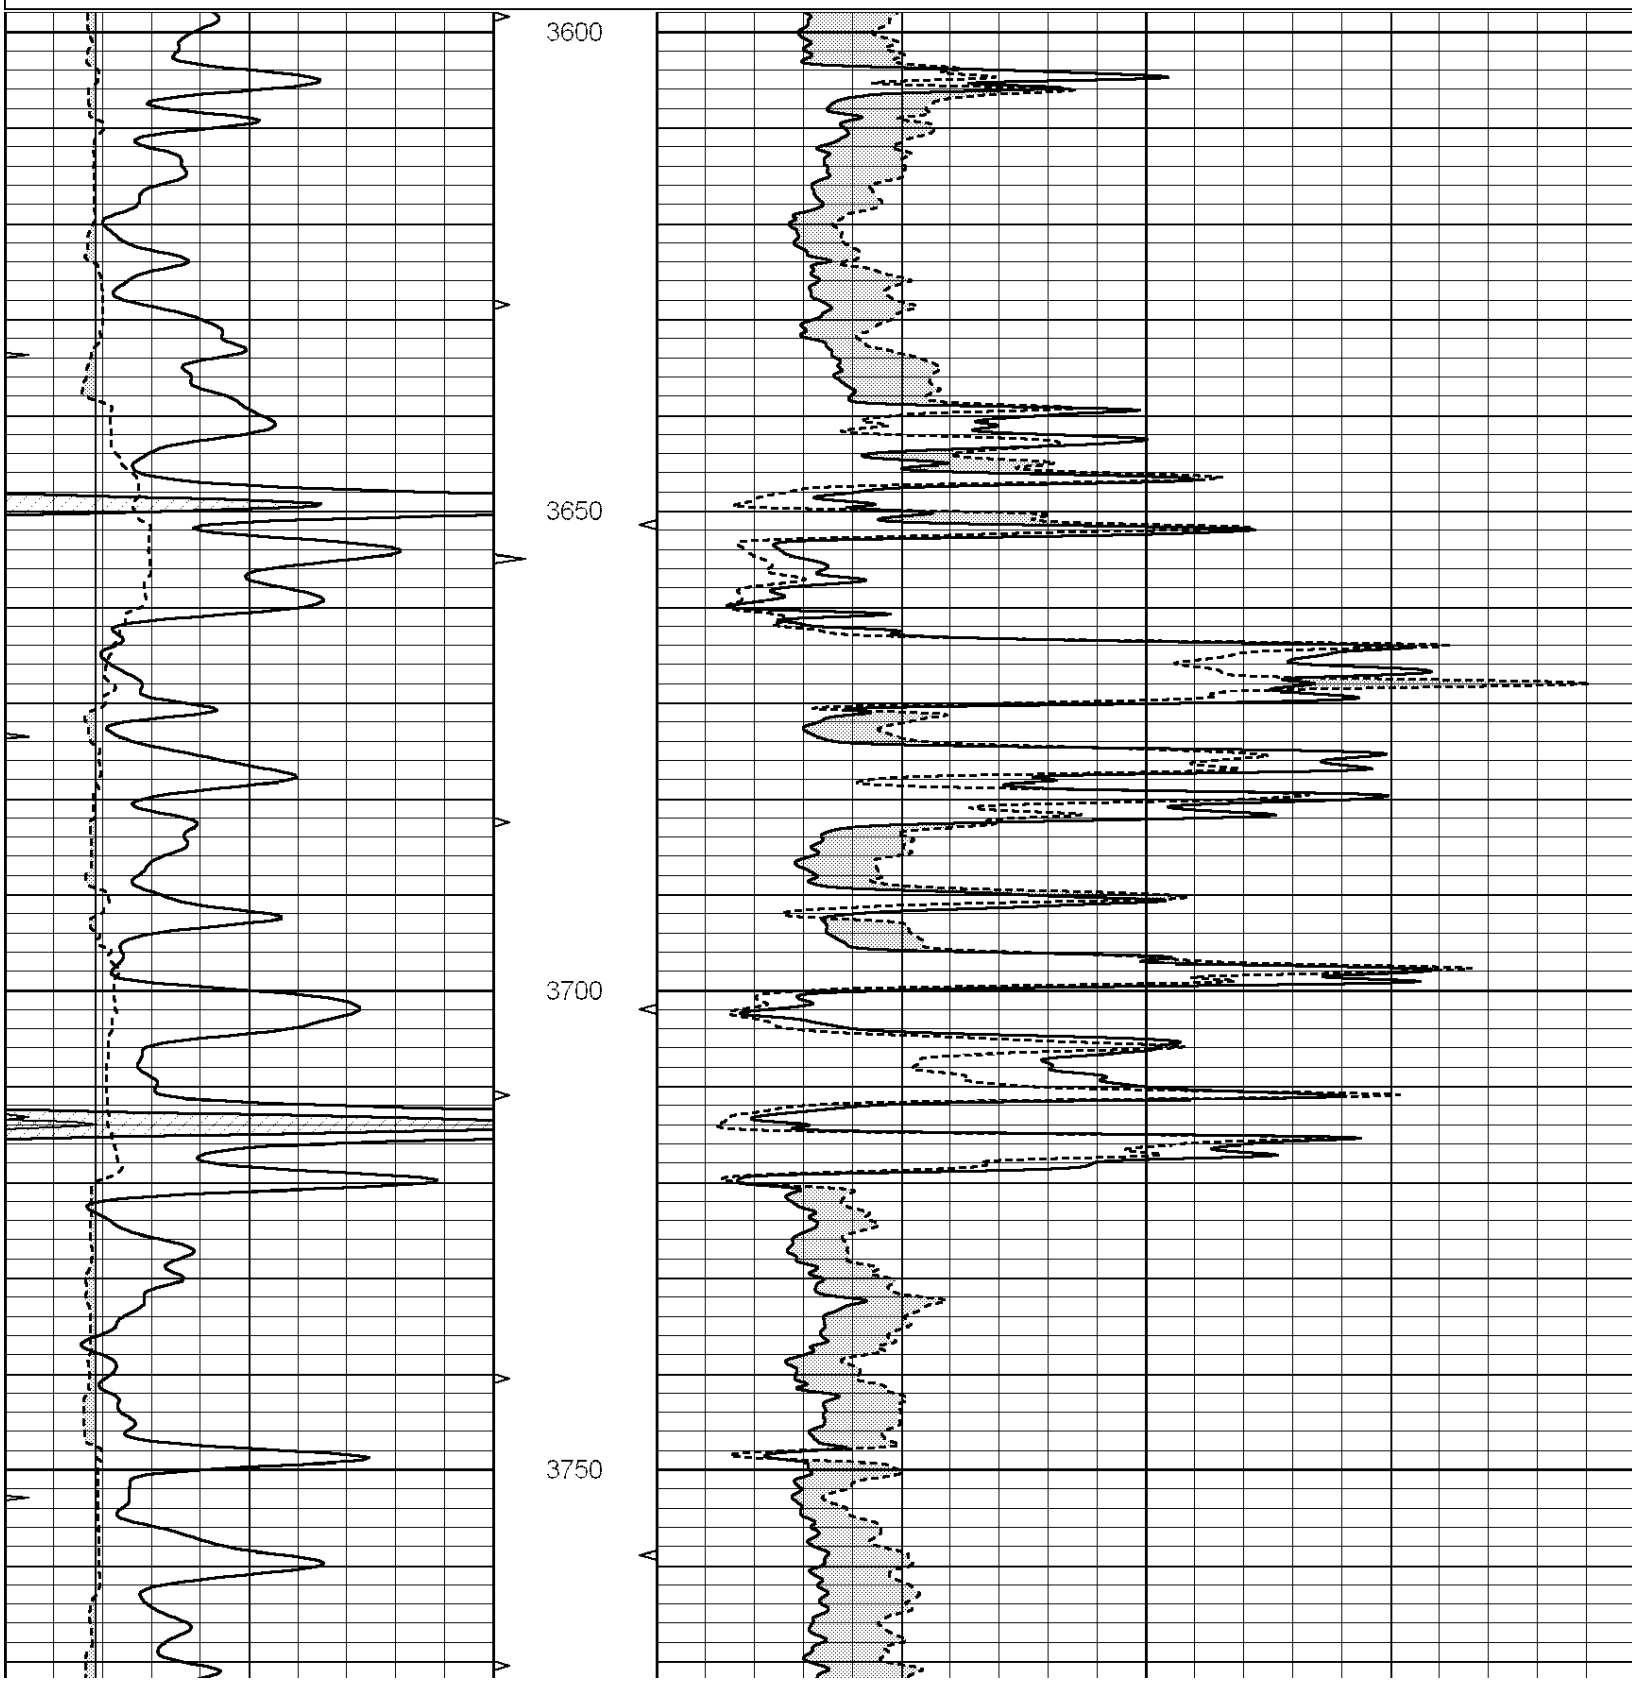

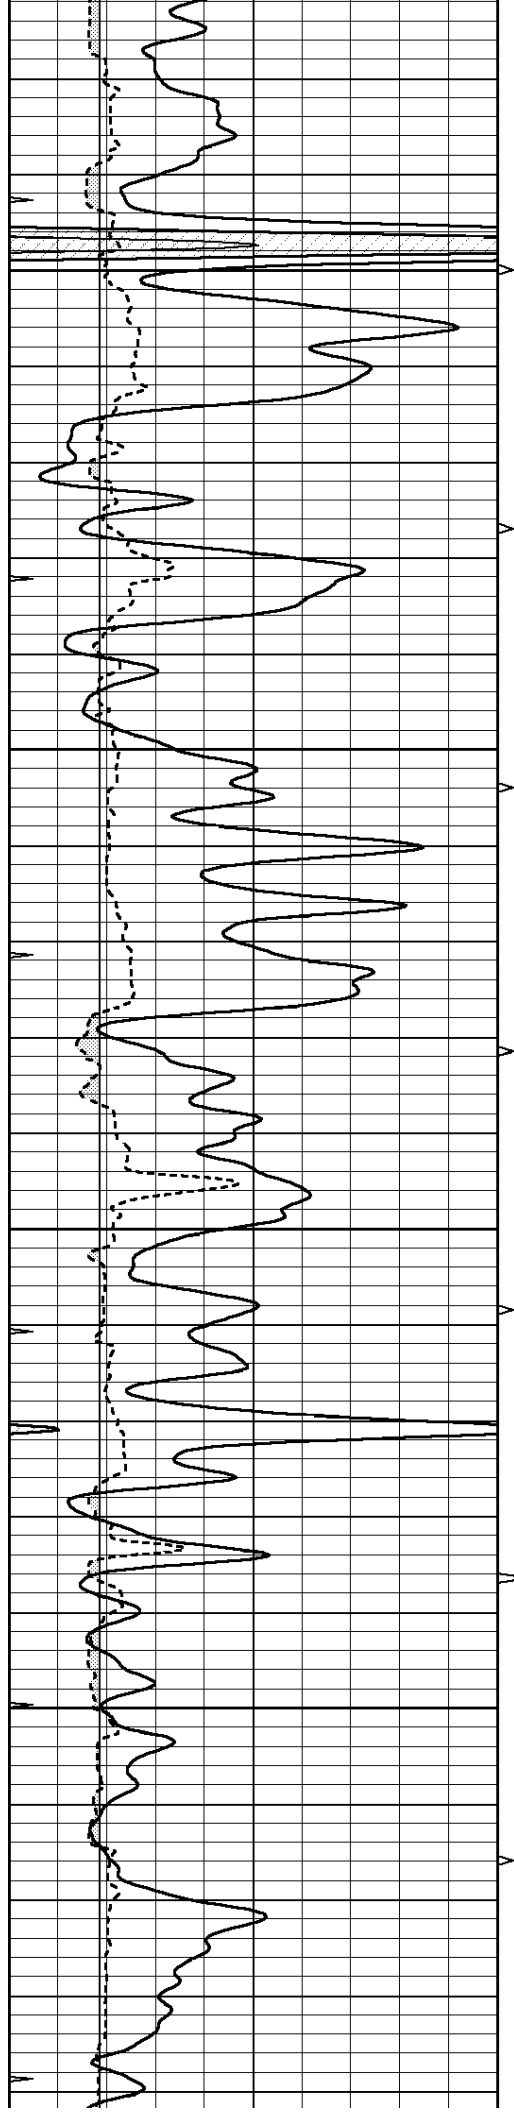



3800

3850

3900

3950

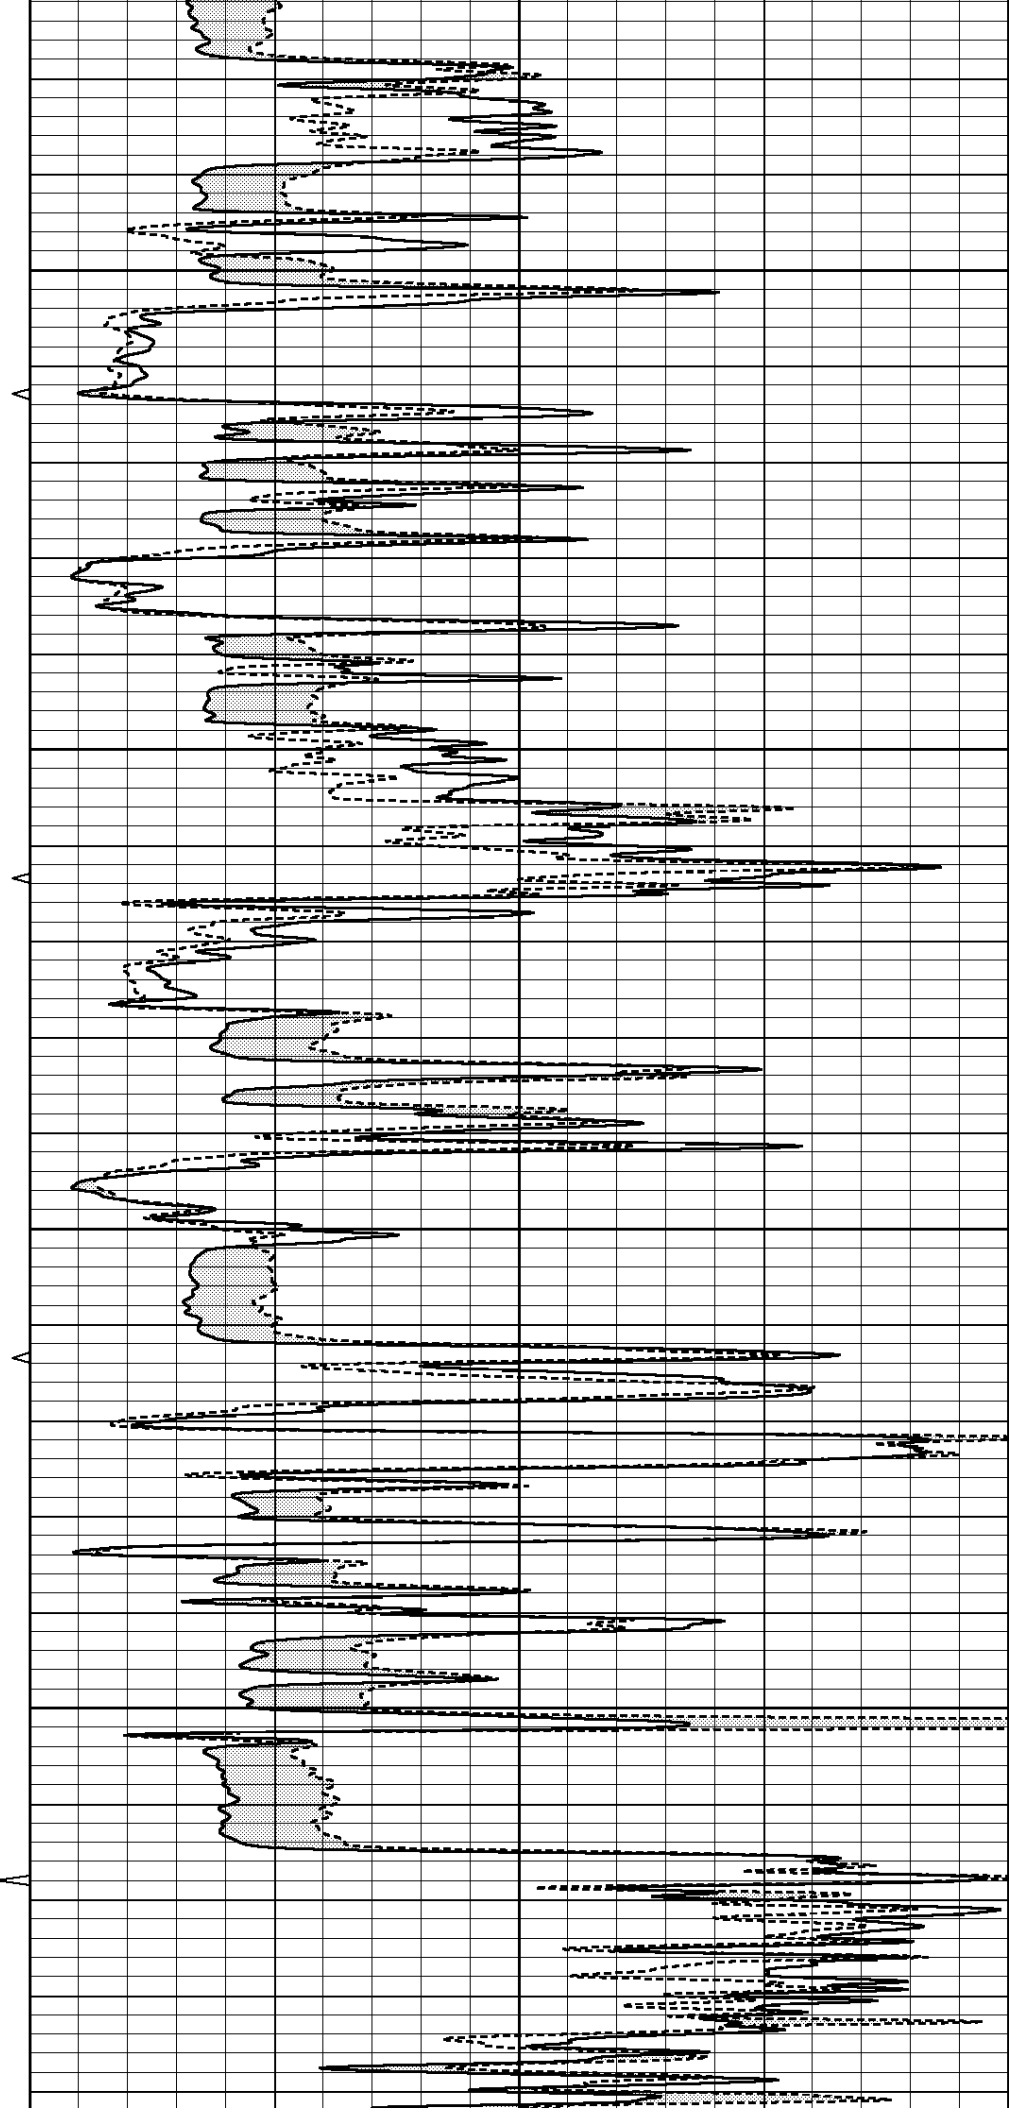

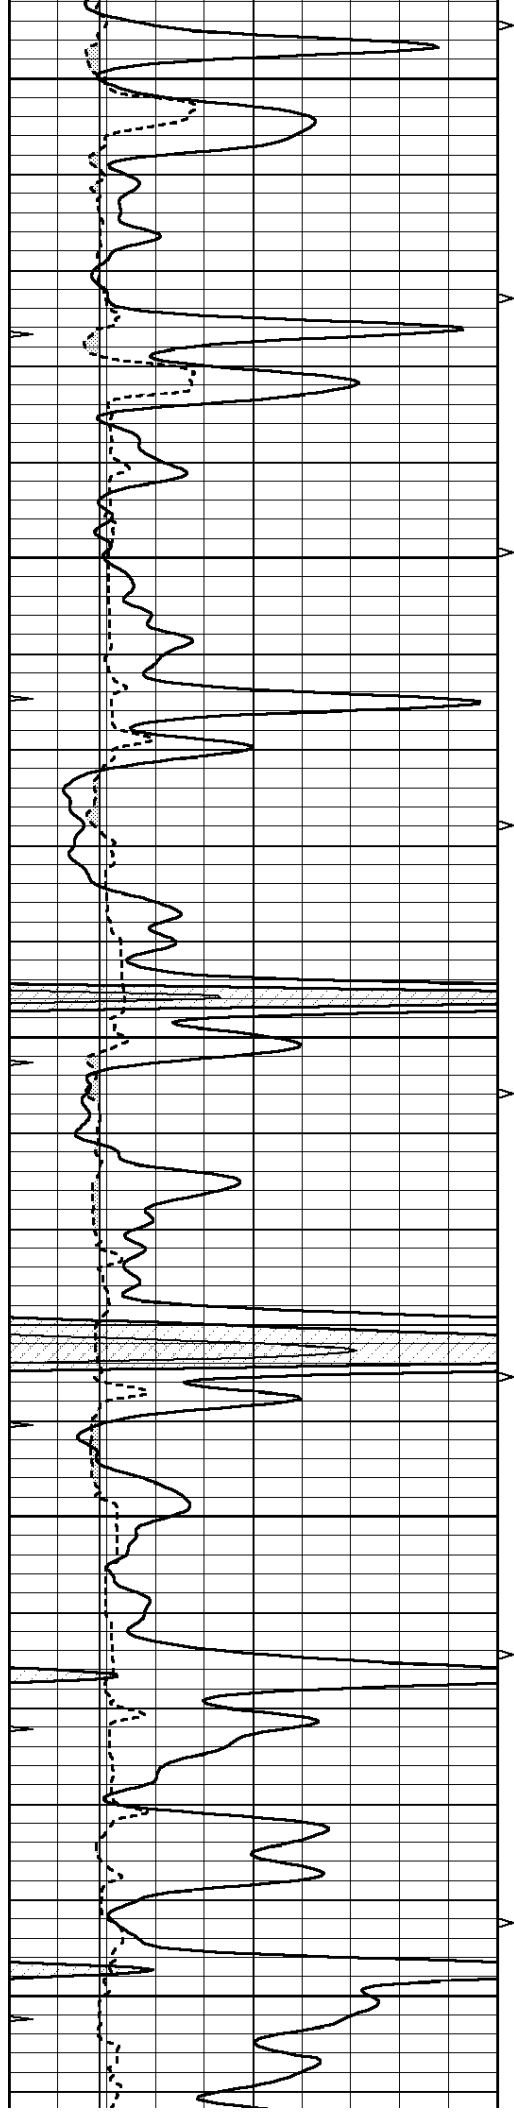


4000


4050

4100

4150

4200

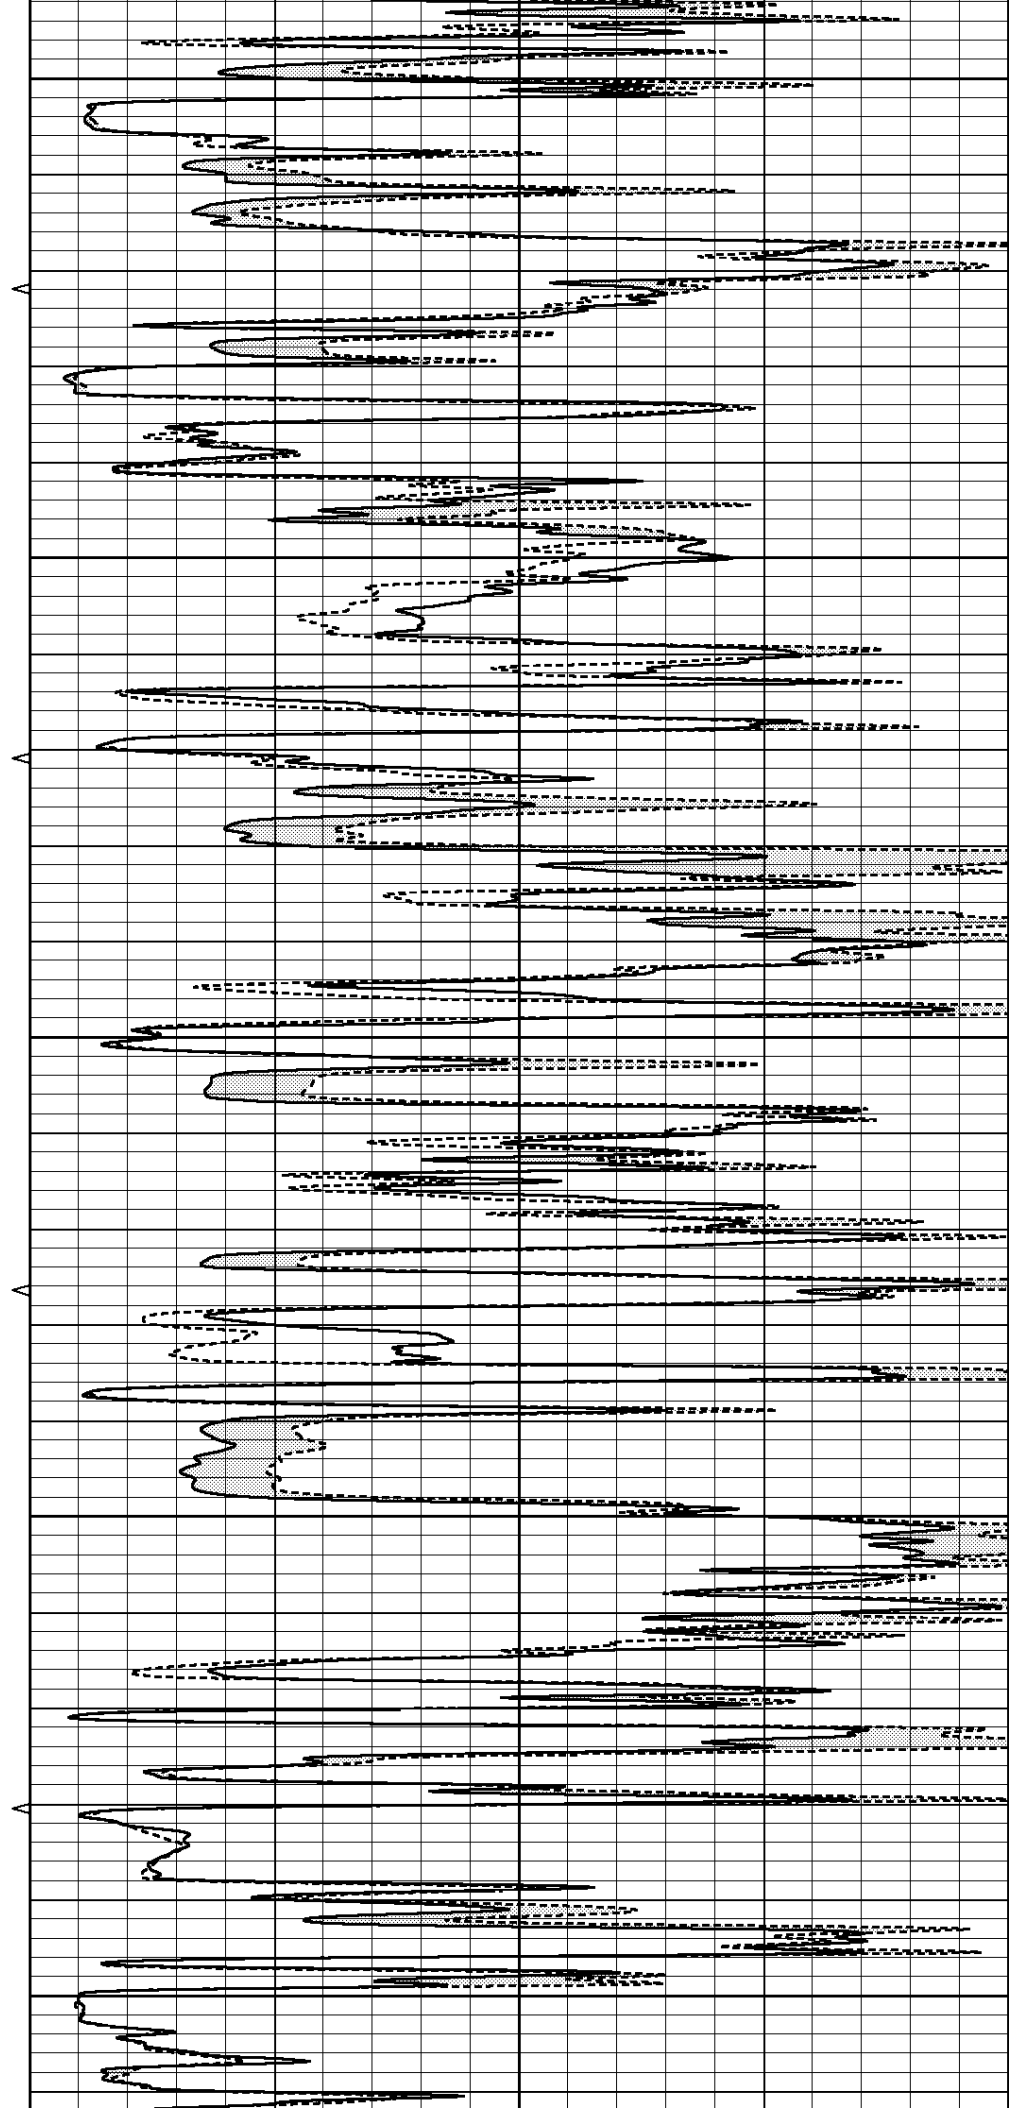

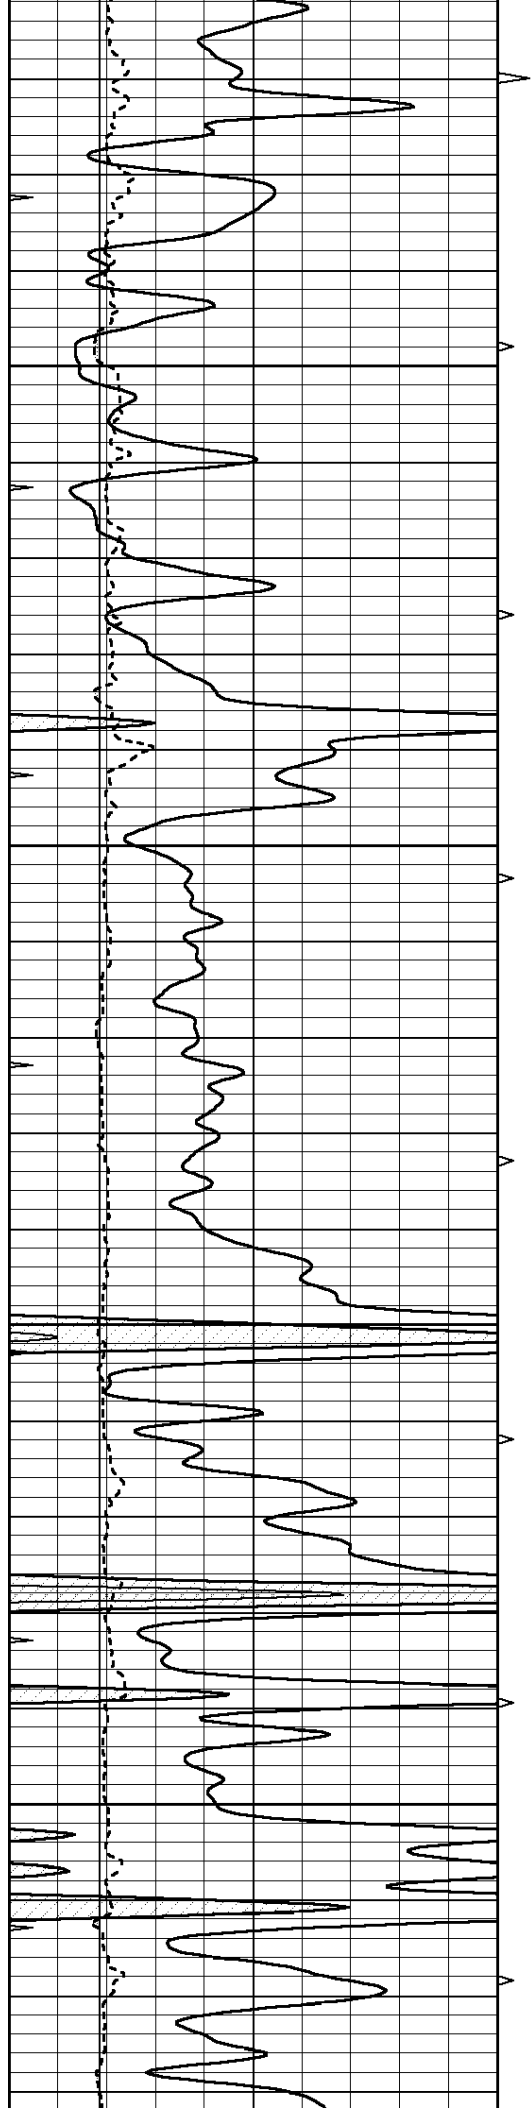



4250

4300

4350

4400

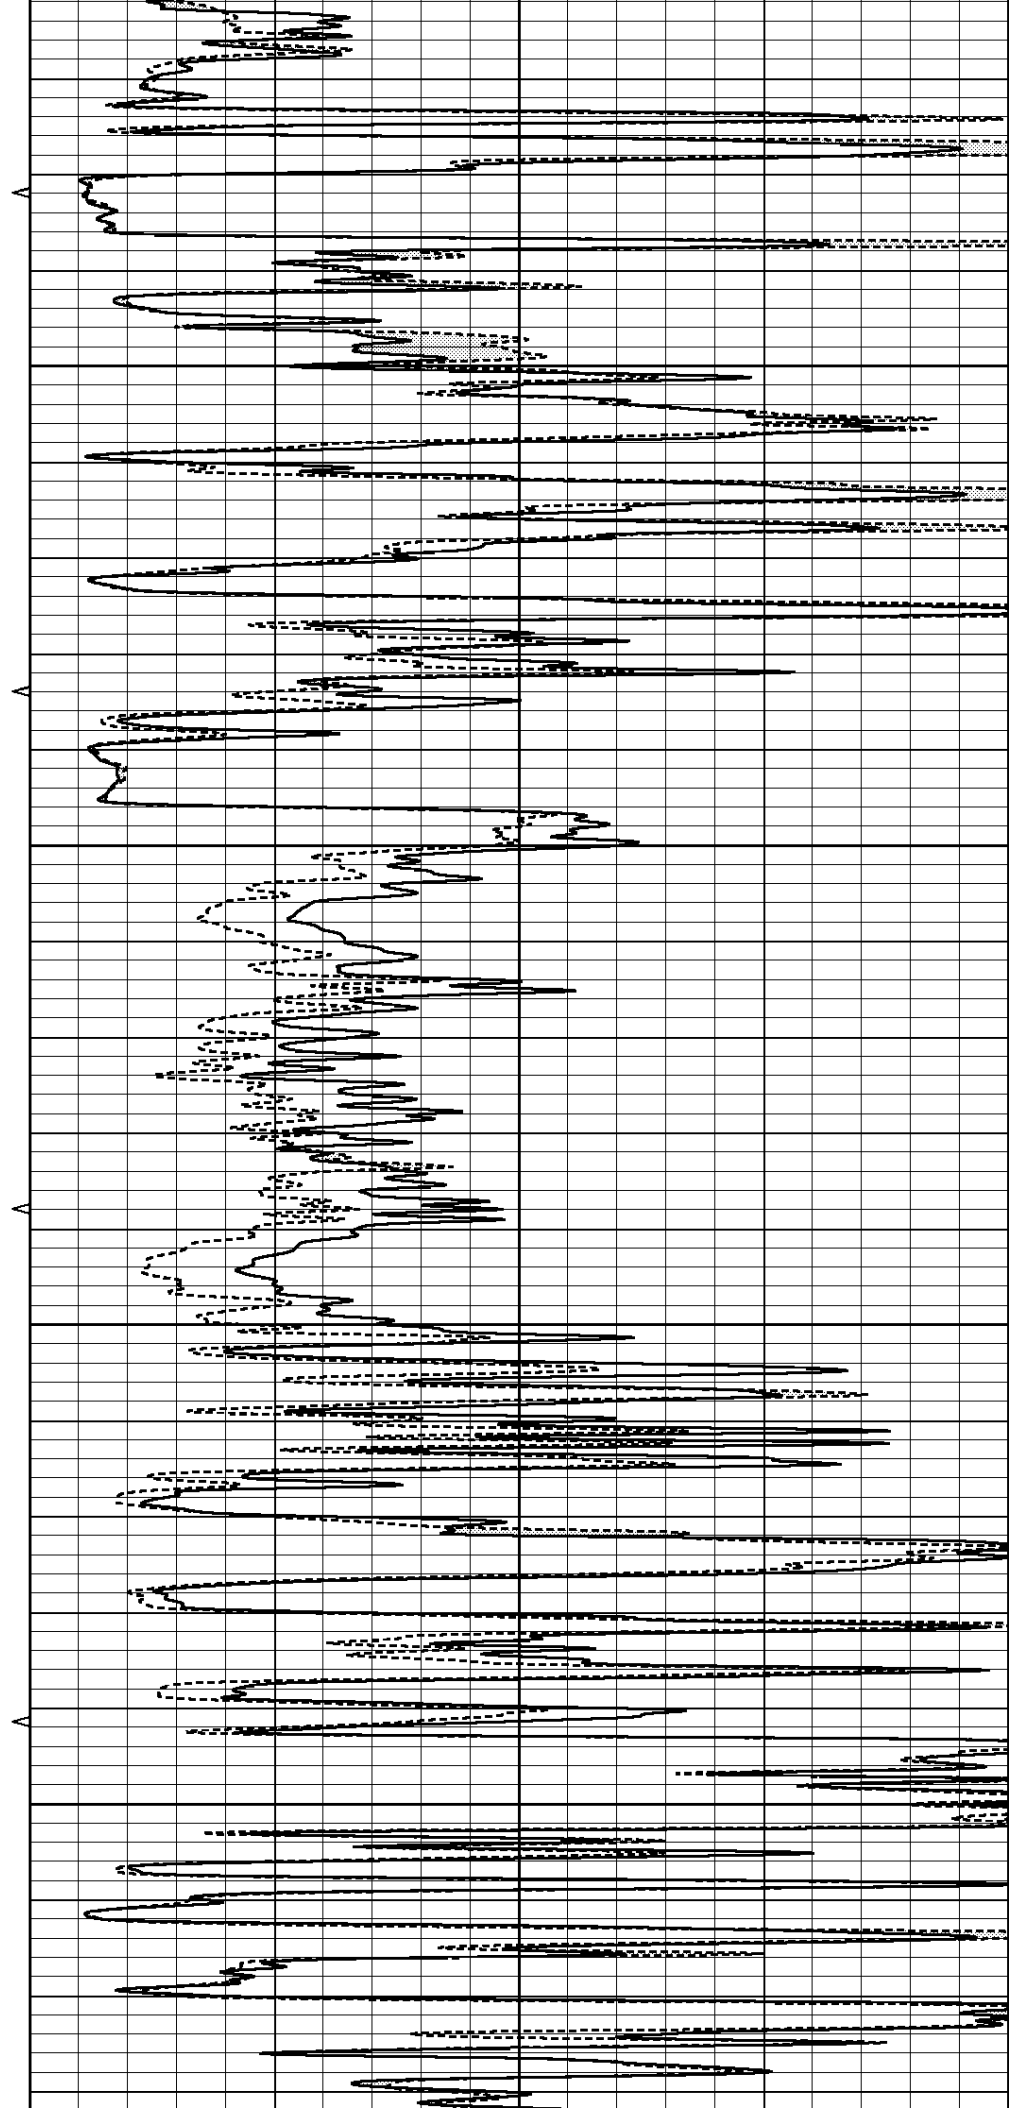


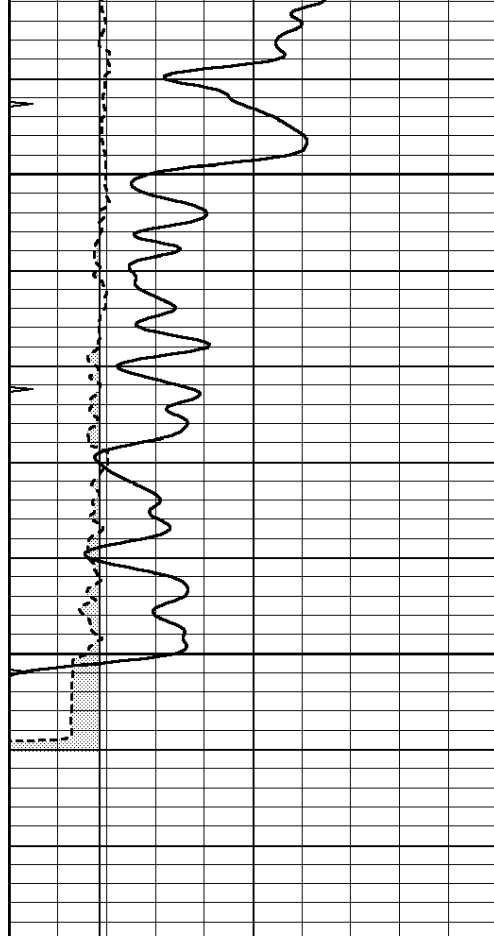

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

4450

4500

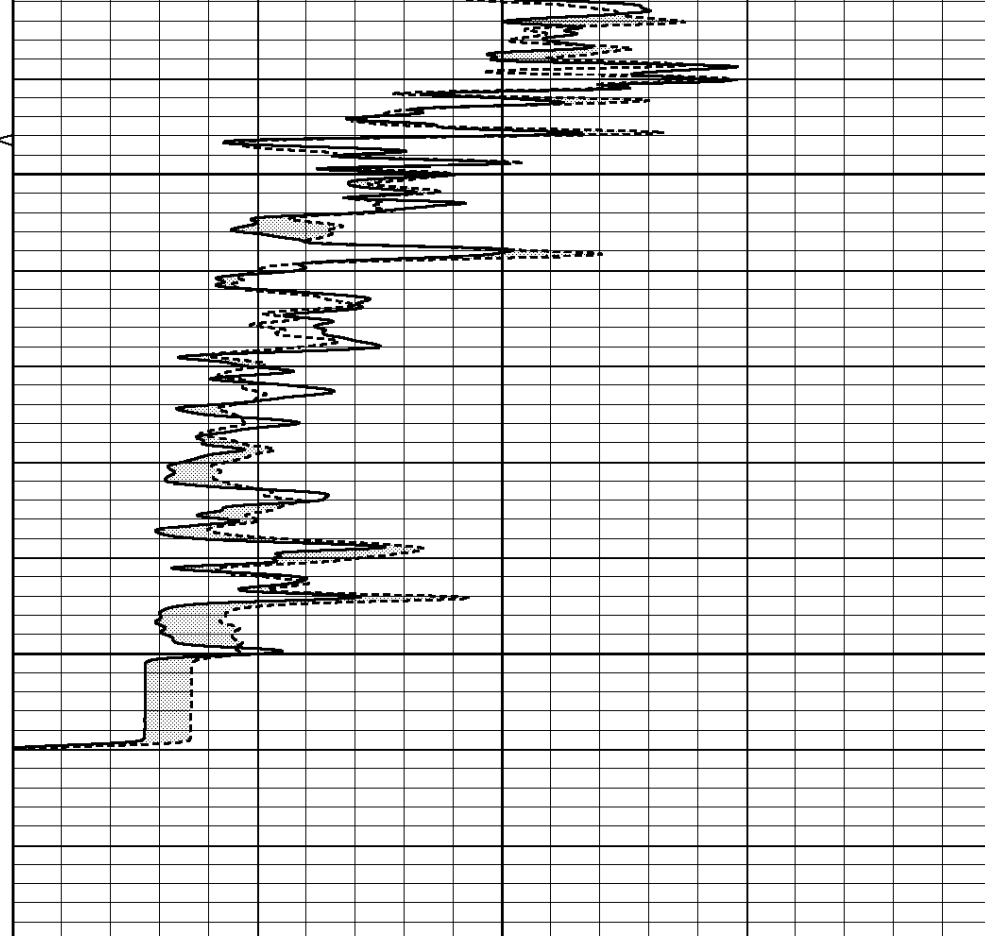

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40




**COMPLETION
& PRODUCTION
SERVICES CO.**

REPEAT SECTION


Database File: 010189ddn.db
 Dataset Pathname: pass6A
 Presentation Format: _micro
 Dataset Creation: Thu May 09 03:30:48 2013
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

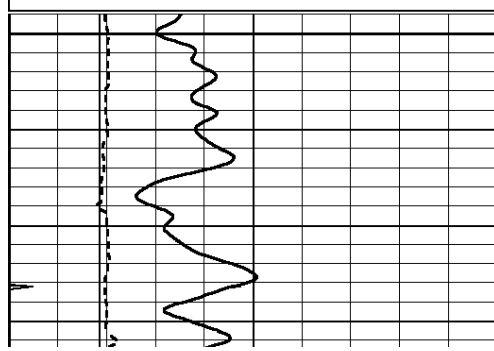

4300

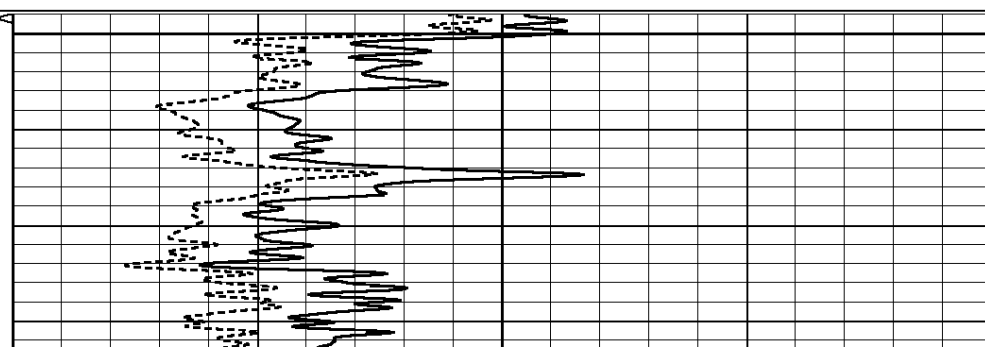




0	GAMMA RAY (GAPI)	150
6	MELCAL (in)	16
0	MINMK	20

4350

4400

4450

4500

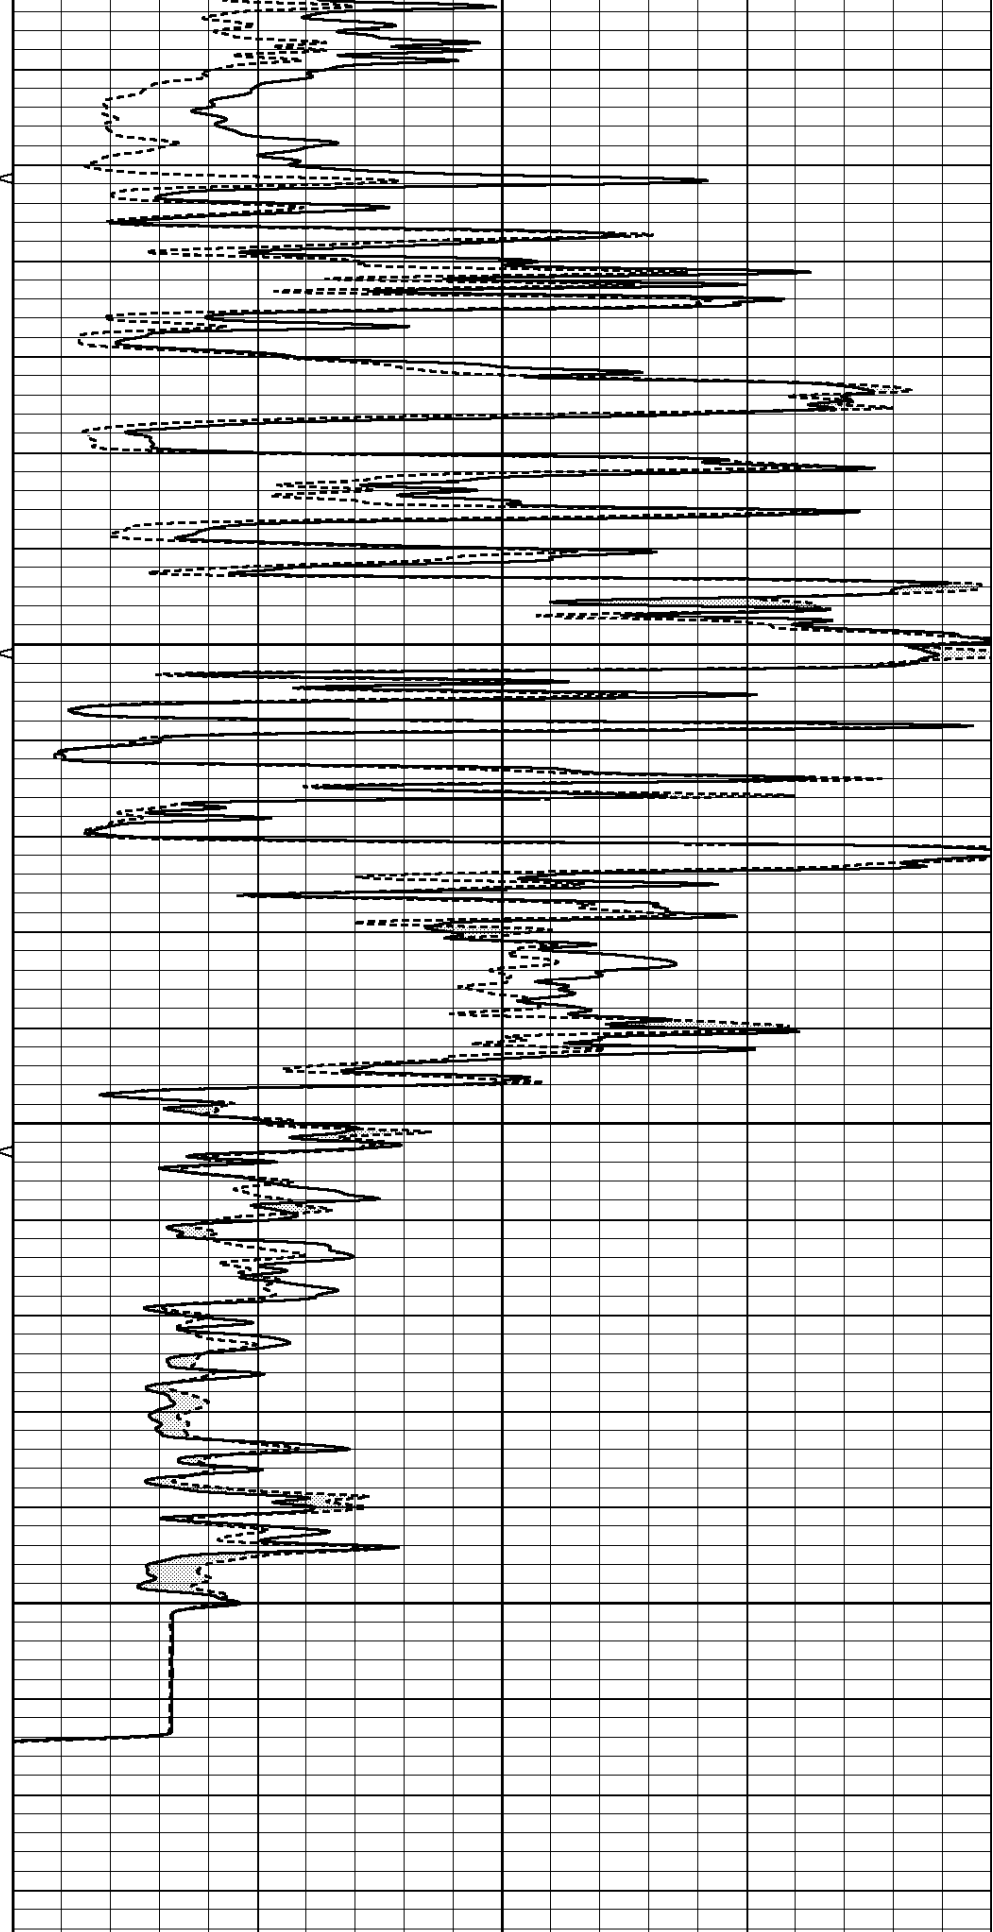

0	MEL1.5 (Ohm-m)	40
0	MEL2.0 (Ohm-m)	40

Calibration Report

Database File: 010189ddn.db
 Dataset Pathname: pass7.A
 Dataset Creation: Thu May 09 03:40:21 2013

MICRO Calibration Report

Serial Number: MICRO4
 Tool Model: PROBE
 Performed: Thu May 09 01:54:08 2013

Caliper Calibration: Gain=2.675 Offset=-6.400

	Low Cal	High Cal
References	8.600	14.000
Readings	5.584	7.602

1.5" Calibration: Gain=25.000 Offset=-0.800

	Low Cal	High Cal
References	0.000	20.000
Readings	0.009	1.541

2" Calibration: Gain=32.000 Offset=-0.500

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	1.198

Gamma Ray Calibration Report

Serial Number: GR2
 Tool Model: OPEN
 Performed: Thu May 09 01:51:46 2013

Calibrator Value: 200.0 GAPI

Background Reading: 0.0 cps
 Calibrator Reading: 740.0 cps

Sensitivity: 0.9500 GAPI/cps