



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company	LOTUS OPERATING COMPANY, LLC.		
Well	#3 ACHENBACH		
Field	HARDTNER		
County	BARBER		
State	KANSAS		
Location:	Company	LOTUS OPERATING COMPANY, INC.	
	Well	#3 ACHENBACH	
	Field	HARDTNER	
	County	BARBER	
Location:	State	KANSAS	
	API # :	15-007-24019-0000	
	965' FSL & 905' FWL		
	SEC 1 TWP 35S RGE 13W		
Permanent Datum	GROUND LEVEL	Elevation	1505
Log Measured From	KELLY BUSHING 13' A.G.L.		
Drilling Measured From	KELLY BUSHING		
		Other Services	CDL/CNL/PE DIL/SONIC/FF
		Elevation	K.B. 1518 D.F. 1516 G.L. 1505
Date	5/14/13		
Run Number	TWO		
Depth Driller	5675		
Depth Logger	5675		
Bottom Logged Interval	5653		
Top Log Interval	3600		
Casing Driller	8 5/8"@274'		
Casing Logger	290		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 3,000 PPM	
Density / Viscosity	9.6/55		
pH / Fluid Loss	9.0/9.6		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.800@92F		
Rinf @ Meas. Temp	.600@92F		
Rmc @ Meas. Temp	.960@92F		
Source of Rinf / Rmc	MEASUREMENT		
Rim @ BHT	.562@131F		
Time Circulation Stopped	5.5 HOURS		
Time Logger on Bottom	2:15 P.M.		
Maximum Recorded Temperature	131F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	TIM HELLMAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
DIRECTIONS
HARDTNER, KS., 2W. TO "GYF HILL RD.", 1N., E. INTO






NABORS
**COMPLETION
& PRODUCTION**



MAIN SECTION


Database File: 010905pe.db
Dataset Pathname: pass7.3
Presentation Format: micro
Dataset Creation: Tue May 14 18:56:46 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

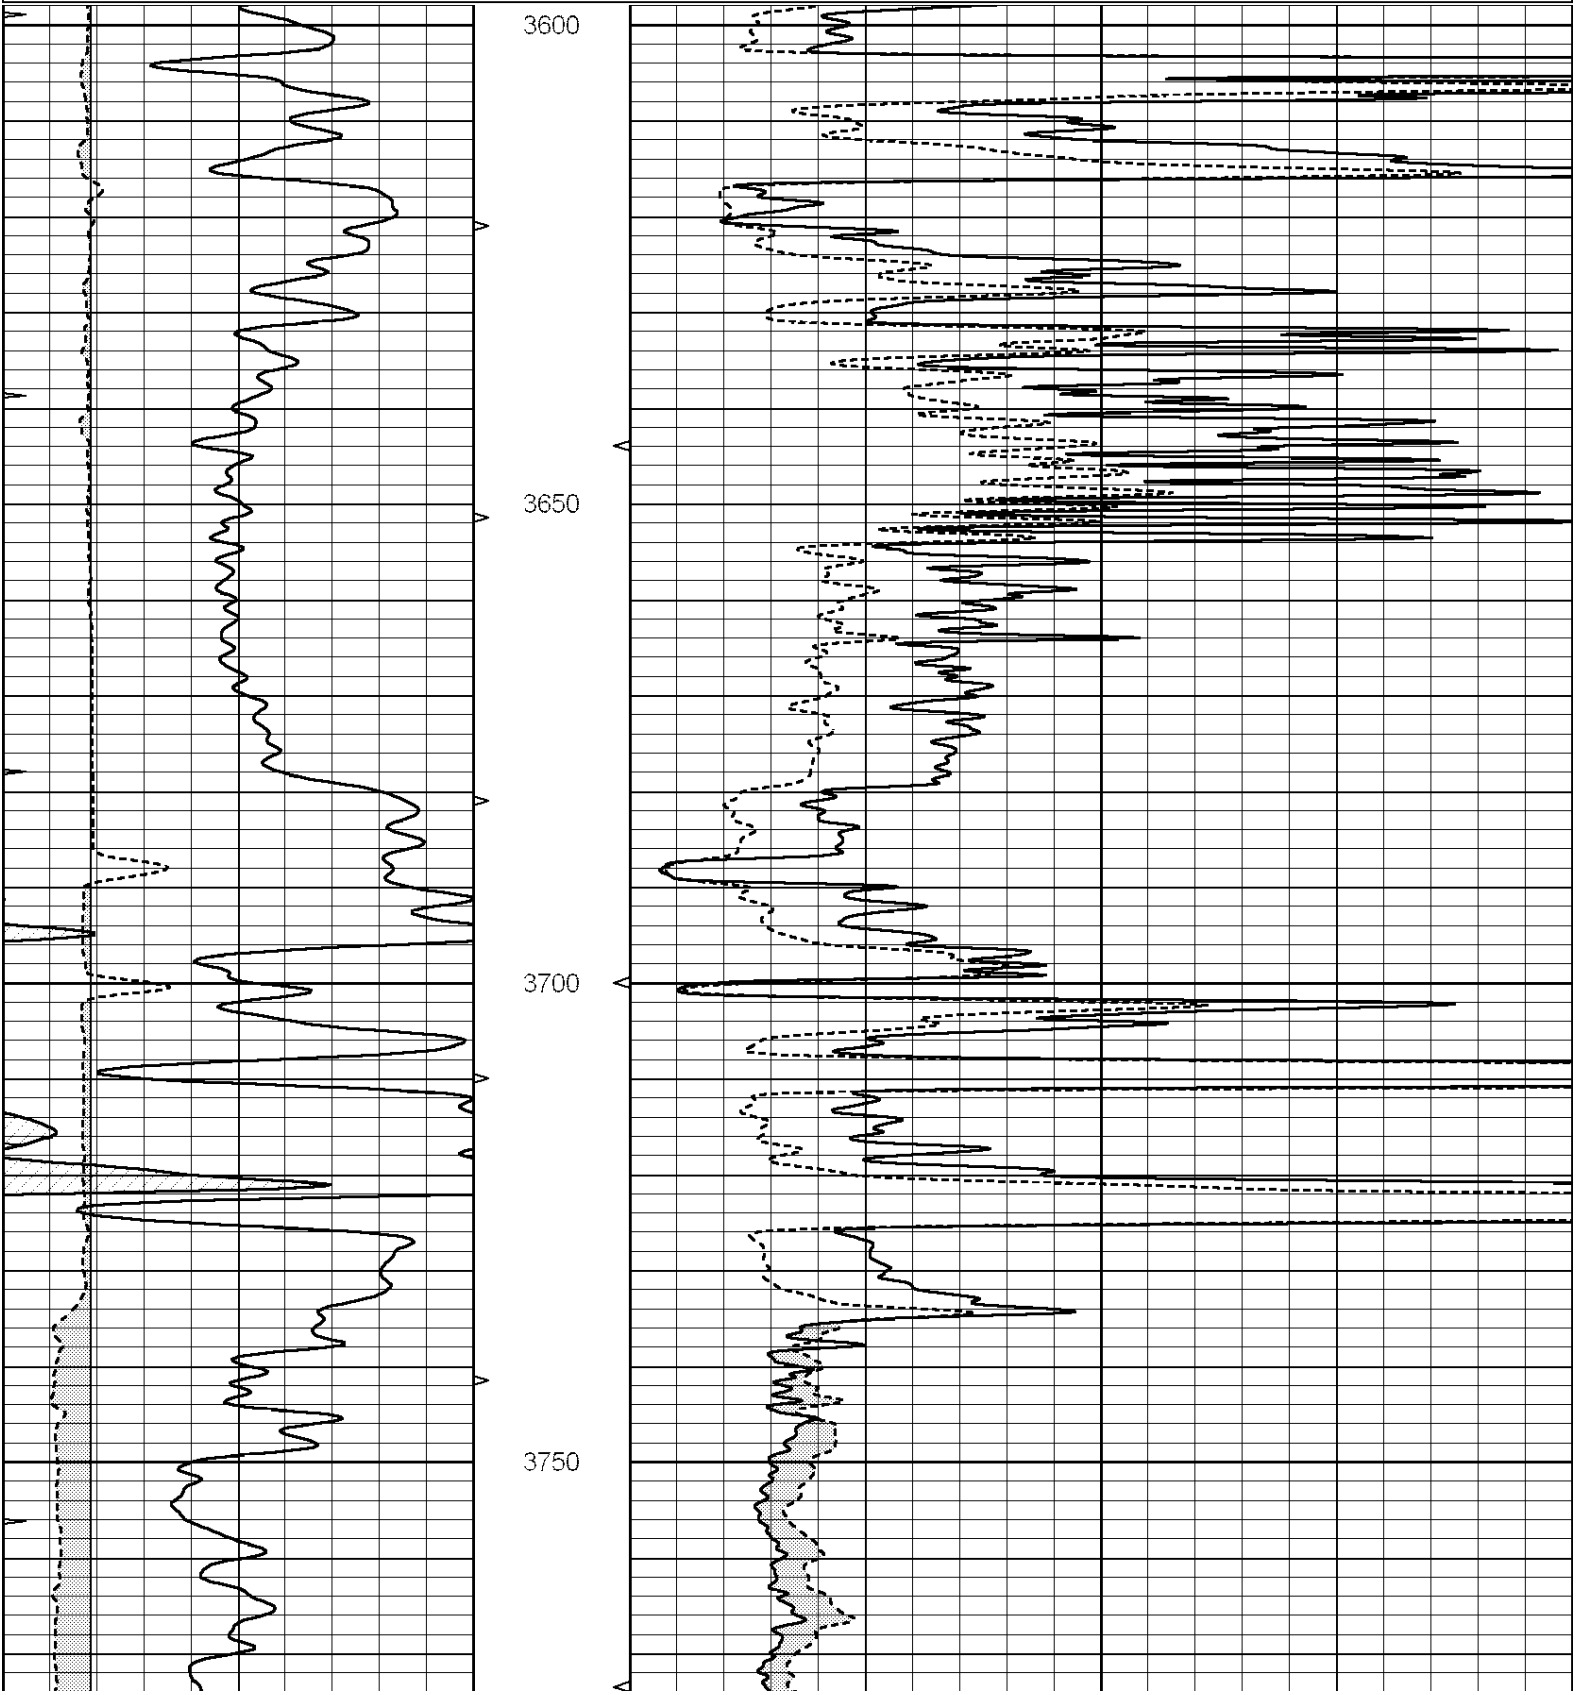

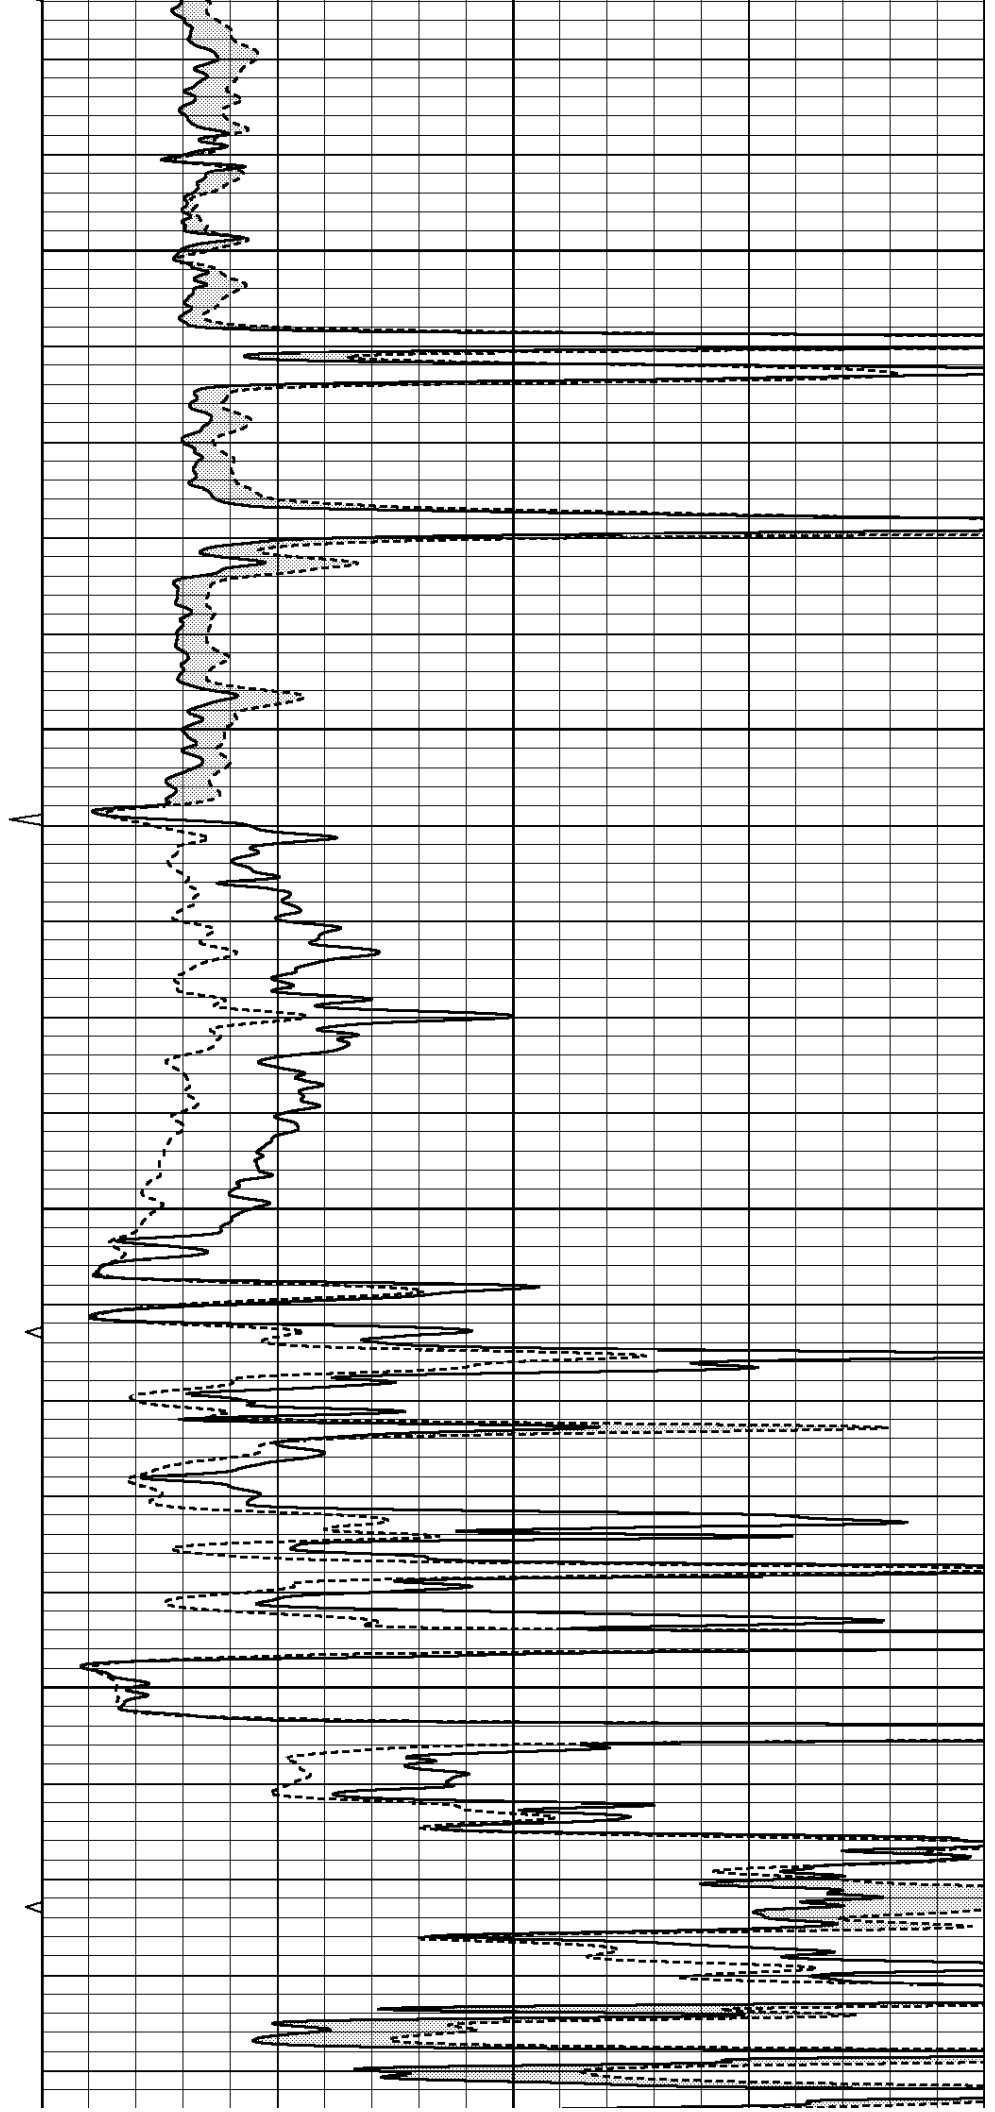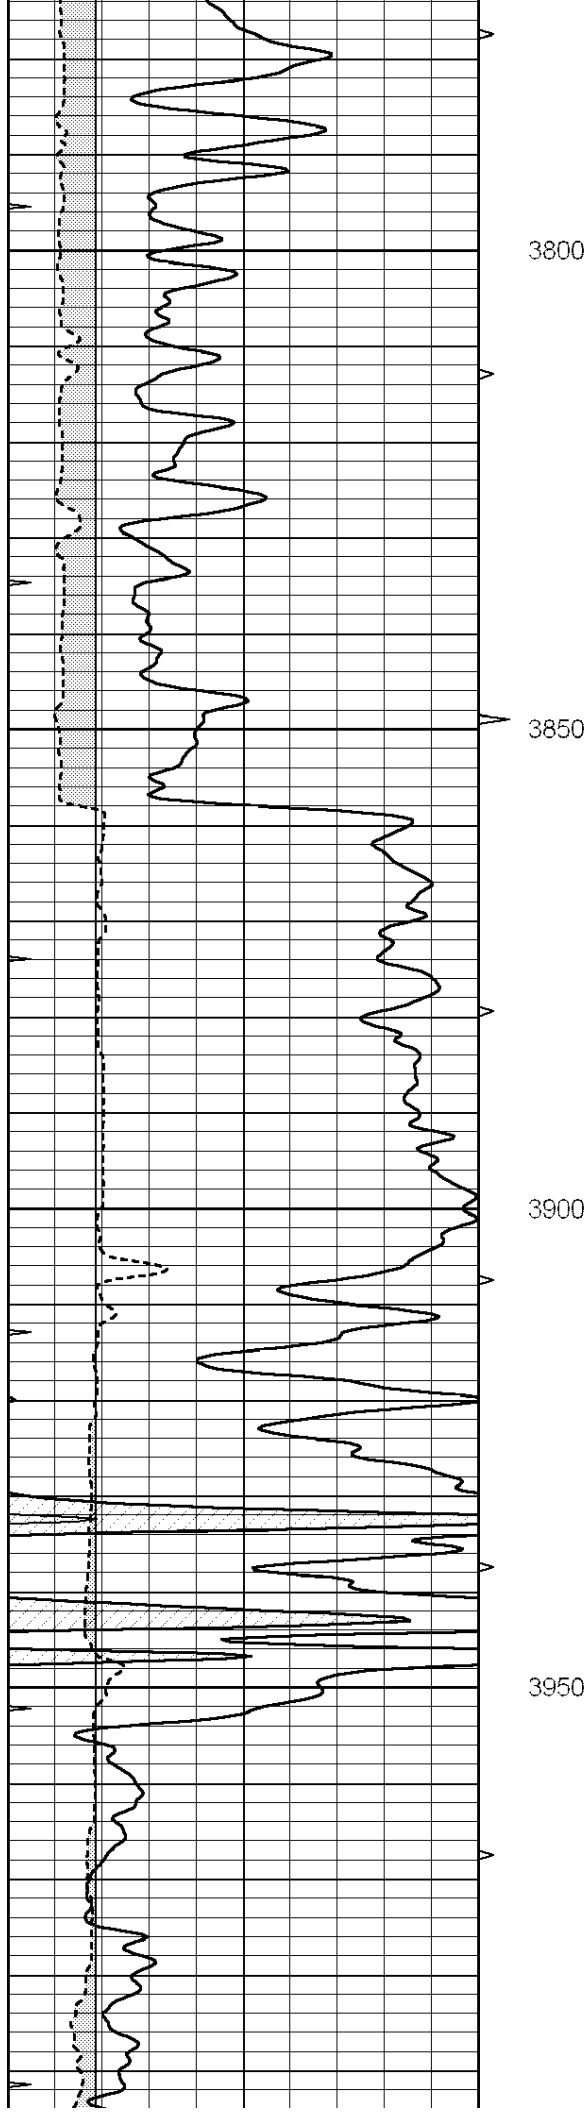

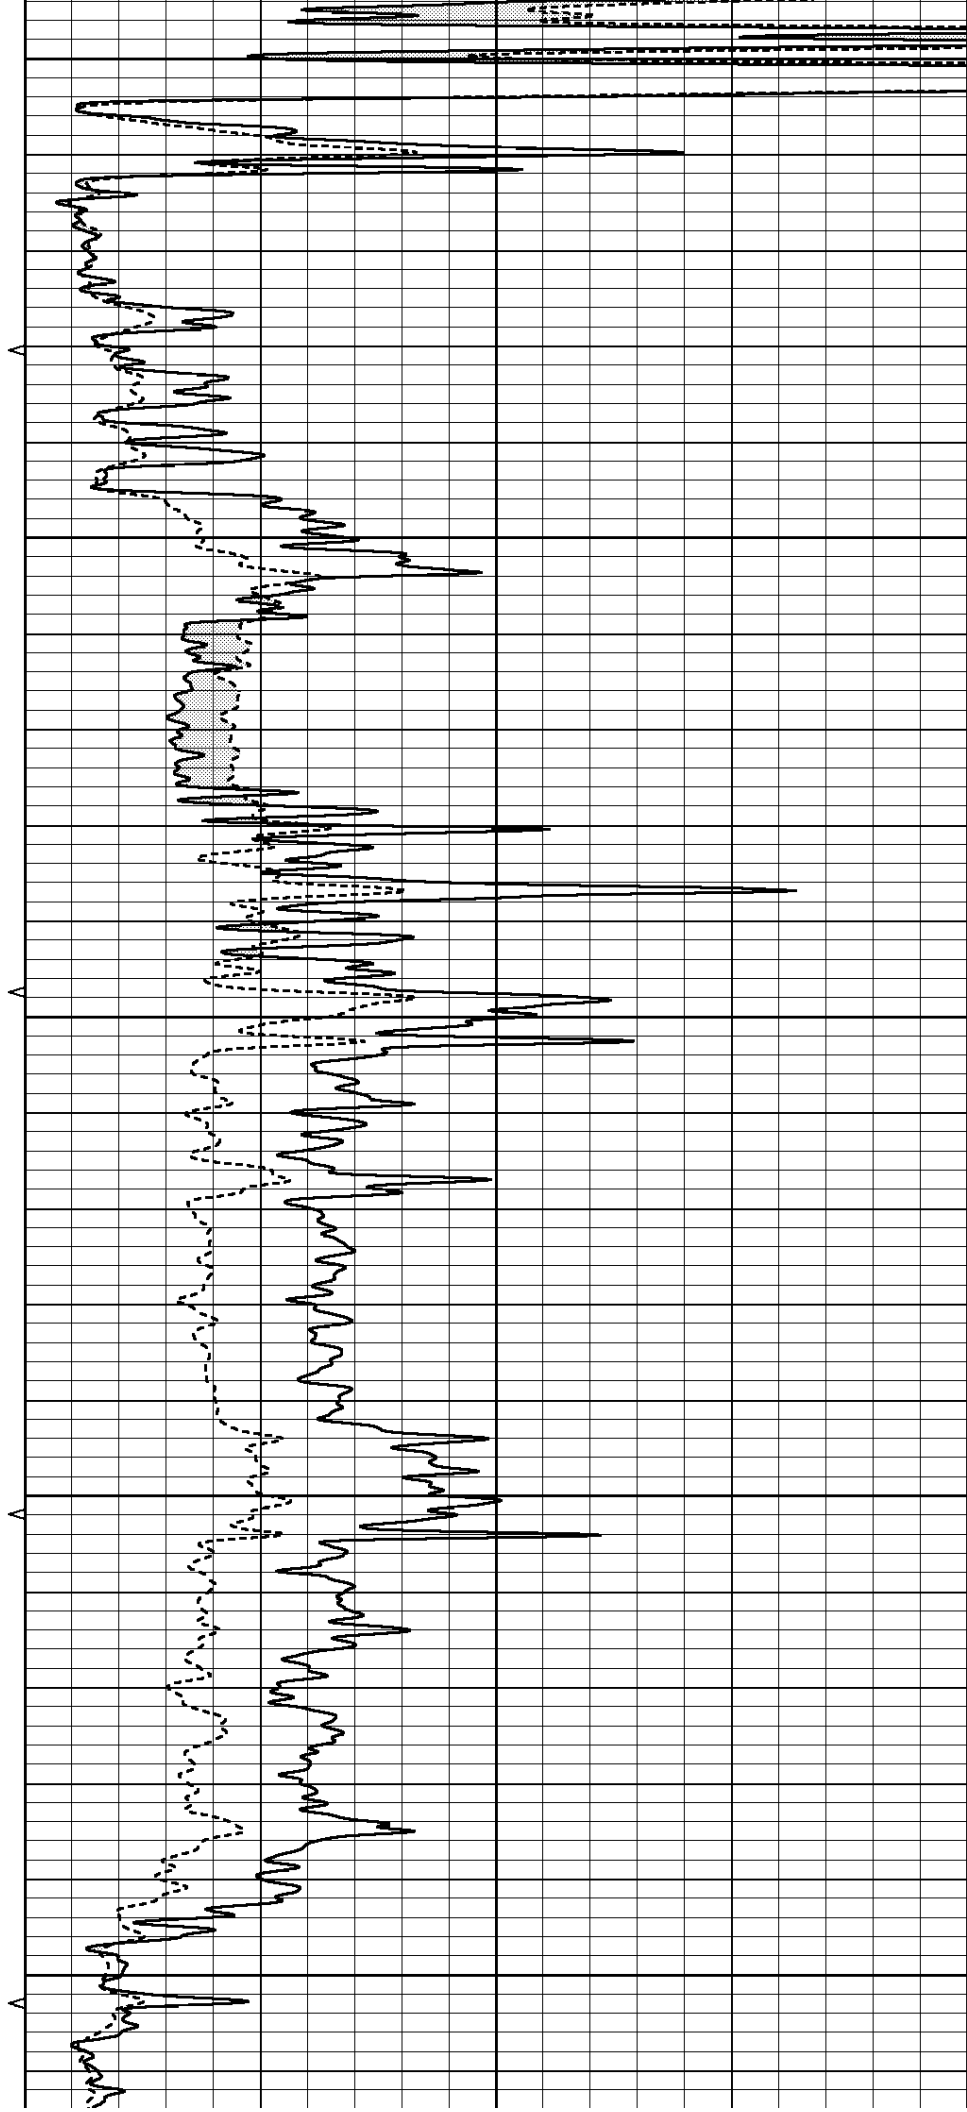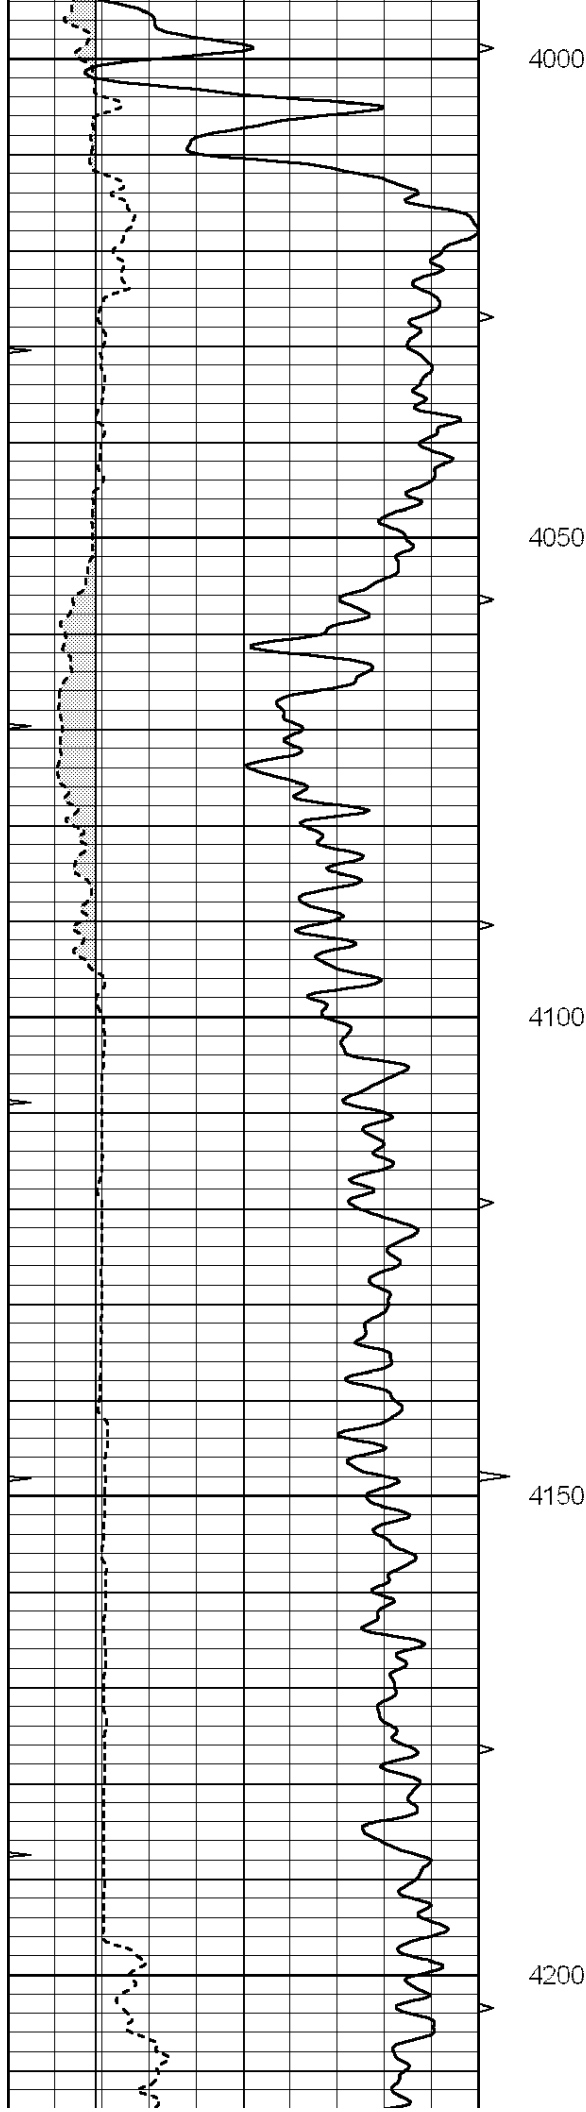

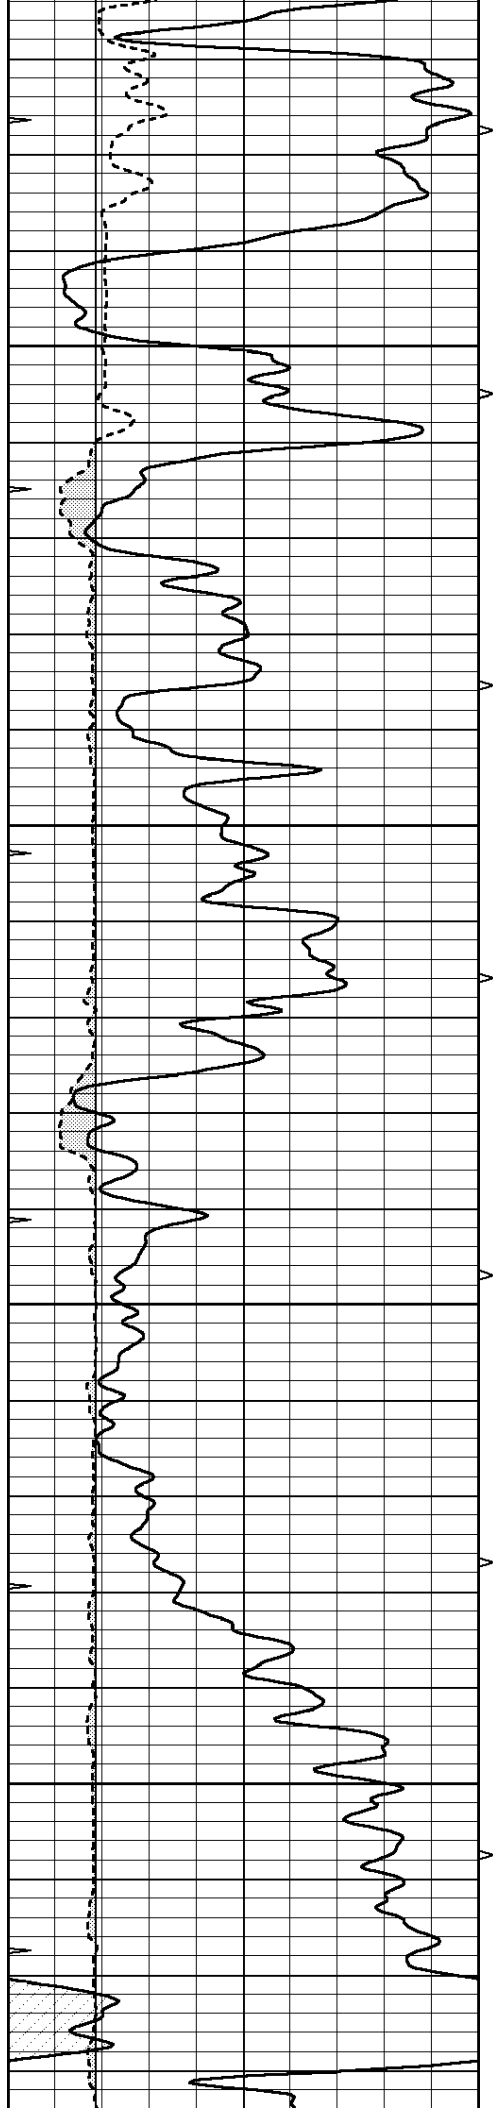




4250

4300

4350

4400

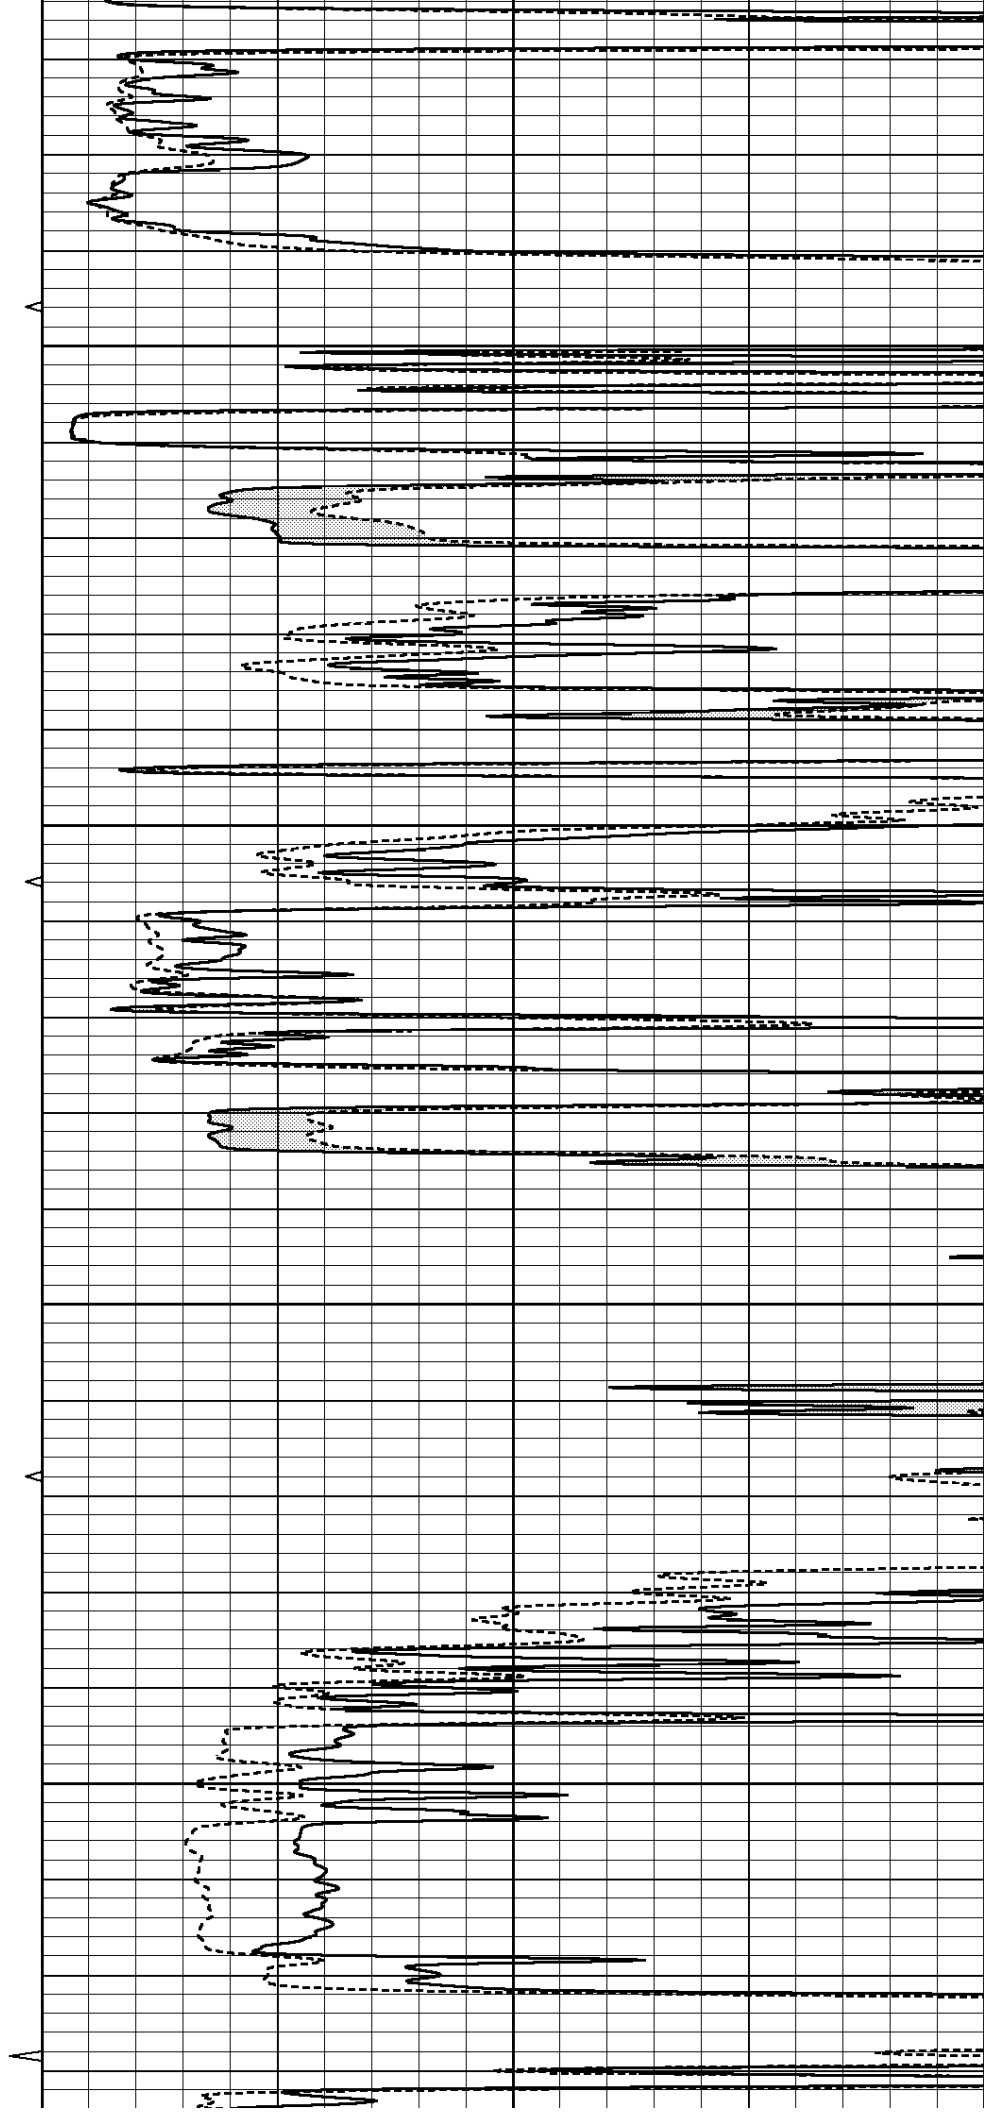

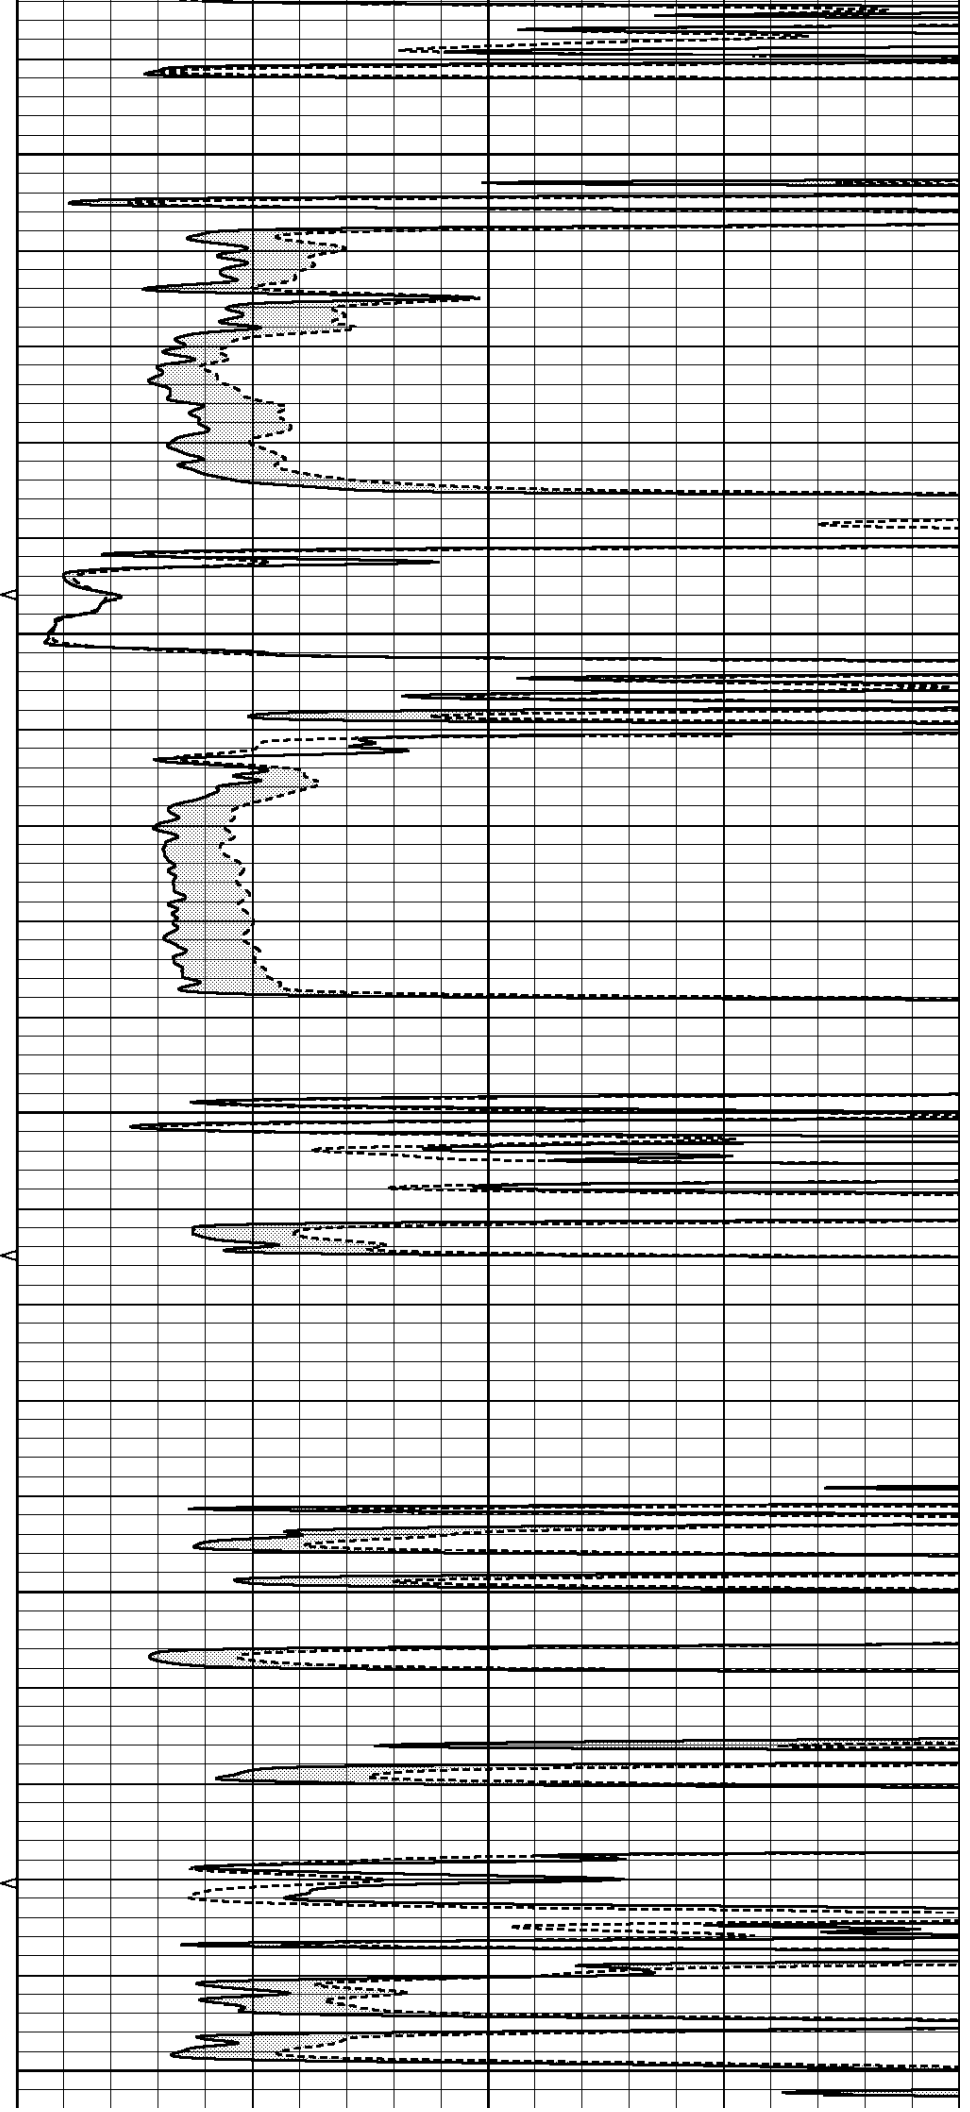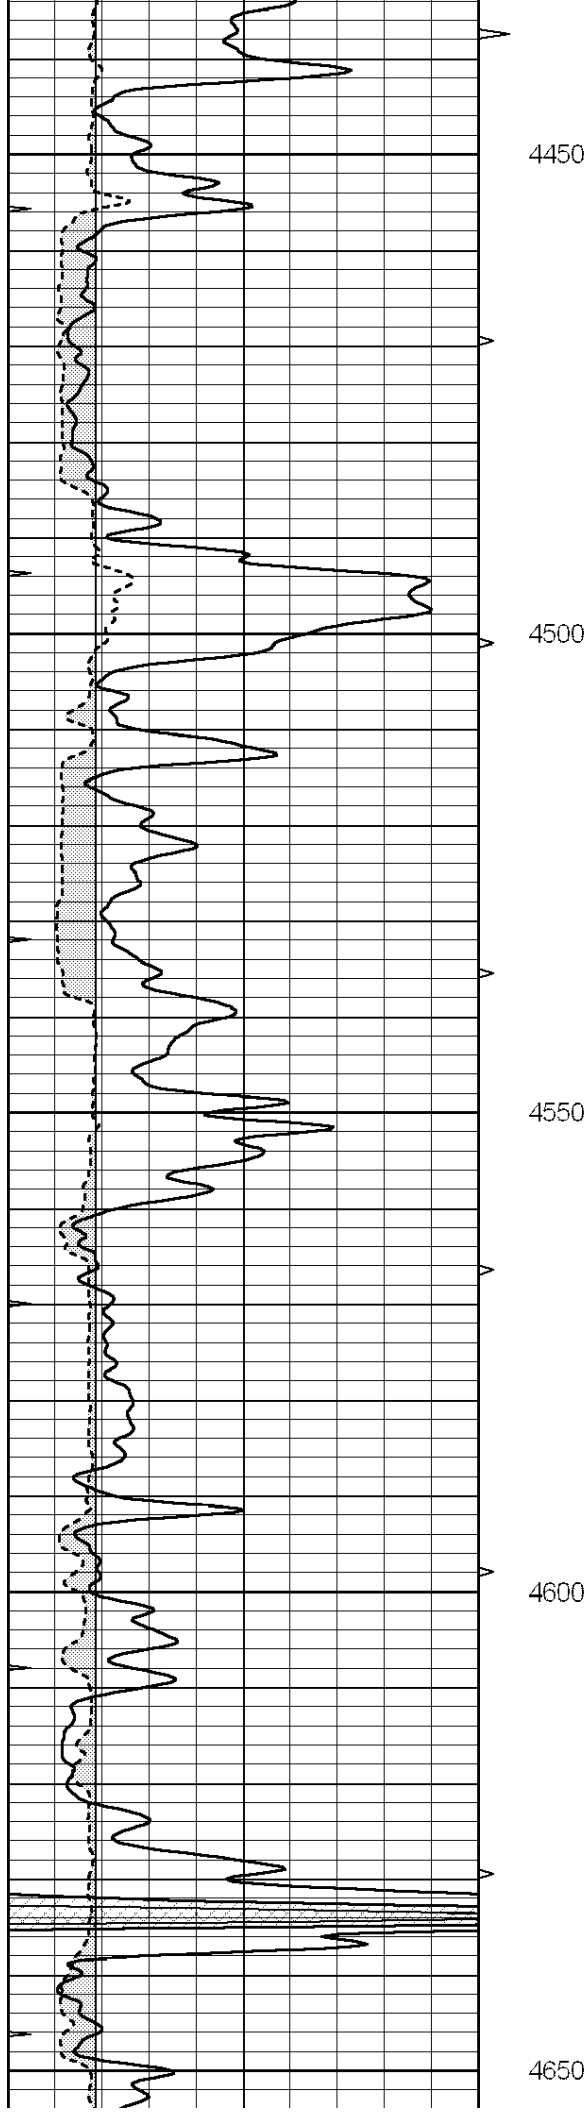






4700


4750

4800

4850

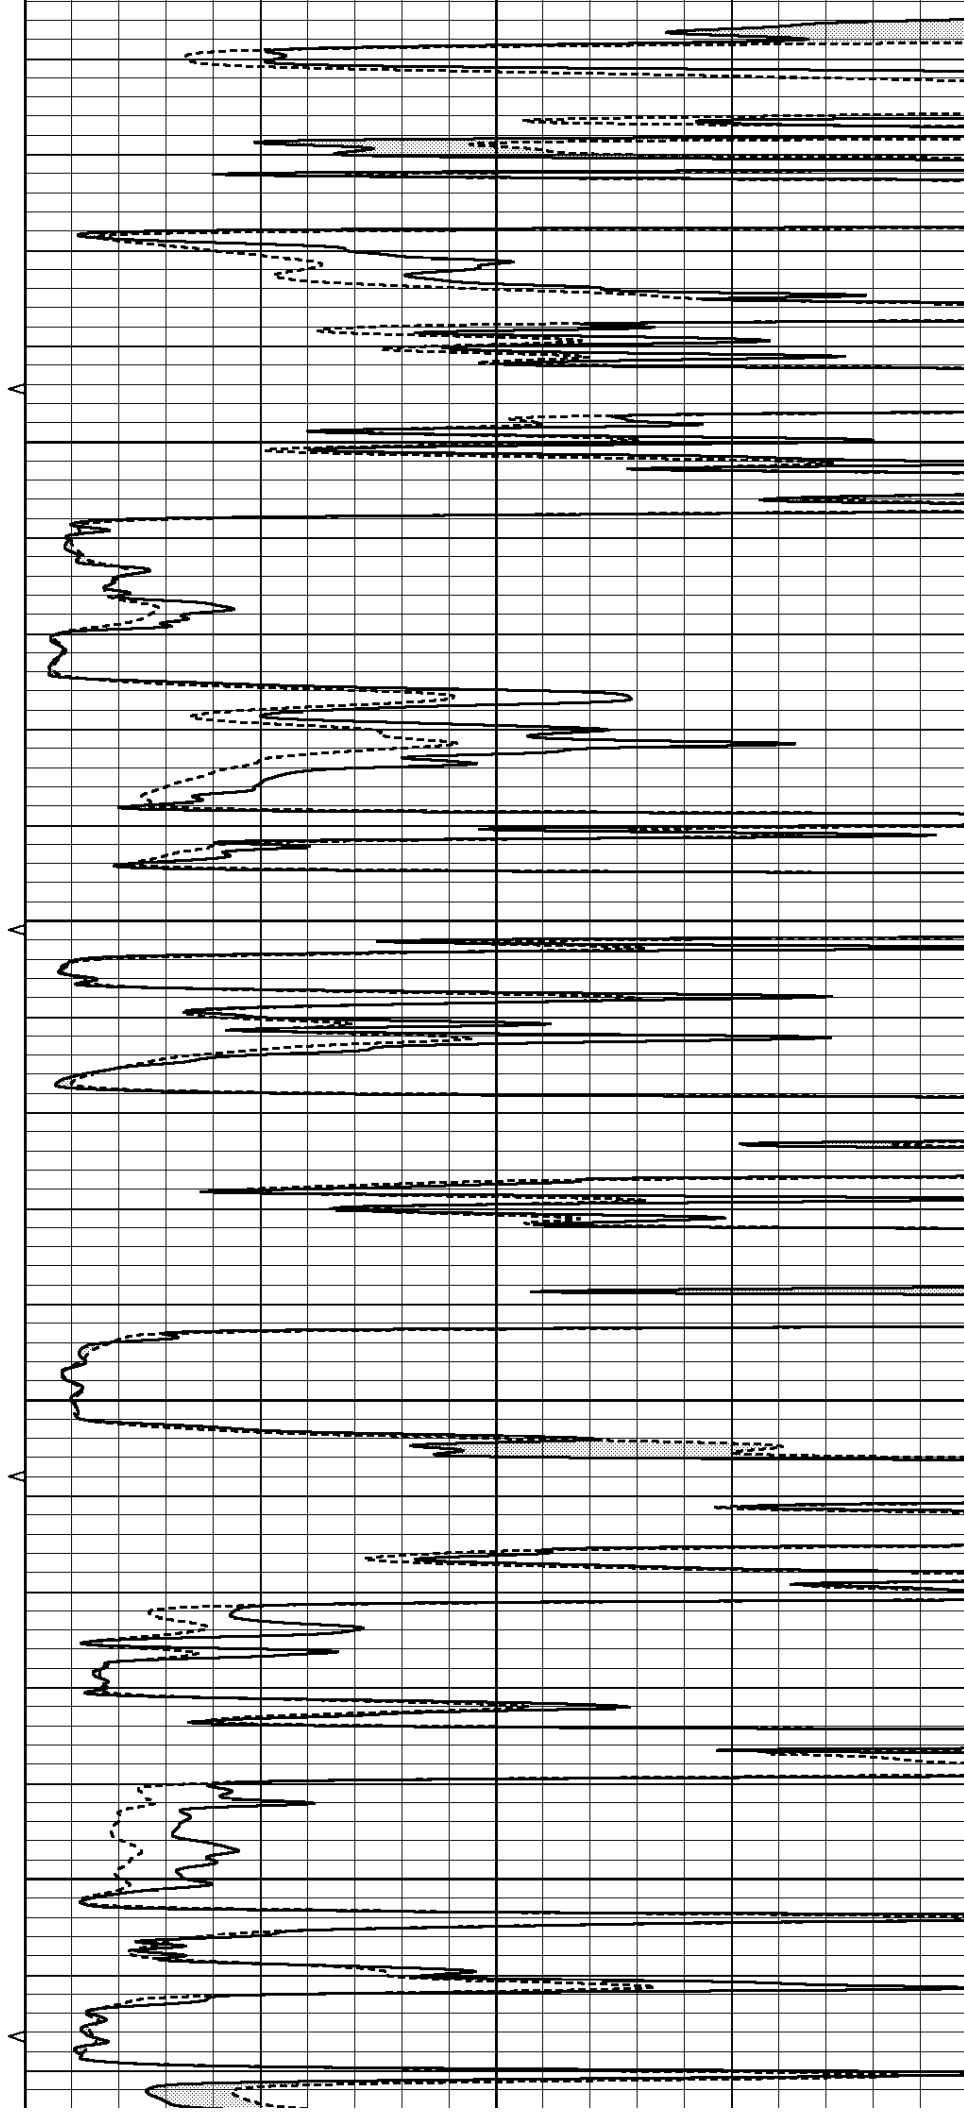

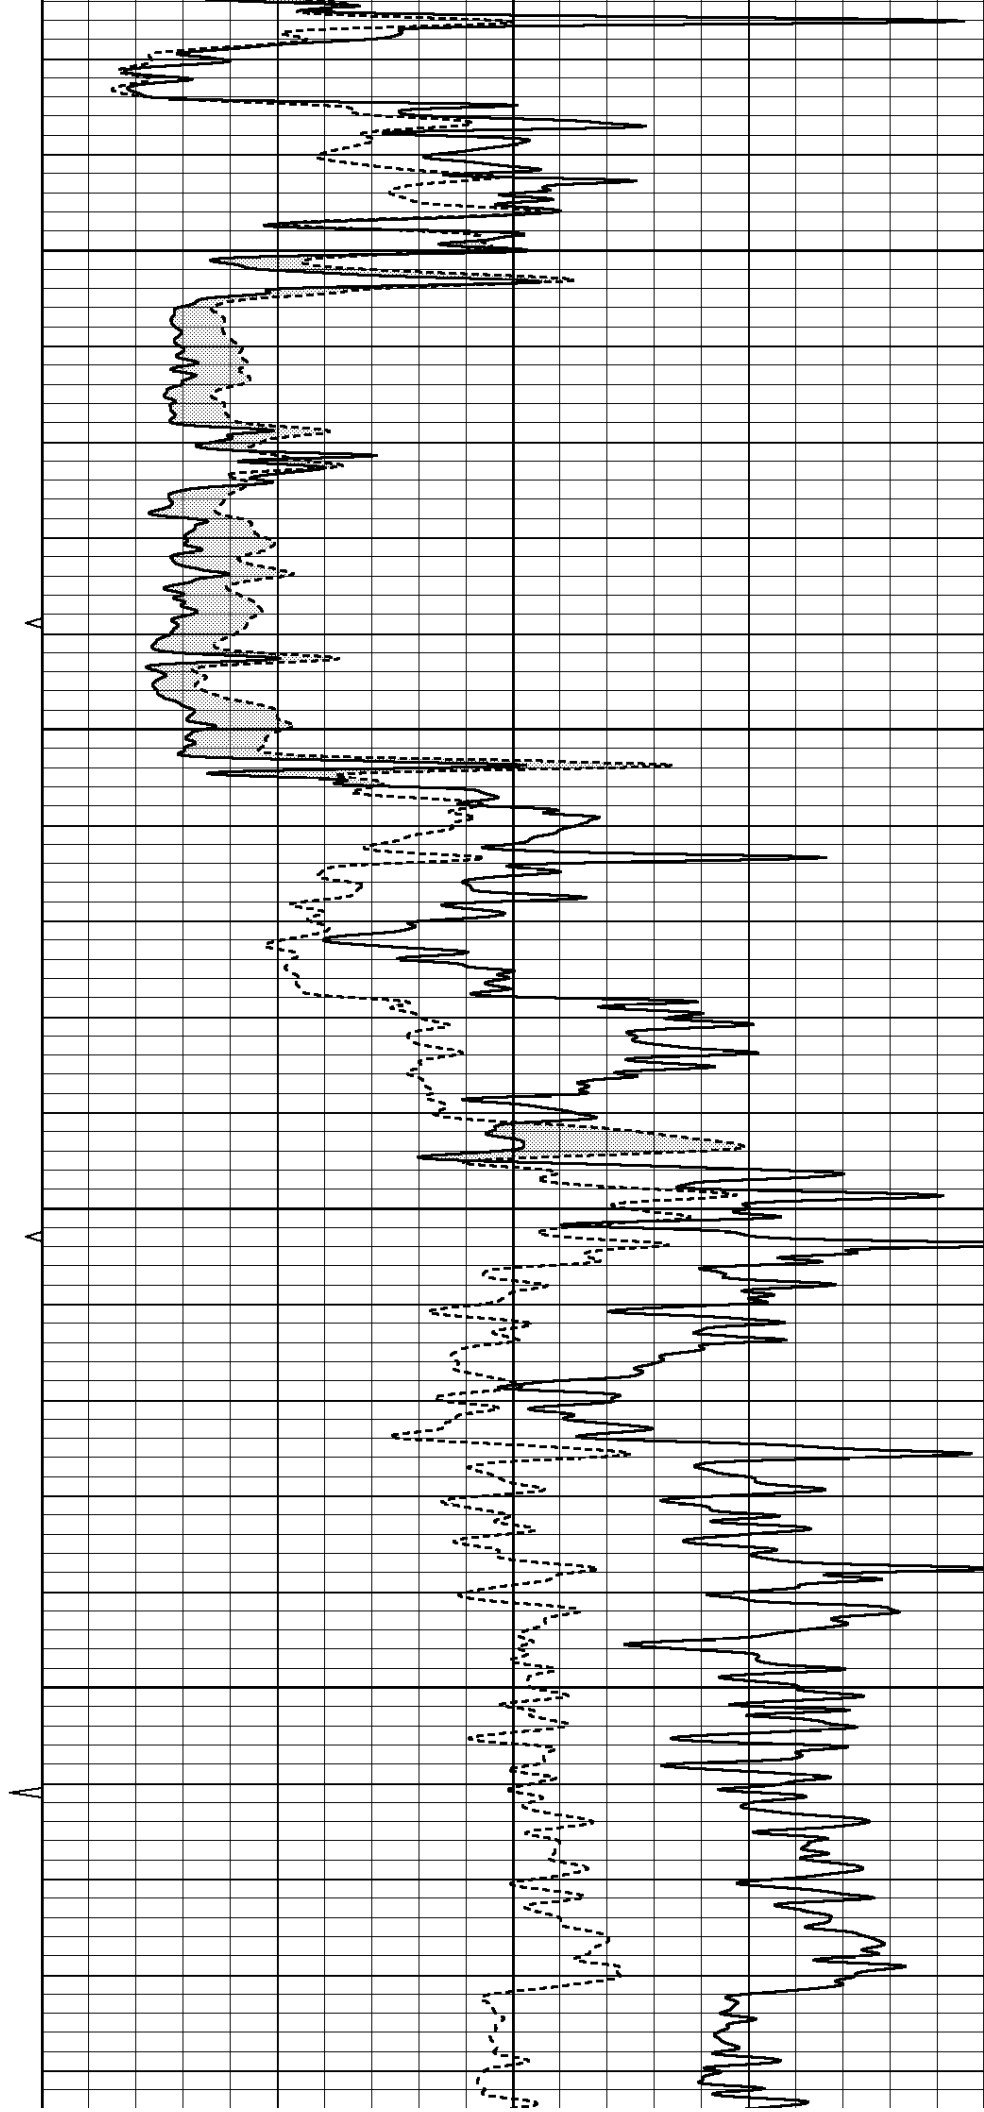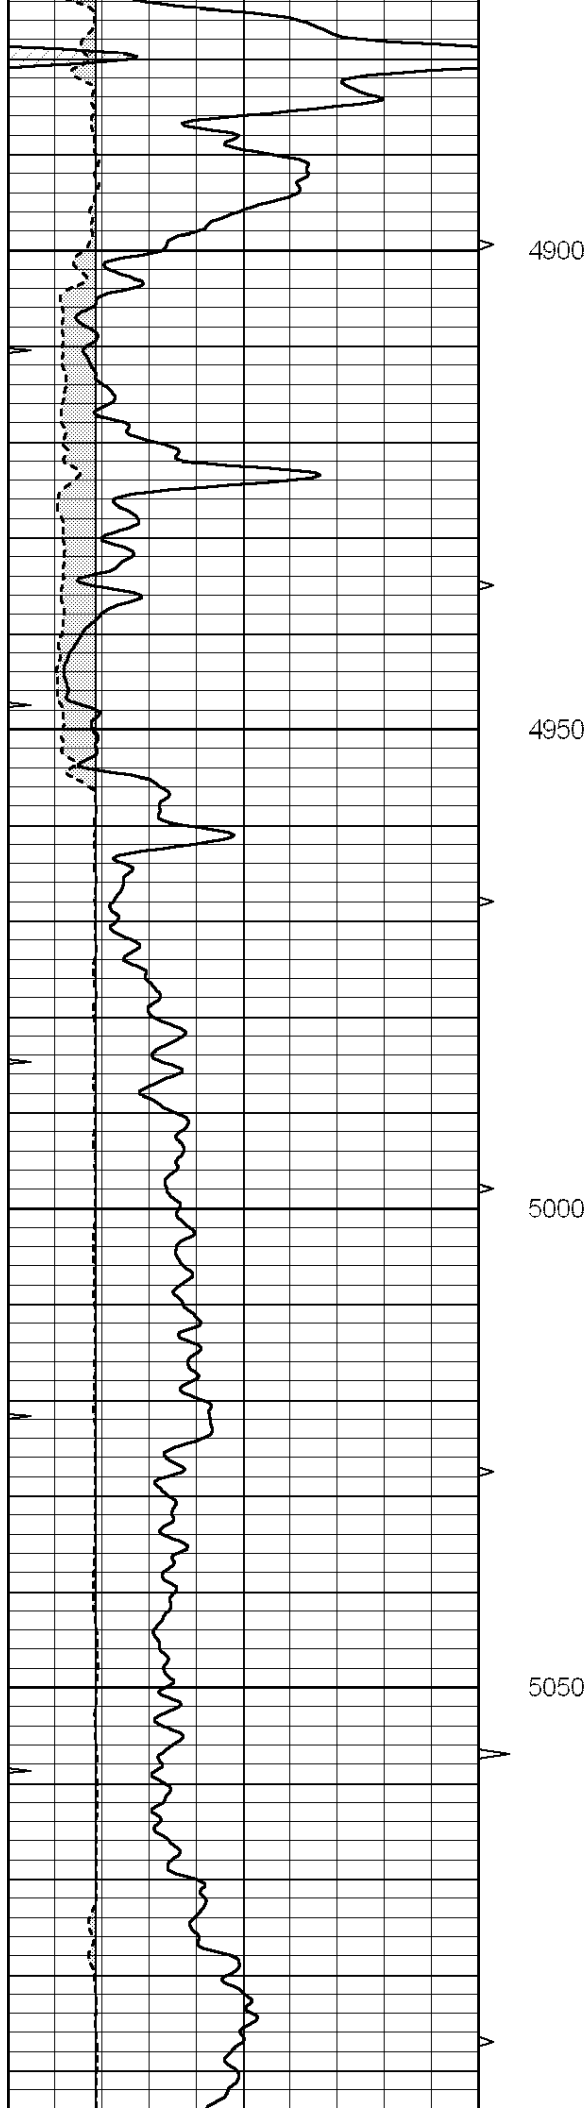

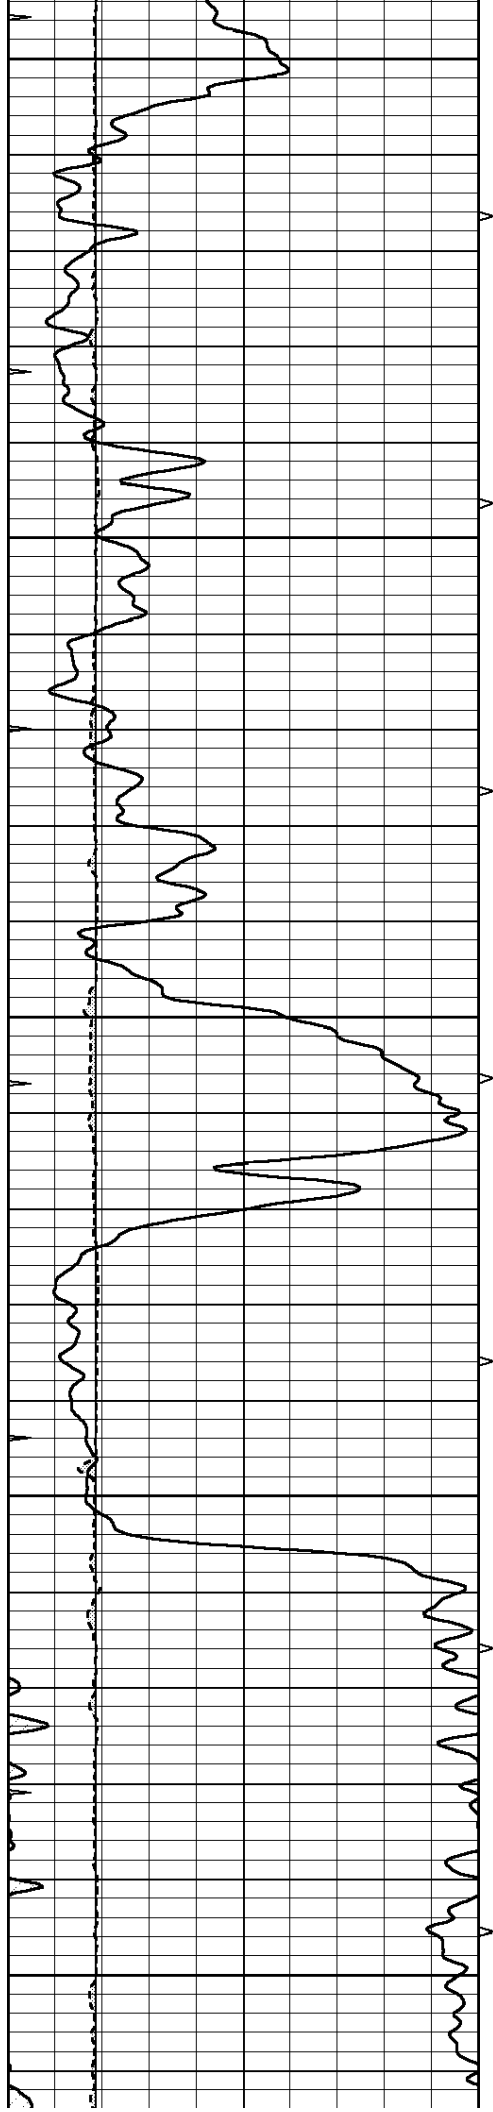


5100


5150

5200

5250

5300

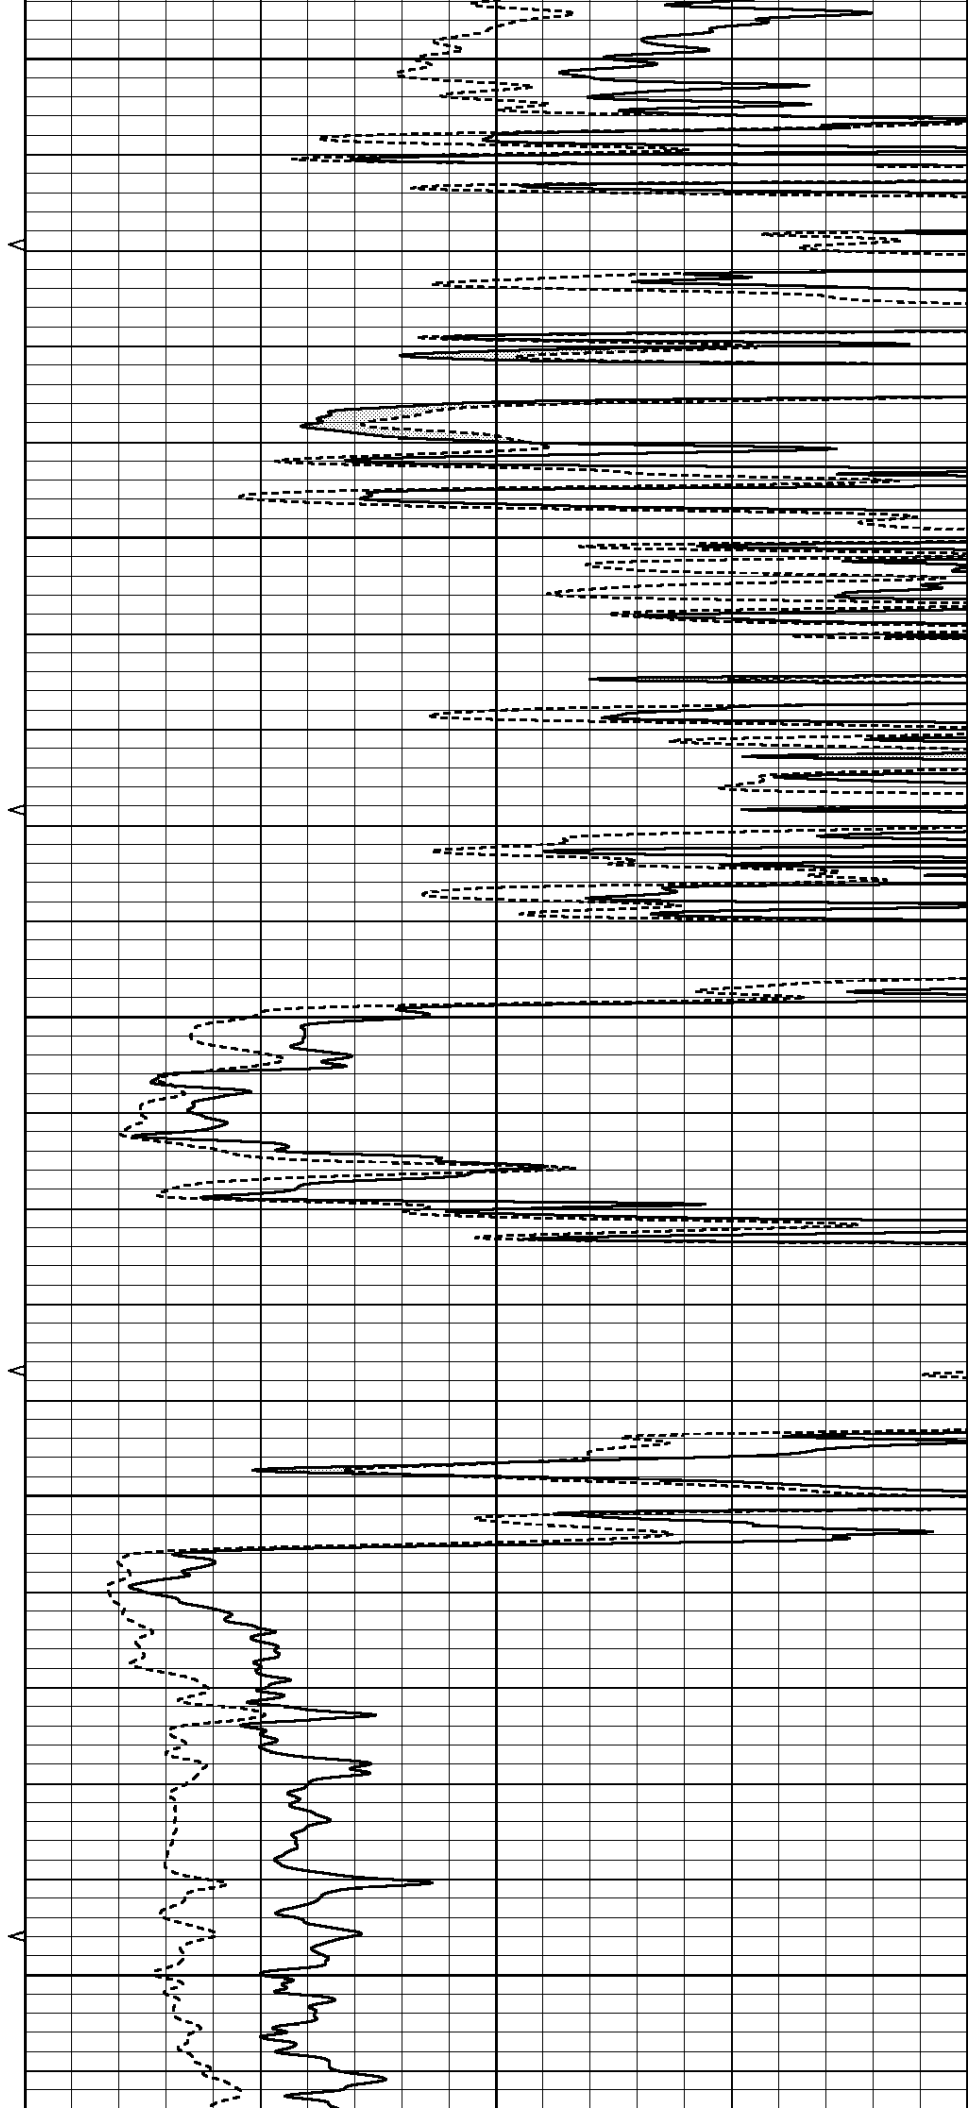

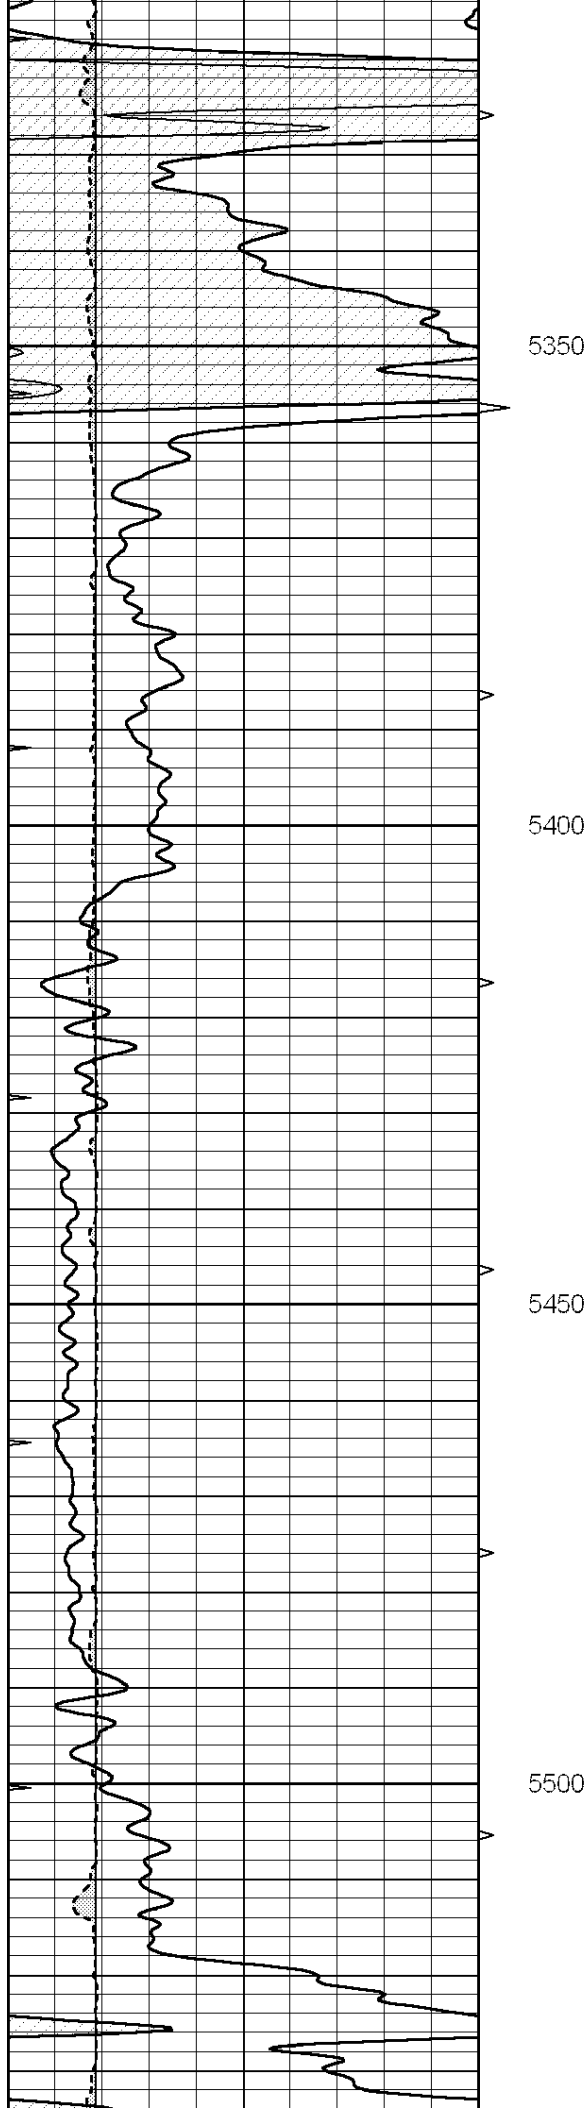



5350

5400

5450

5500

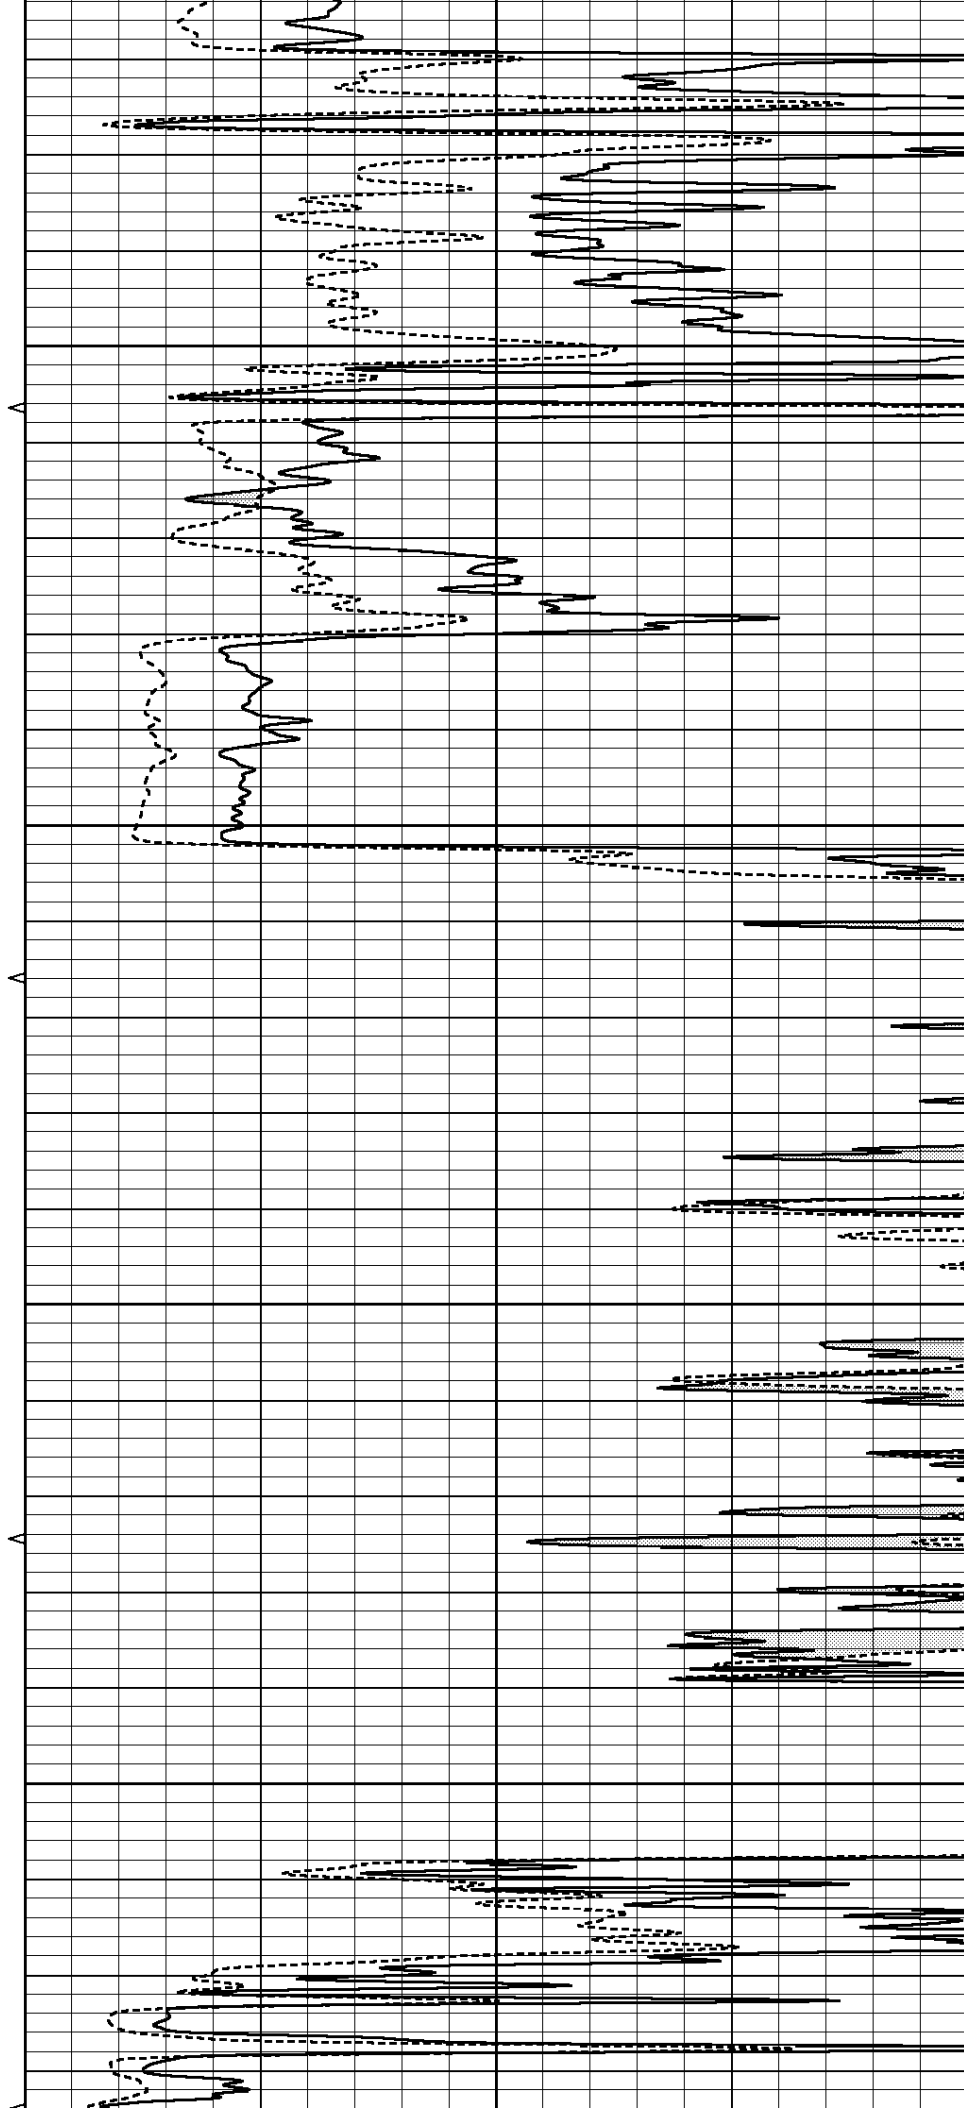

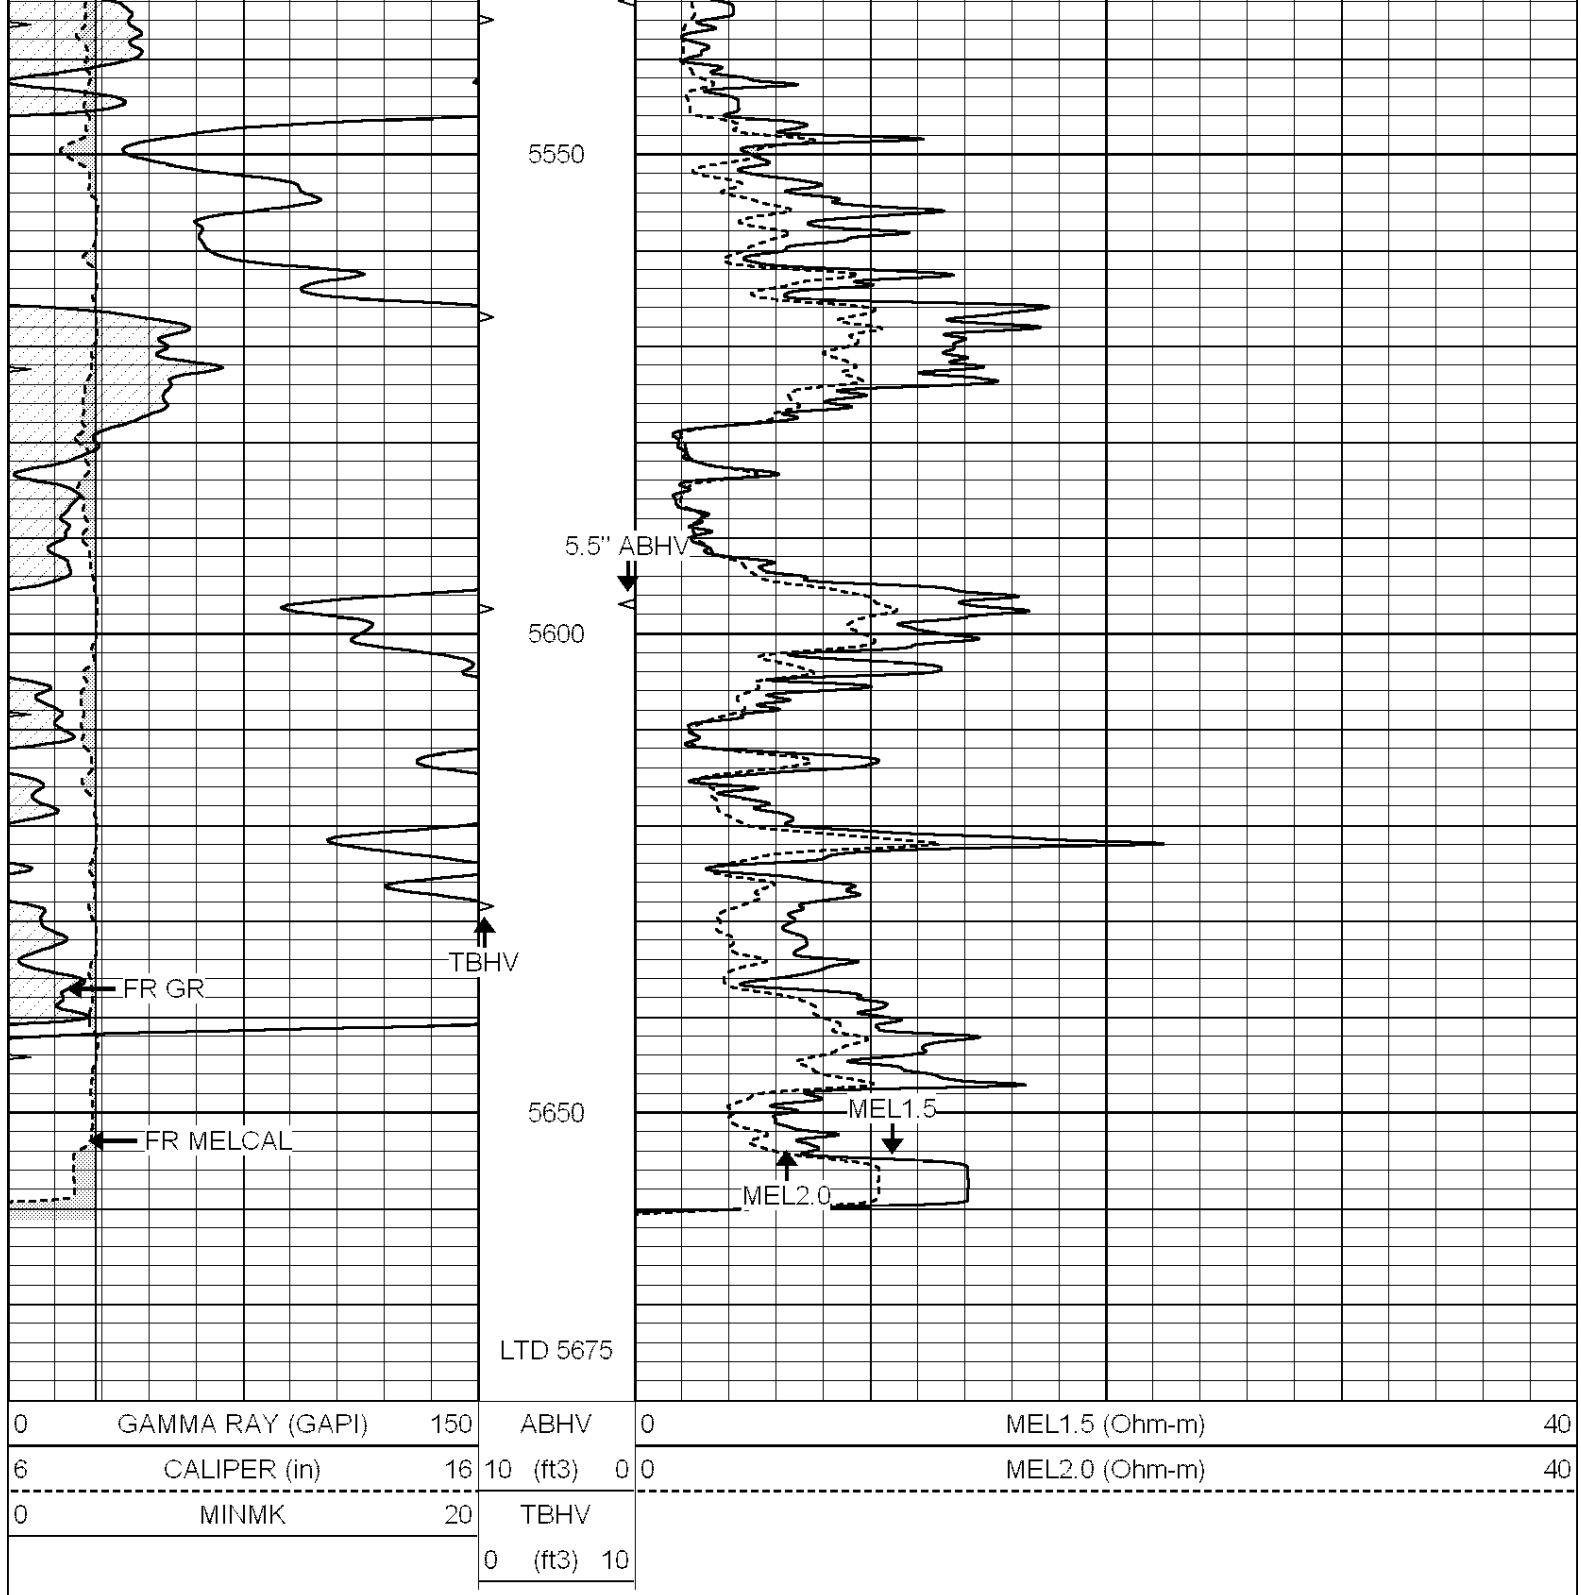


NABORS
COMPLETION
& PRODUCTION
SERVICES CO.


REPEAT SECTION

Database File: 010905pe.db
Dataset Pathname: pass6.2
Presentation Format: micro
Dataset Creation: Tue May 14 18:04:04 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40

0	MINMK	20	TBHV	
		0	(ft3)	10

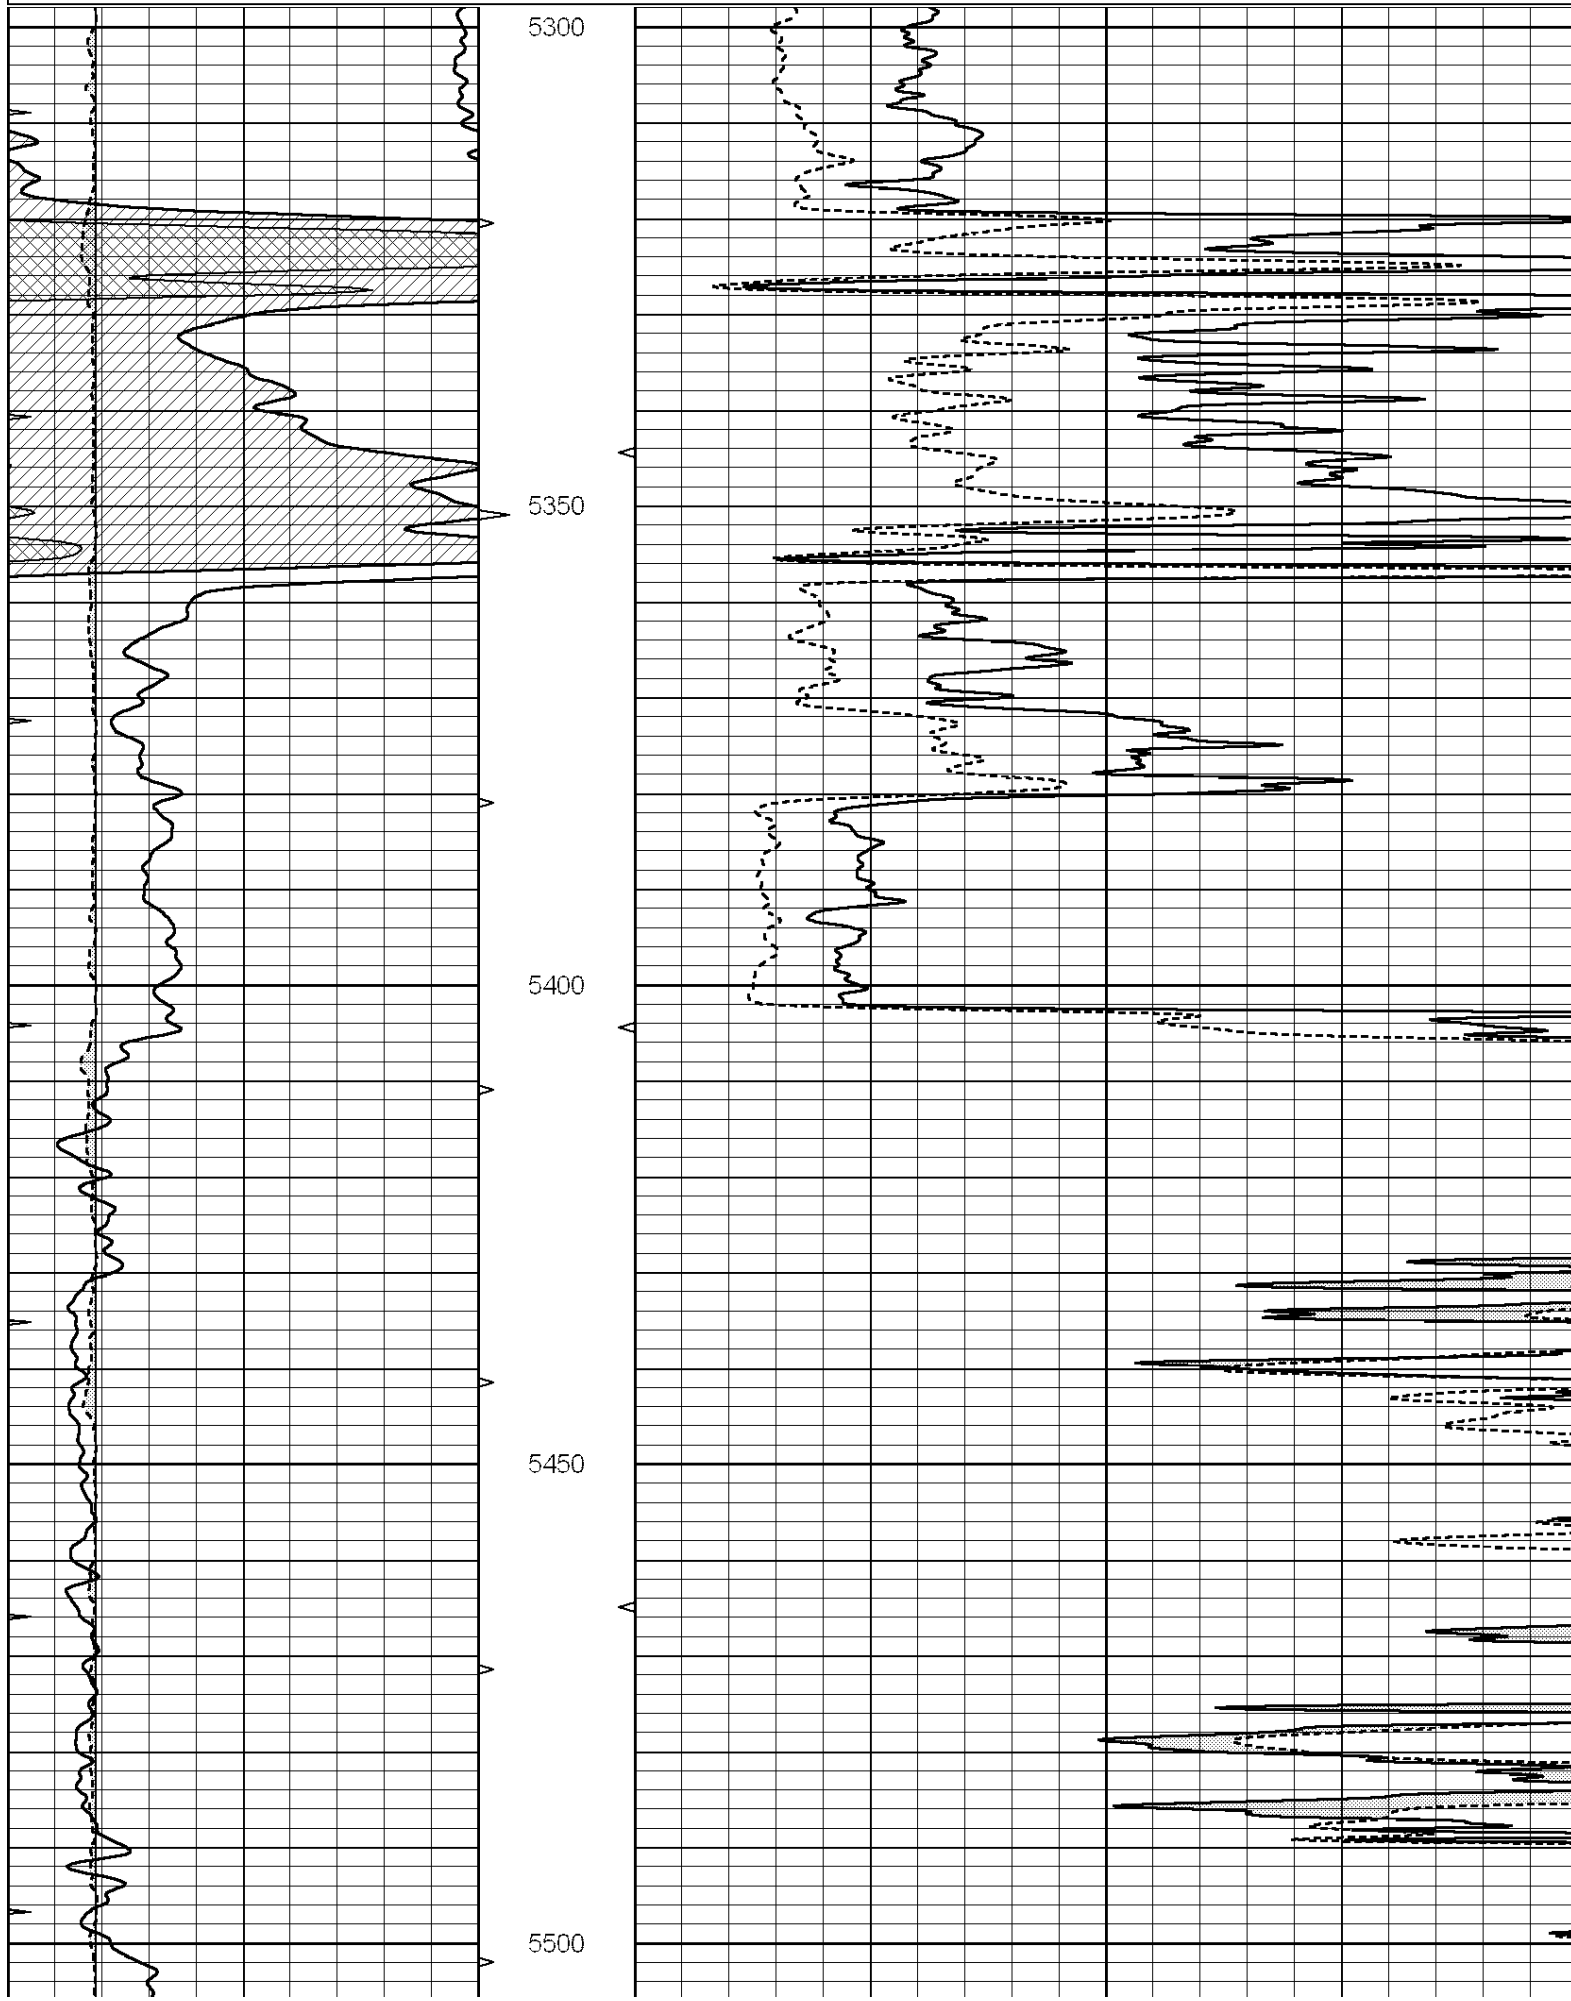

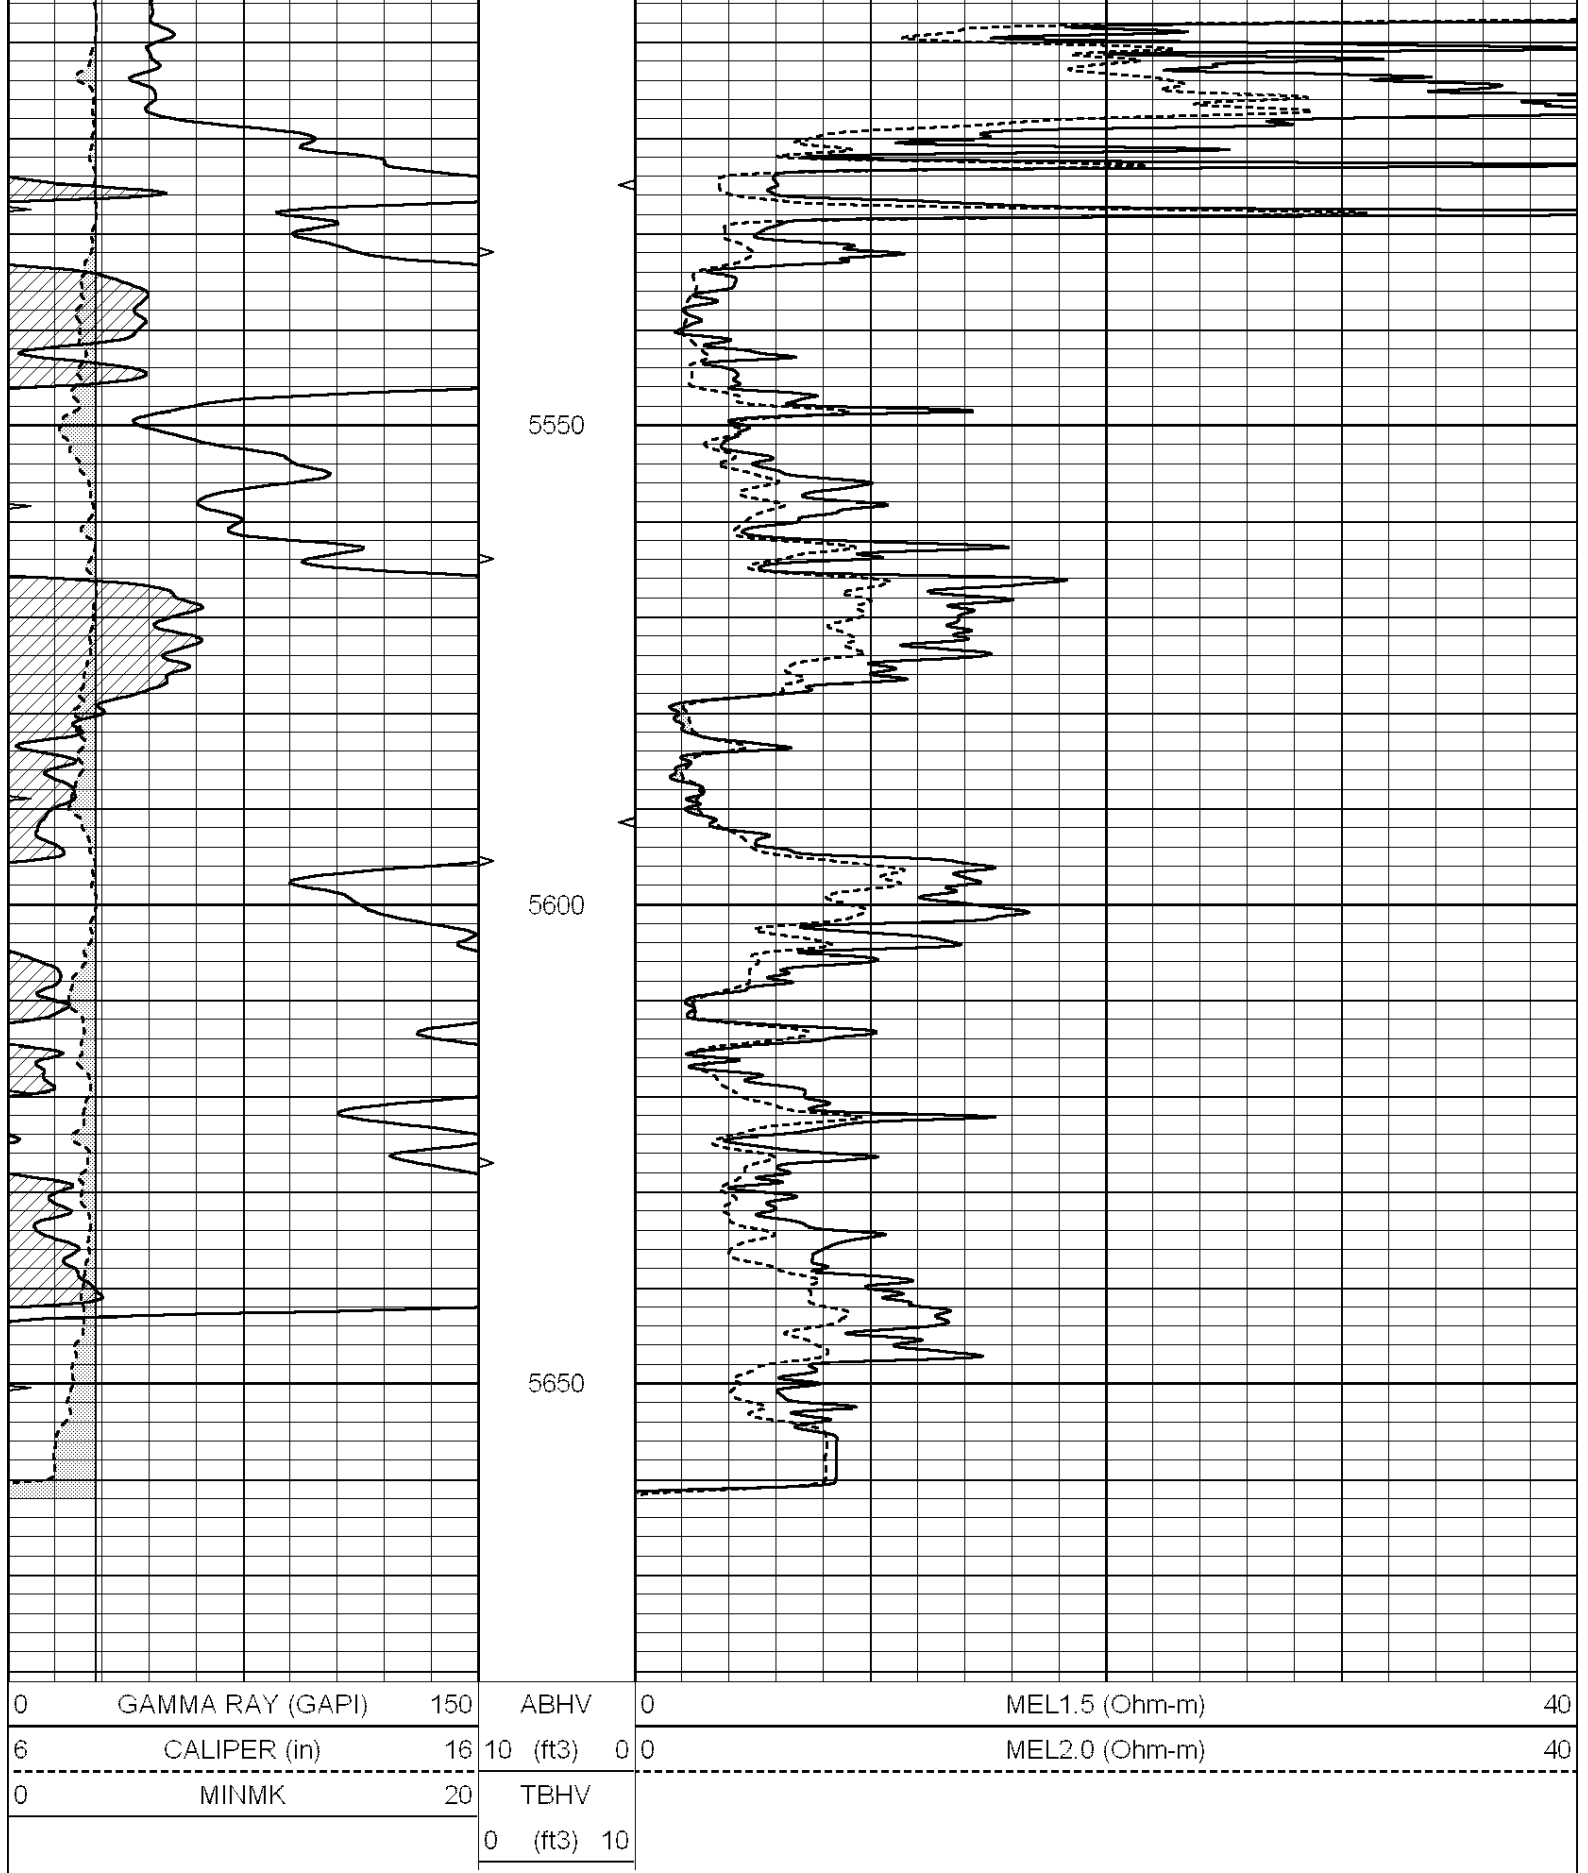

Calibration Report

Database File: 010905pe.db
 Dataset Pathname: pass7.3
 Dataset Creation: Tue May 14 18:56:46 2013

MICRO Calibration Report

Serial Number:	MICRO5
Tool Model:	PROBE
Performed:	Wed Apr 24 10:31:41 2013

Caliper Calibration:	Gain=3.656	Offset=-7.113
	Low Cal	High Cal
References	7.900	15.000
Readings	4.106	6.048

1.5" Calibration:	Gain=40.000	Offset=-1.000
	Low Cal	High Cal
References	0.000	20.000
Readings	0.015	1.005

2" Calibration:	Gain=46.000	Offset=-0.700
	Low Cal	High Cal
References	0.000	20.000
Readings	0.009	0.910

Gamma Ray Calibration Report

Serial Number:	GR3
Tool Model:	OPEN
Performed:	Tue May 14 17:32:44 2013

Calibrator Value:	200.0	GAPI
-------------------	-------	------

Background Reading:	3.0	cps
Calibrator Reading:	186.0	cps

Sensitivity:	2.4000	GAPI/cps
--------------	--------	----------