



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company VINCENT OIL CORPORATION Well BORDEN TRUST #1-33 Field WILDCAT County FORD State KANSAS		Company VINCENT OIL CORPORATION Well BORDEN TRUST #1-33 Field WILDCAT County FORD State KANSAS	
Location: 1035' FNL & 2083' FEL API # : 15-057-20900-0000 SEC 33 TWP 29S RGE 24W		Other Services CDL/CNL/PE DIL/SON	
Permanent Datum Log Measured From Drilling Measured From		GROUND LEVEL Elevation 2584 KELLY BUSHING 10' A.G.L. KELLY BUSHING	
Date	7/2/13		
Run Number	TWO		
Depth Driller	5490		
Depth Logger	5492		
Bottom Logged Interval	5474		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 650'		
Casing Logger	648		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	8.9/65	CHLORIDES 12000 PPM	
pH / Fluid Loss	10.0/10.0		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.45 @ 89F		
Rmf @ Meas. Temp	.33 @ 89F		
Rmc @ Meas. Temp	.54 @ 89F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.31 @ 129F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	129F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	JIM HALL		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS COMPLETION & PRODUCTION SVCS. (785) 628-6395

DIRECTIONS:
BLOOM, KS. - 2 1/2 W. ON YUCCA RD. - S. INTO





NABORS
COMPLETION
& PRODUCTION

MAIN SECTION

Database File: 011266pe.db
 Dataset Pathname: pass8.1
 Presentation Format: _micro
 Dataset Creation: Tue Jul 02 04:06:55 2013 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

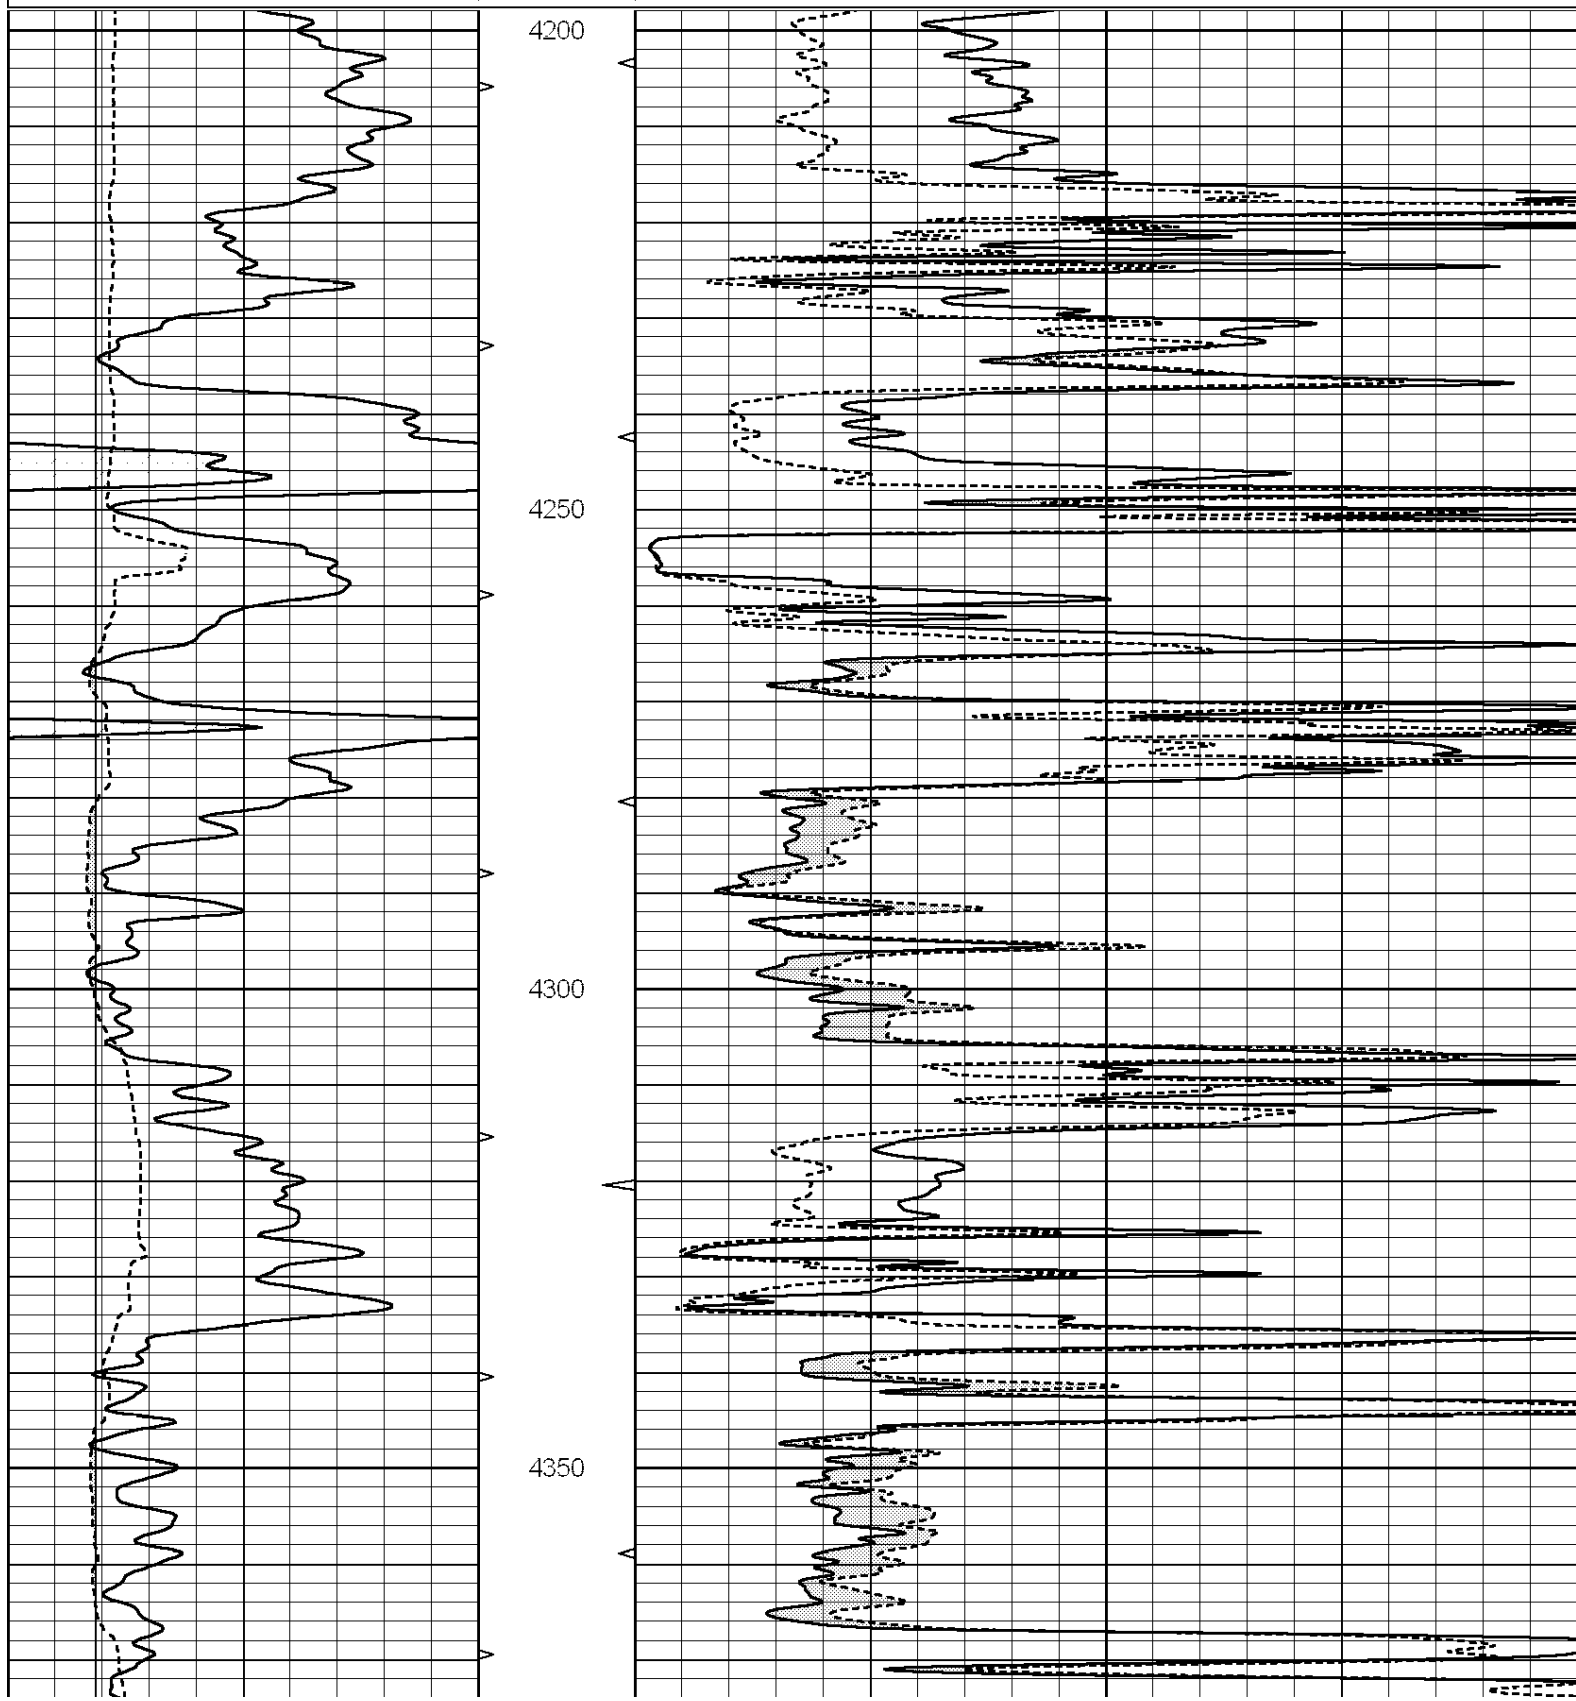

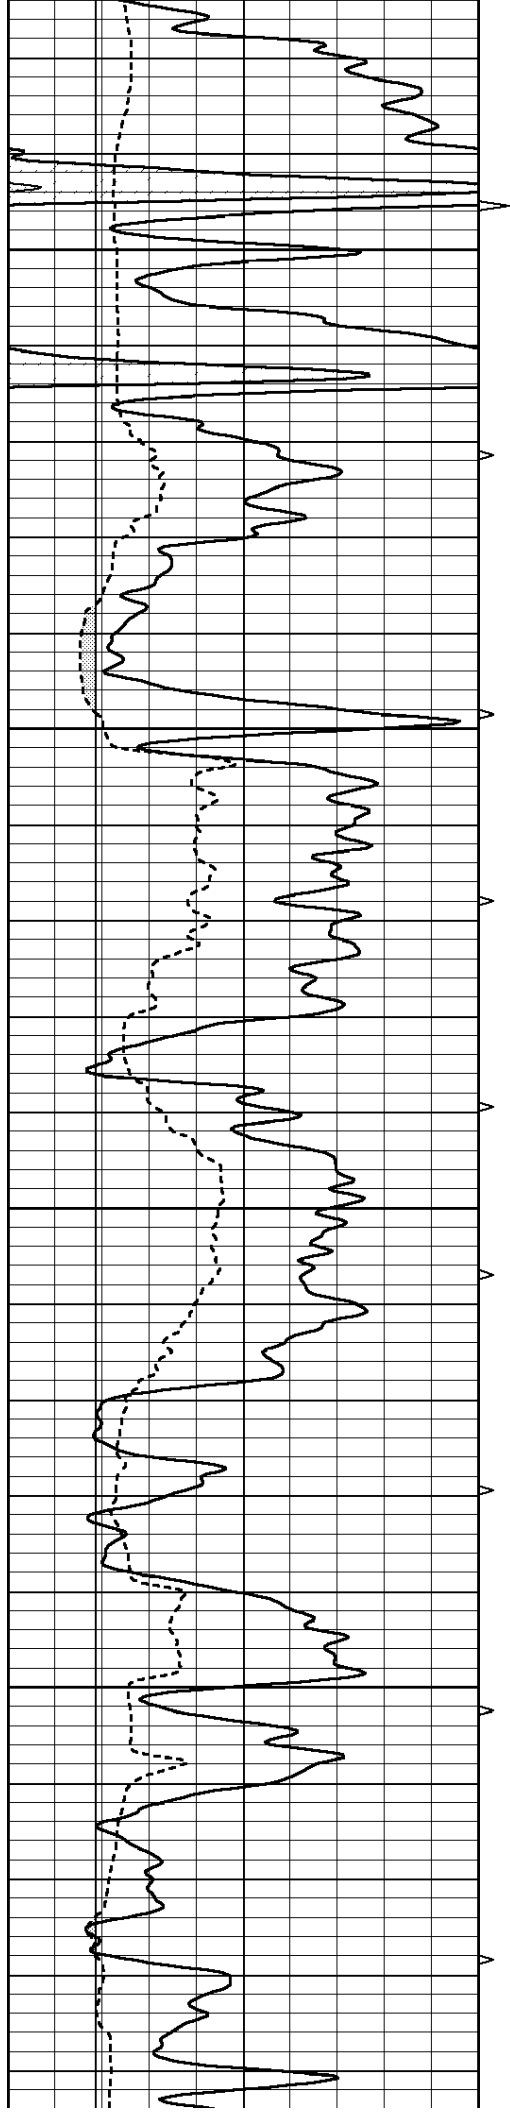



4400



4450


4500

4550

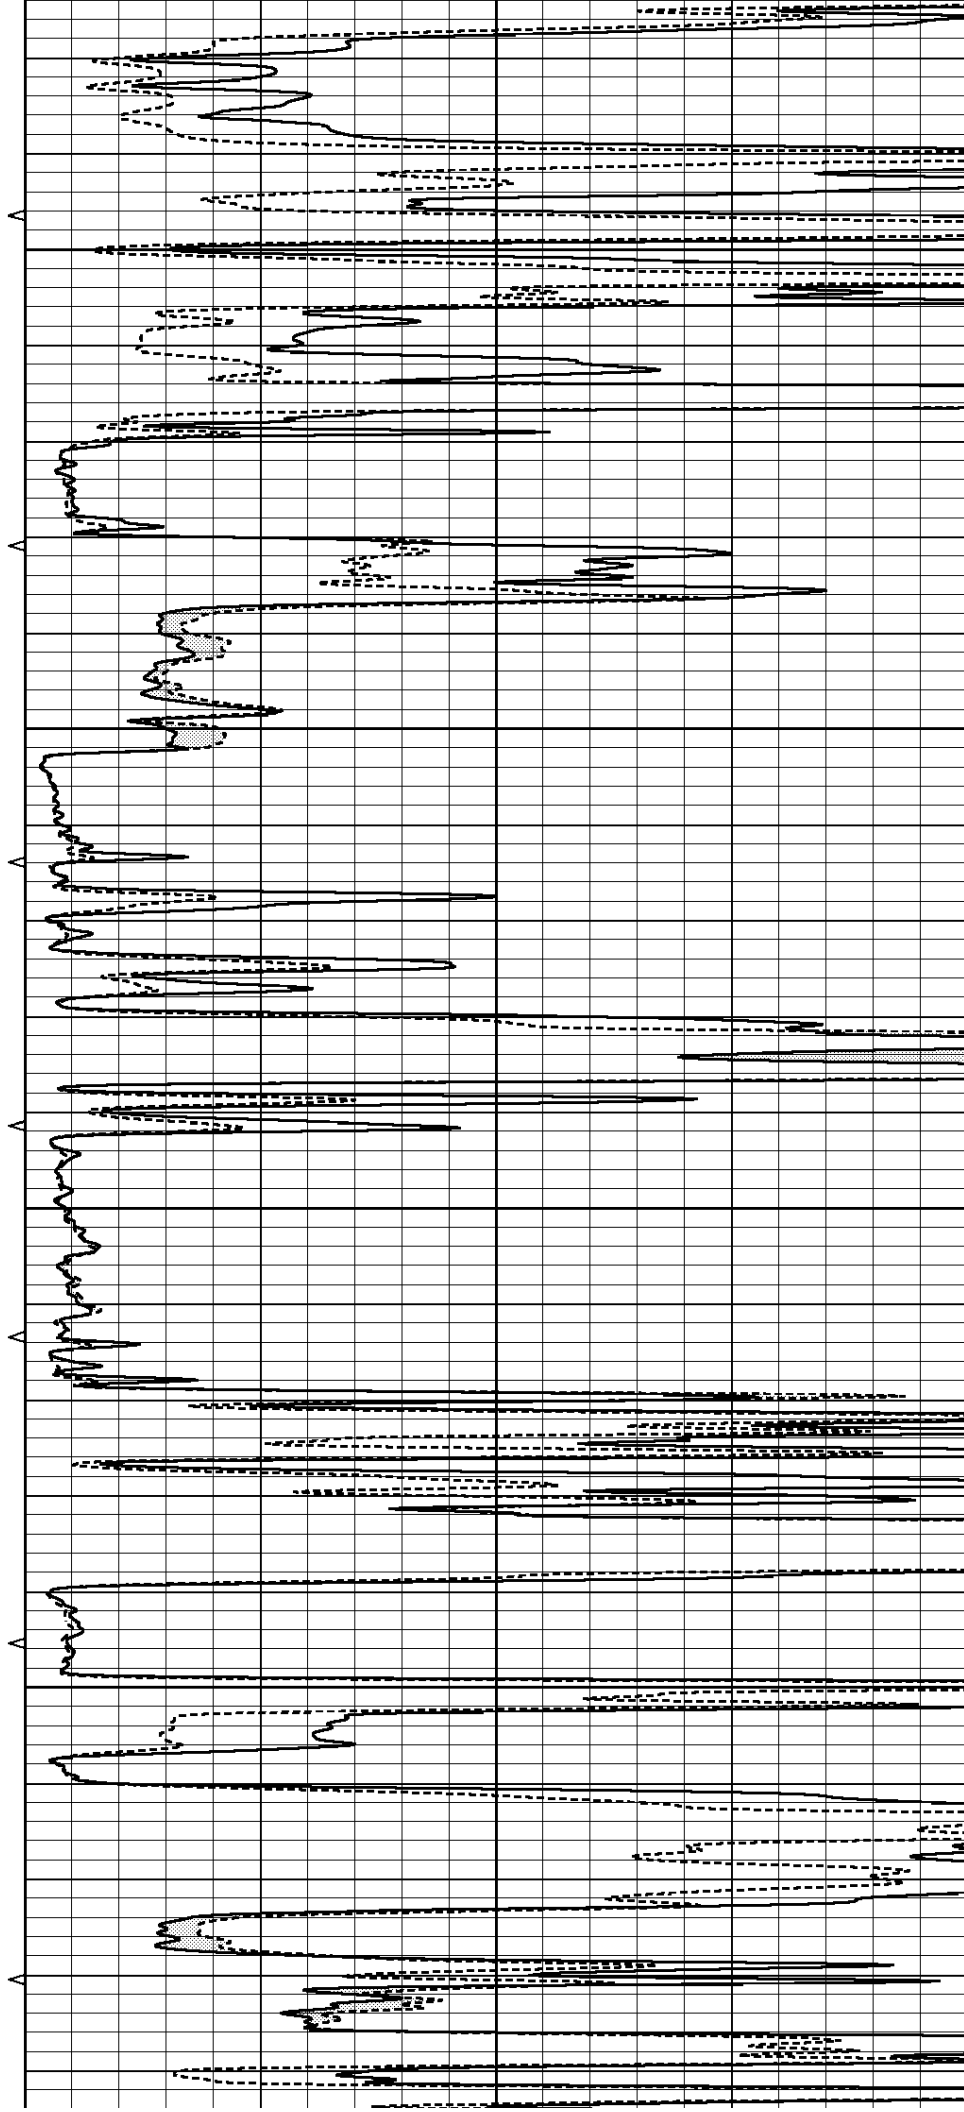

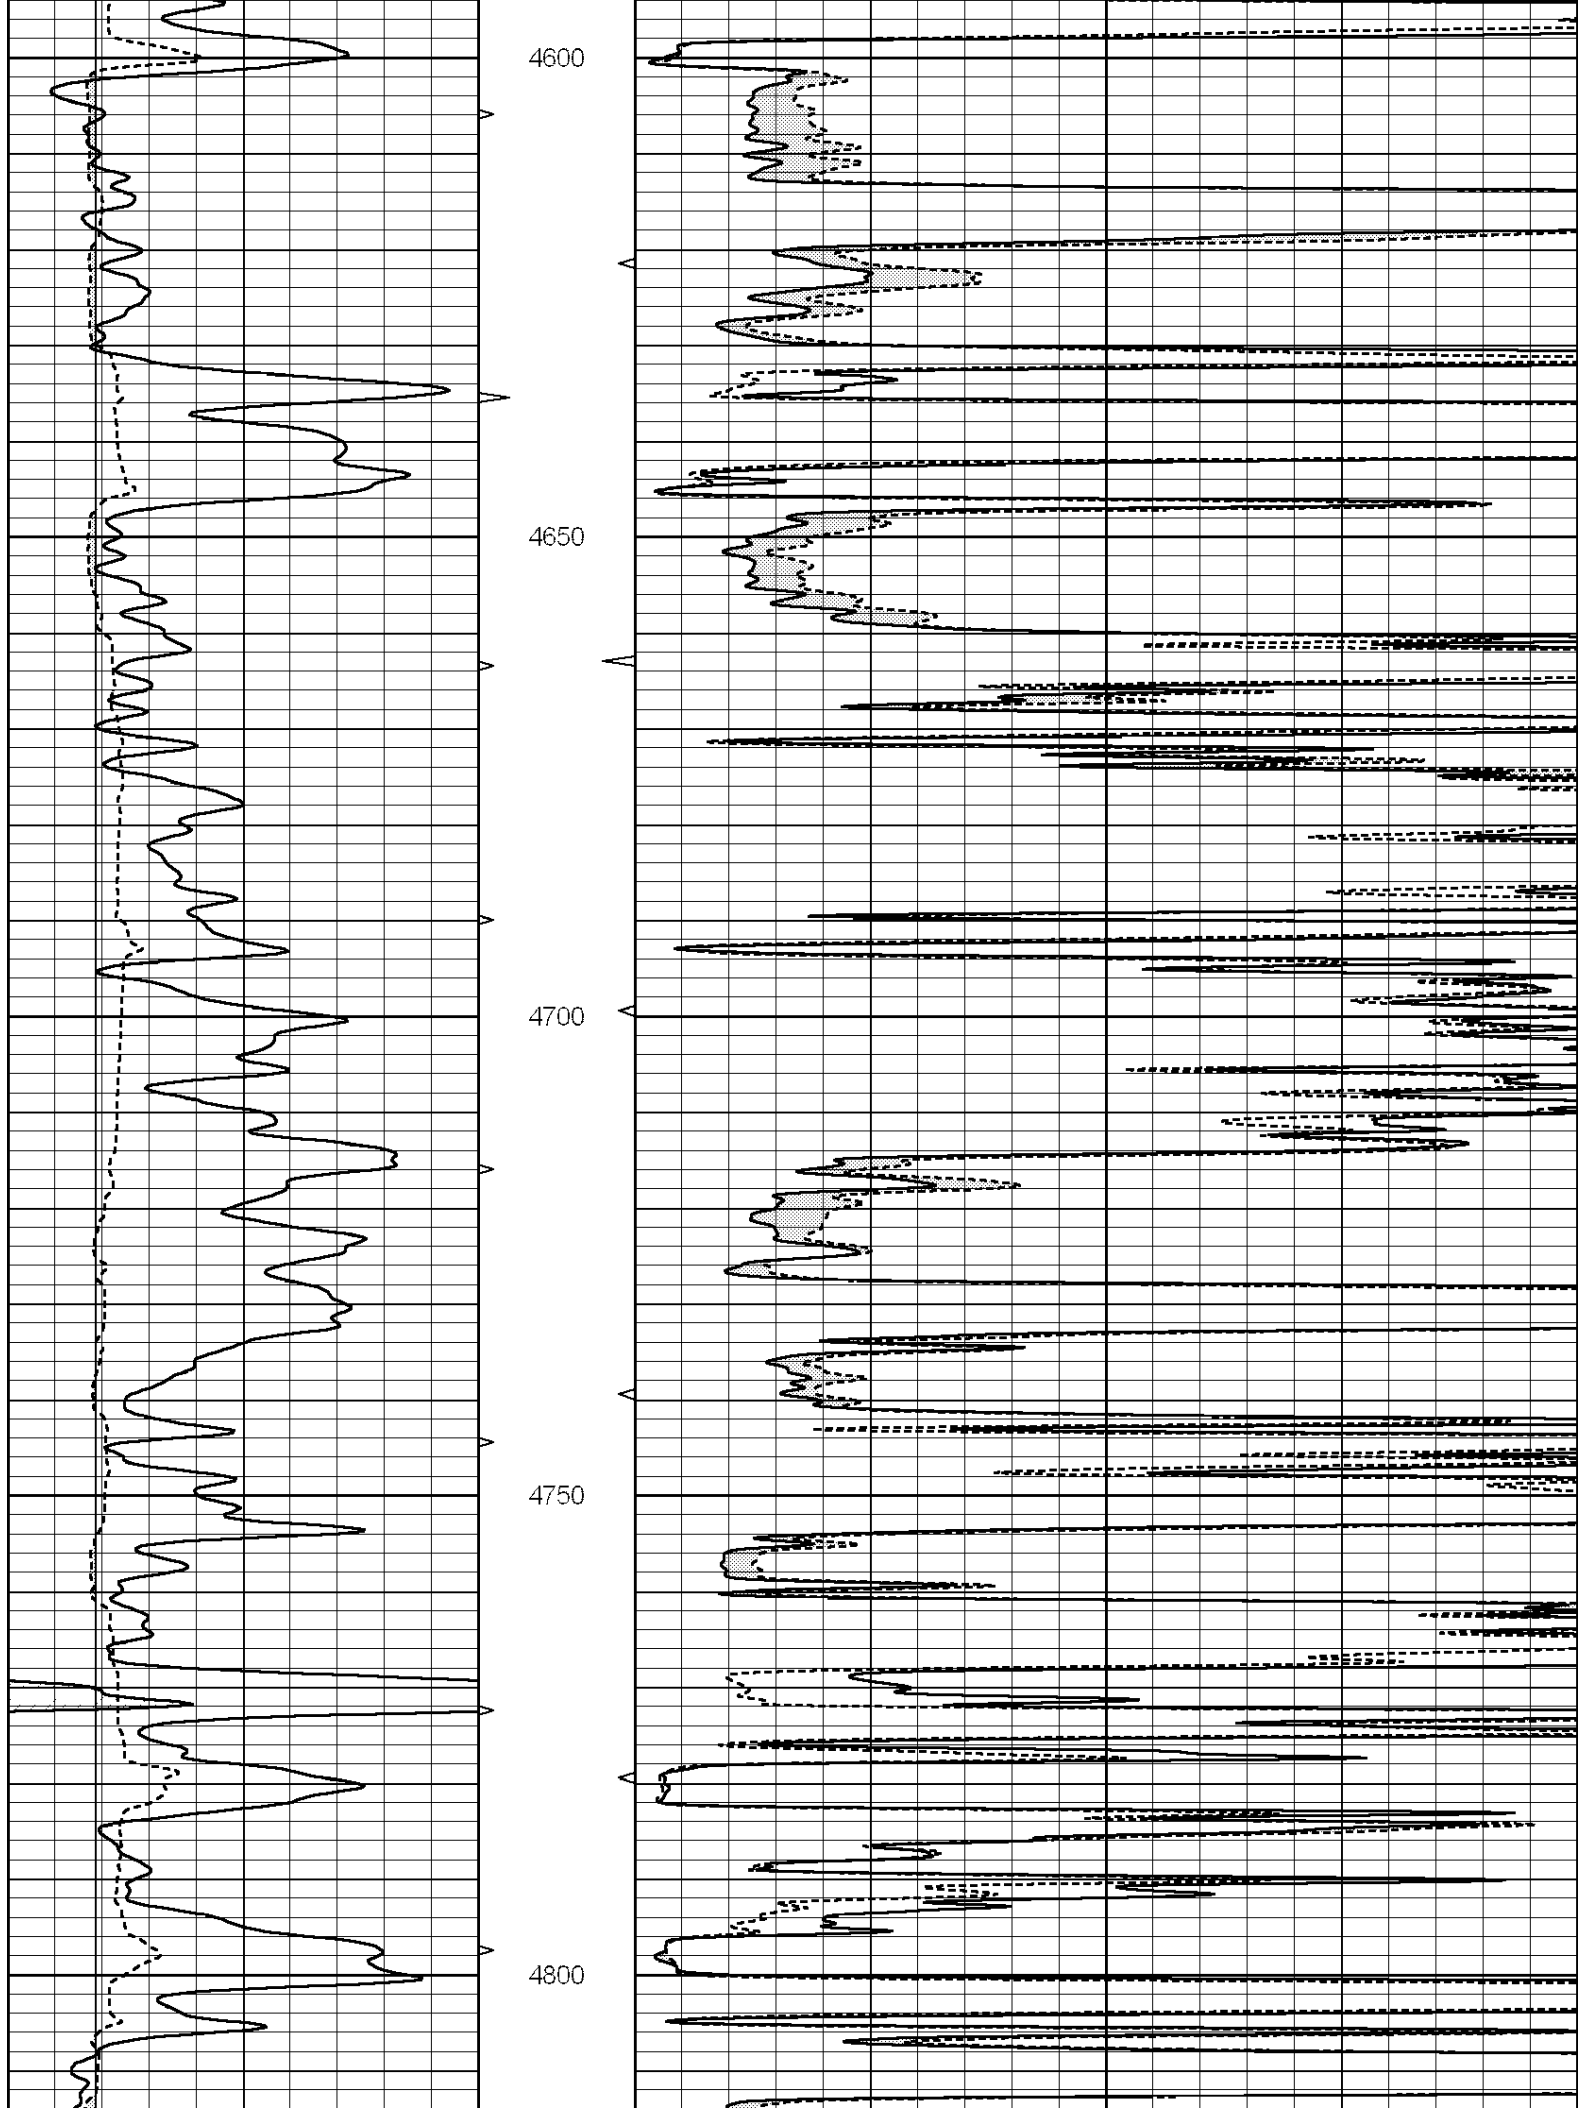

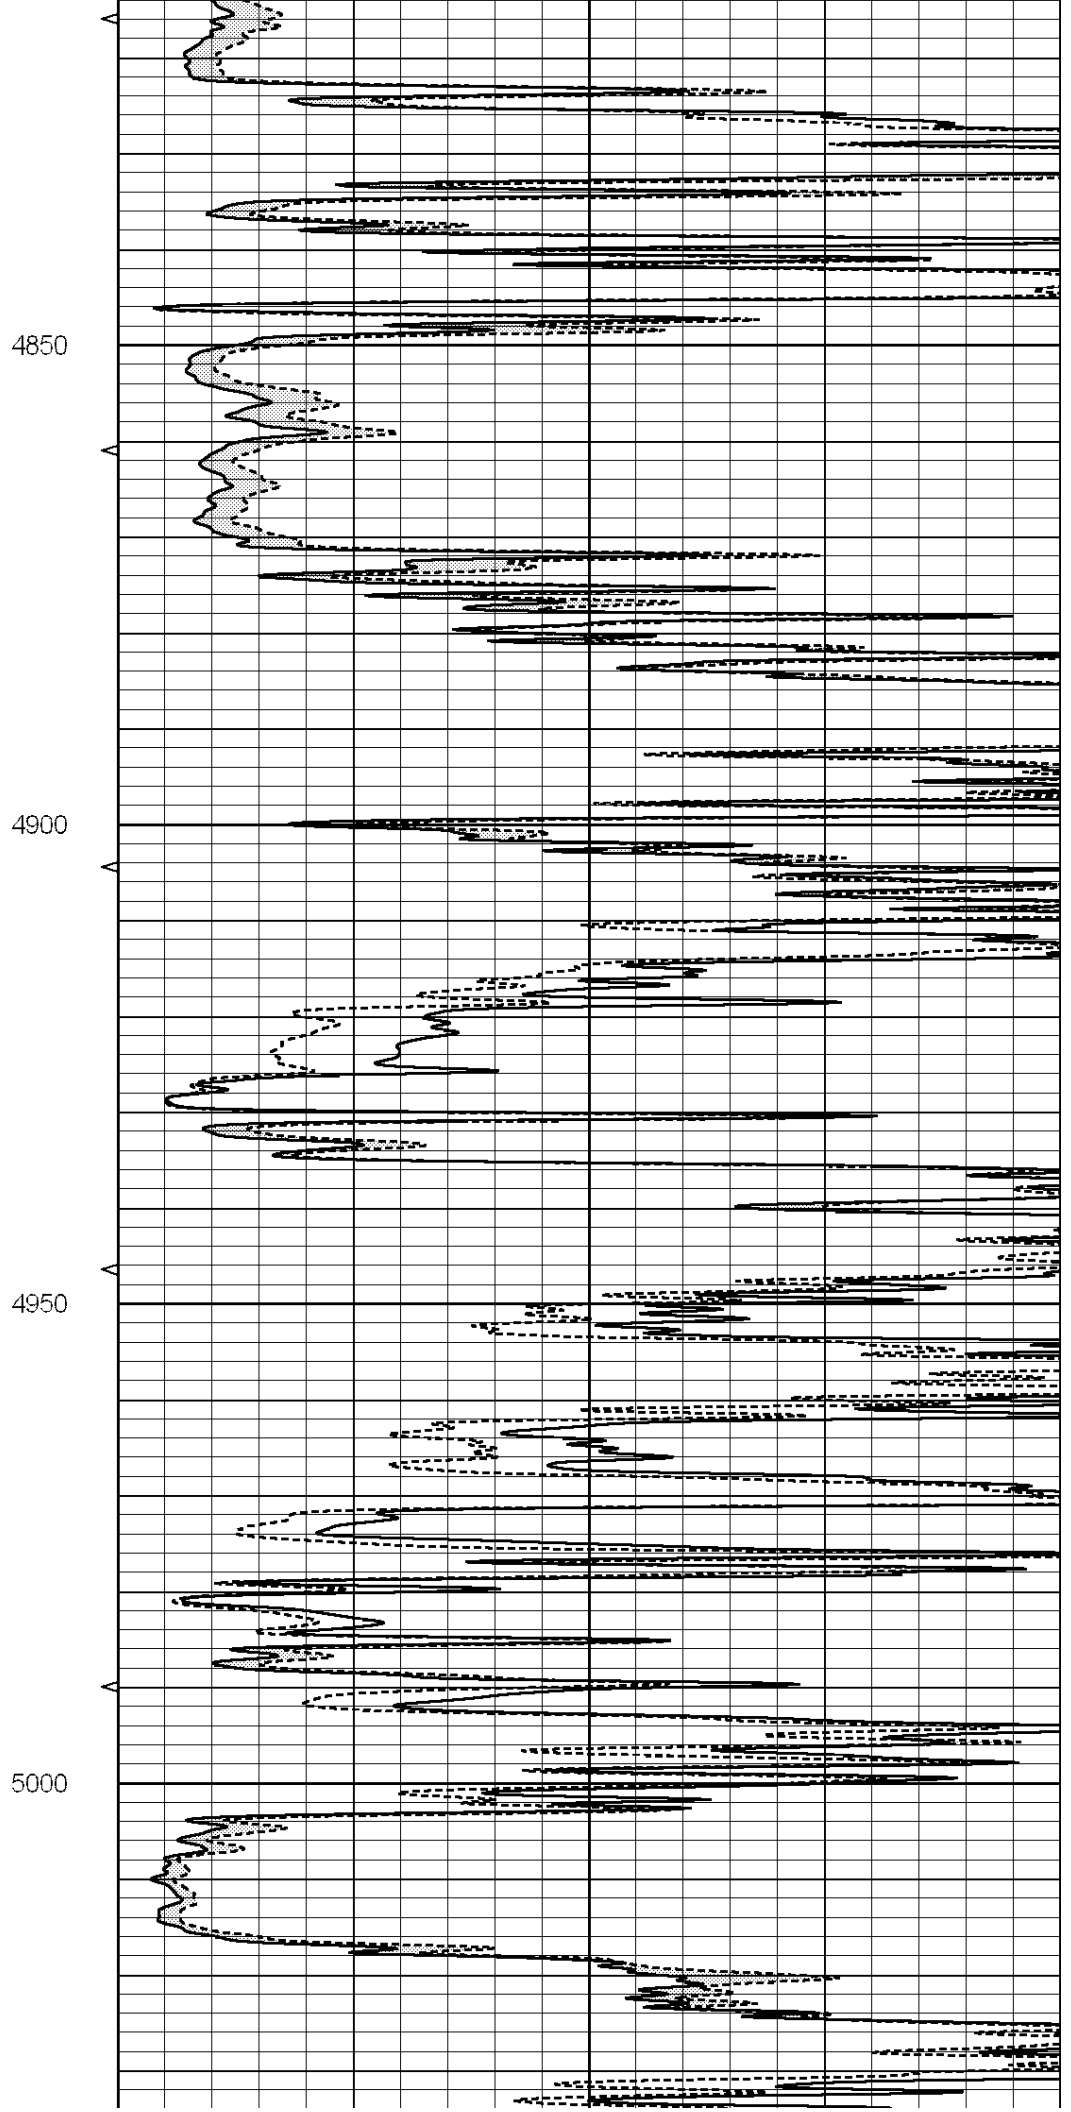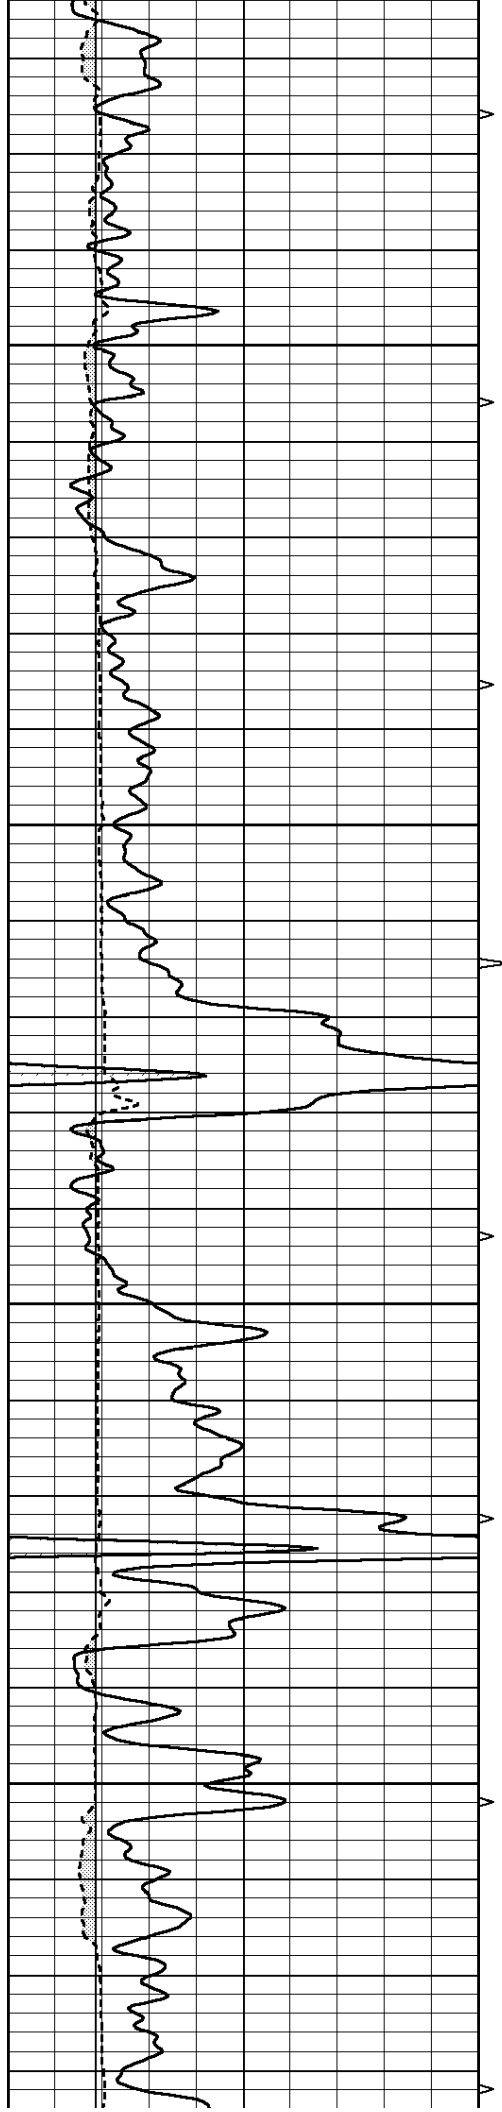

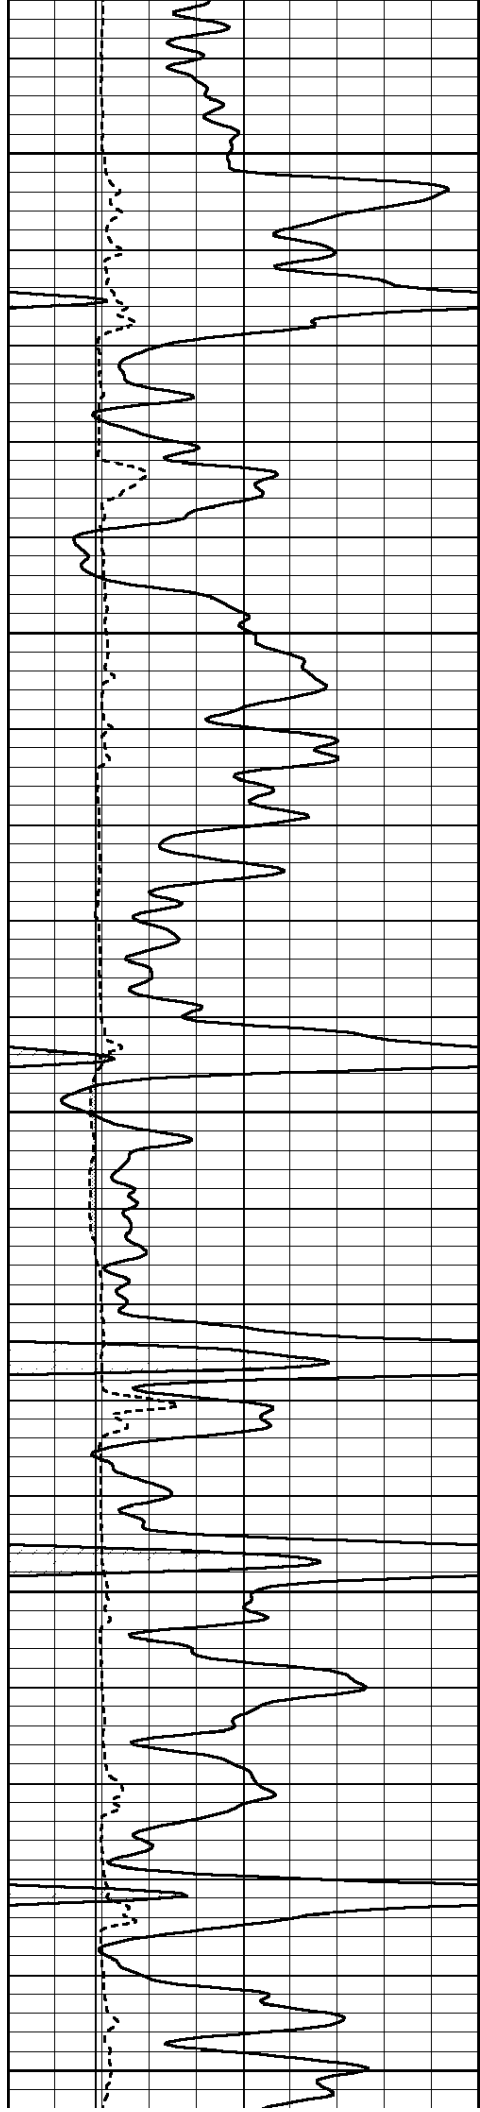


5050


5100

5150

5200

5250

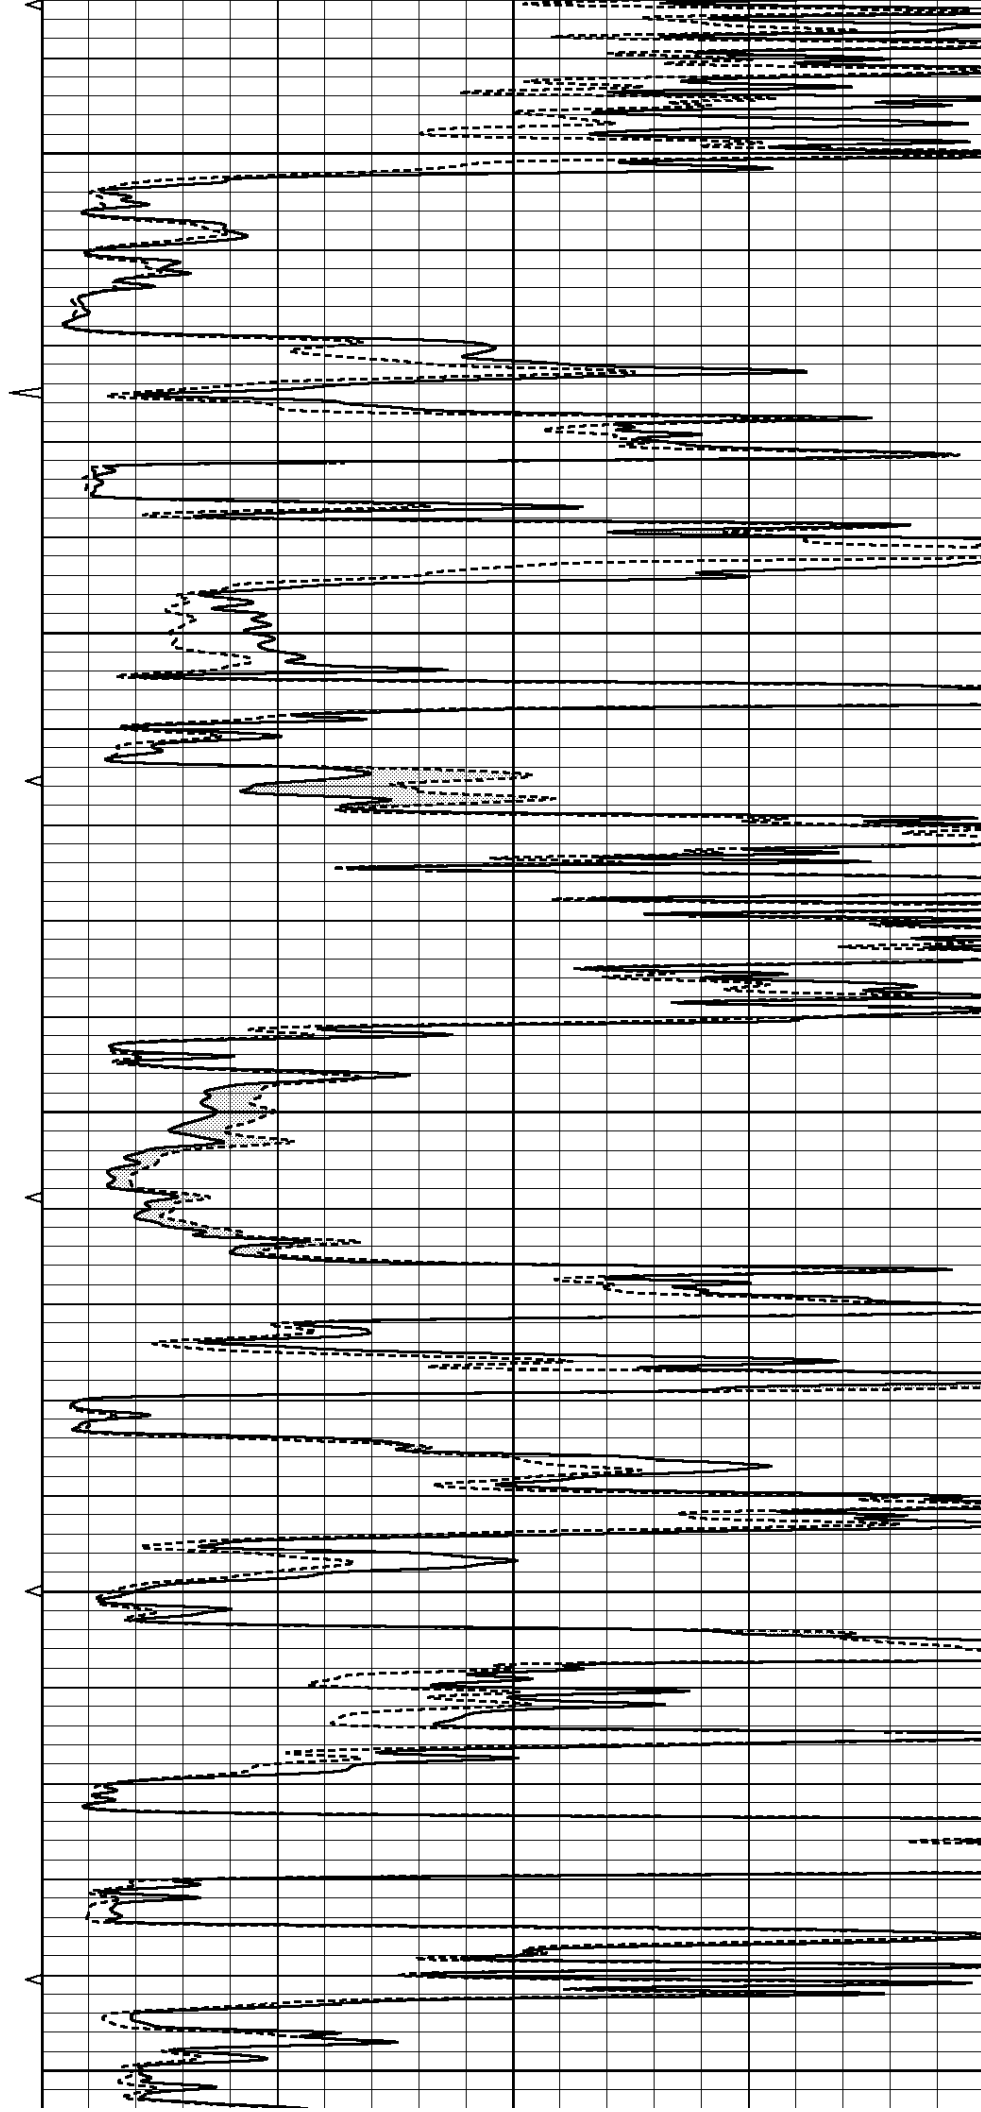

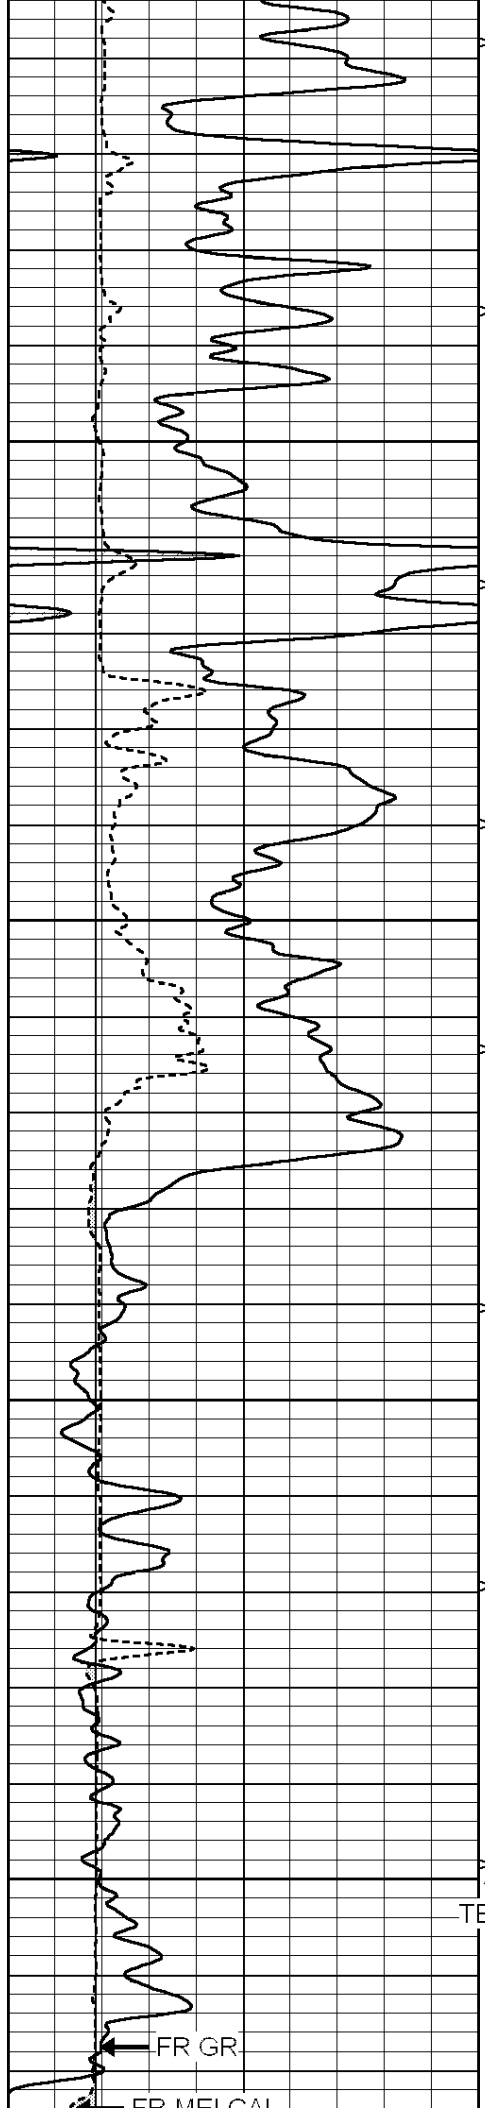

5300

5350

5400


5450

TBHV


FR GR

EP MEL CAL

ABHV
4.5" CSG

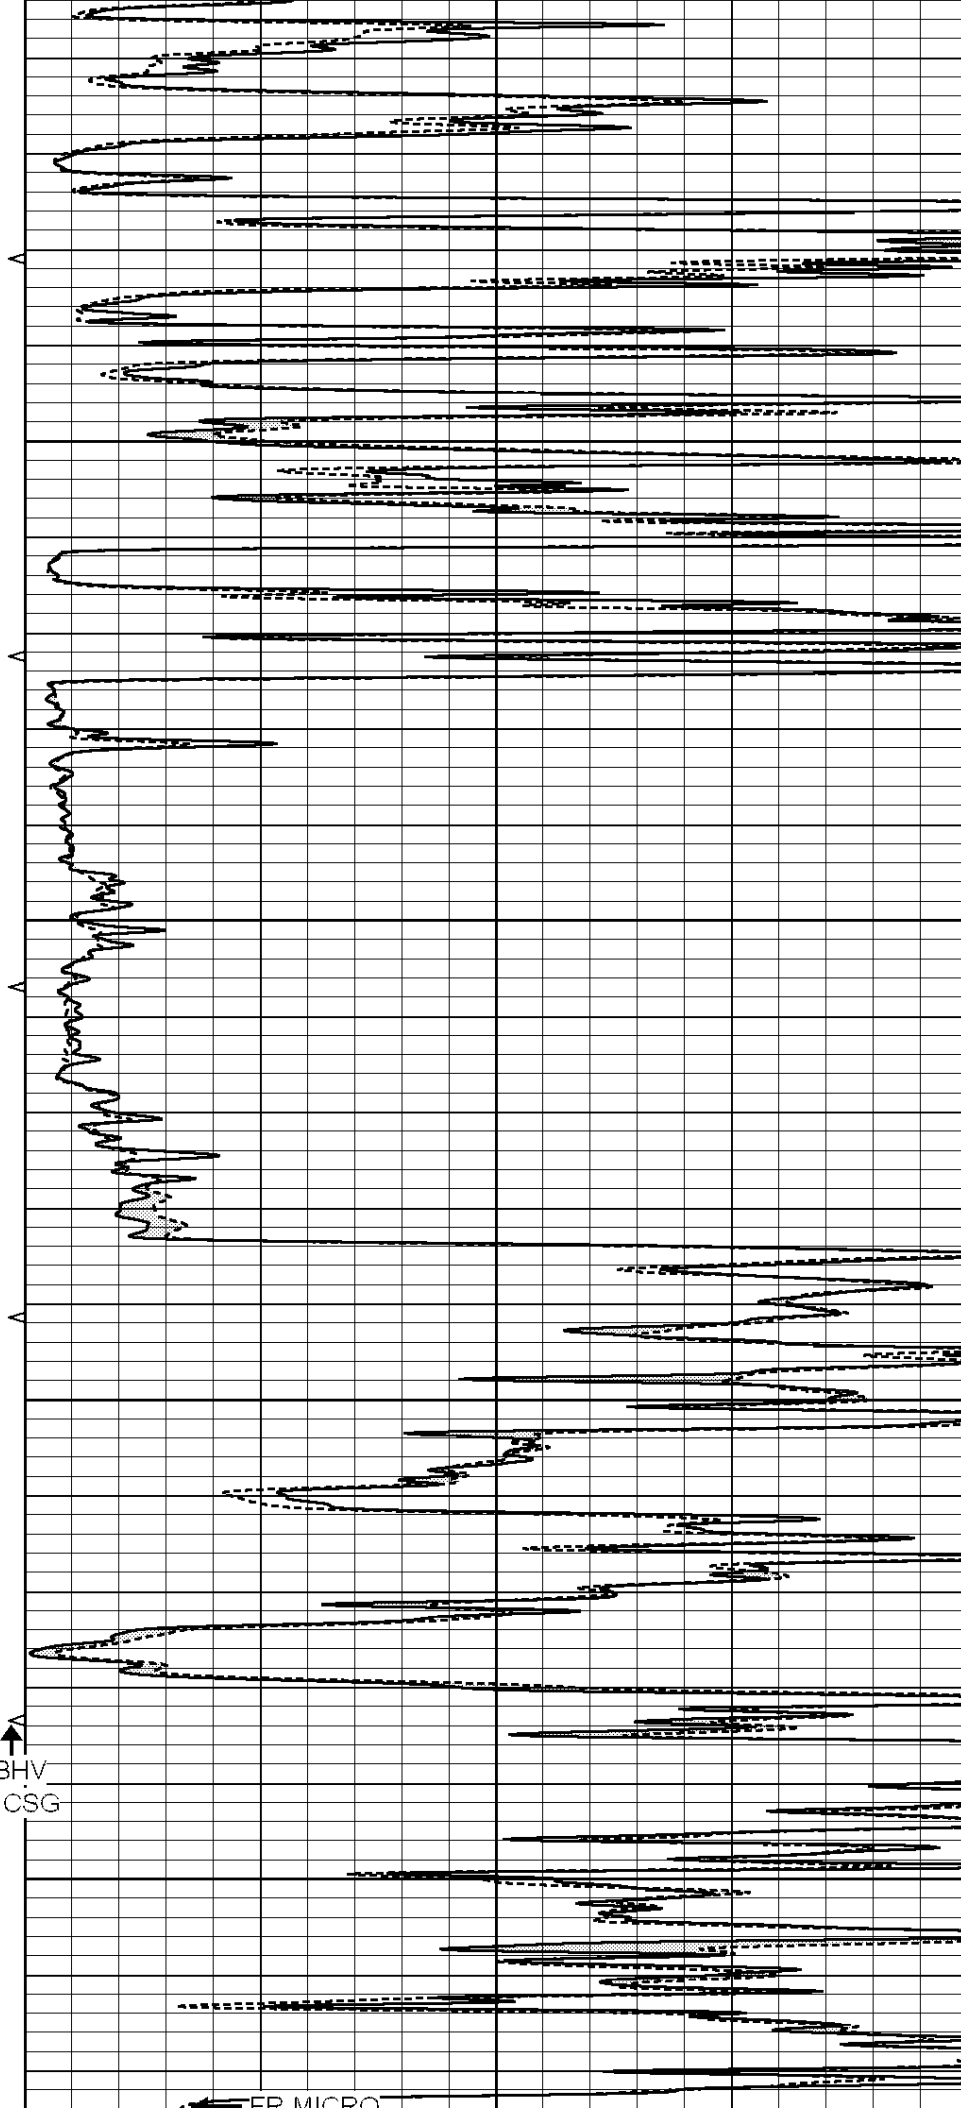



EP MICRO

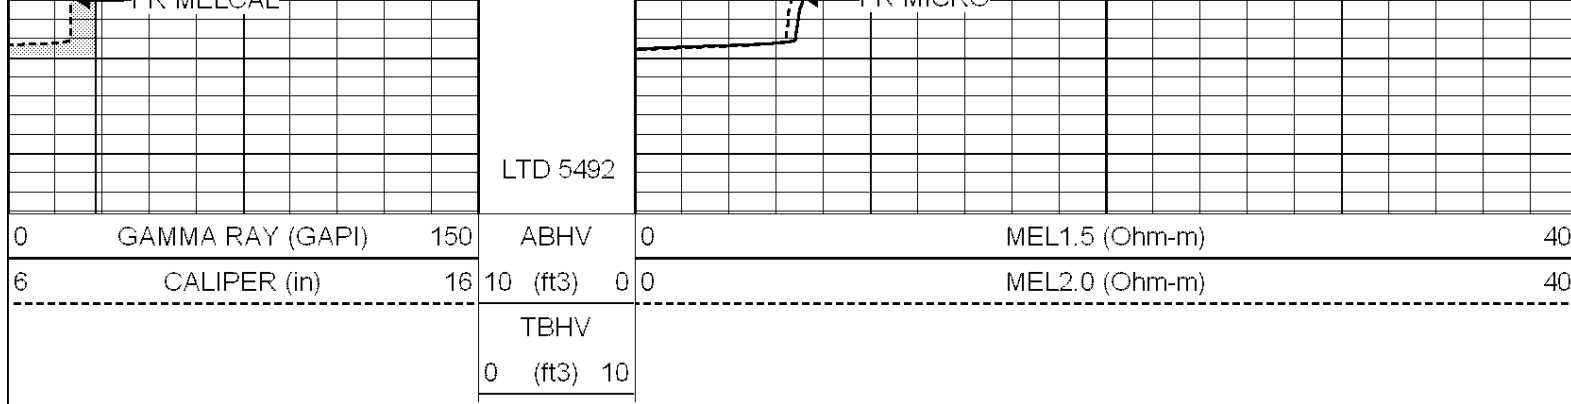



NABORS
 COMPLETION
 & PRODUCTION
 SERVICES CO.

REPEAT SECTION

Database File: 011266pe.db
 Dataset Pathname: pass7.1
 Presentation Format: _micro
 Dataset Creation: Tue Jul 02 03:28:14 2013 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

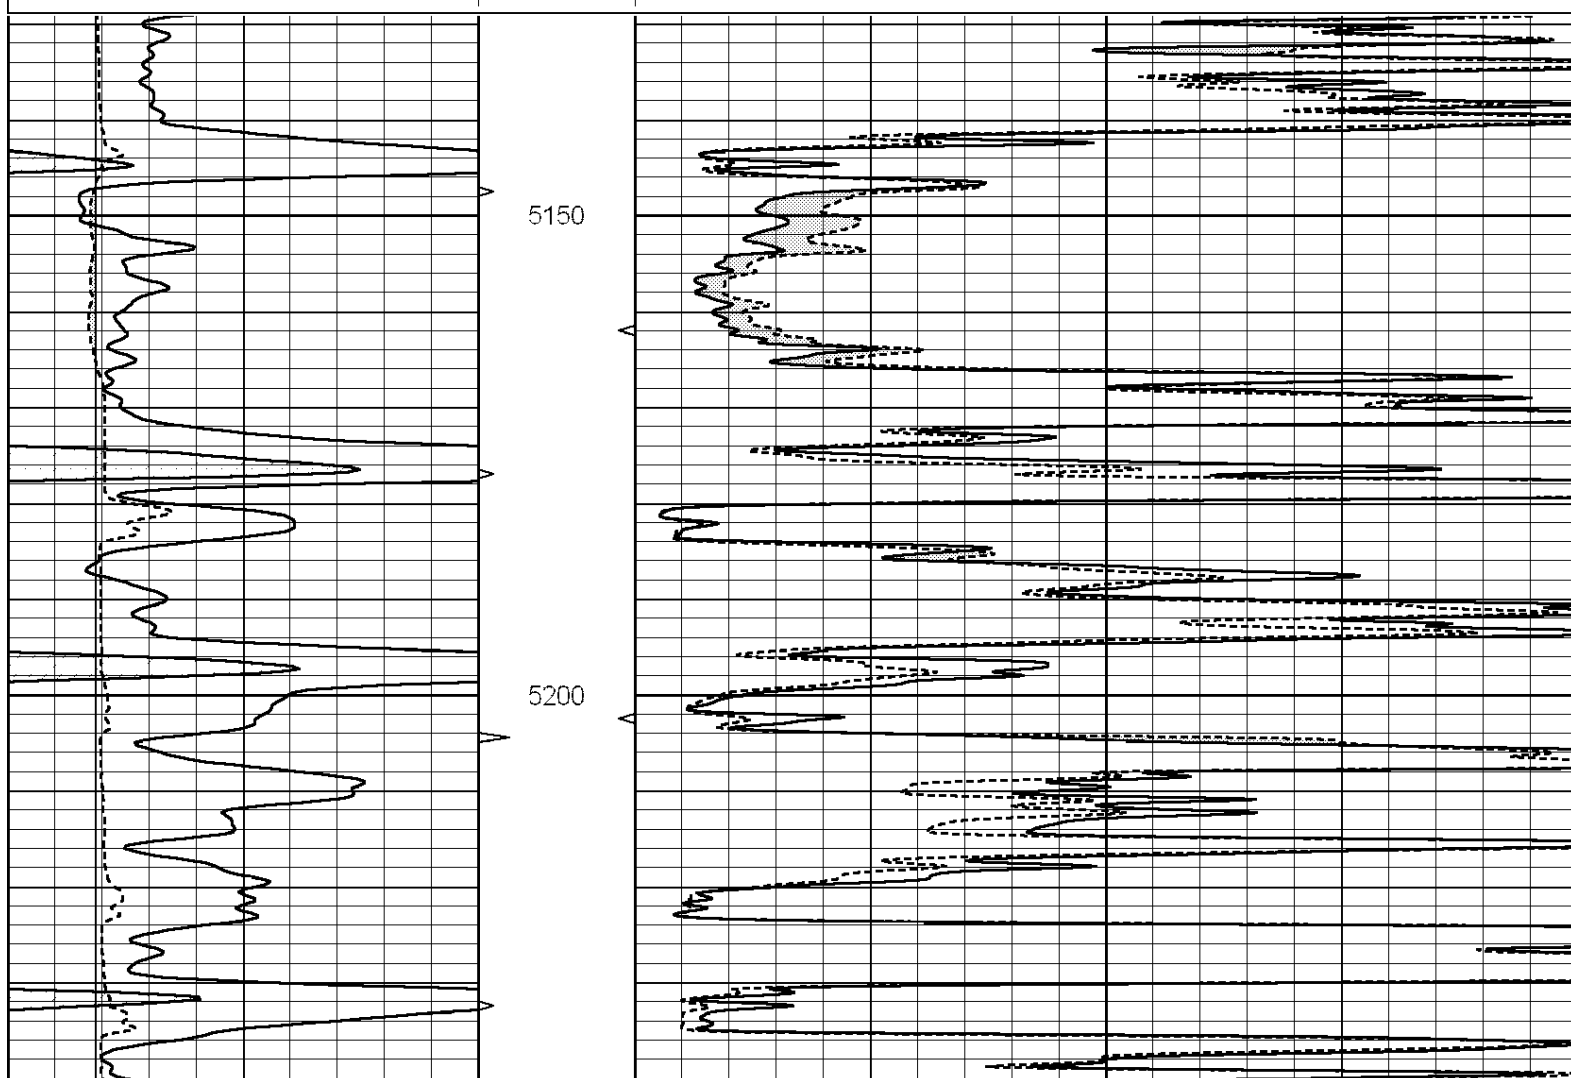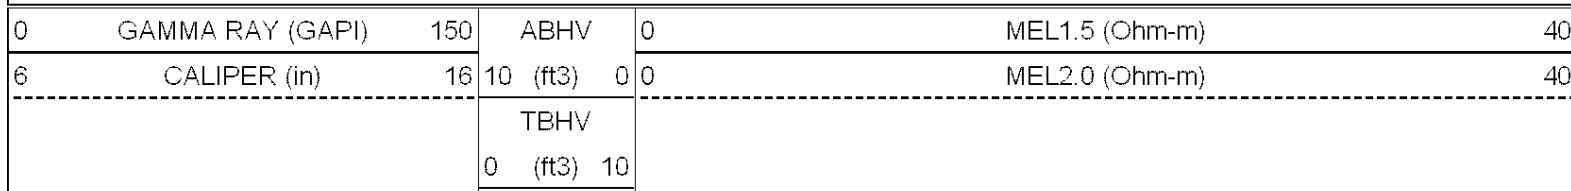

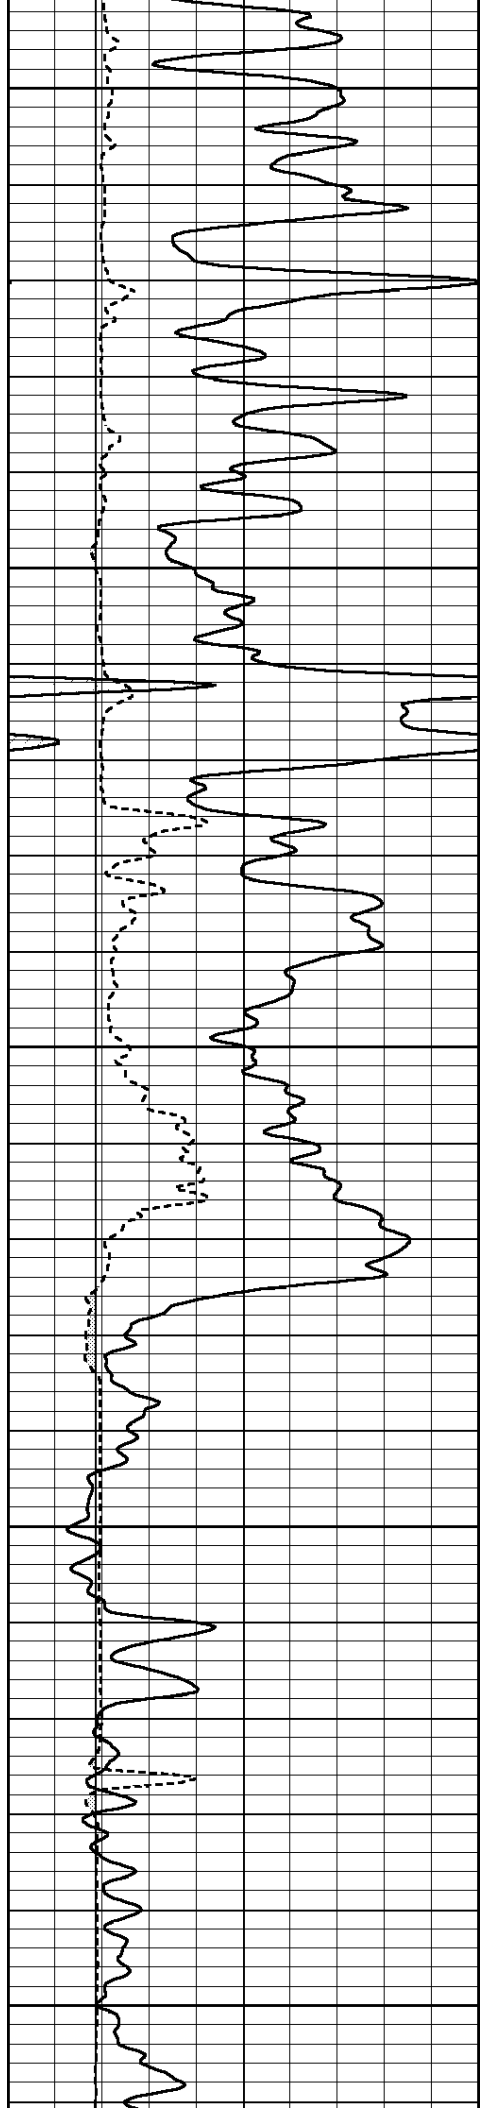


5250


5300

5350

5400

5450

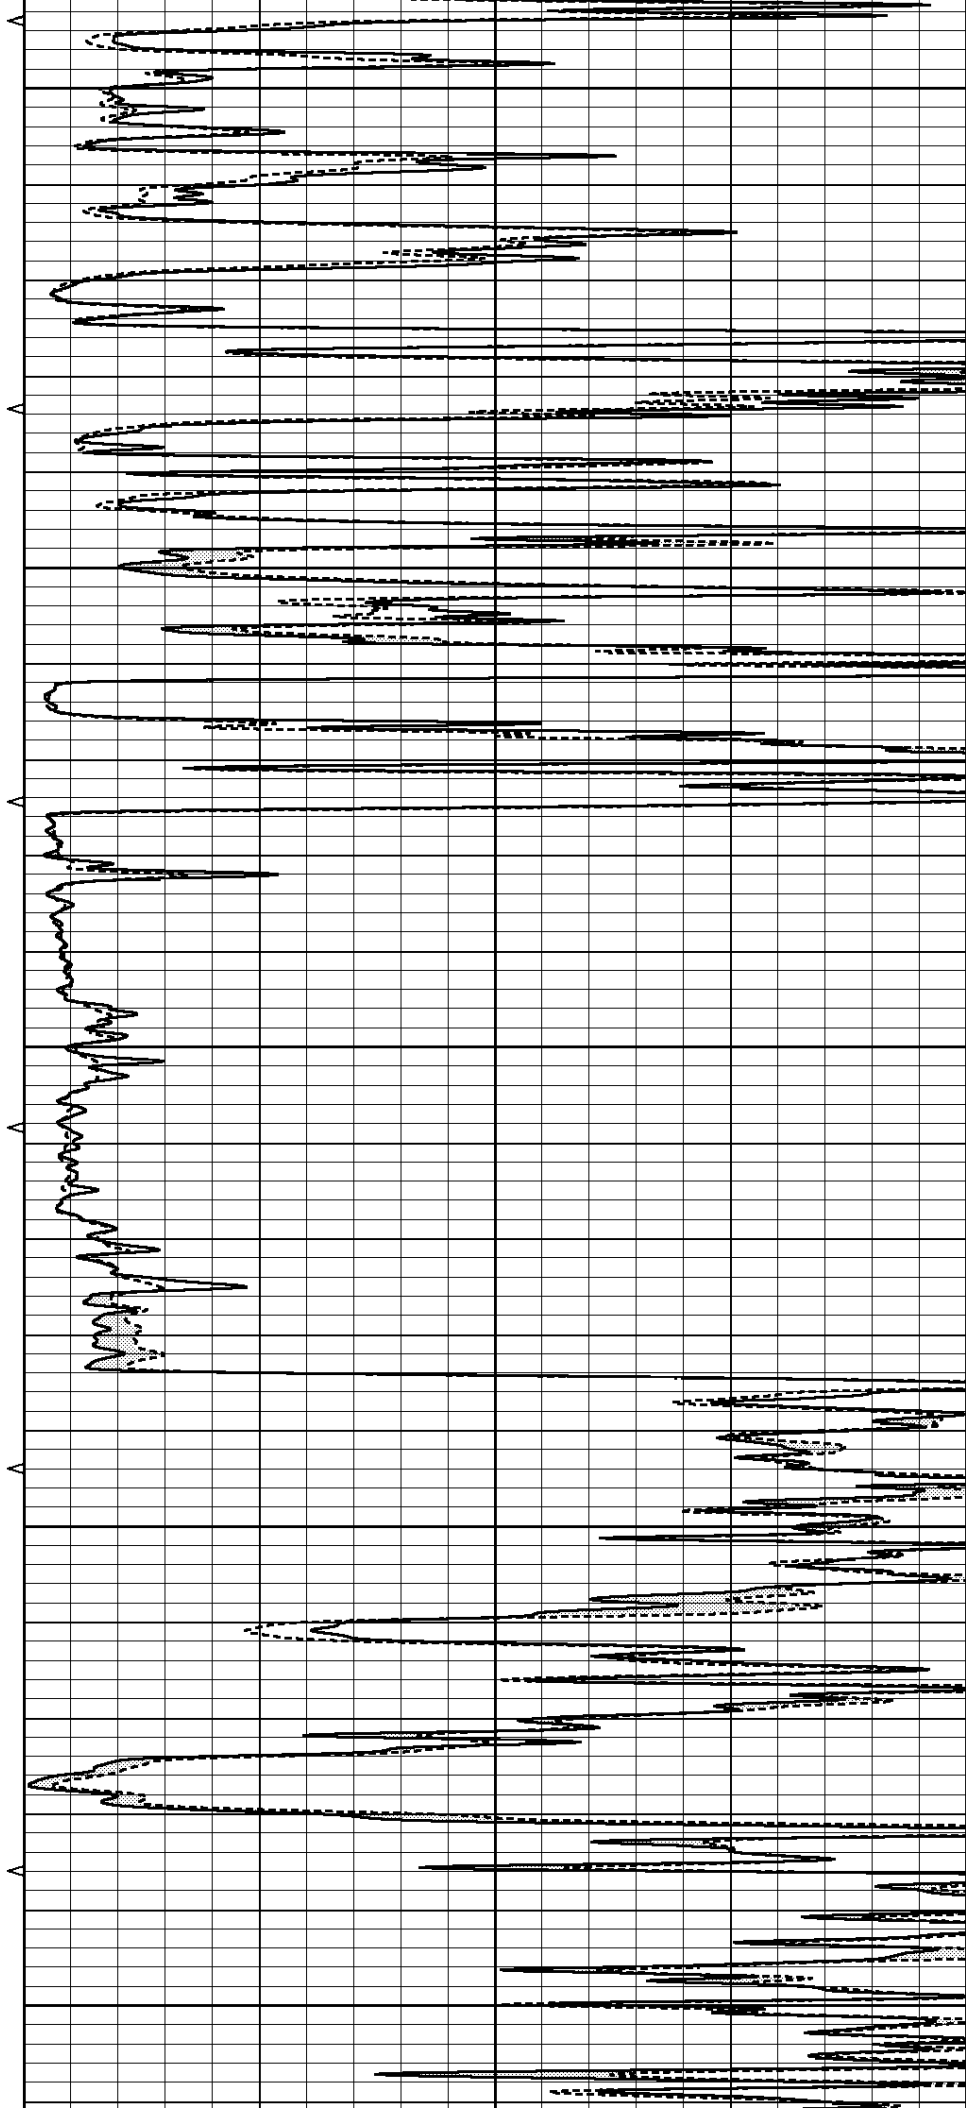

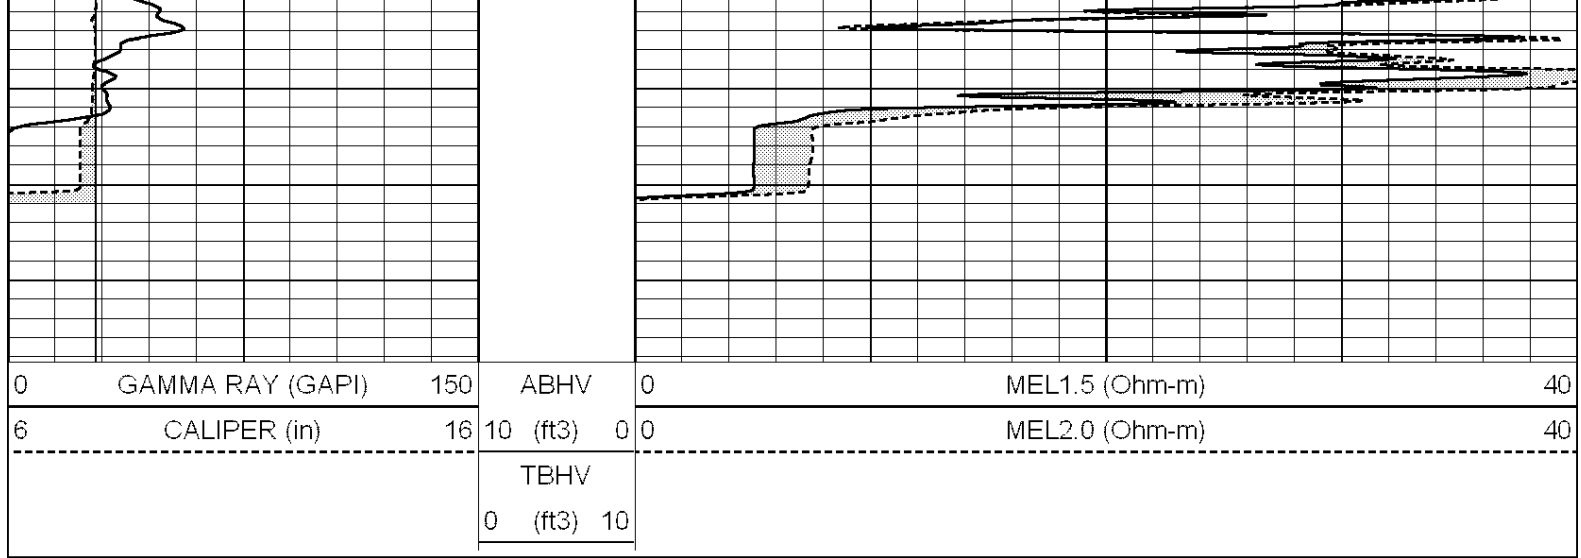

Calibration Report			
Database File:	011266pe.db		
Dataset Pathname:	pass7.1		
Dataset Creation:	Tue Jul 02 03:28:14 2013 by Calc Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	MICRO6		
Tool Model:	PROBE		
Performed:	Sun Jun 16 11:26:16 2013		
Caliper Calibration:	Gain=5.542	Offset=-1.270	
	Low Cal	High Cal	
References	8.000	14.000	
Readings	1.431	2.513	
1.5" Calibration:	Gain=45.075	Offset=-0.700	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.004	1.196	
2" Calibration:	Gain=47.041	Offset=-0.600	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.006	0.913	
Gamma Ray Calibration Report			
Serial Number:	#8		
Tool Model:	OPEN		
Performed:	Mon Jun 13 16:56:43 2011		
Calibrator Value:	150.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	175.0	cps	
Sensitivity:	0.8371	GAPI/cps	