



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

DUAL INDUCTION LOG

Company		MULL DRILLING COMPANY, INC.	
Well		#1-12 BROWN TRUST	
Field		WILDCAT	
County		SCOTT	
State		KANSAS	
Location:		APL # : 15-171-20932-0000	
Permanent Datum		GROUND LEVEL	
Log Measured From		KELLY BUSHING 9' A.G.L.	
Drilling Measured From		KELLY BUSHING	
SEC 12 TWP 16S RGE 32W		Elevation	
		K.B. 2945	
		D.F. 2943	
		G.L. 2936	
Other Services		CDL/CNL/PE	
		MEL/SONIC	
Date	10/1/13		
Run Number	ONE		
Depth Driller	4700		
Depth Logger	4699		
Bottom Logged Interval	4697		
Top Log Interval	00		
Casing Driller	8 5/8"@210'		
Casing Logger	208		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,600 PPM	
Density / Viscosity	9.3/60		
pH / Fluid Loss	11.0/4.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.900@85F		
Rmf @ Meas. Temp	.675@85F		
Rmc @ Meas. Temp	1.08@85F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.627@122F		
Time Circulation Stopped	2.5 HOURS		
Time Logger on Bottom	10:15 A.M.		
Maximum Recorded Temperature	122F		
Equipment Number	4854		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEVIN KESSLER		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING "NABORS" HAYS, KANSAS (785) 628-6395
 DIRECTIONS
 OAKLEY, KS & HWY 83, 31S. ON HWY 83 TO "RD. 280", 3E. TO DEAD END SIGN. CONTINUE 1 1/2
 MORE E. ON PATURE TRAIL
 (ALTERNATE) 14 N. OF SCOTT CITY ON HWY 83

Database File:

011679pe.db

Dataset Pathname:

pass3.9

Presentation Format:

dil2


Dataset Creation:


Tue Oct 01 11:38:24 2013

Charted by:

Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	0	RLL3 (Ohm-m)	50
-100	SP (mV)	100	0	RILD (Ohm-m)	50
-----			-----		
			1000	CILD (mmho/m)	0
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

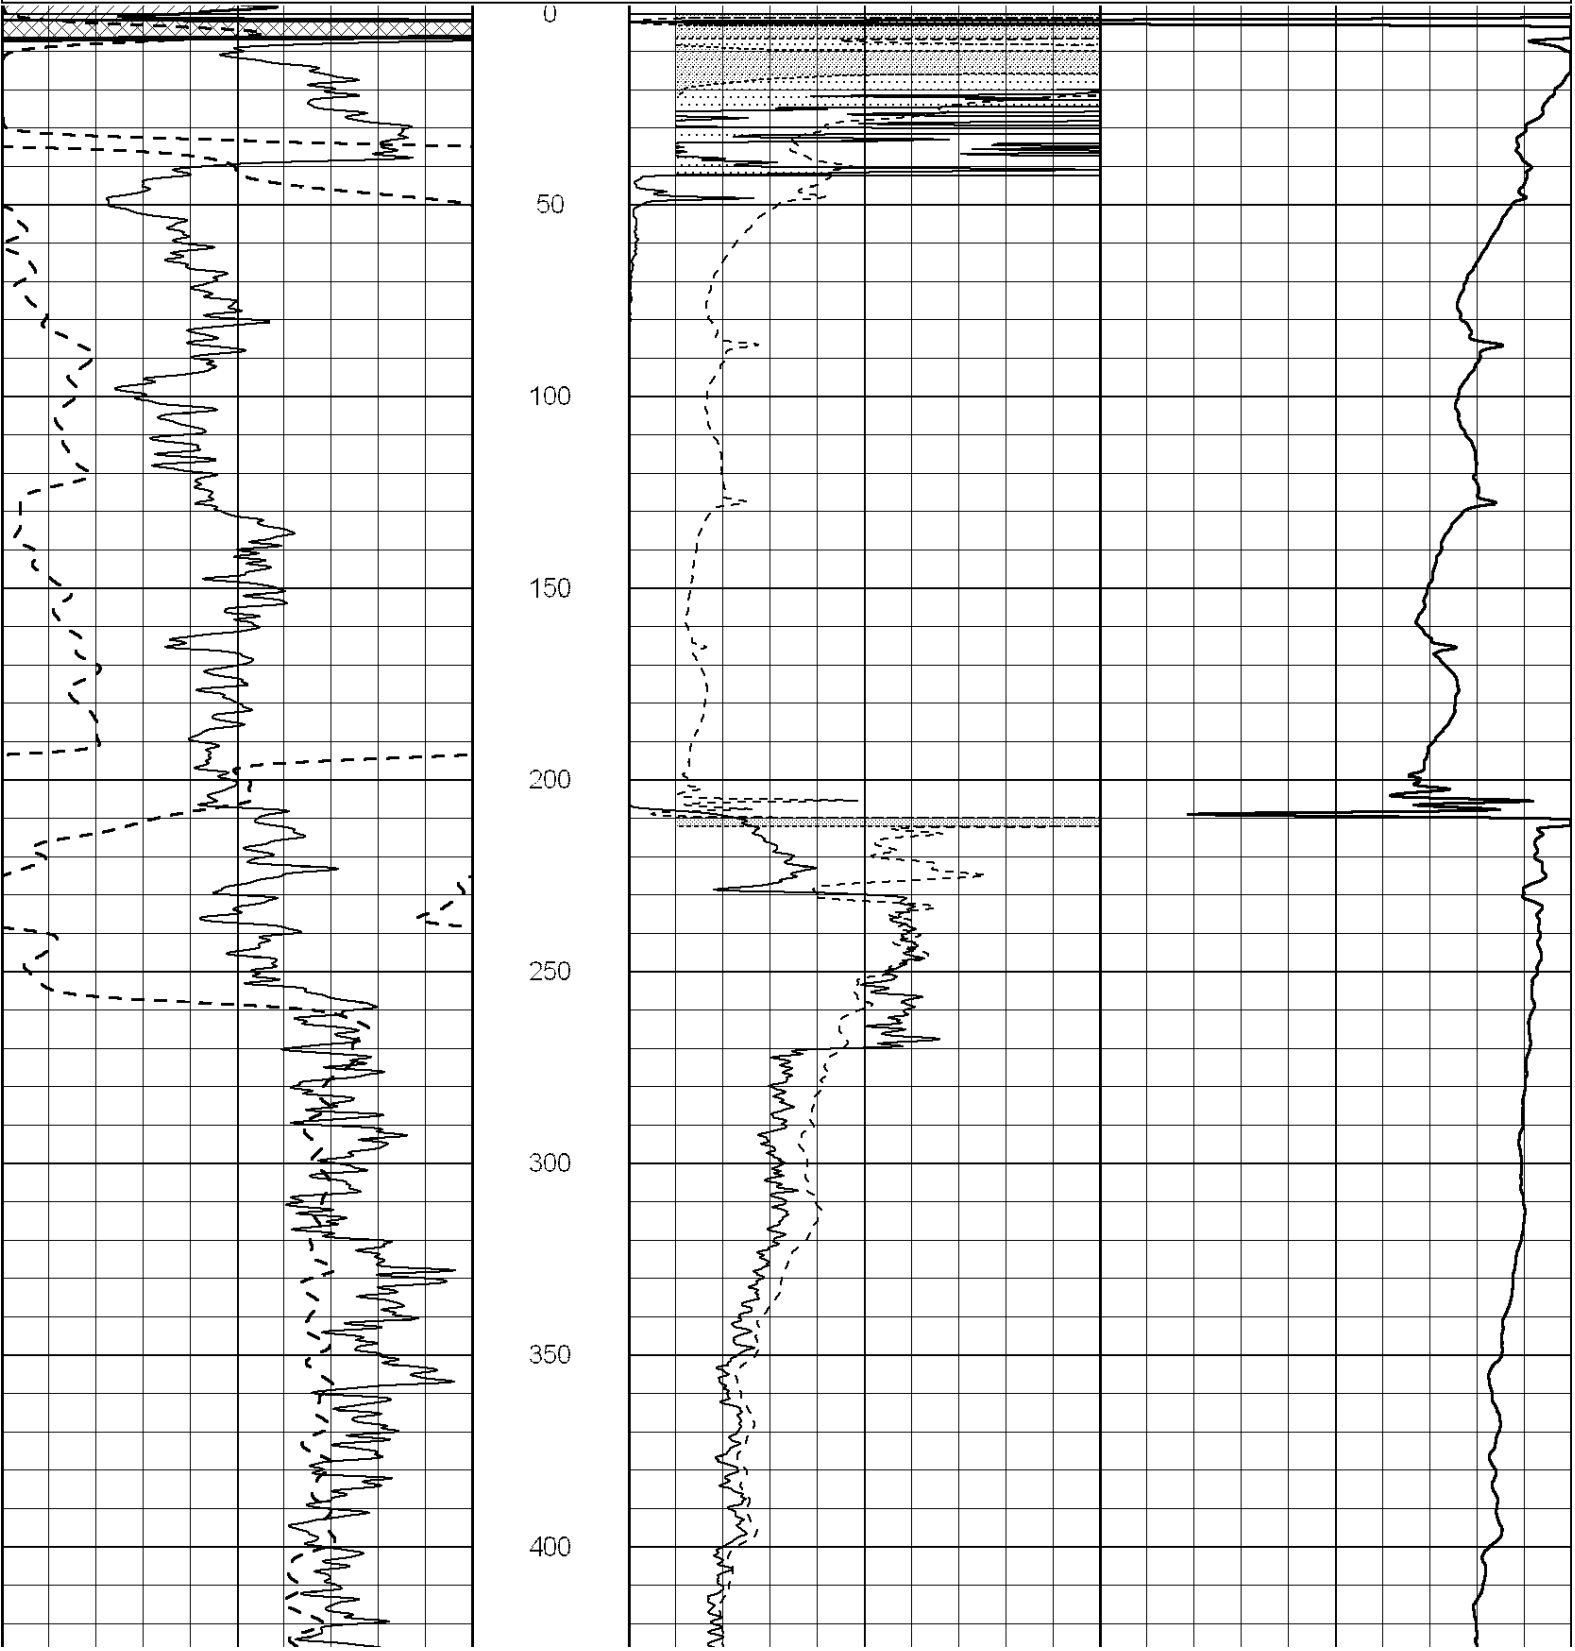

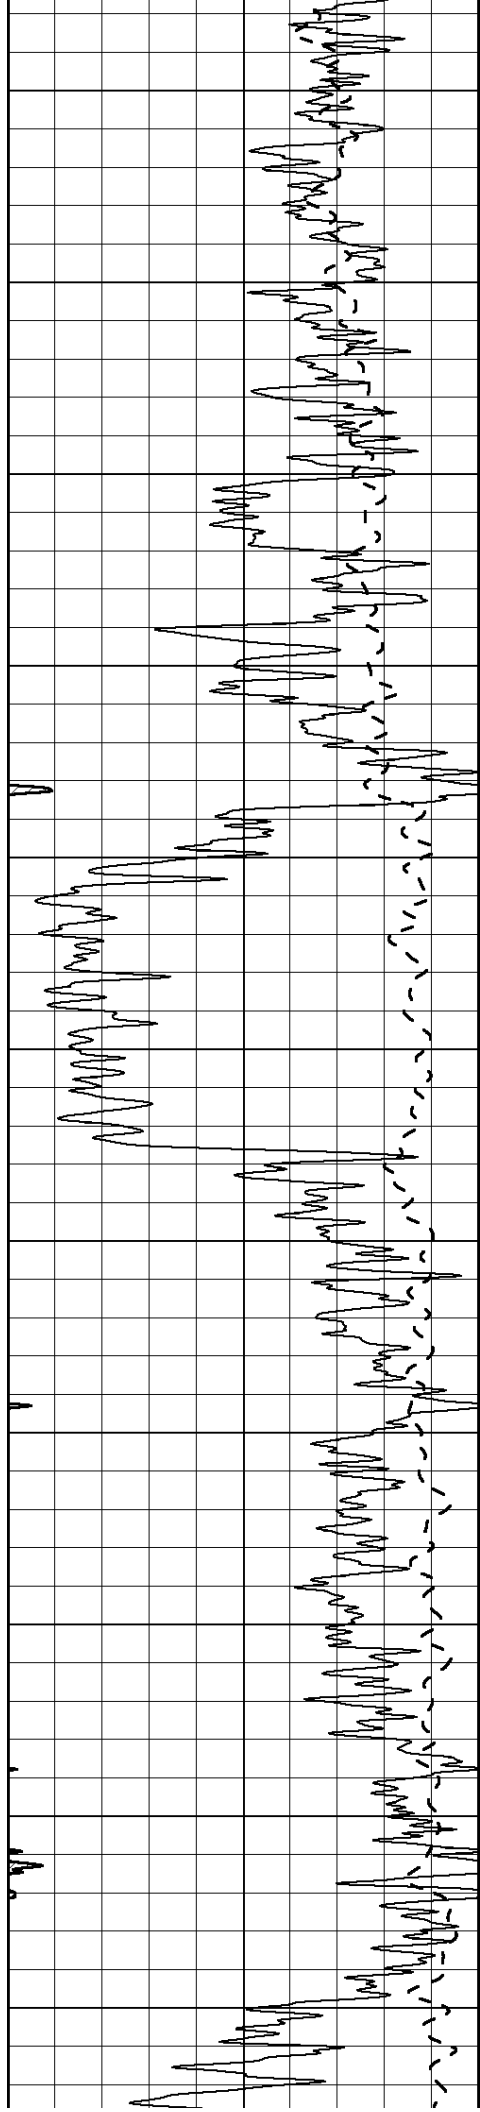

450

500

550

600

650

700


750


800

850



900


950

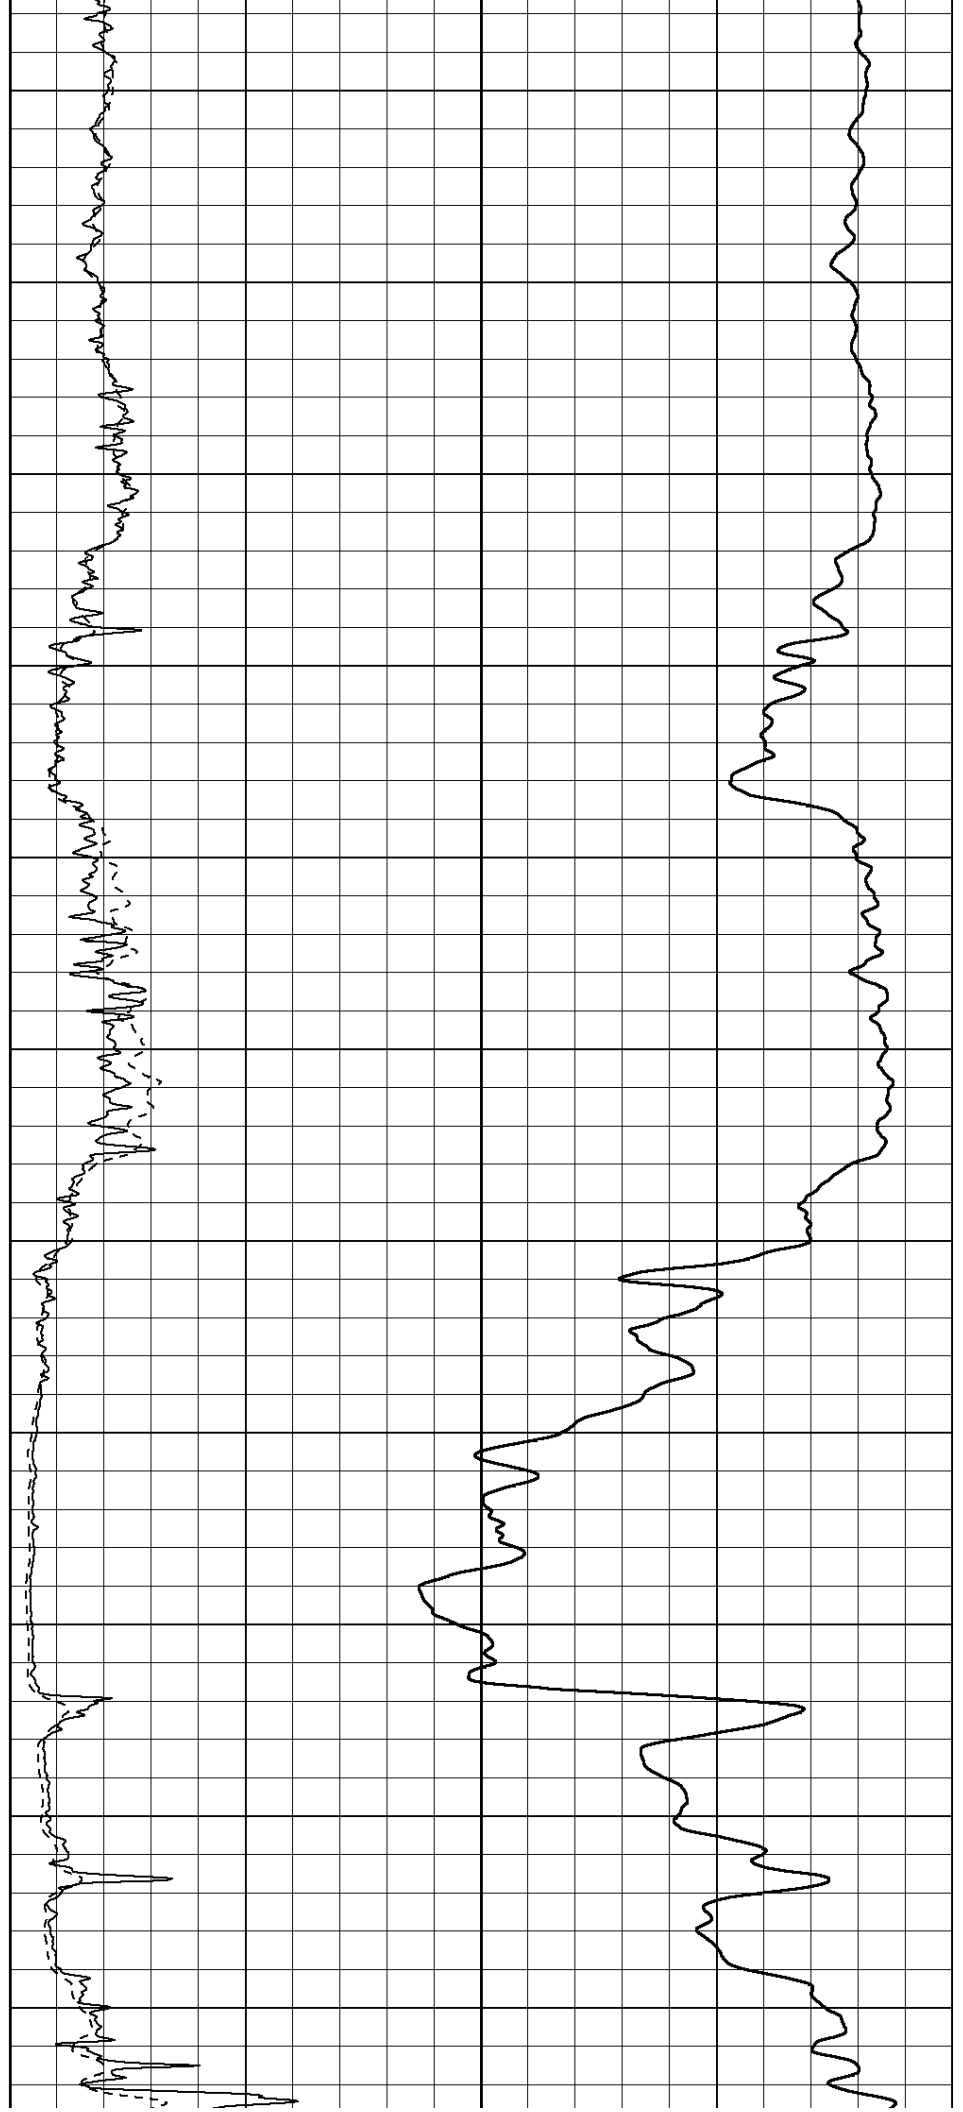

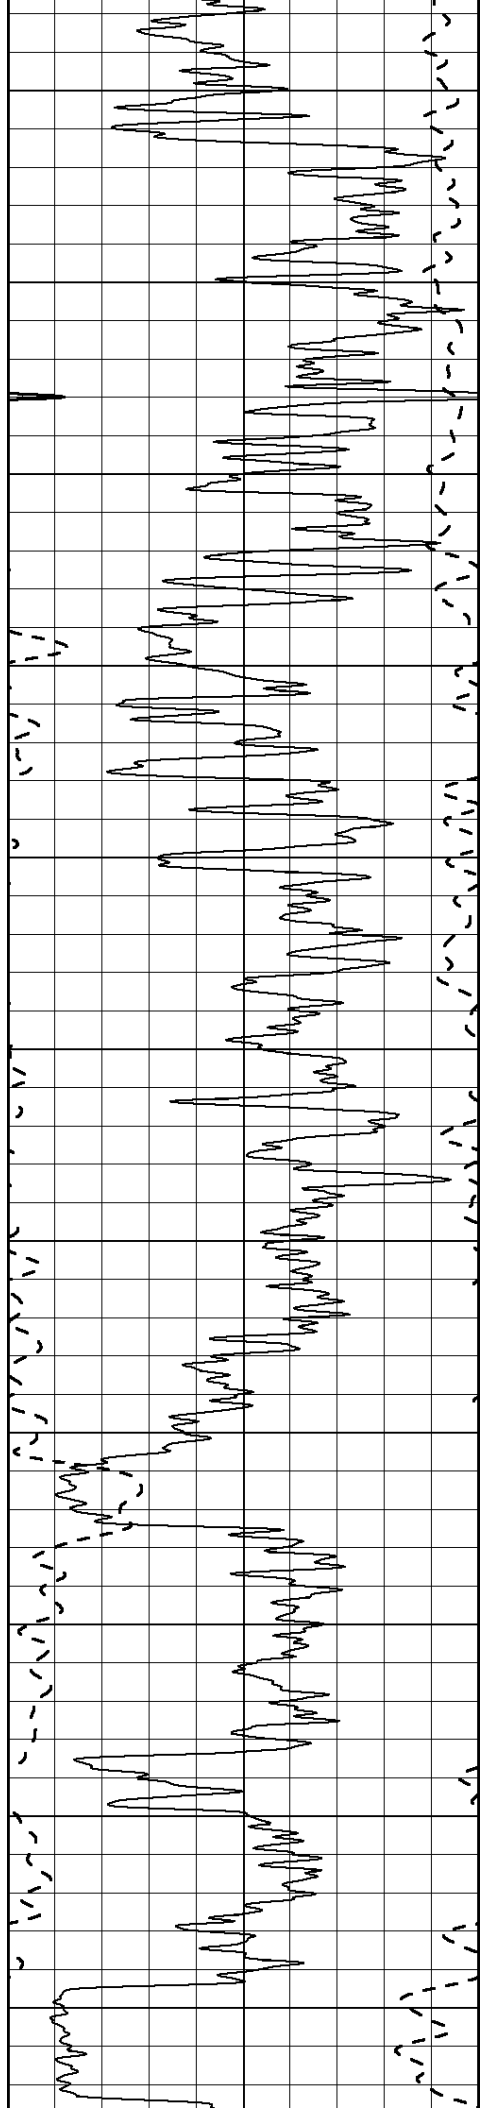

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

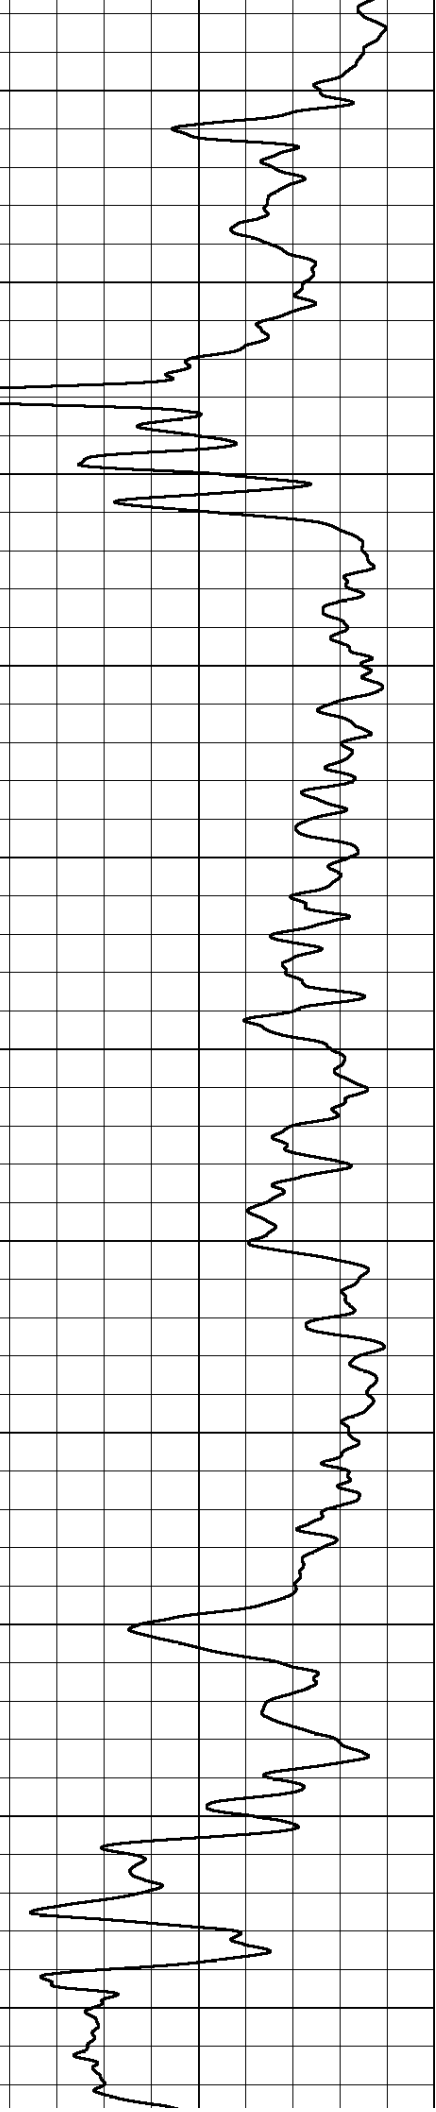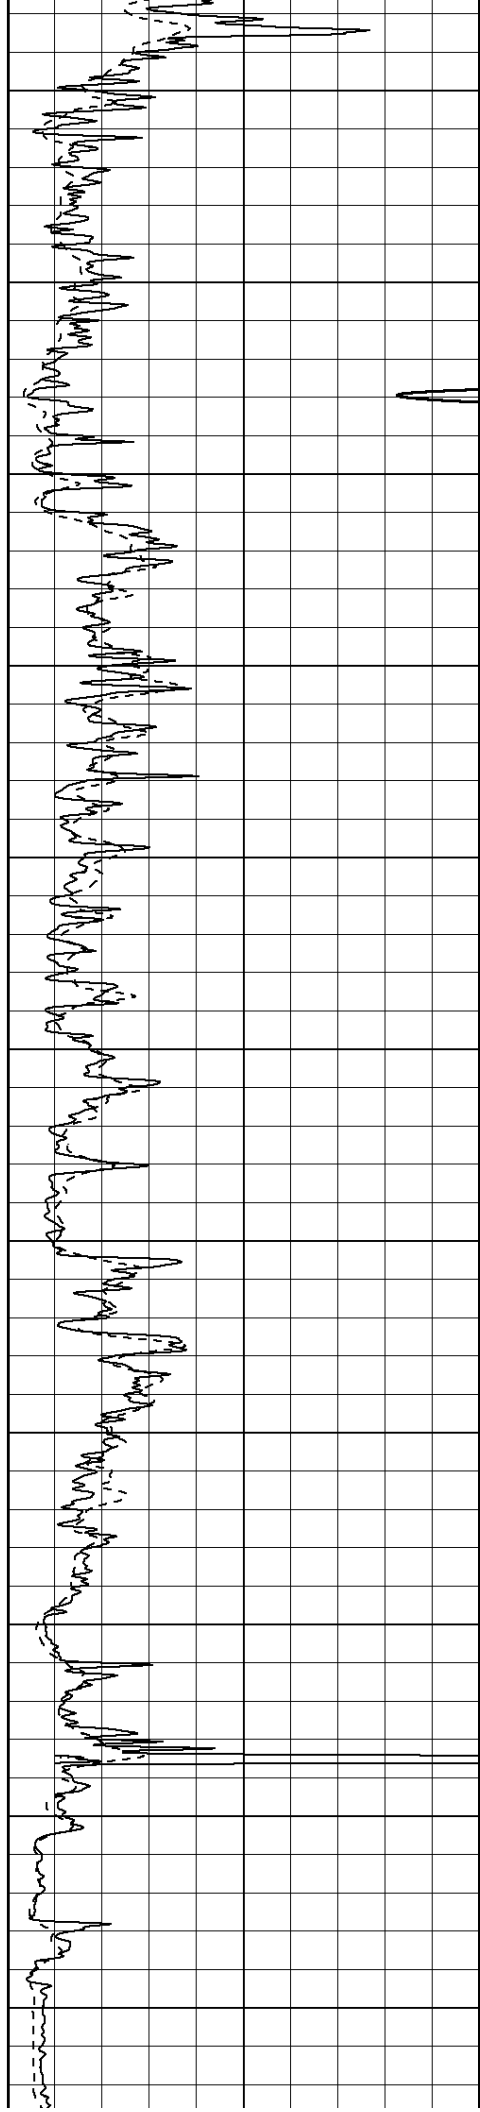

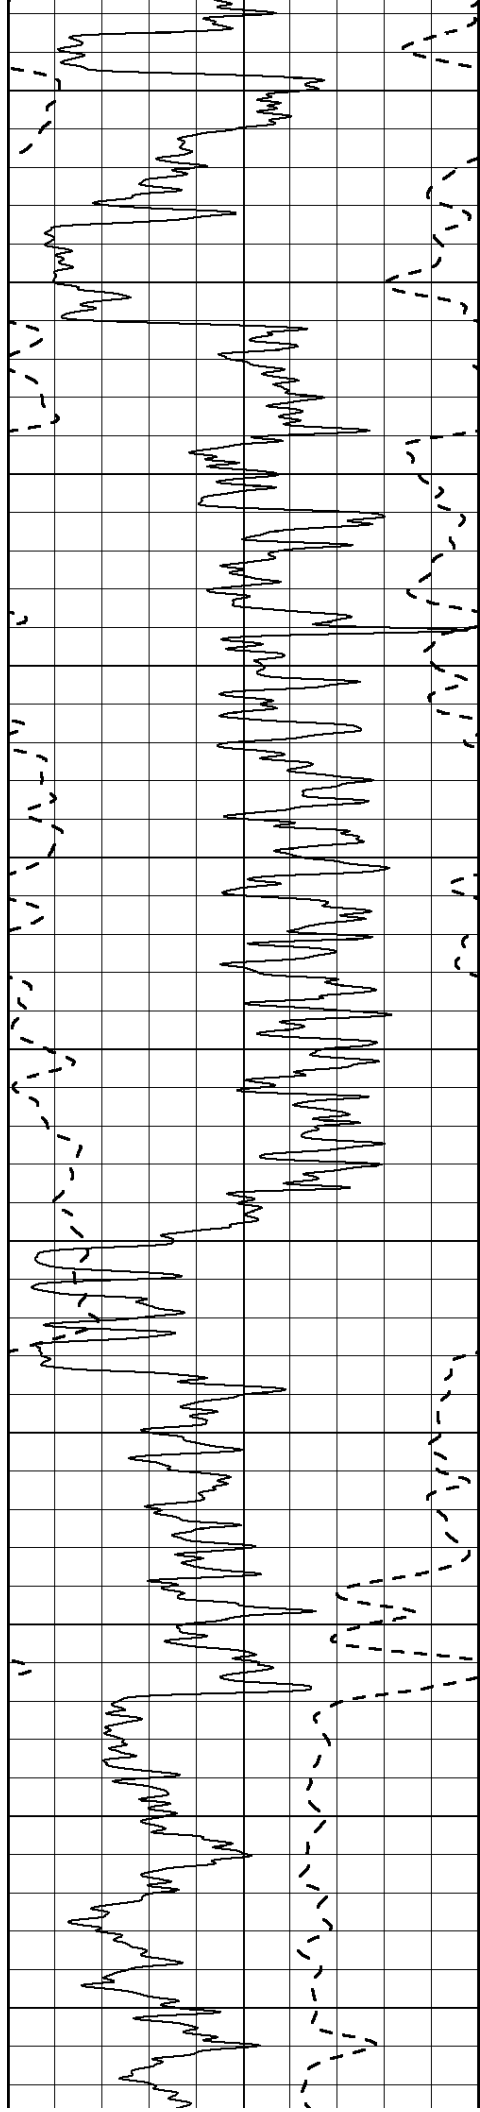

1550

1600

1650

1700

1750

1800


1850


1900

1950

2000

2050

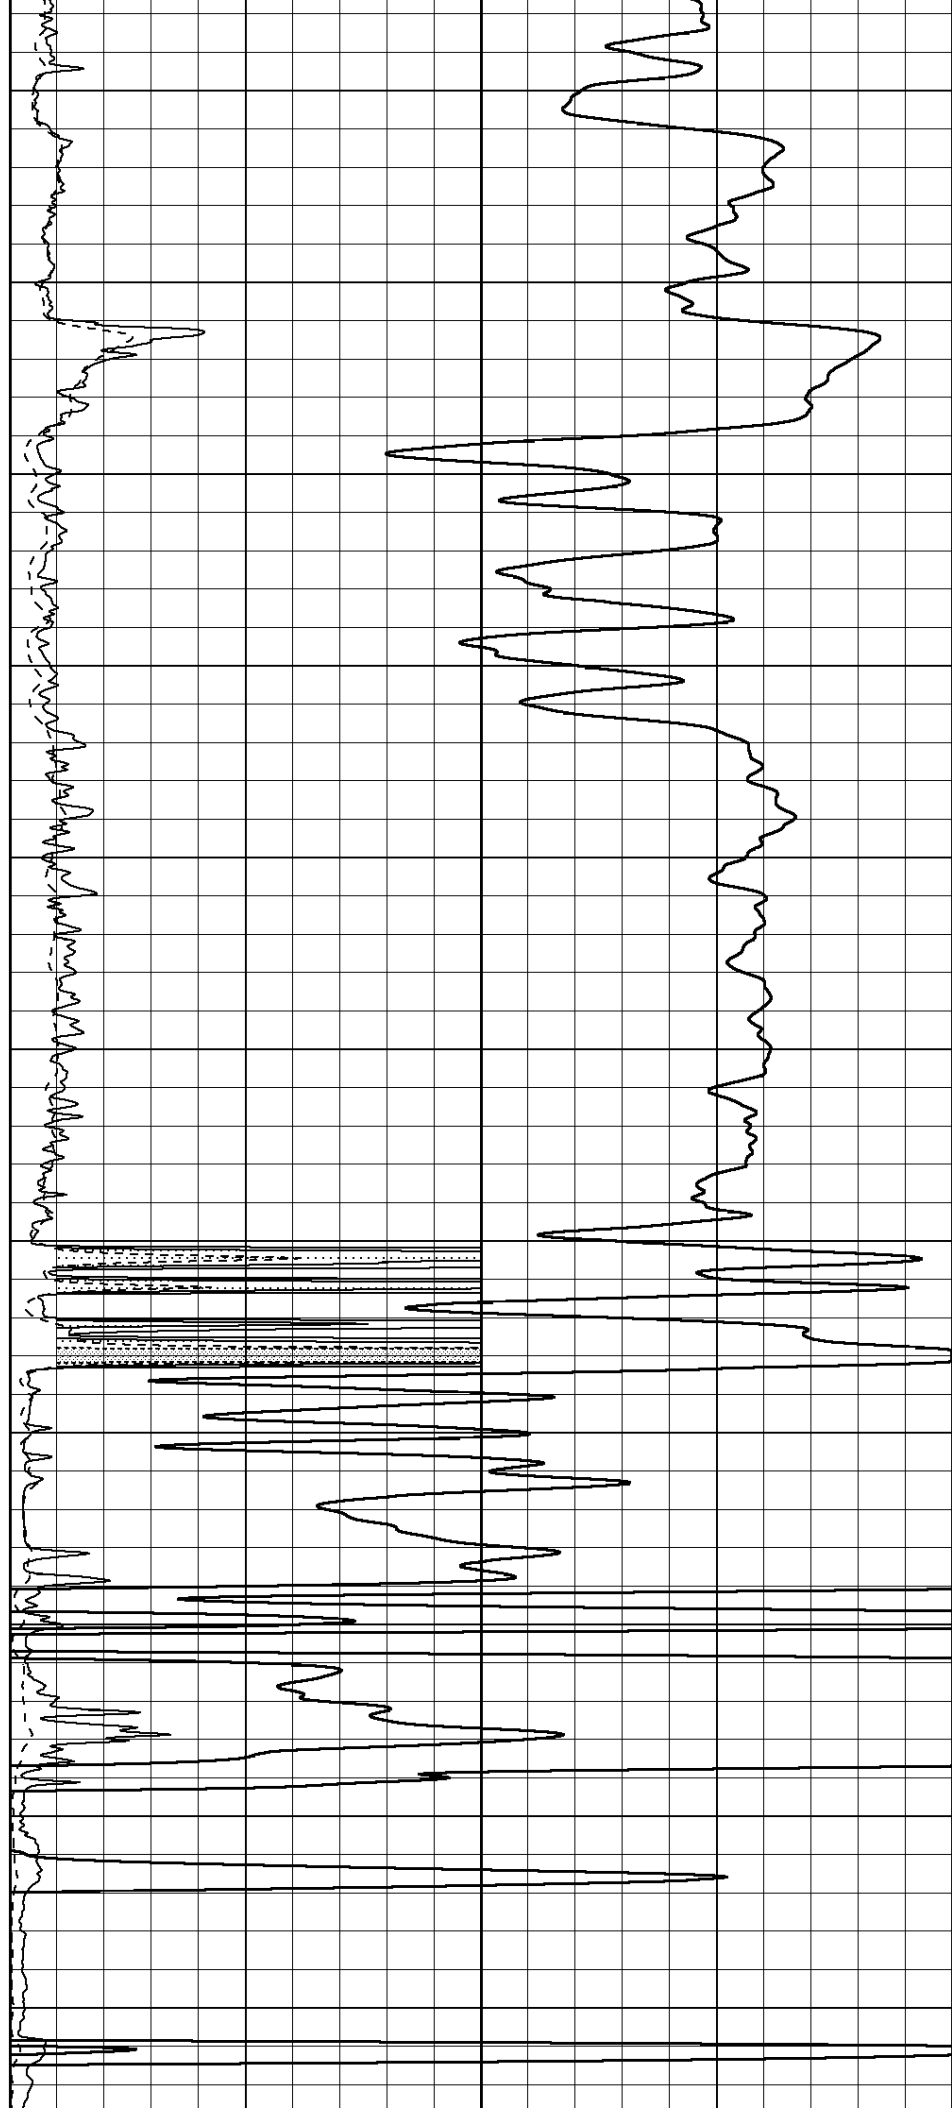

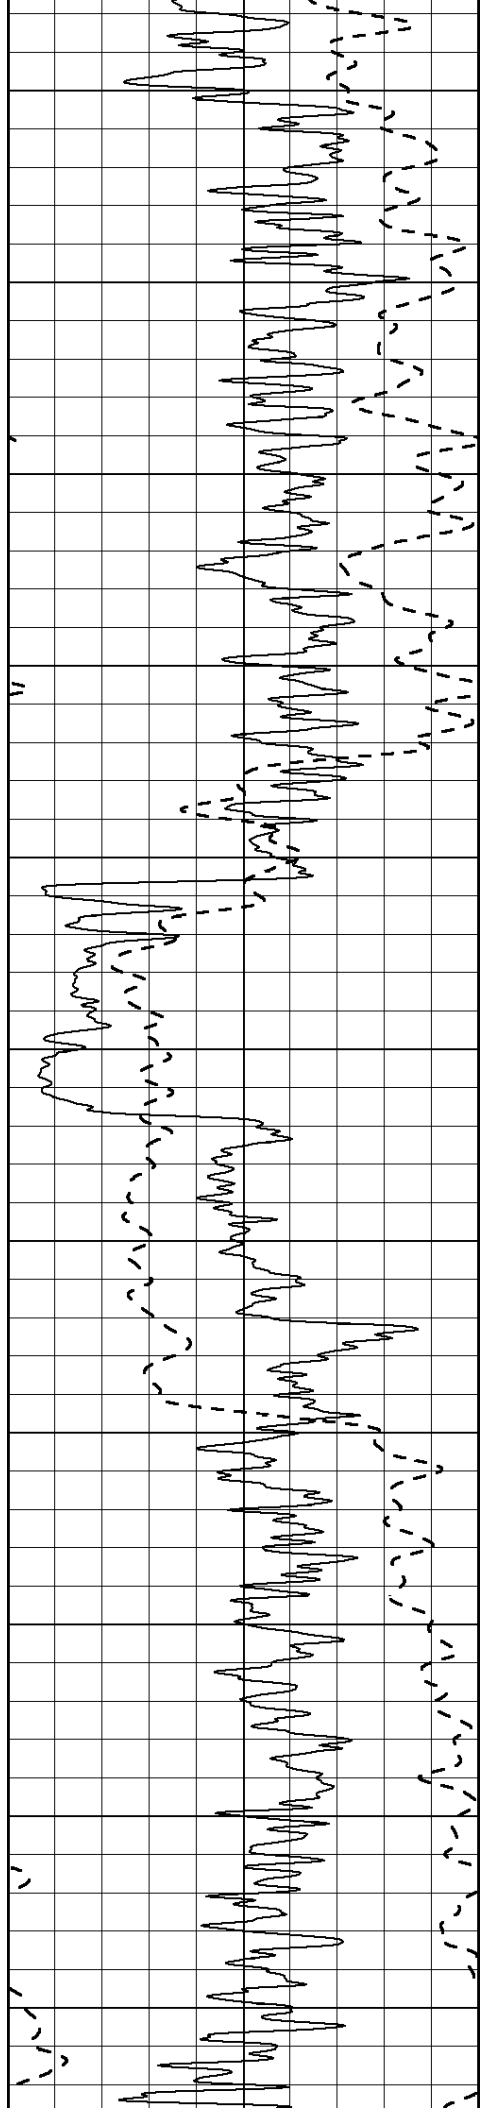

2100

2150

2200

2250

2300

2350


2400


2450

2500

2550

2600

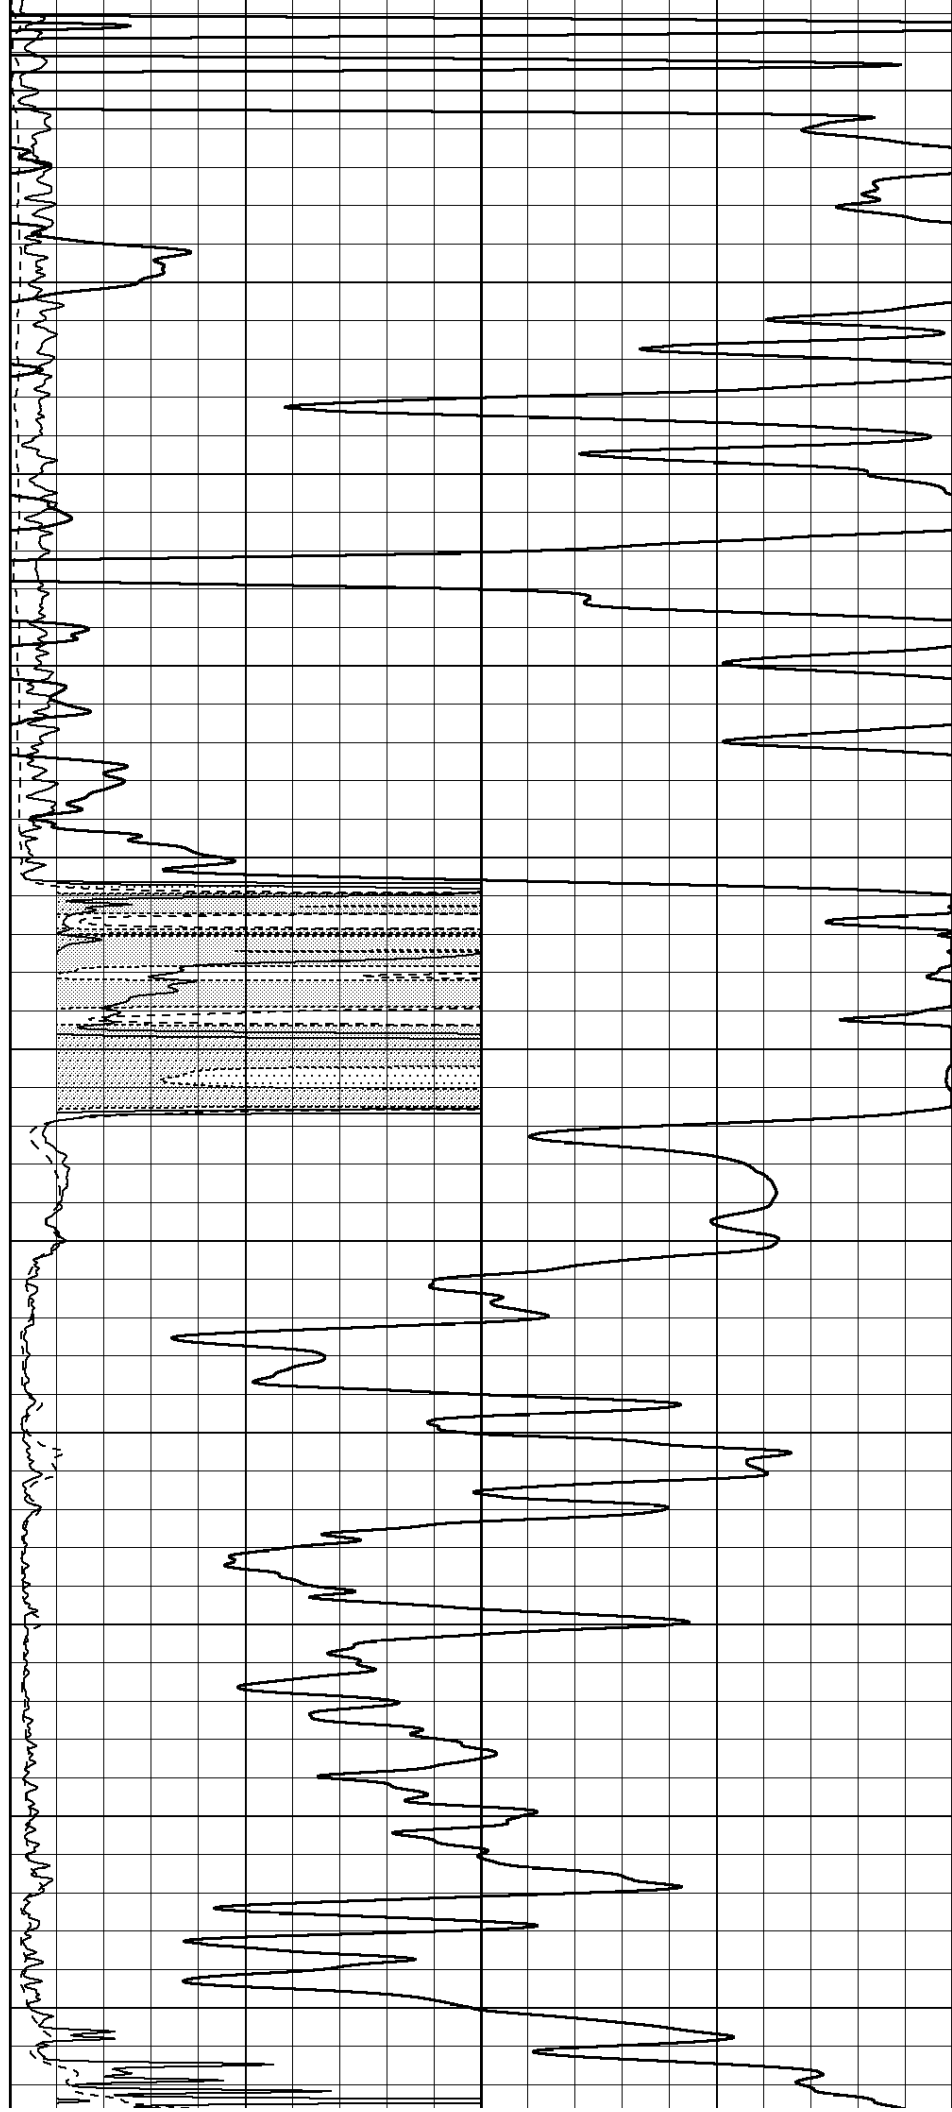

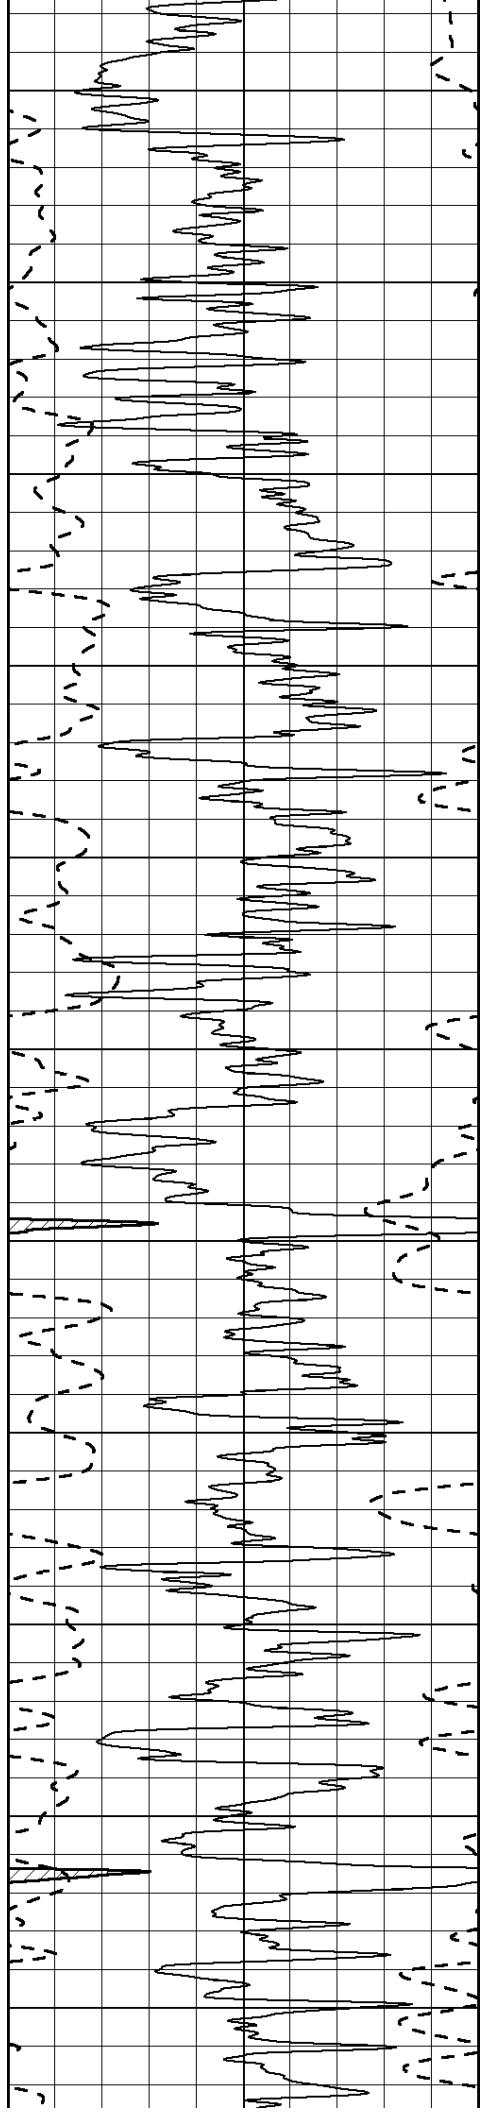

2650

2700

2750

2800

2850

2900


2950


3000

3050

3100

3150

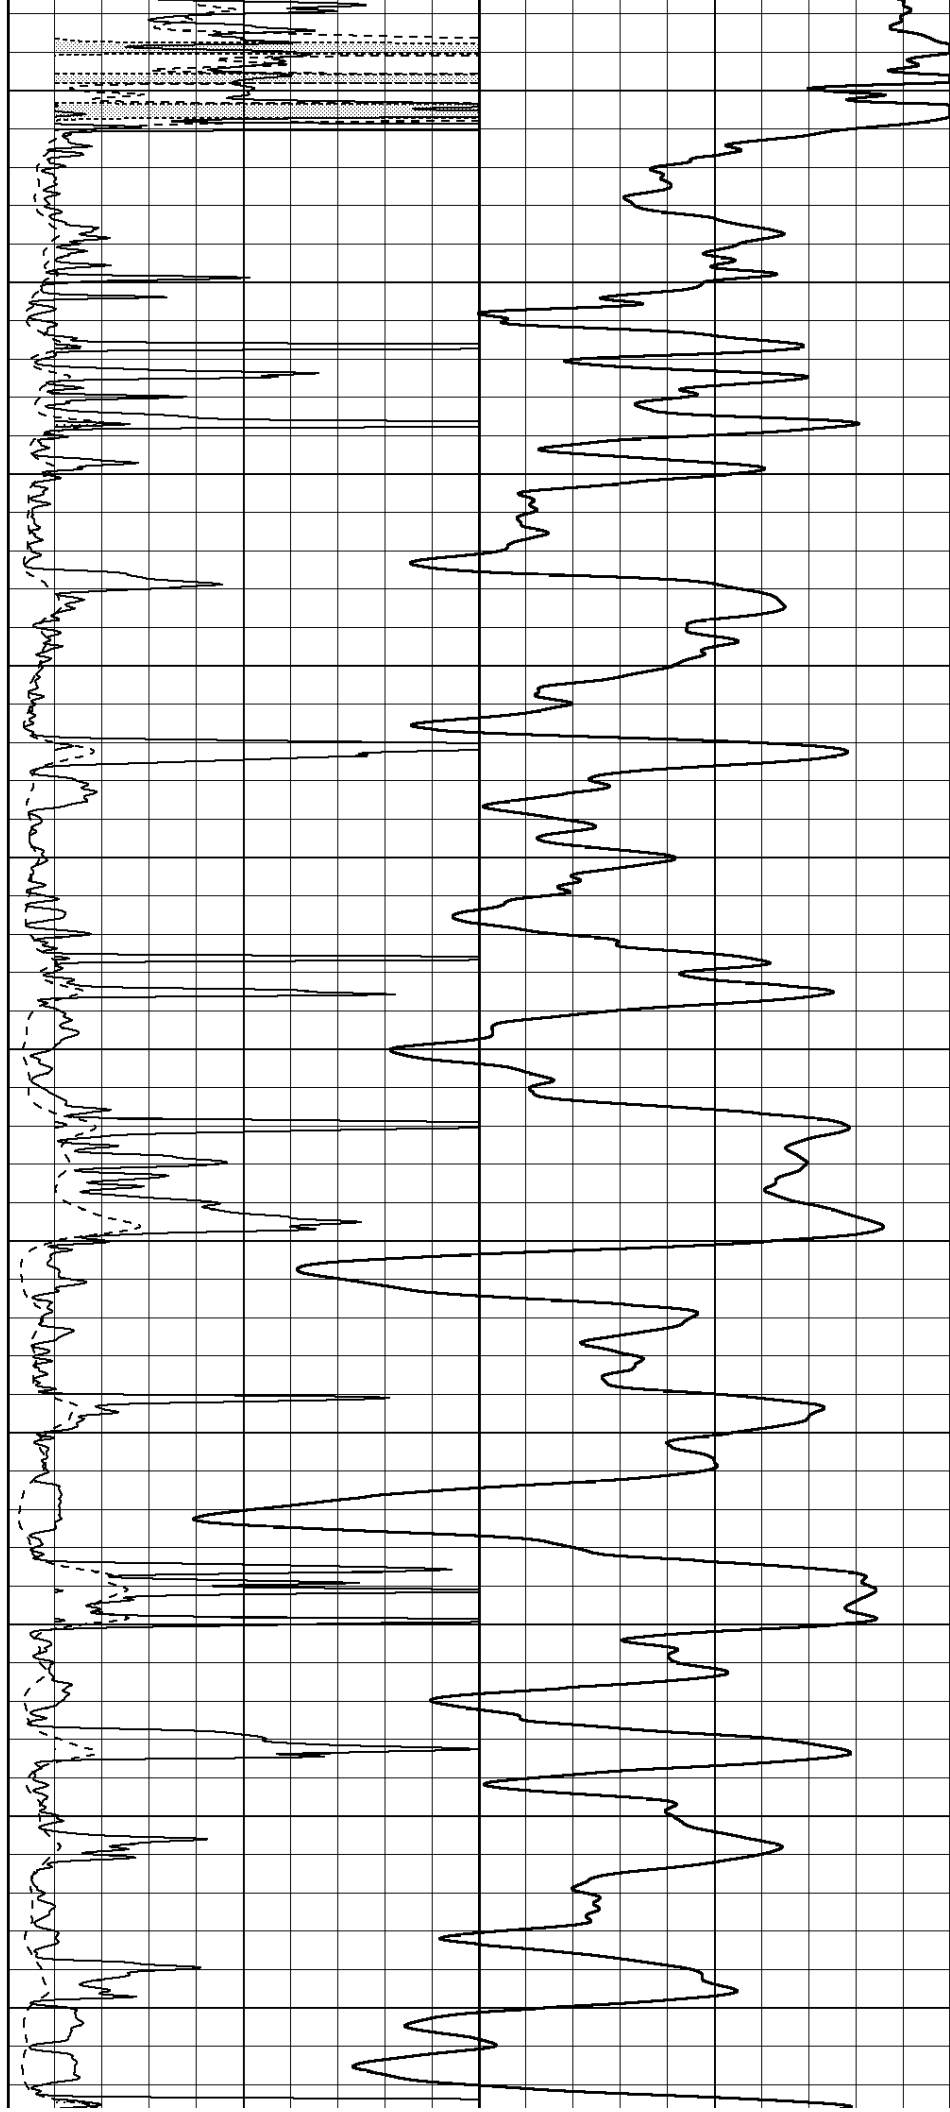

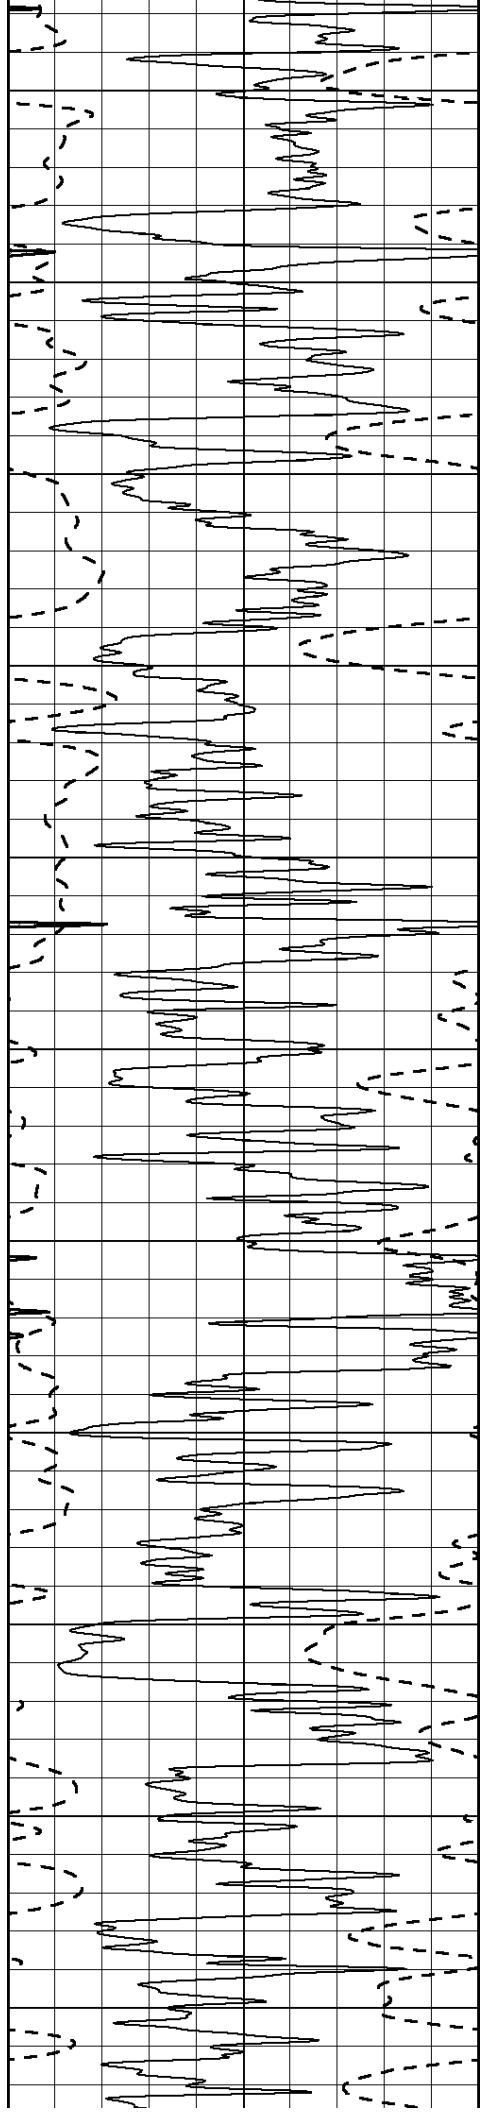

3200

3250

3300

3350

3400

3450



3500


3550

3600

3650

3700

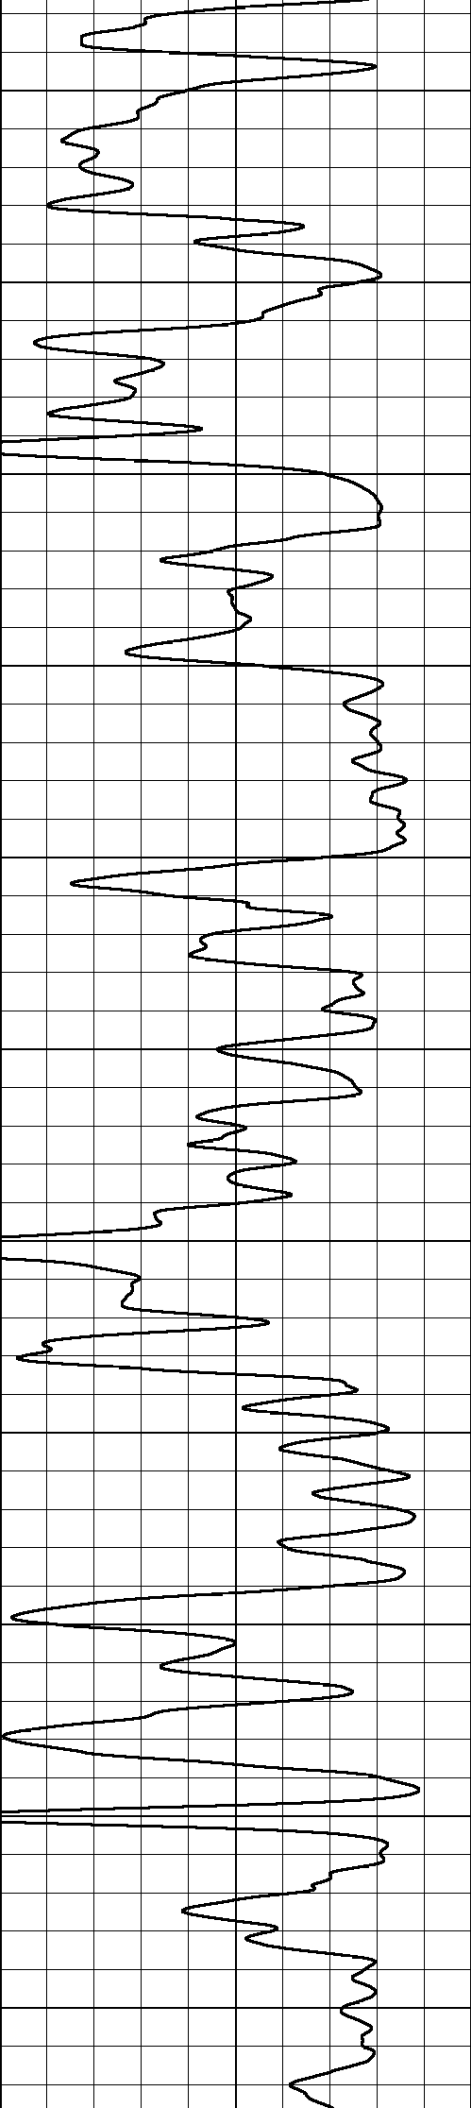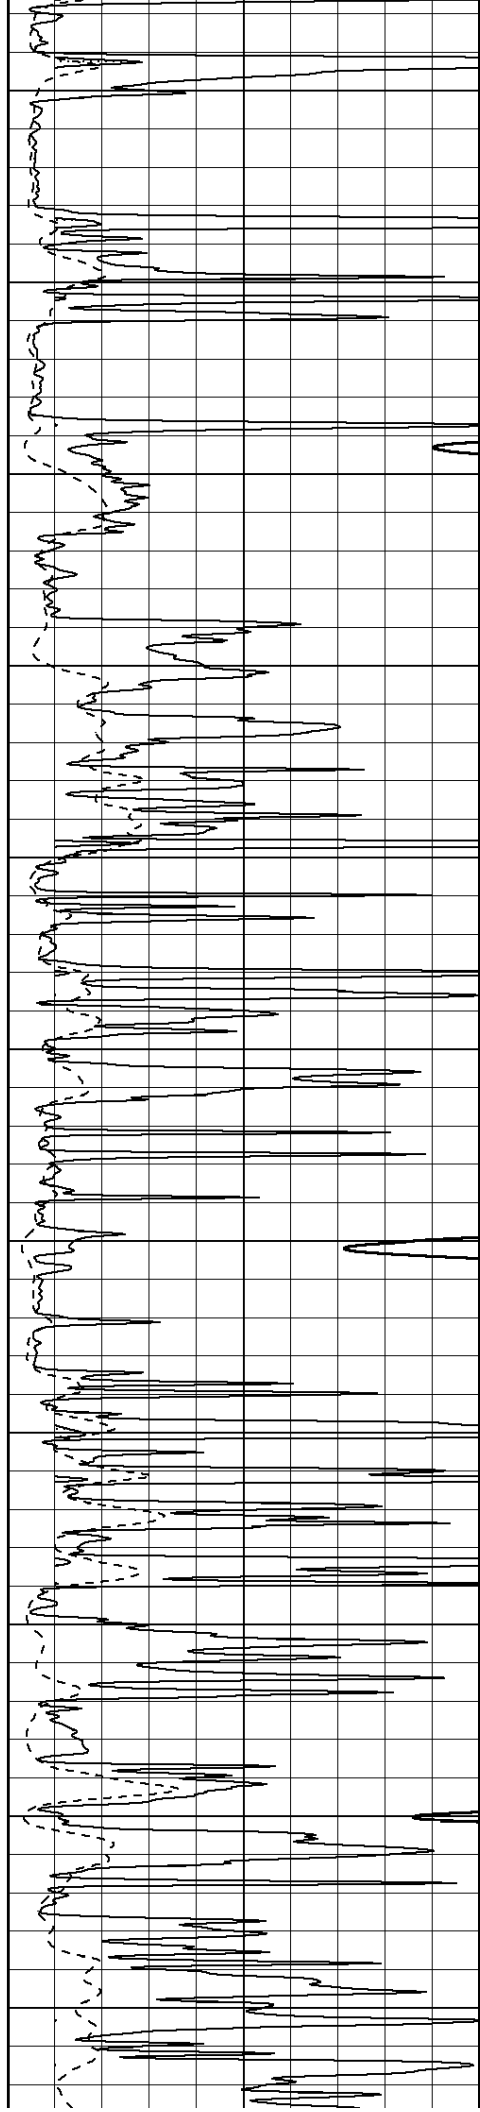

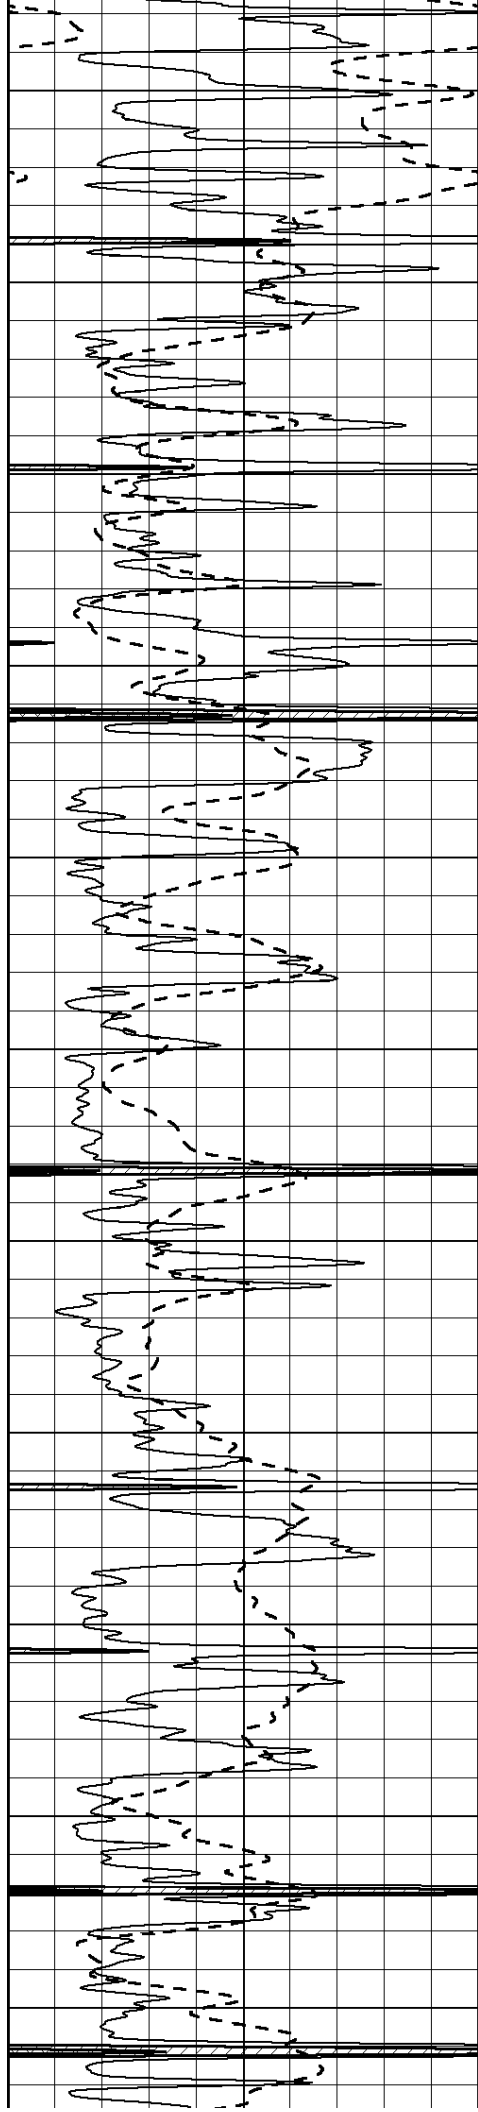

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200

4250

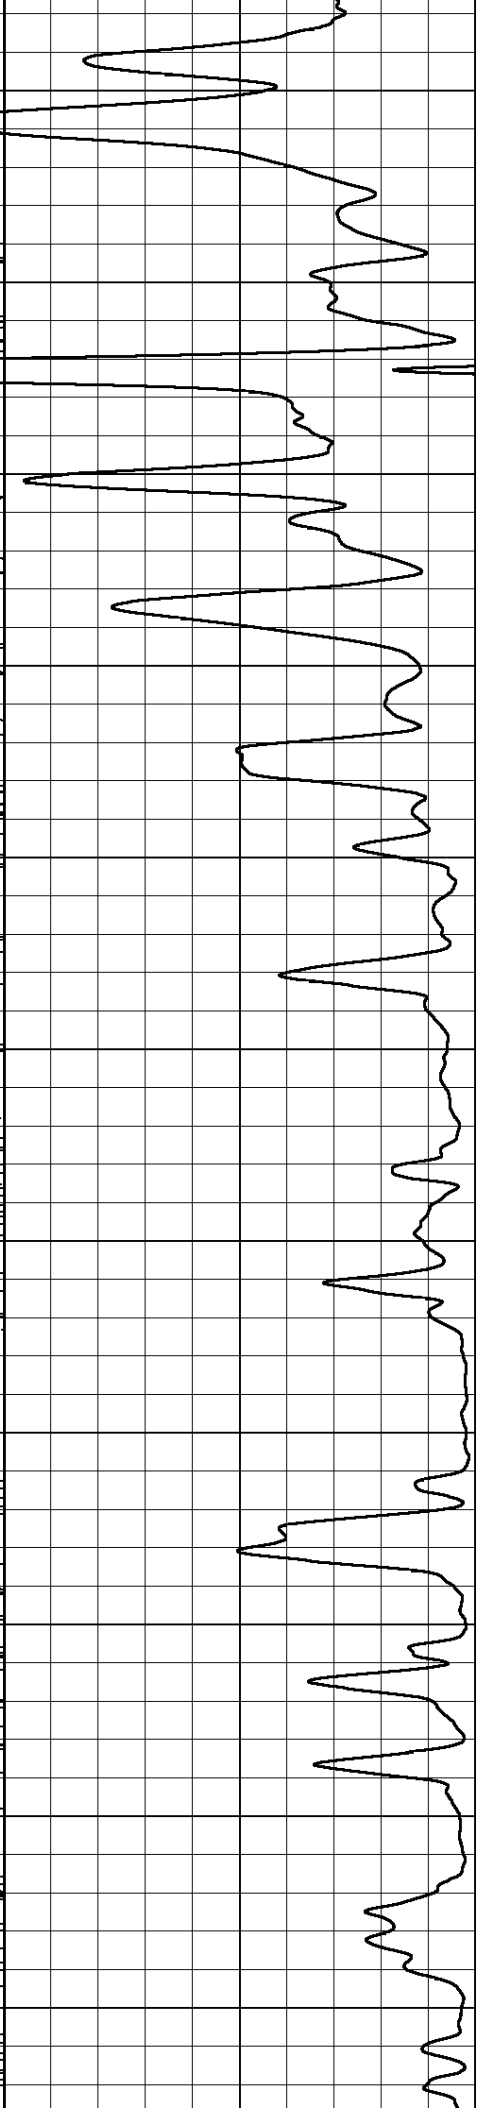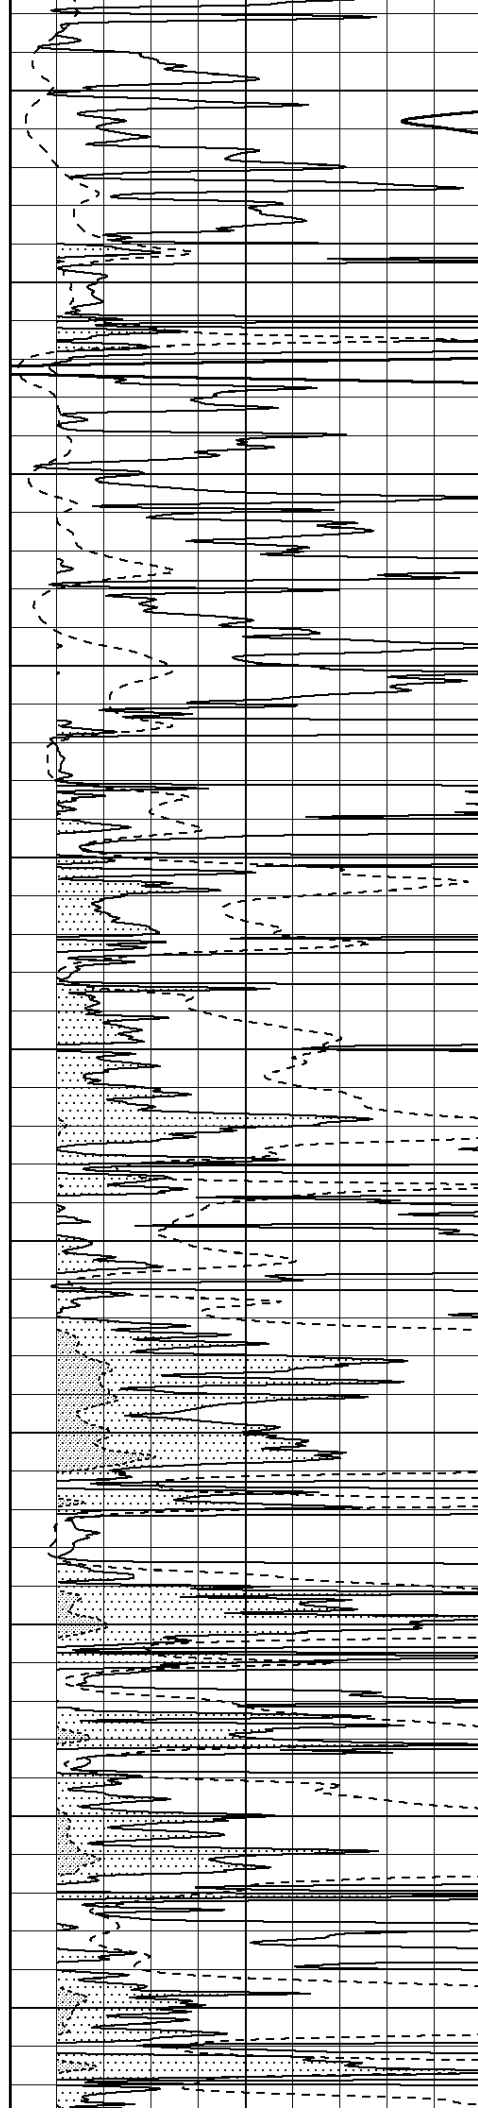

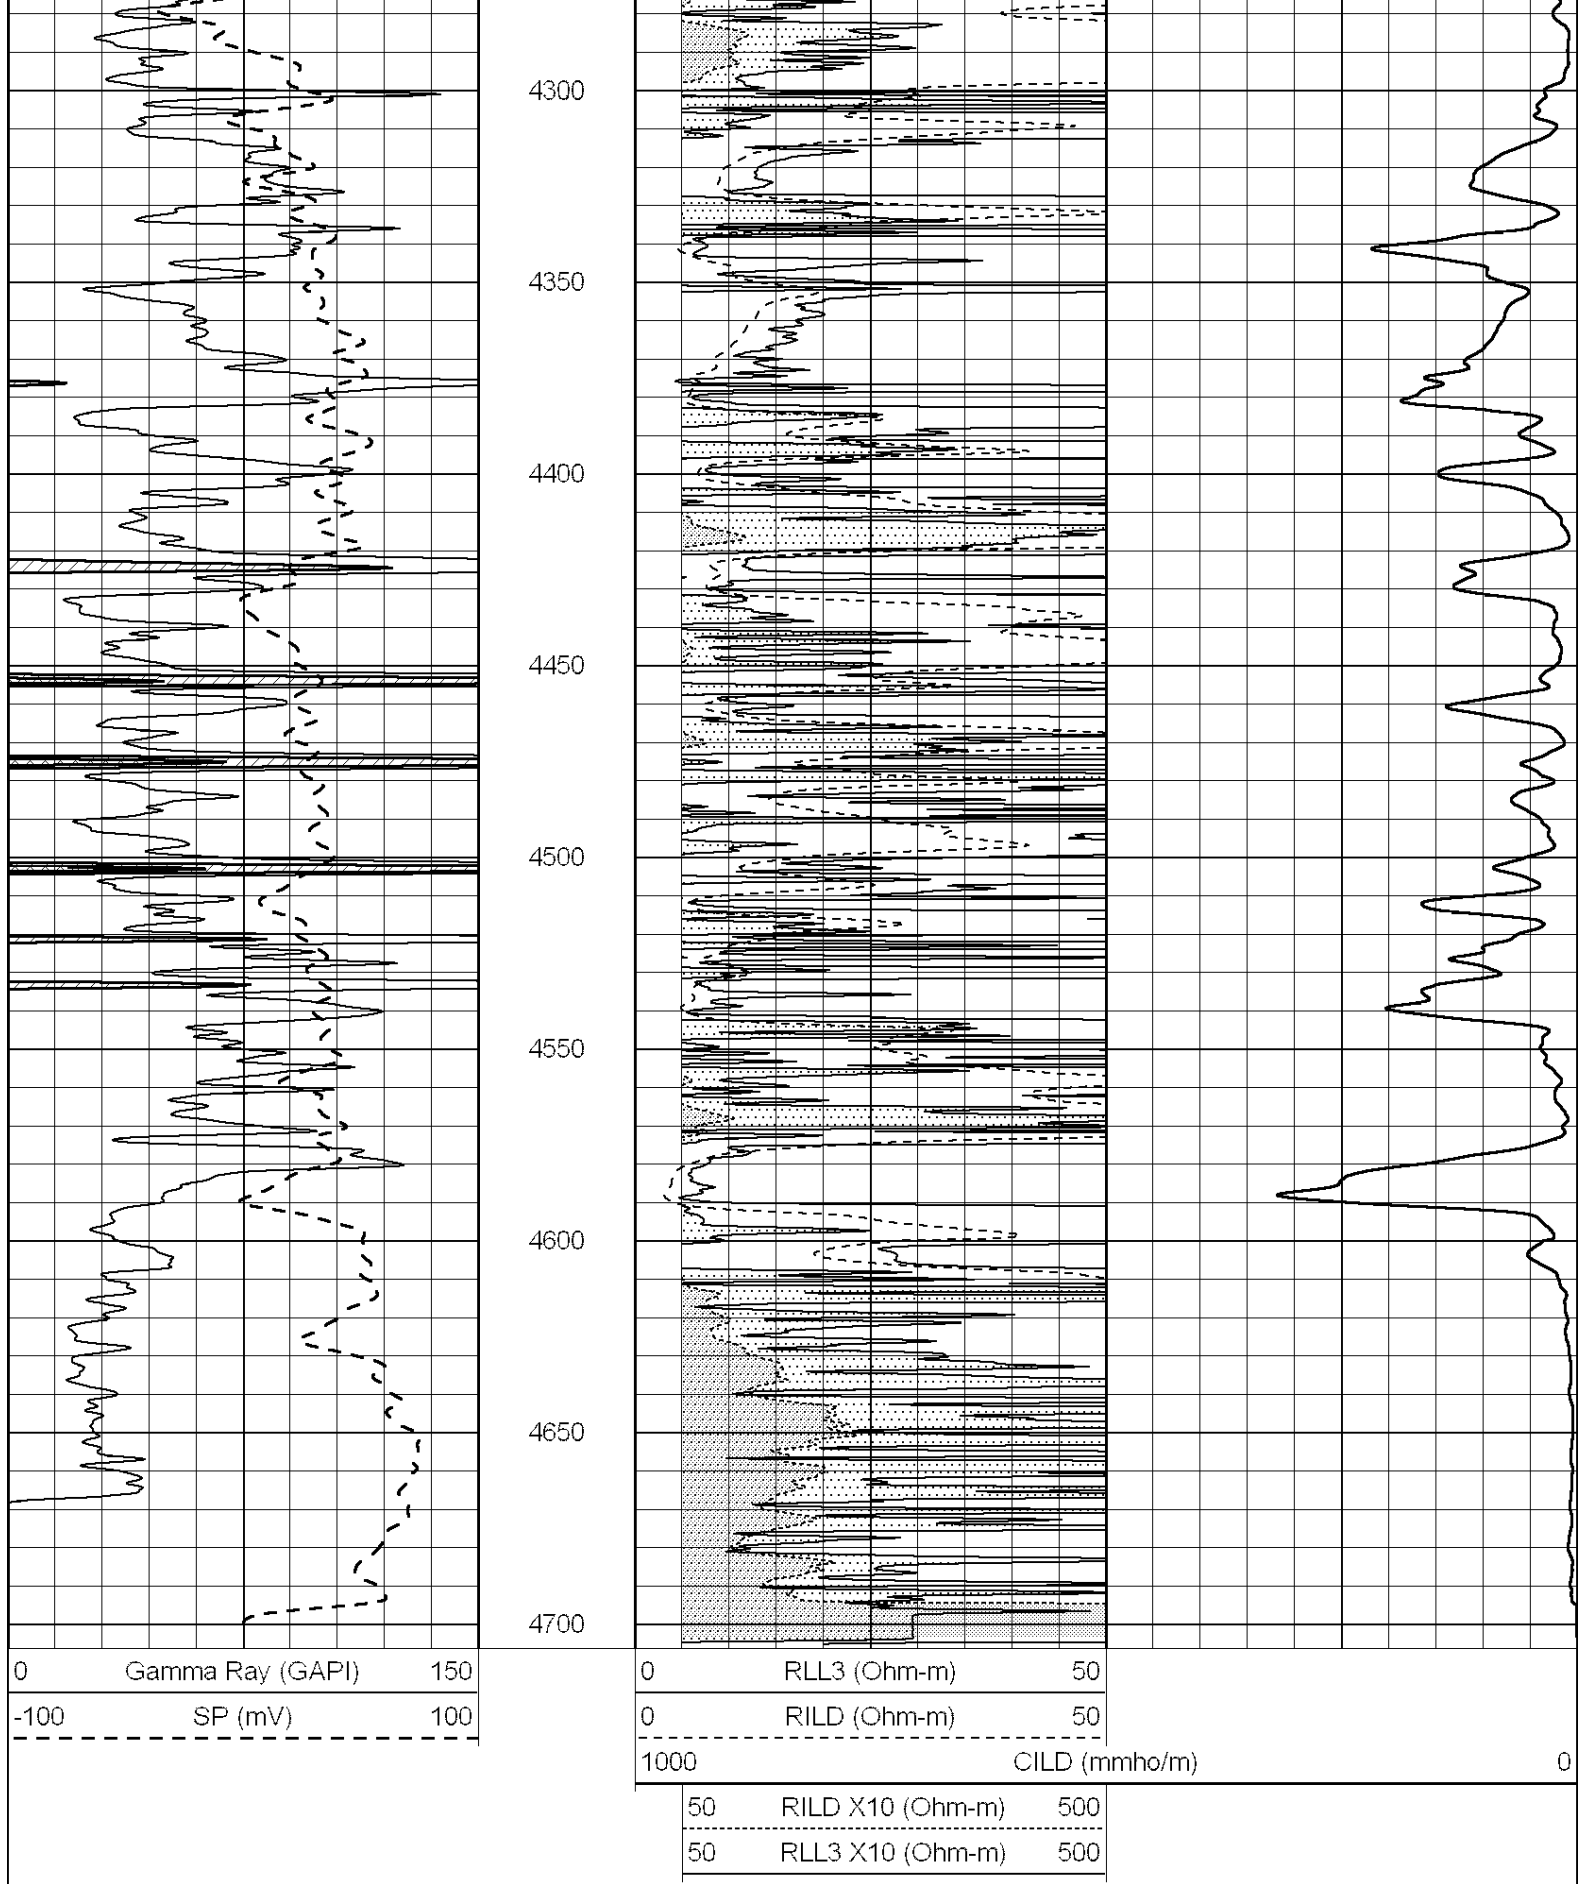


COMPLETION
& PRODUCTION
SERVICES CO.

ANHYDRITE

Database File: 011679pe.db
 Dataset Pathname: pass3.10
 Presentation Format: dil
 Dataset Creation: Tue Oct 01 11:38:42 2013
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

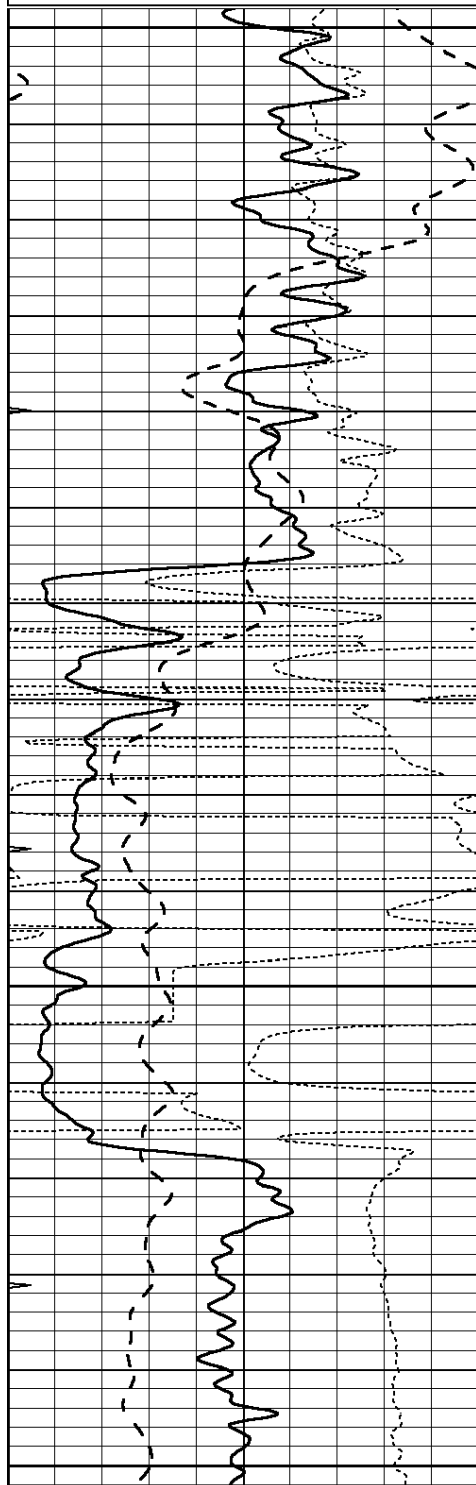


2250

2300

2350

2400

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

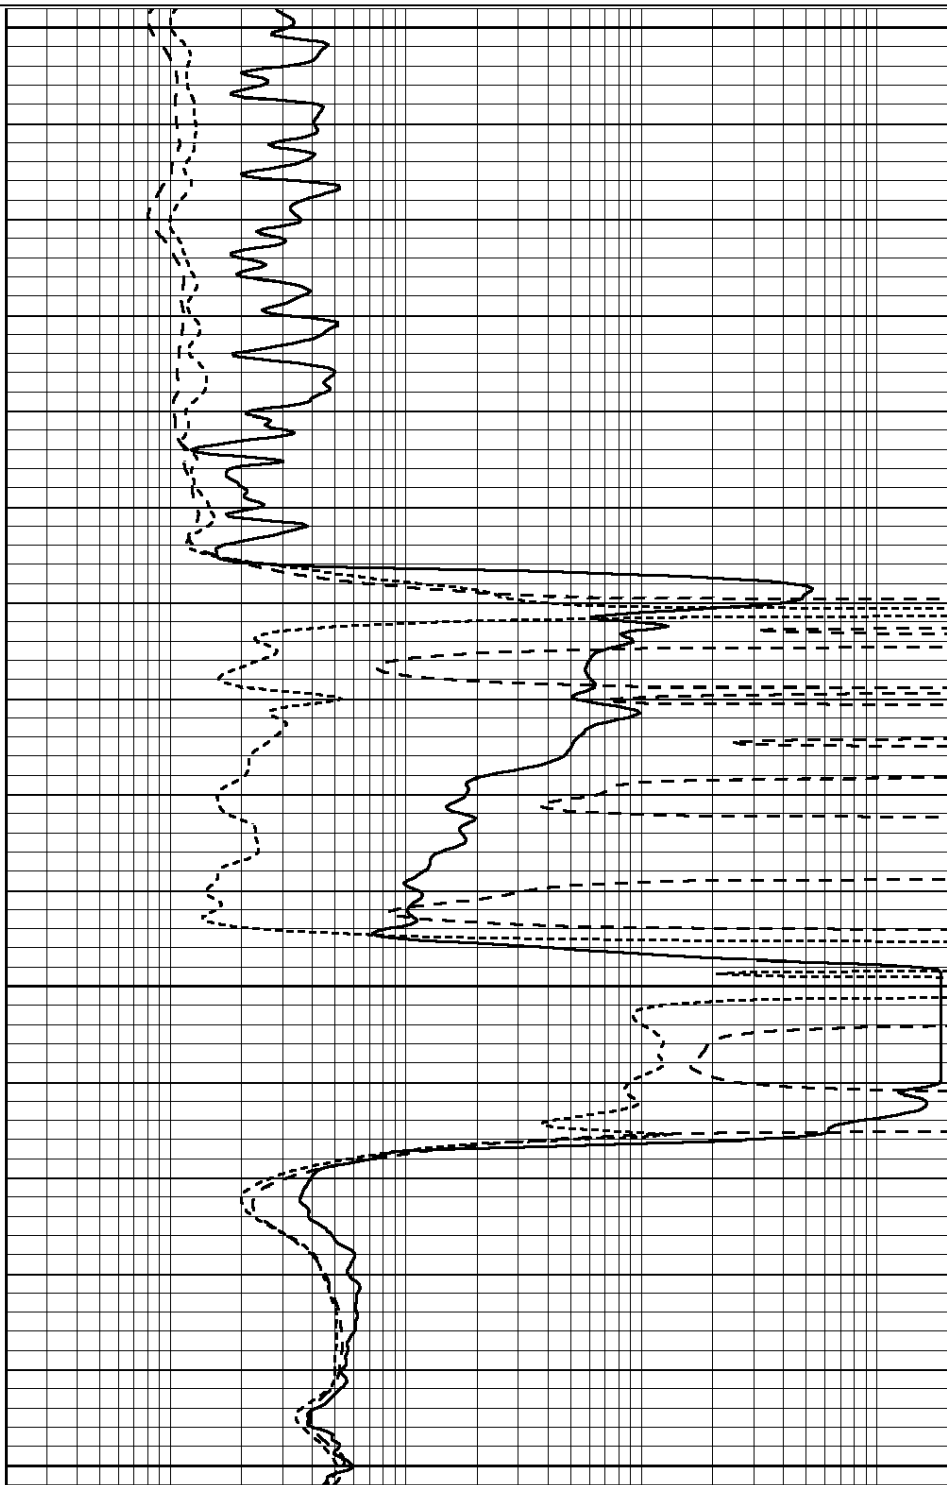

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000




**COMPLETION
& PRODUCTION
SERVICES CO.**

MAIN SECTION

Database File: 011679pe.db
Dataset Pathname: pass3.9
Presentation Format: dil
Dataset Creation: Tue Oct 01 11:38:24 2013
Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

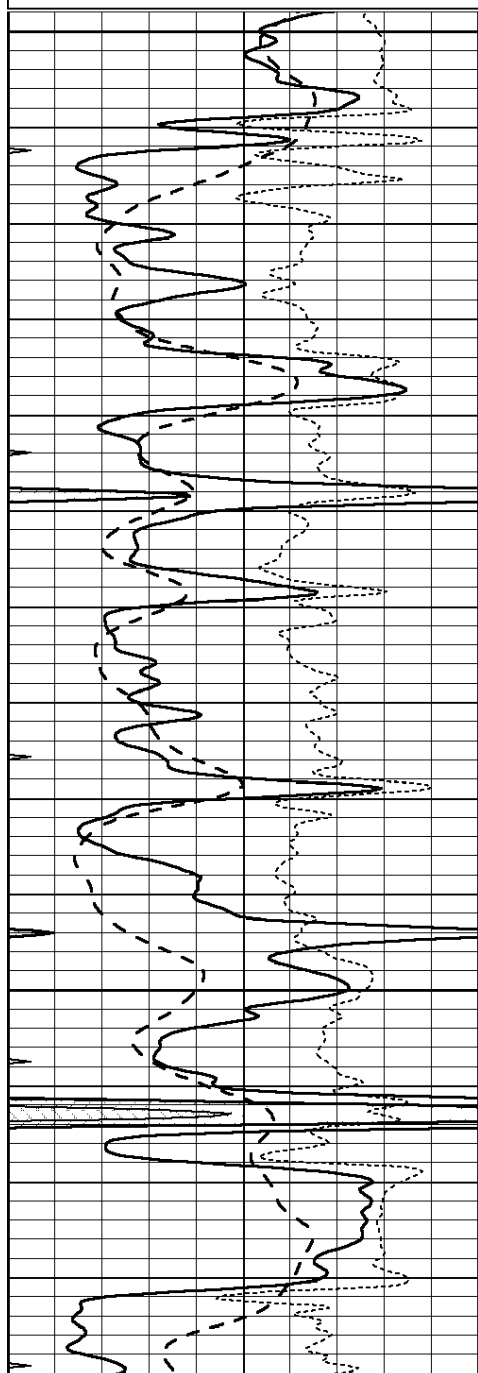


3800

3850

3900

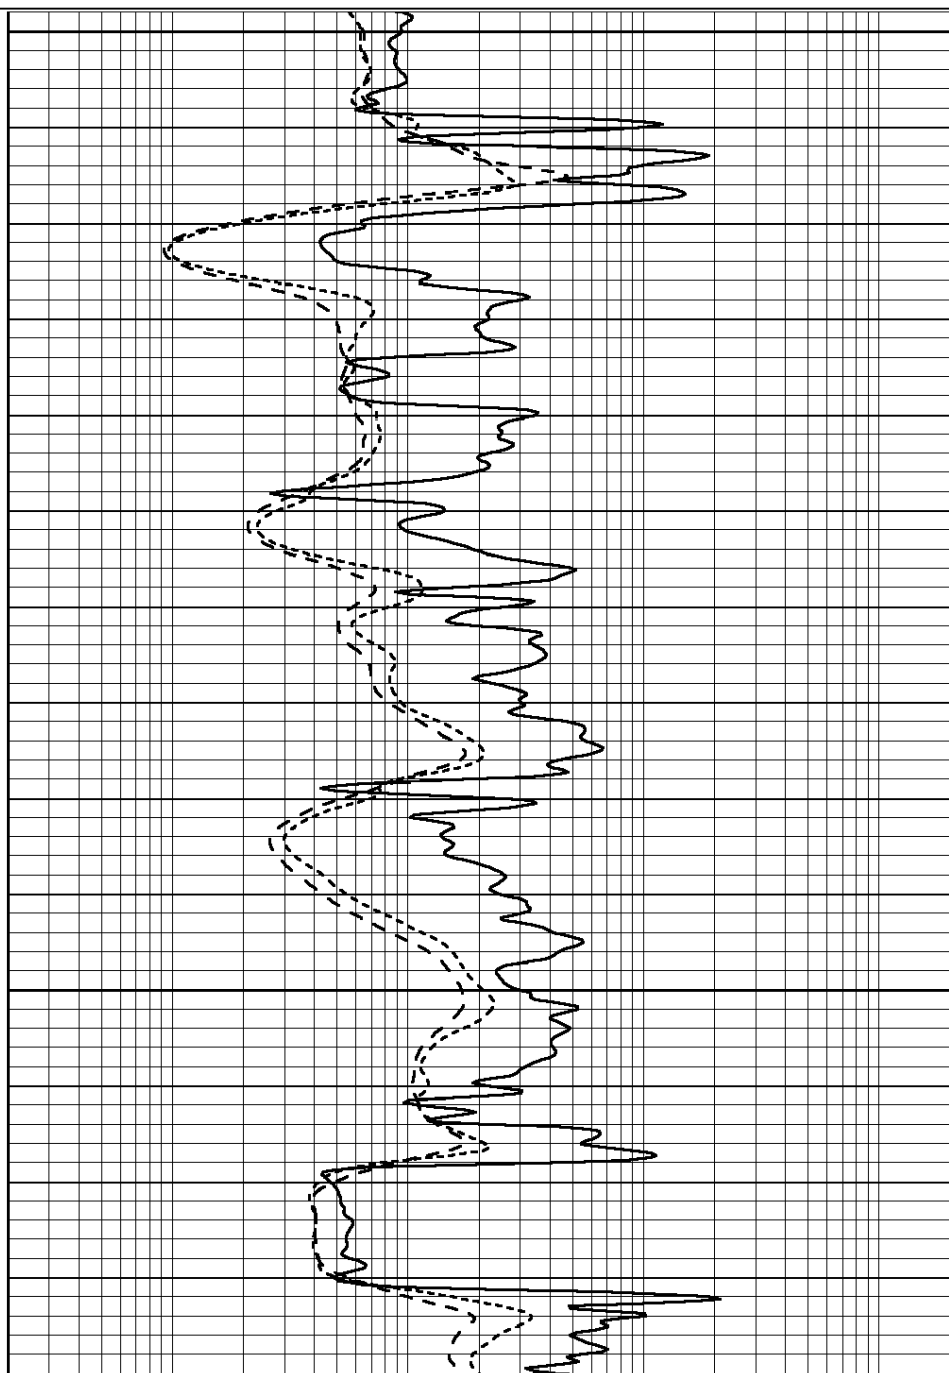

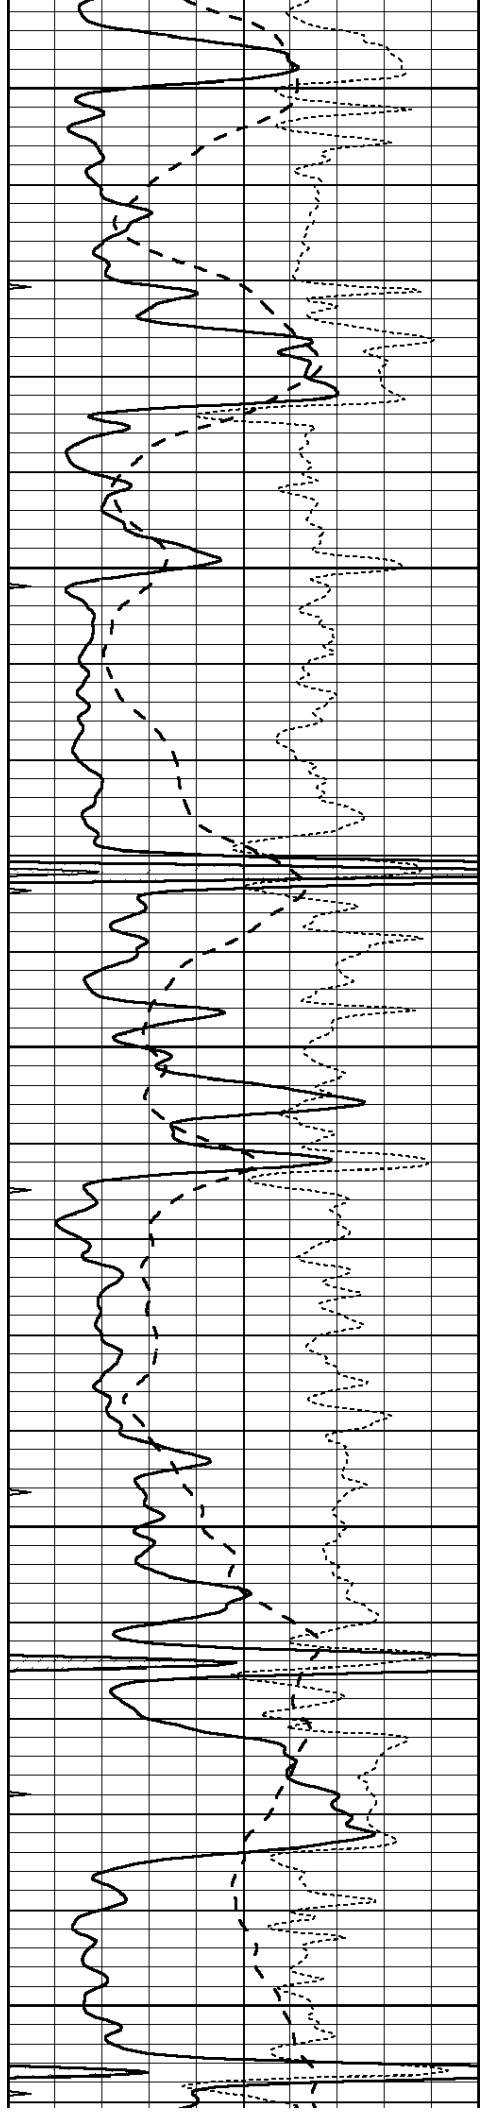


3950


4000

4050

4100

4150

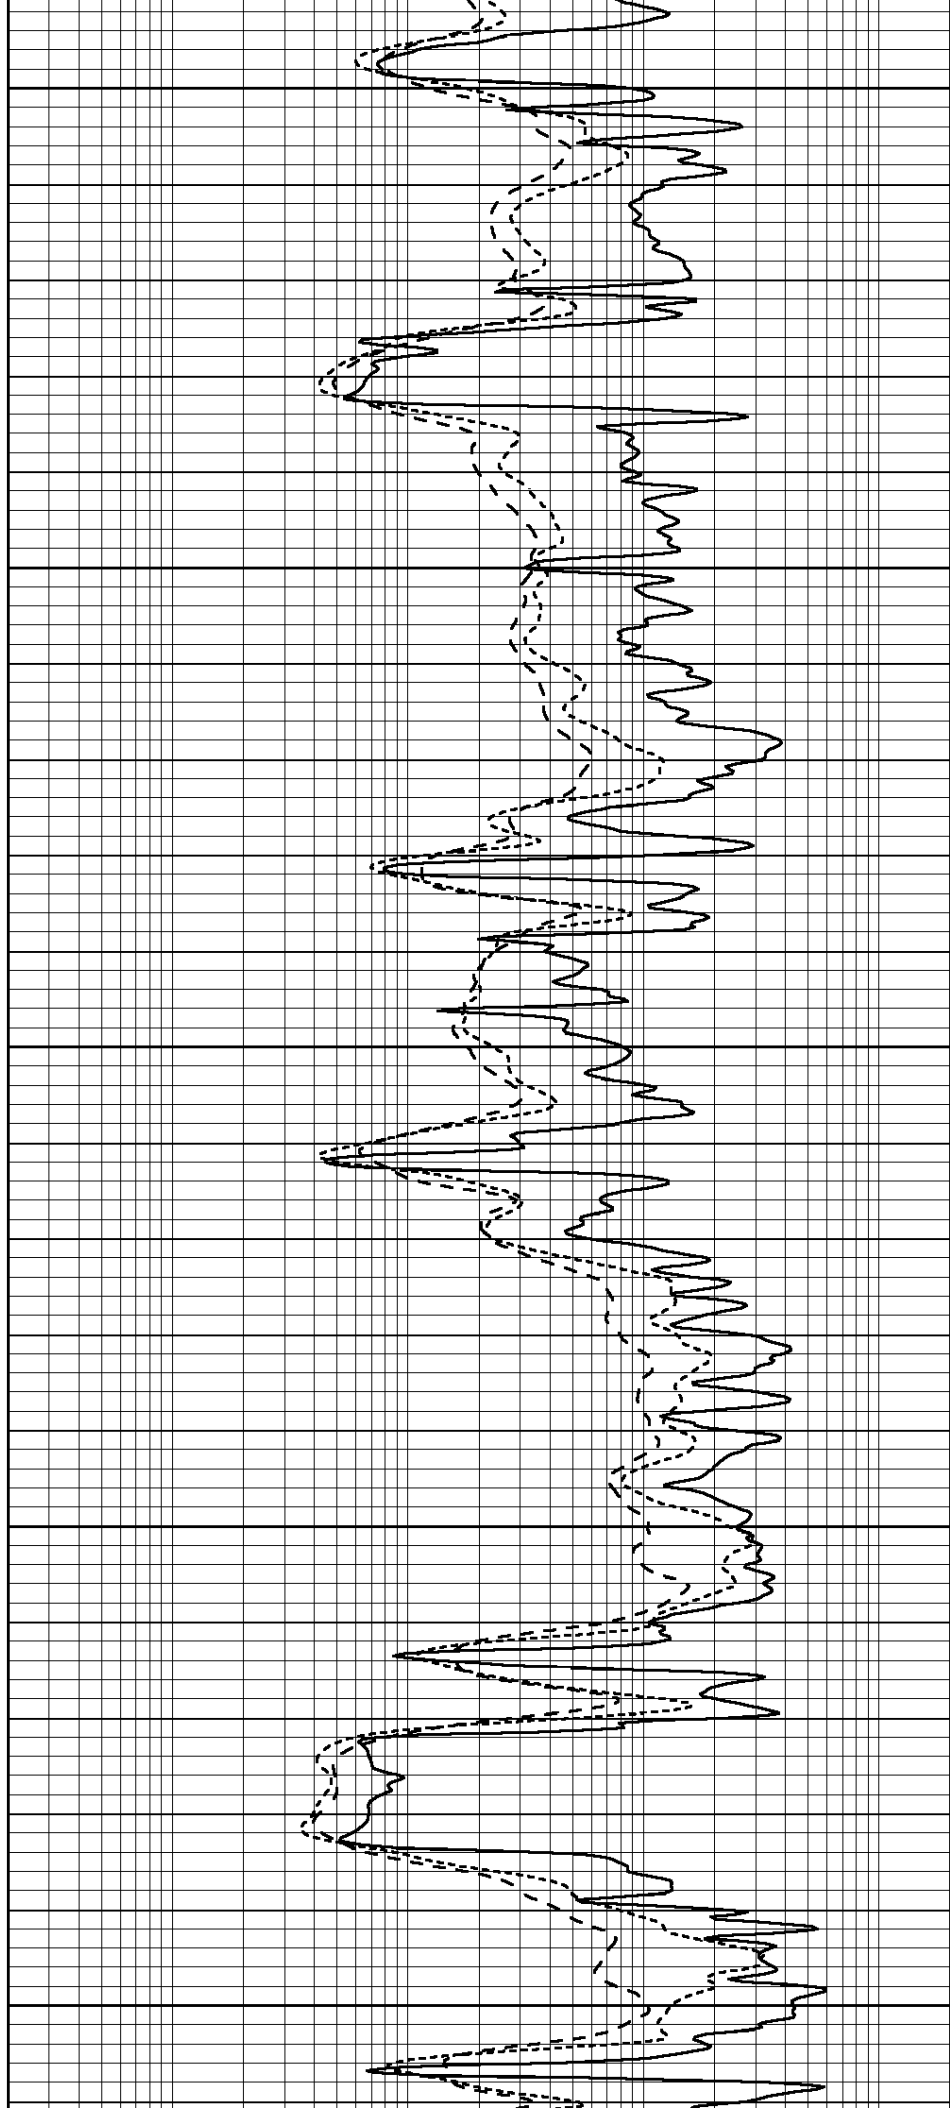

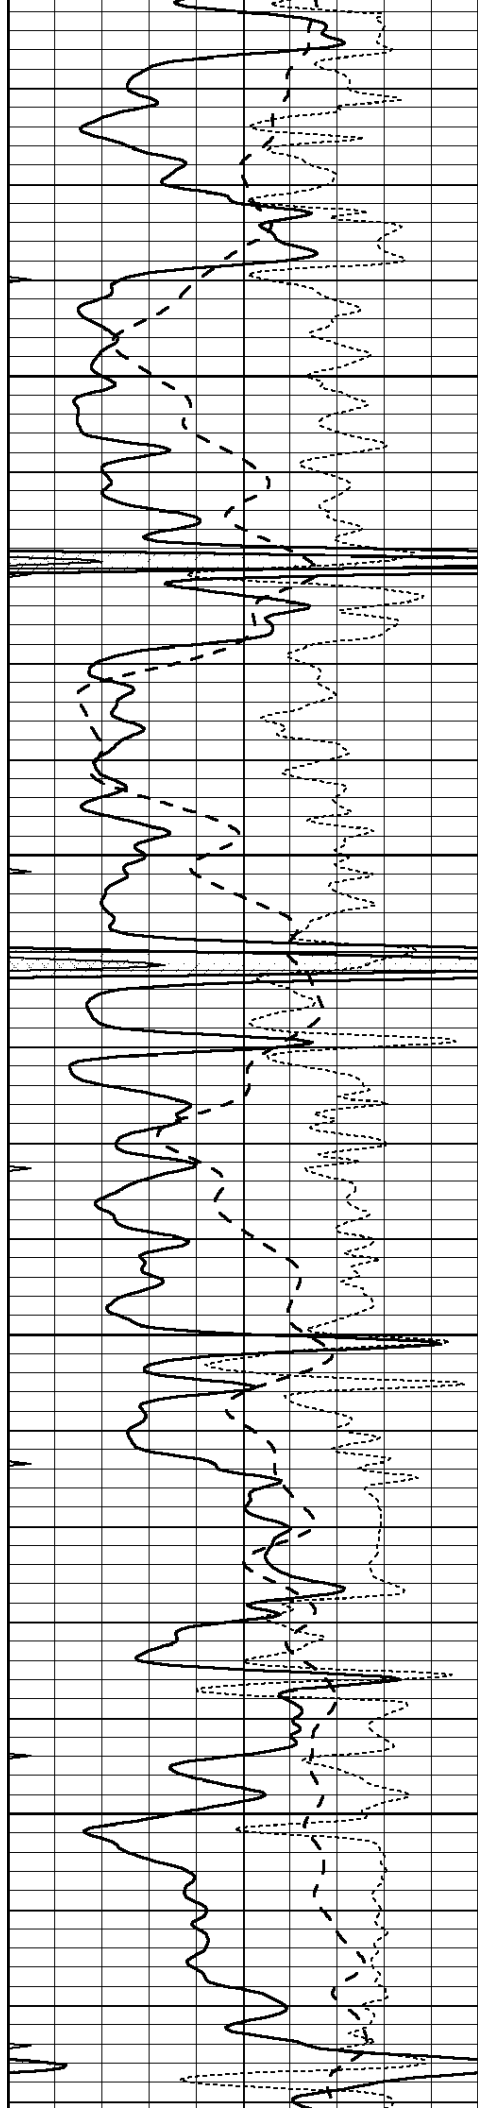



4200

4250

4300

4350

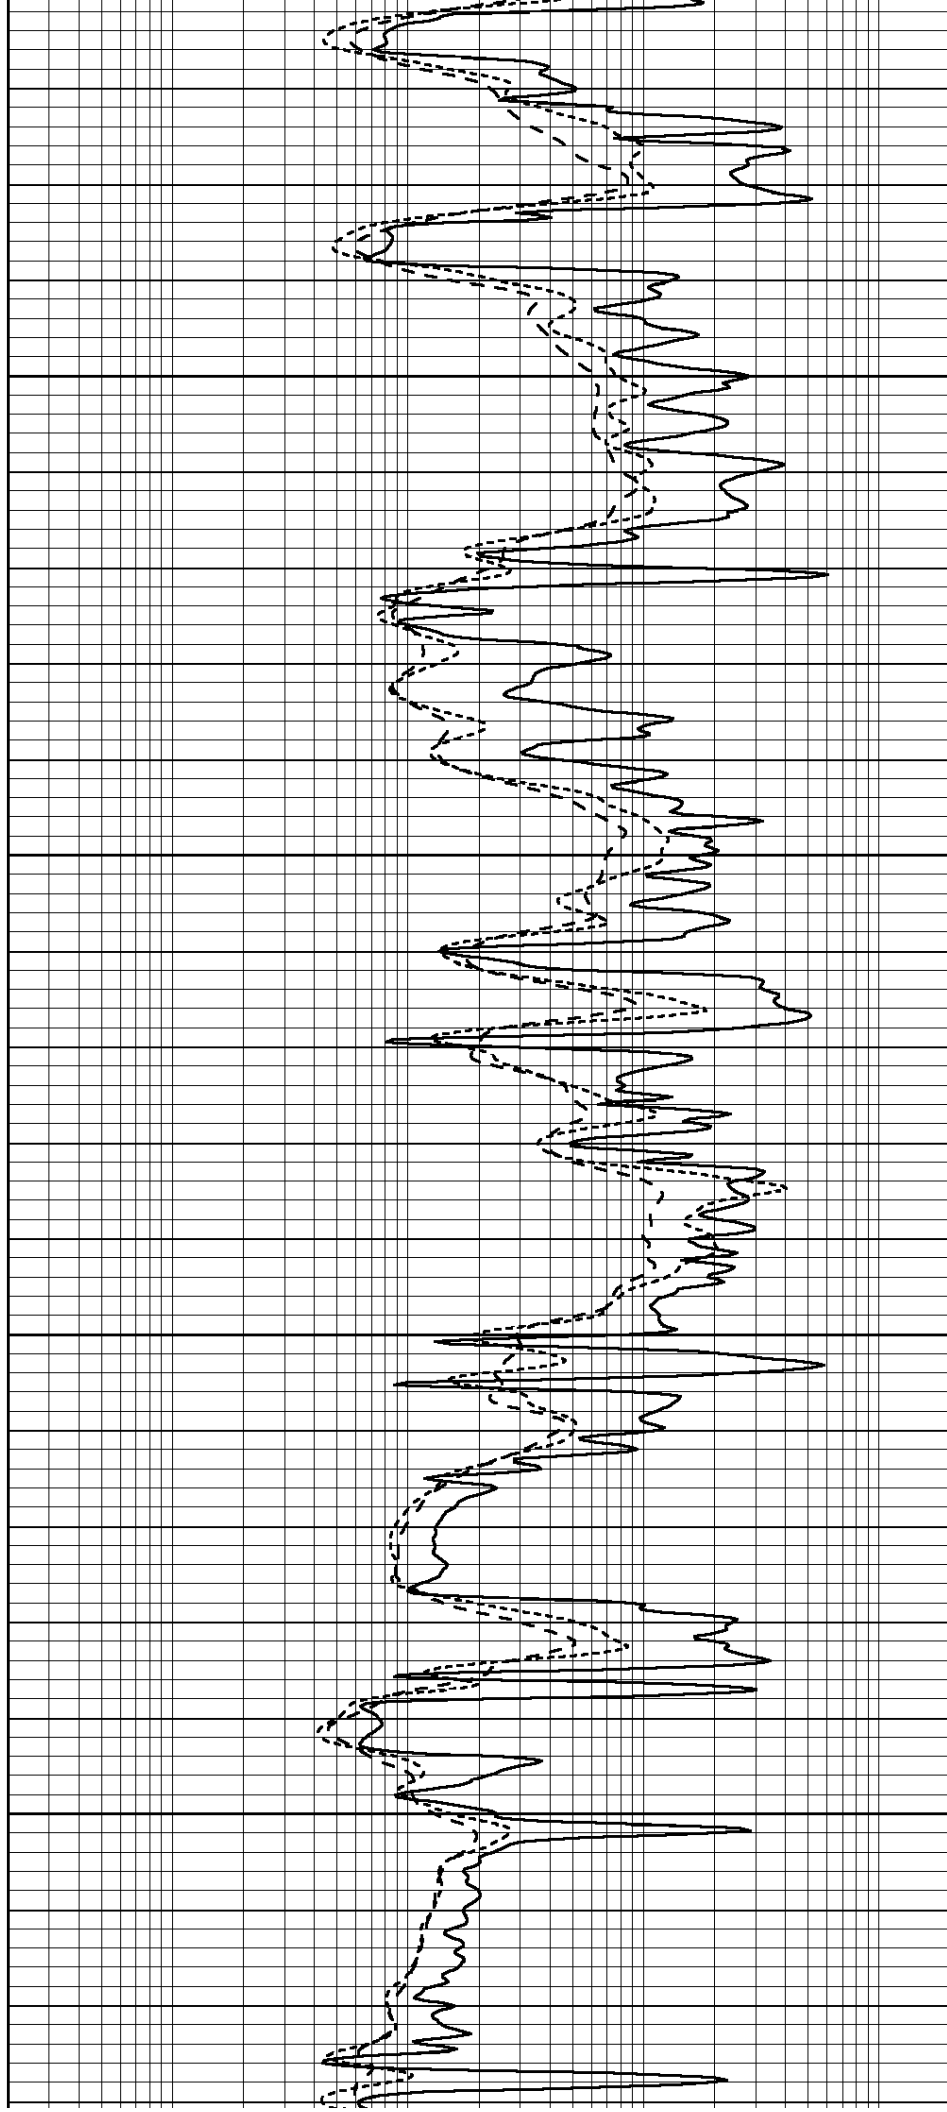

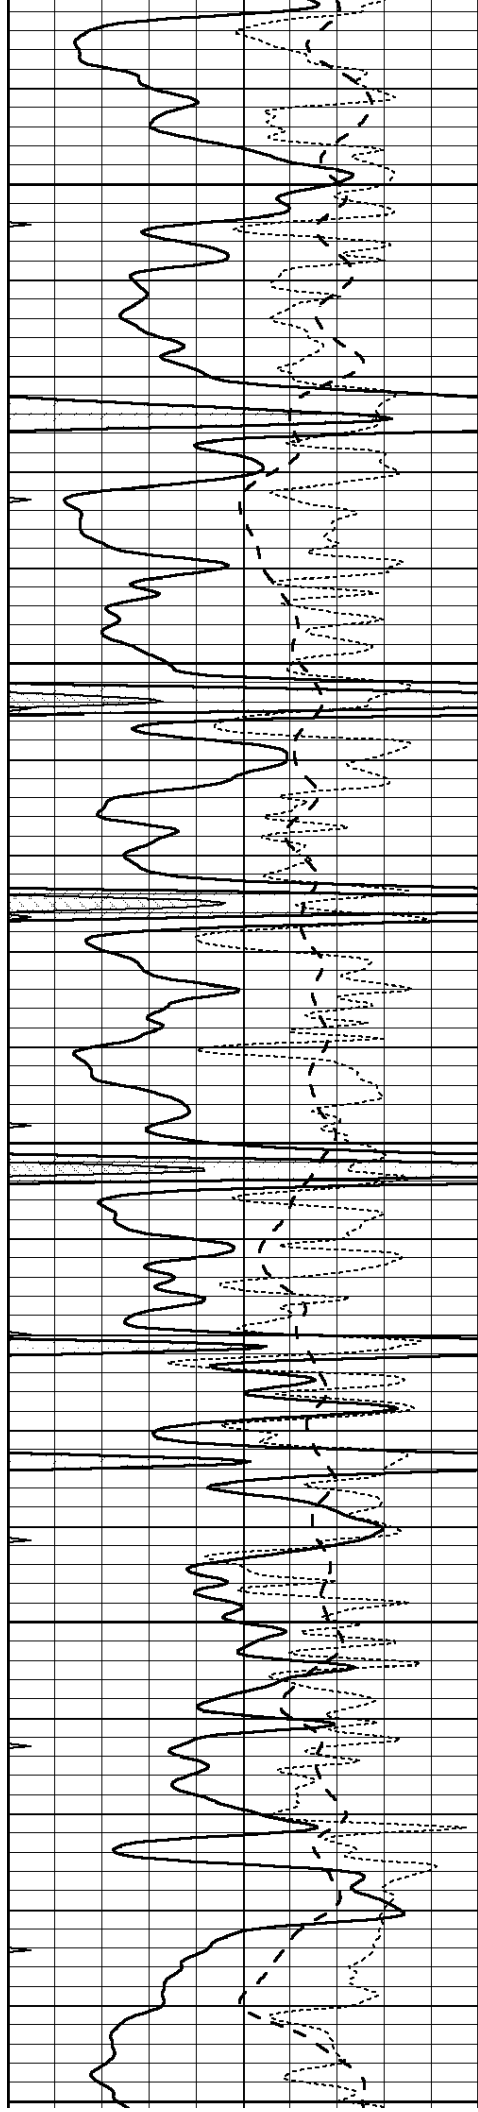


4400


4450

4500

4550

4600

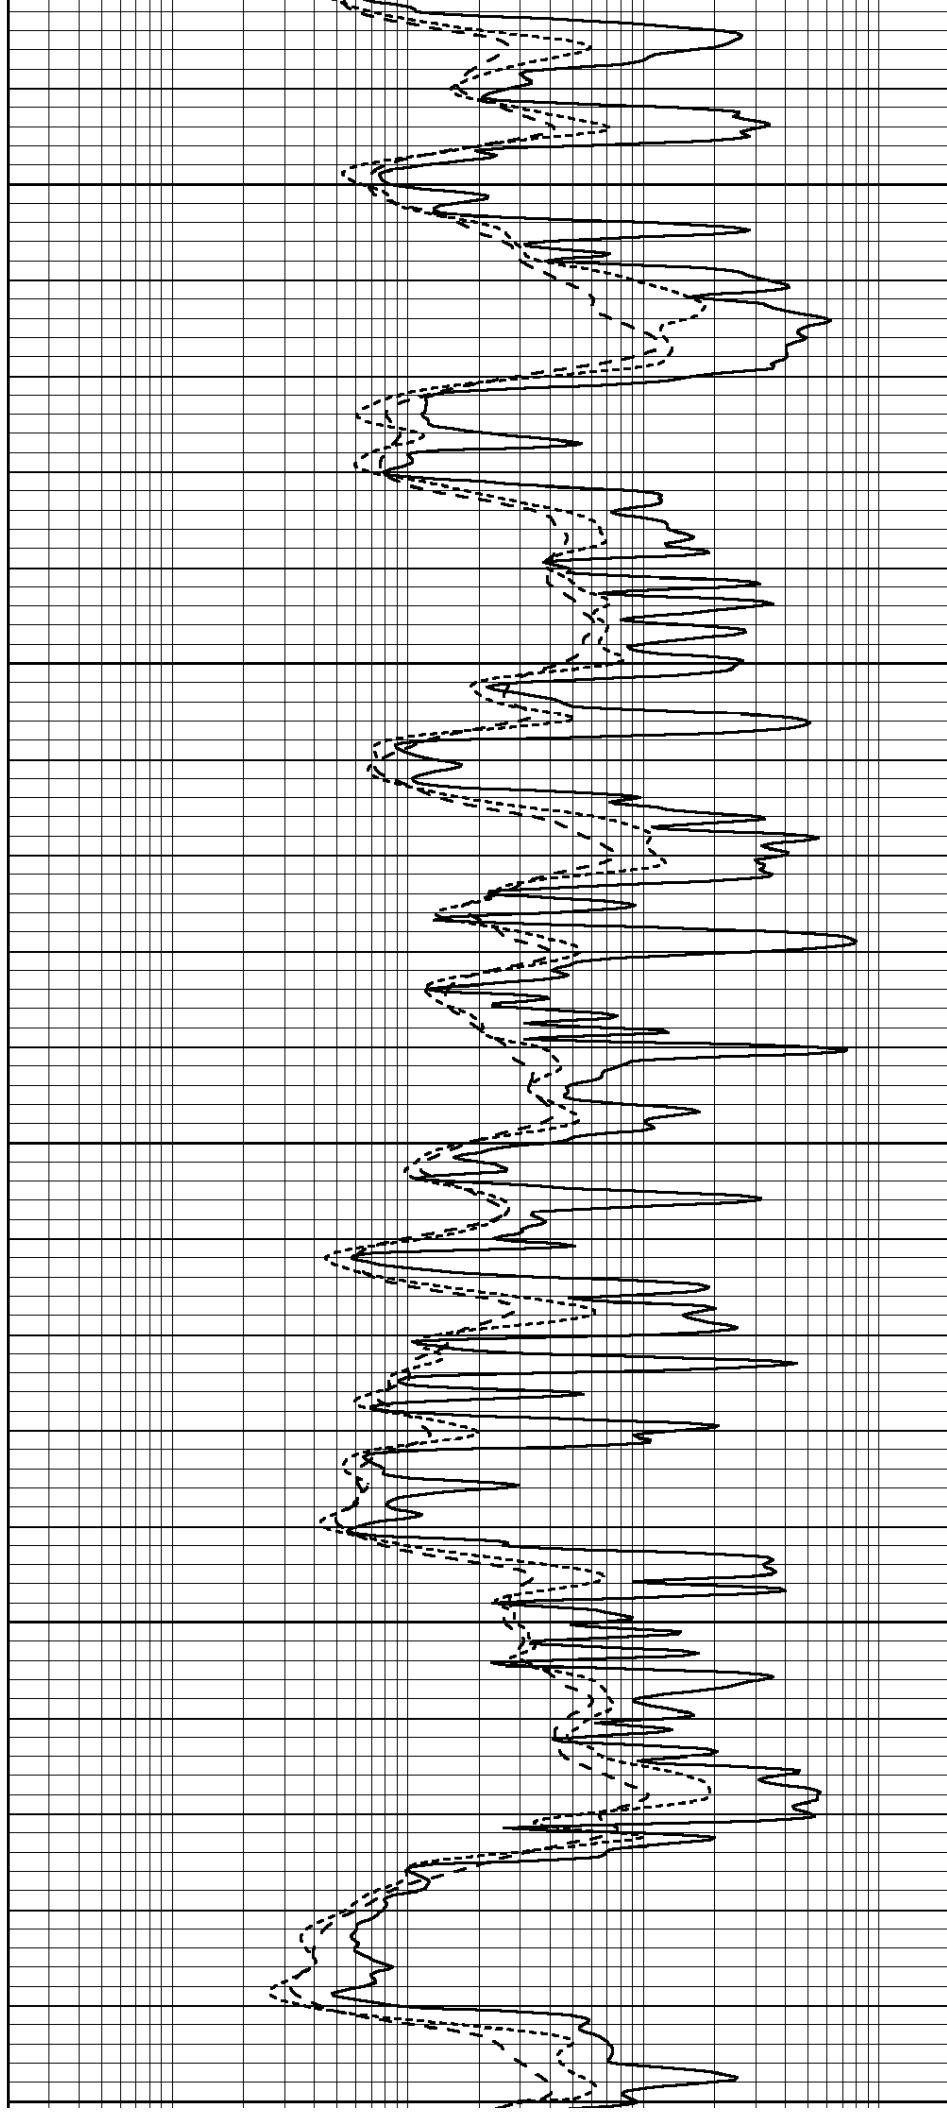


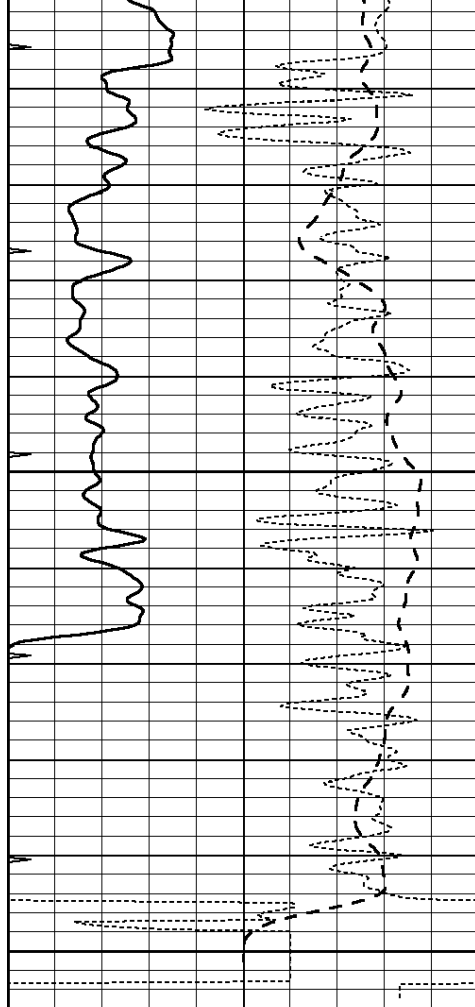

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4650

4700

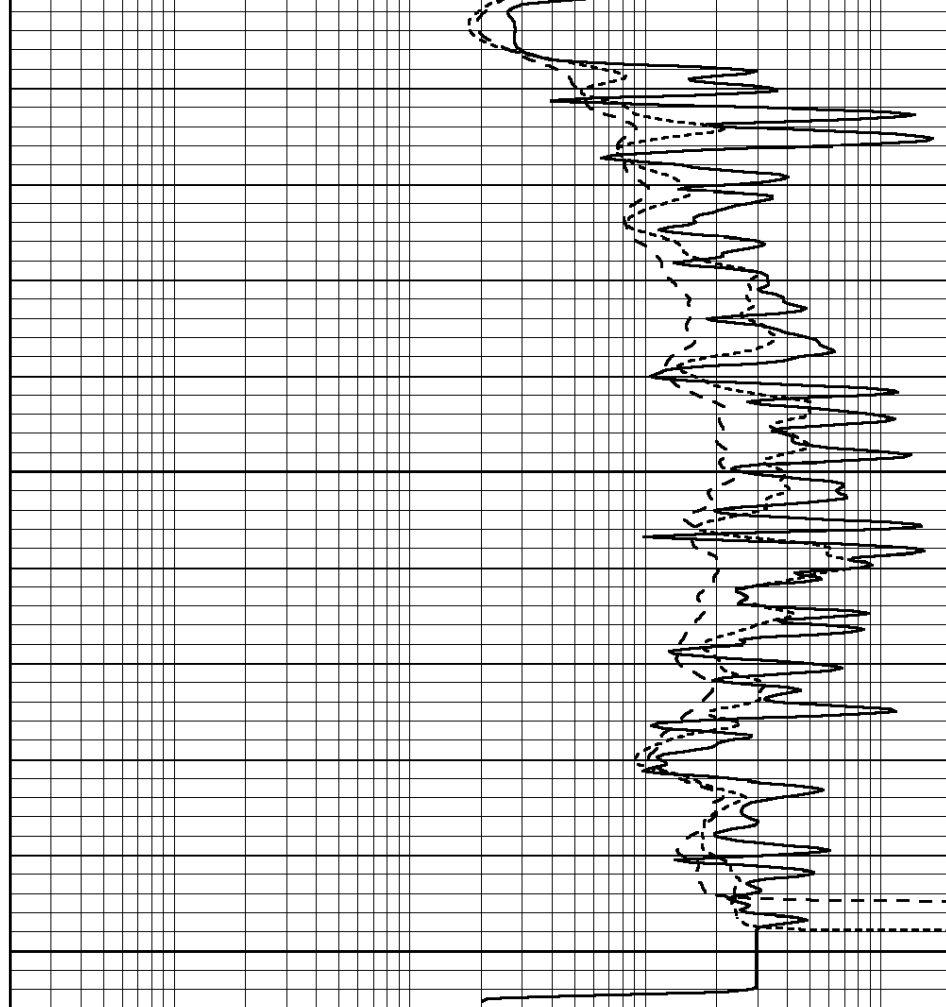

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000



**COMPLETION
& PRODUCTION
SERVICES CO.**



REPEAT SECTION


Database File: 011679pe.db
 Dataset Pathname: pass2.2
 Presentation Format: dil
 Dataset Creation: Tue Oct 01 10:14:56 2013 by Calc SOC 120430
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

4500

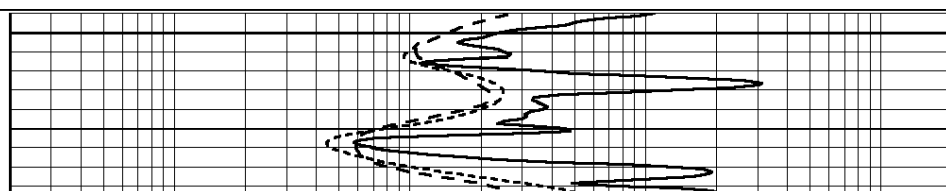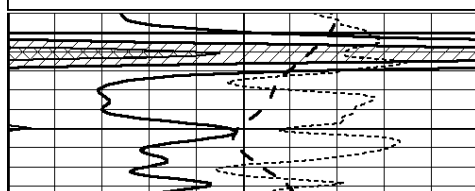

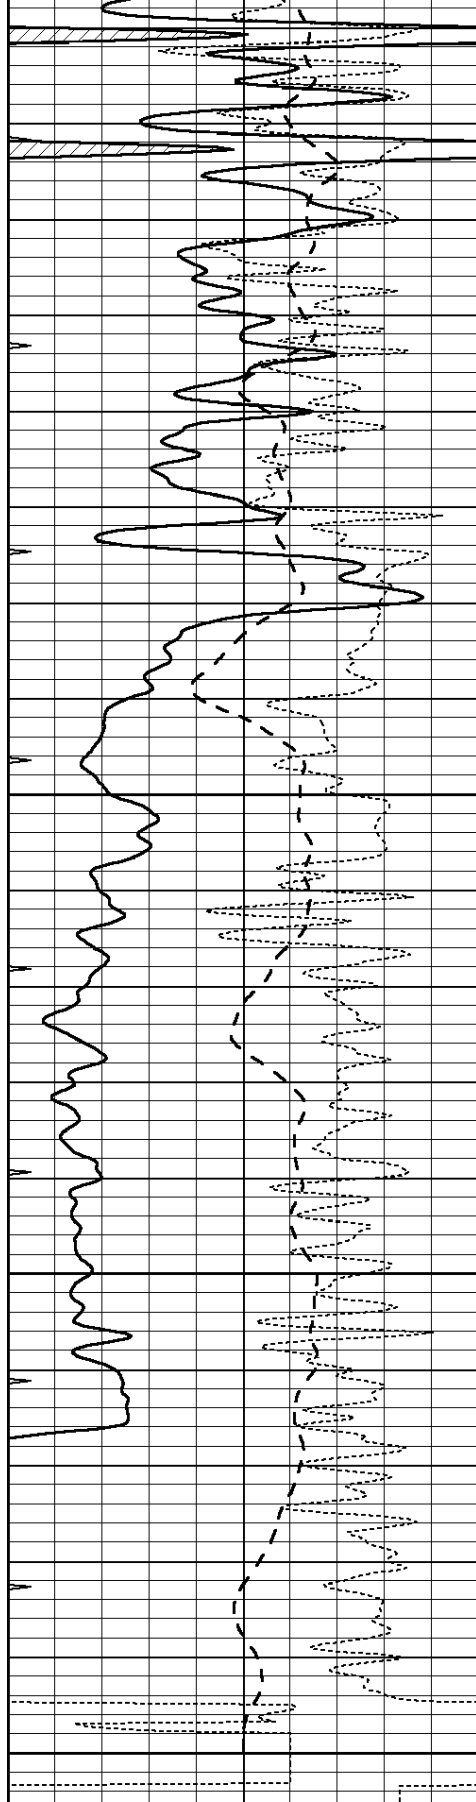


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

4550

4600

4650

4700

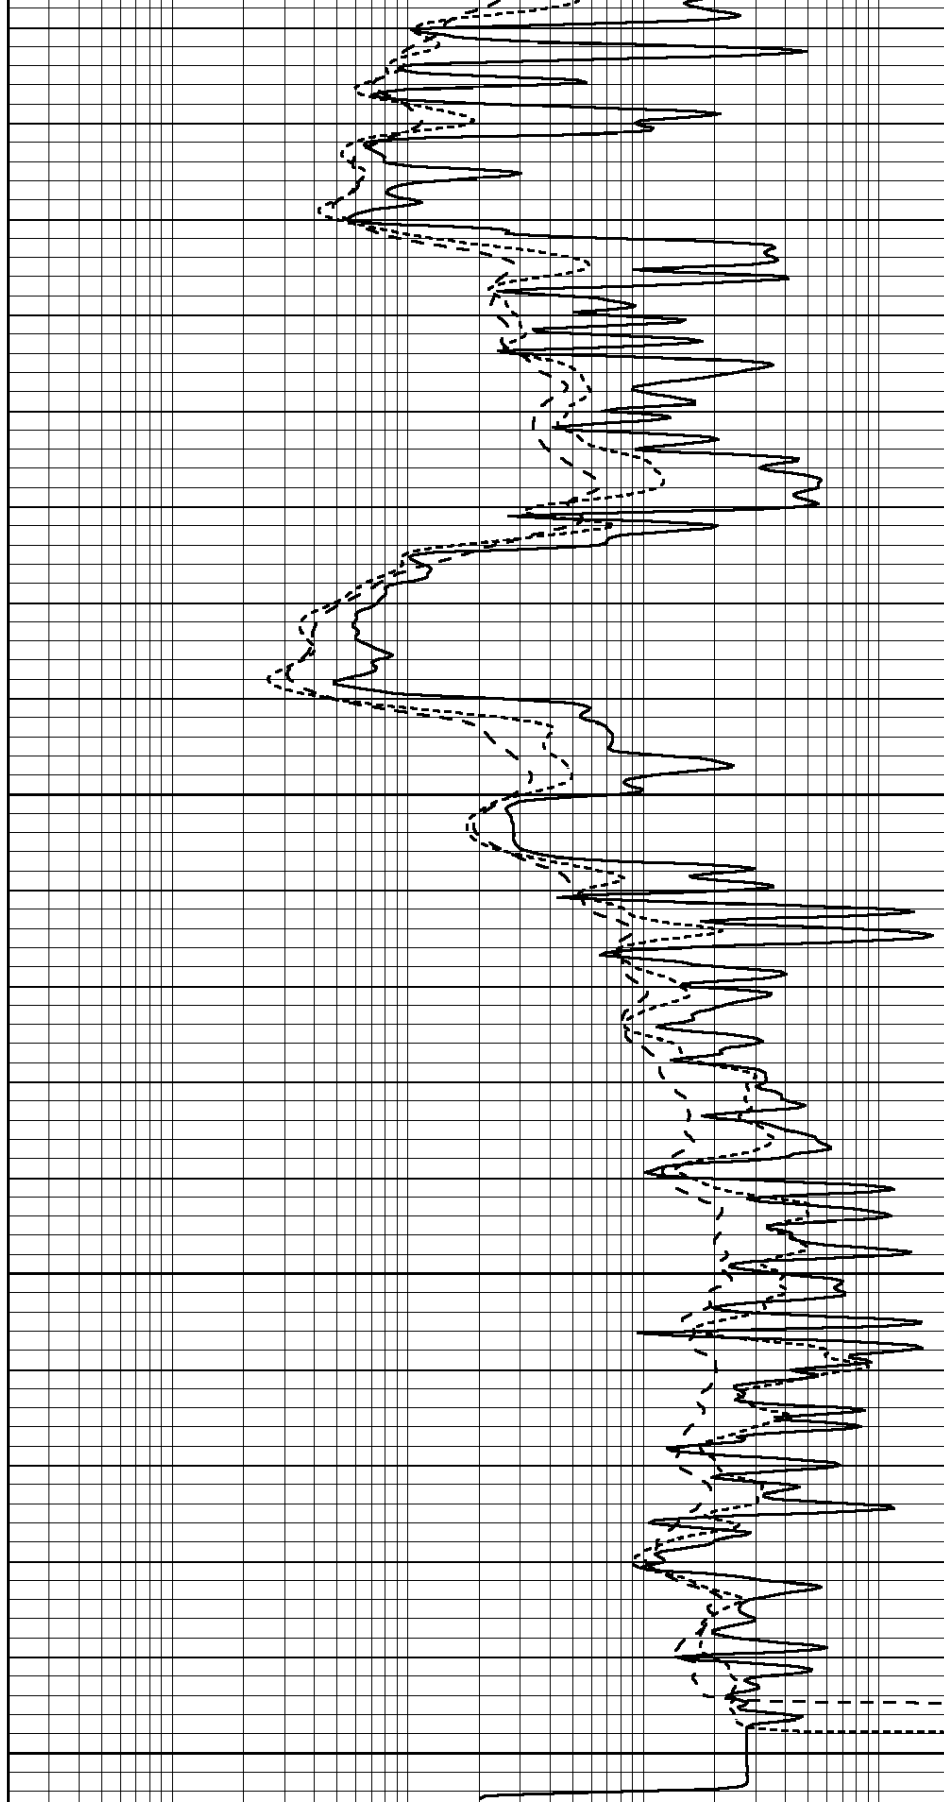

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

Calibration Report

Database File: 011679pe.db
 Dataset Pathname: pass3.9
 Dataset Creation: Tue Oct 01 11:38:24 2013

Dual Induction Calibration Report

Serial-Model: PROBE9-DILG
 Surface Cal Performed: Tue Oct 01 10:15:43 2013
 Downhole Cal Performed: Mon Jul 28 12:02:56 2008
 After Survey Verification Performed: Mon Jul 28 12:02:56 2008

Surface Calibration

Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	-0.014	0.629	V	0.000	400.000	mmho/m	621.923	-10.000
Medium	0.039	0.728	V	0.000	464.000	mmho/m	640.000	-16.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.011	0.610	V	0.000	400.000	mmho/m	667.135	-7.256
Medium	0.005	0.712	V	0.000	464.000	mmho/m	655.677	-3.102

Downhole Calibration

Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	14.508	388.384	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	166.367	504.400	mmho/m	1.000	0.000
LL3		7.500	V		1400.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		4000.000	mmho-m		

After Survey Verification

Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 001 Model: PRB

Master Calibration

Performed Tue May 28 08:54:22 2013

	Background	Magnesium	Aluminum	Sandstone	
Window 1	1890.3	12786.5	4236.7	13497.2	cps
Window 2	1764.1	11051.7	3765.5	11456.4	cps
Window 3	1442.8	5894.4	2376.2	5911.4	cps
Window 4	428.0	428.9	420.8	426.5	cps
Long Space	0.0	9287.6	2001.3	9692.3	cps
Short Space	3.2	3351.1	2186.8	3398.0	cps
Rho		1.7100	2.5900	1.3800	g/cc
Pe		0.0000	2.5700	1.5500	
Rib Angle	: 44.5	Rib Slope	: 0.981	Density/Spine Ratio	: 0.552
Spine Angle	: 74.5	Spine Slope	: 3.596	Spine Intercept	: -20.1

Before Survey Verification

Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification		Performed Wed Dec 31 18:00:00 1969			
Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

--

Compensated Neutron Calibration Report
--

Serial Number:	070808
Tool Model:	Probe

PRE-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Wed Jun 12 18:25:42 2013	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3500	GAPI/cps