



NABORS

**COMPLETION
& PRODUCTION
SERVICES CO.**

**MICRO
LOG**

Company		GORE OIL COMPANY	
Well		CARMICHAEL #2	
Field		WILDCAT	
County		ROOKS	
State		KANSAS	
Location:		API # : 15-163-24139-0000 1400' FNL & 2970' FEL	
SEC 22 TWP 9S RGE 18W		Other Services CDL/CNL DIL/SON	
Permanent Datum Log Measured From Drilling Measured From		GROUND LEVEL Elevation 2153 KELLY BUSHING & A.G.L. KELLY BUSHING	
Date	10/23/13		
Run Number	TWO		
Depth Driller	3800		
Depth Logger	3801		
Bottom Logged Interval	3783		
Top Log Interval	3000		
Casing Driller	8 5/8" @ 265		
Casing Logger	263		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2500 PPM	
Density / Viscosity	9.1/49		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rim @ Meas. Temp	.85 @ 87F		
Rmf @ Meas. Temp	.63 @ 87F		
Rmc @ Meas. Temp	1.02 @ 87F		
Source of Rmf / Rmc	MEASURED		
Rim @ BHT	.64 @ 114F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom			
Maximum Recorded Temperature	114F		
Equipment Number	680		
Location	HAYS, KS.		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	CHUCK SCHMALTZ		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING NABORS COMPLETION & PRODUCTION SVCS. (785) 628-6395

DIRECTIONS:

PLAINVILLE, KS. - 1 1/2 WEST TO RD. 16 - 1 1/2 NORTH - EAST & NORTH INTO



NABORS
COMPLETION
& PRODUCTION

MAIN SECTION

Database File:

010949ddn.db

Dataset Pathname:

pass6.1

Presentation Format:

_micro


Dataset Creation:


Wed Oct 23 21:24:51 2013 by Calc Open-Cased 090629

Charted by:

Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

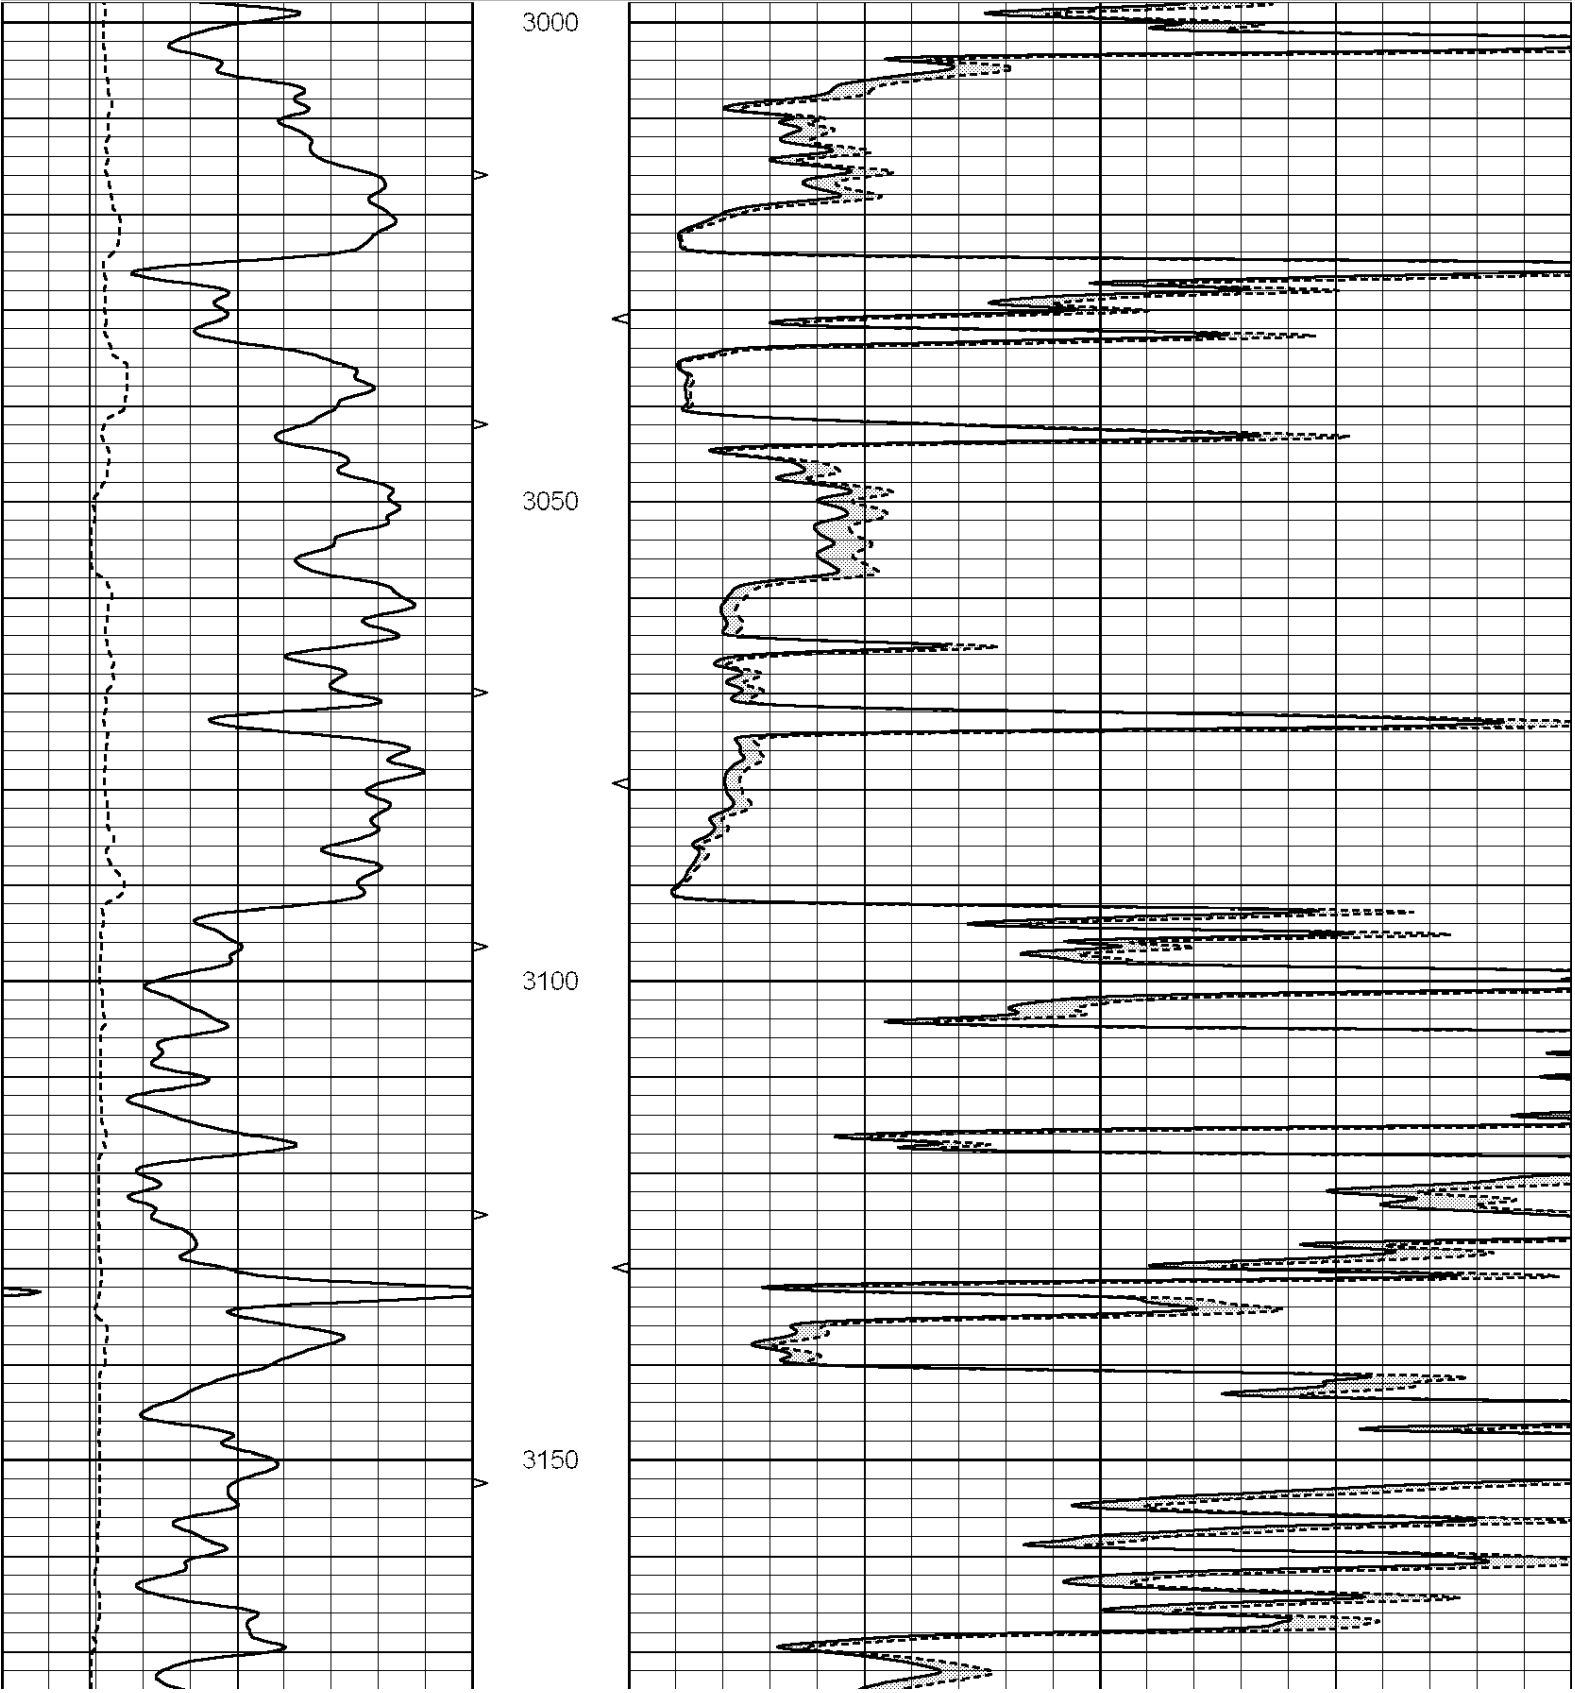

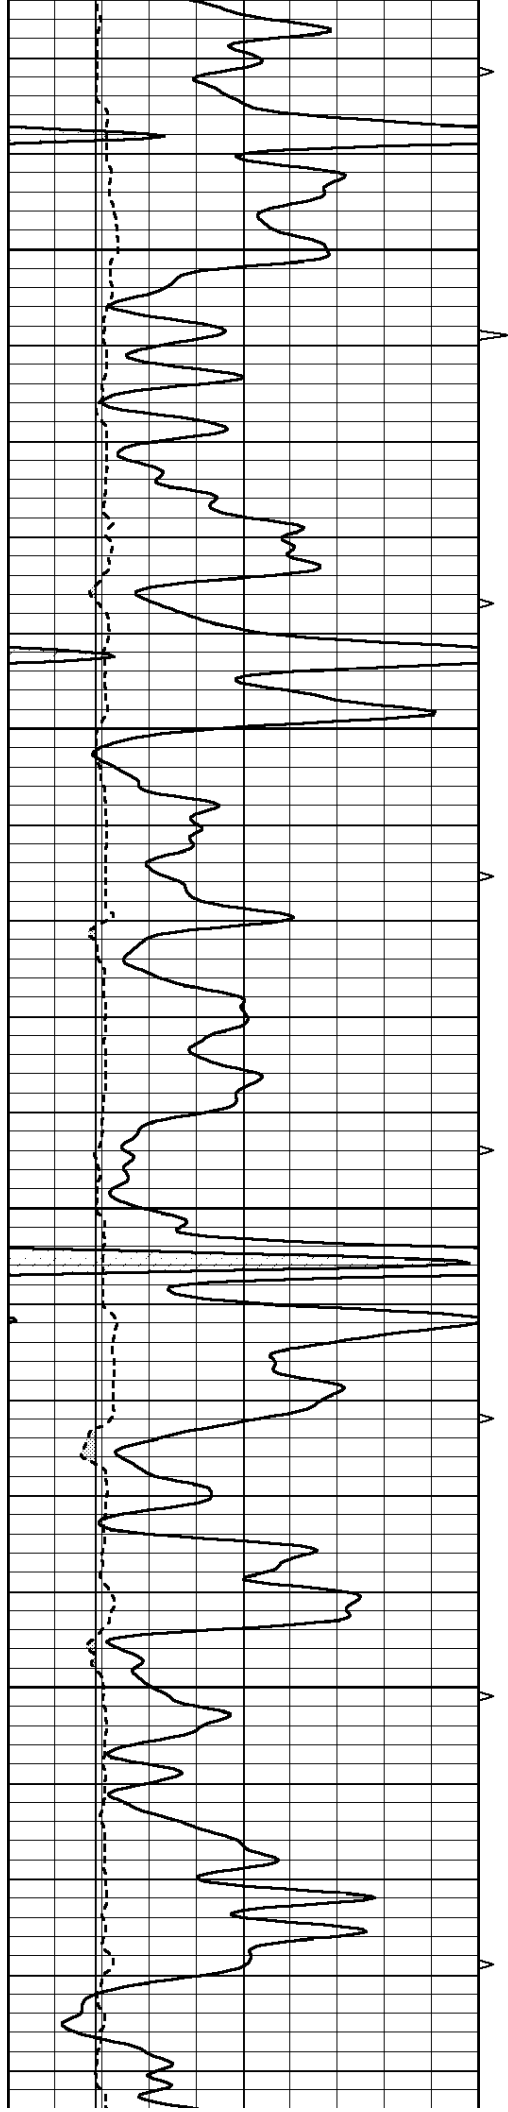



3200

3250

3300

3350

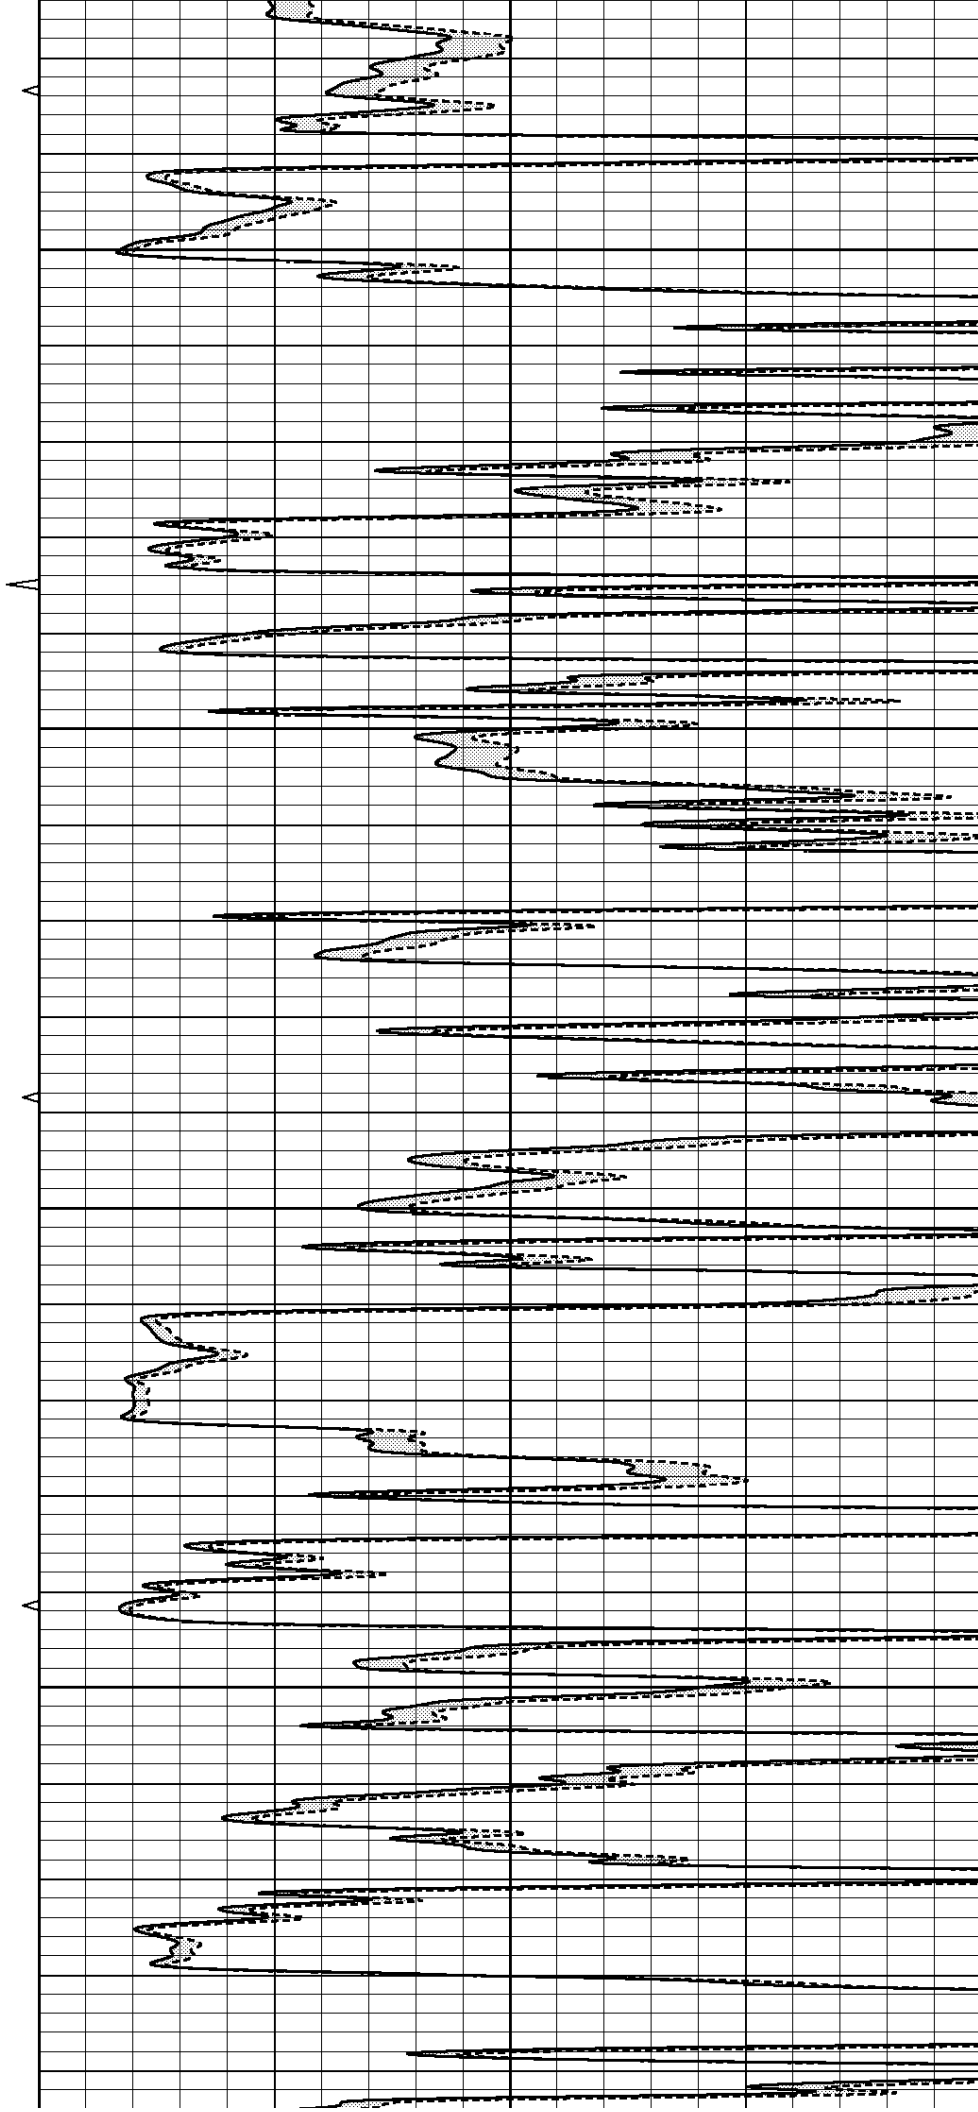

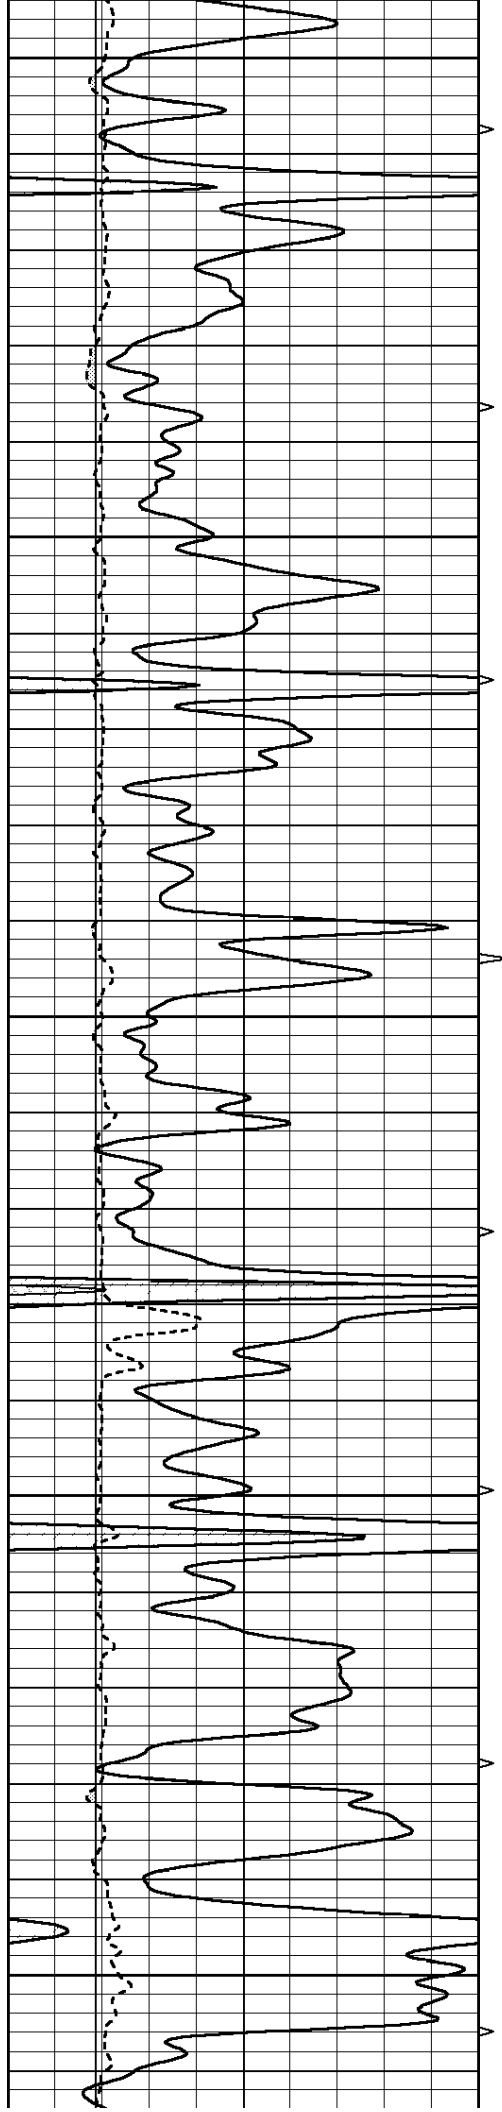


3400


3450

3500

3550

3600

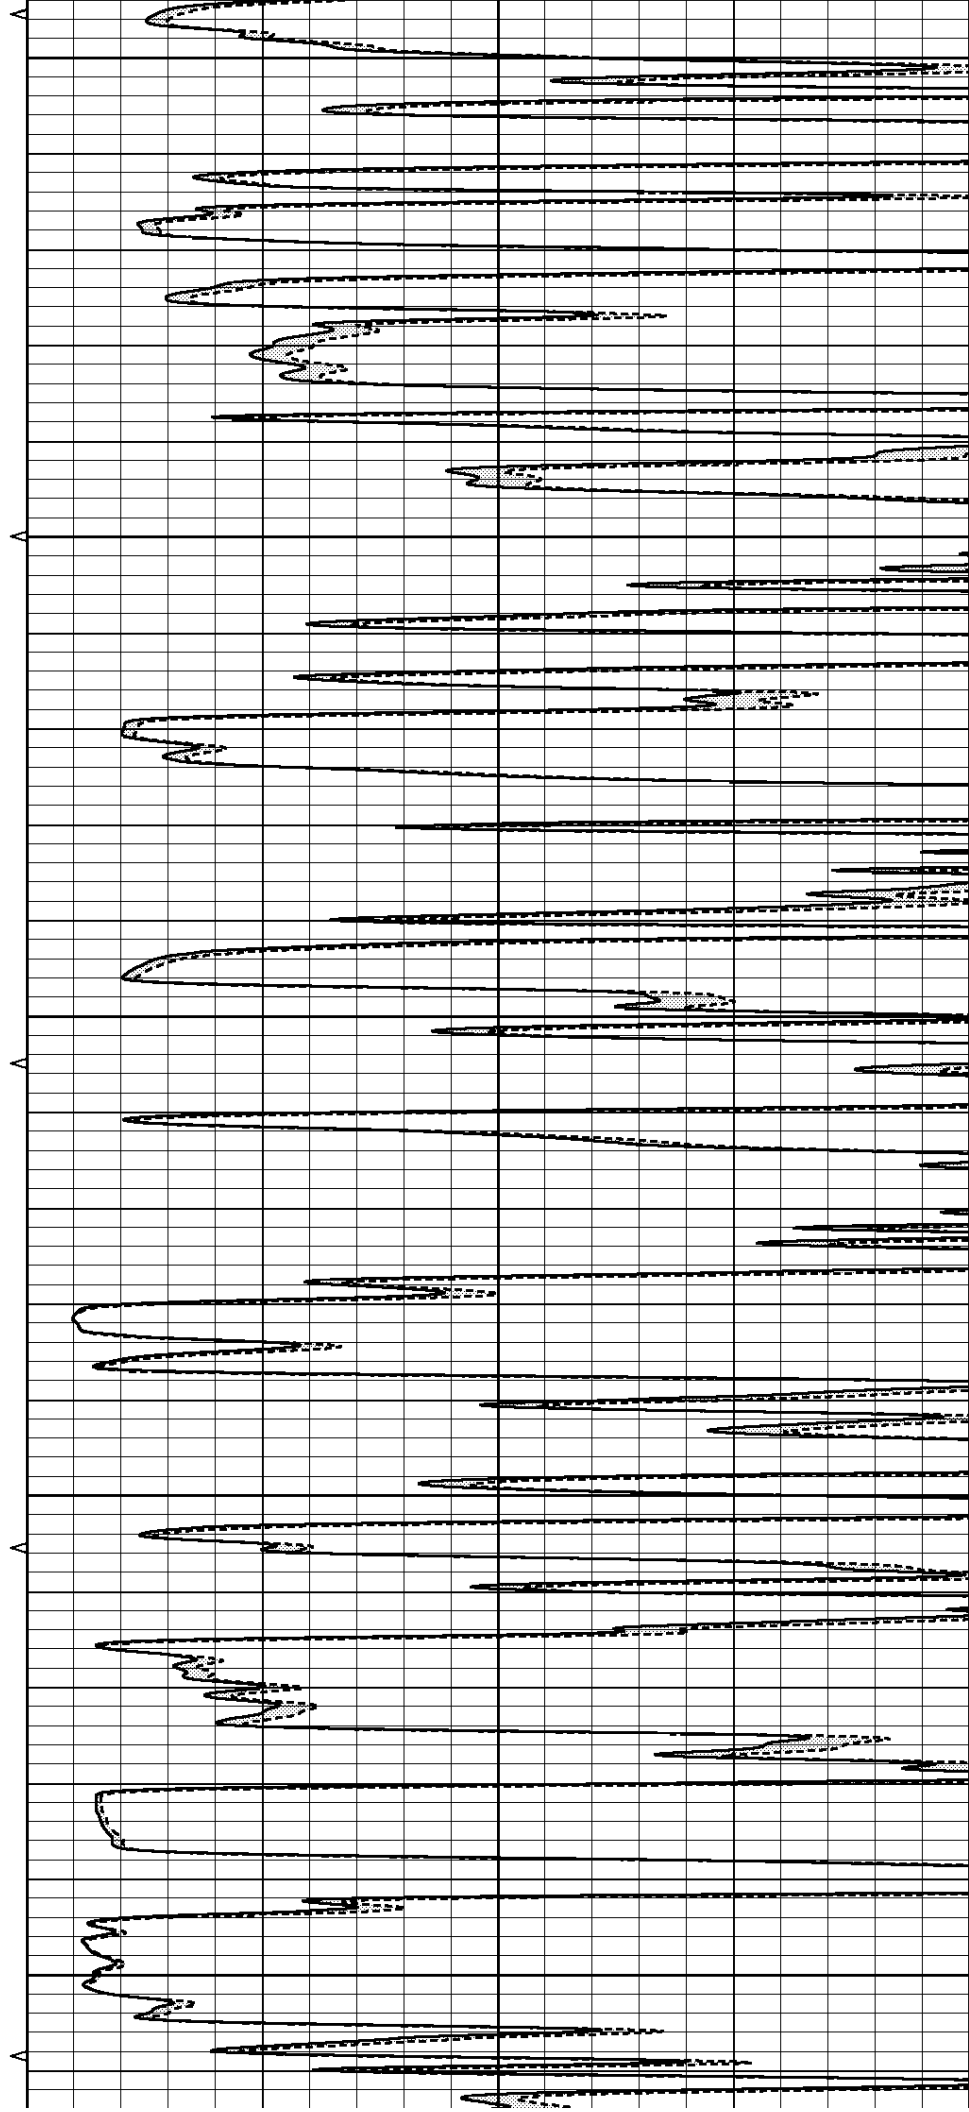


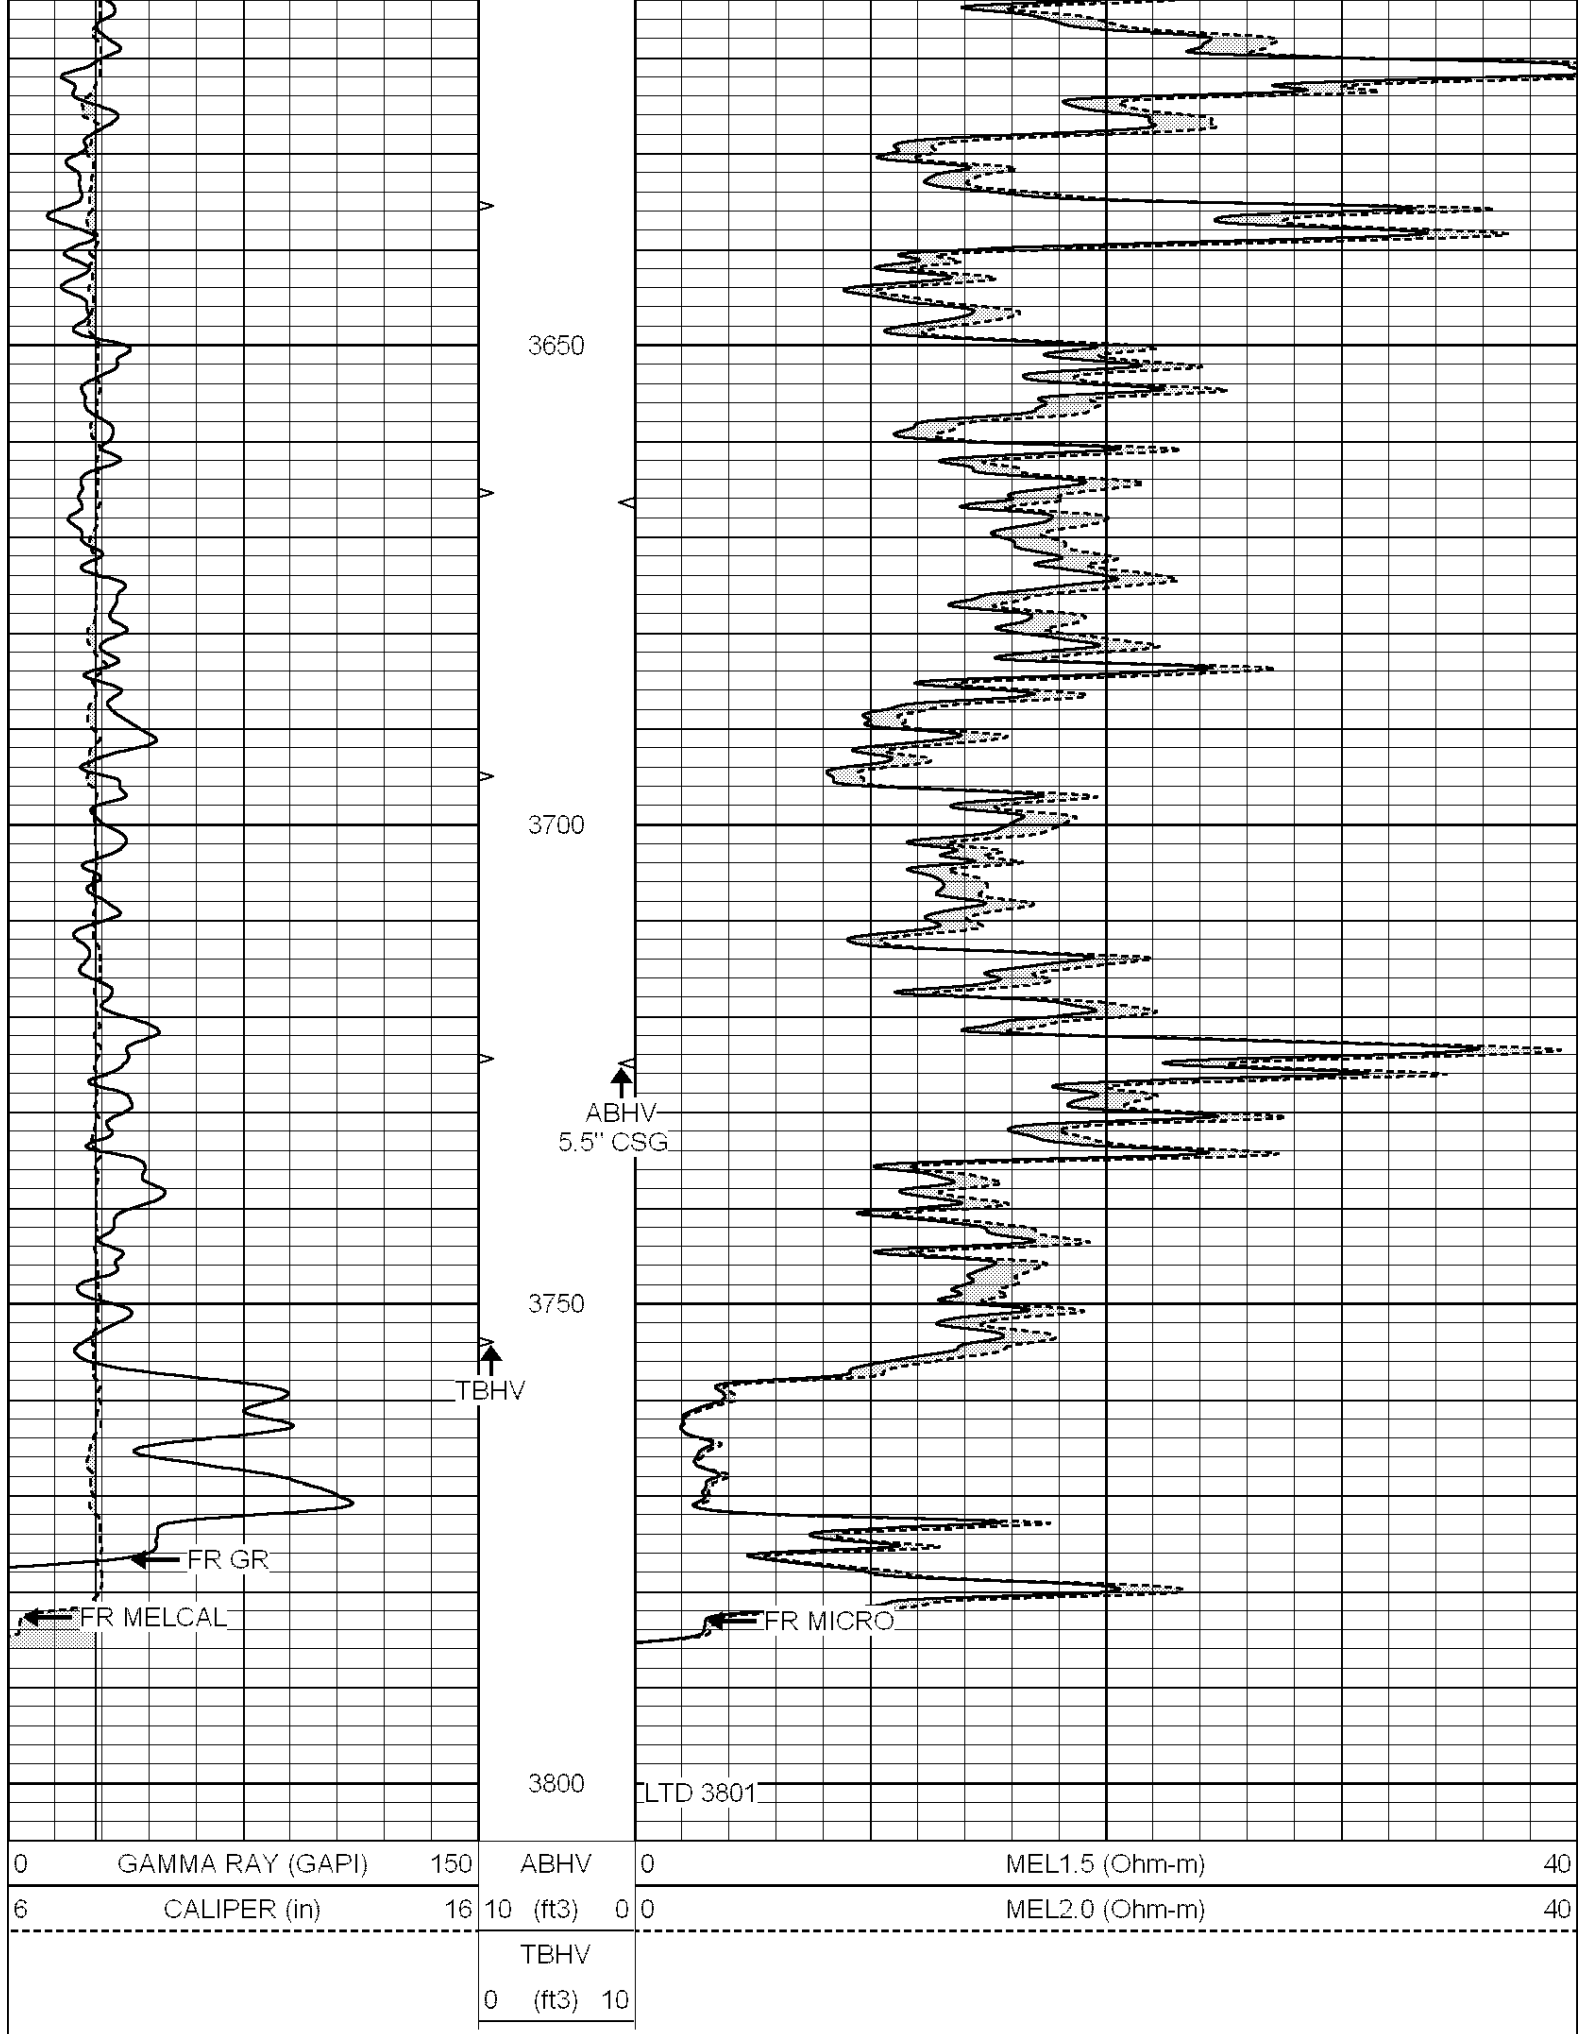


REPEAT SECTION

Database File: 010949ddn.db
 Dataset Pathname: pass5.1
 Presentation Format: _micro
 Dataset Creation: Wed Oct 23 21:24:17 2013 by Calc Open-Cased 090629
 Charted by: Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

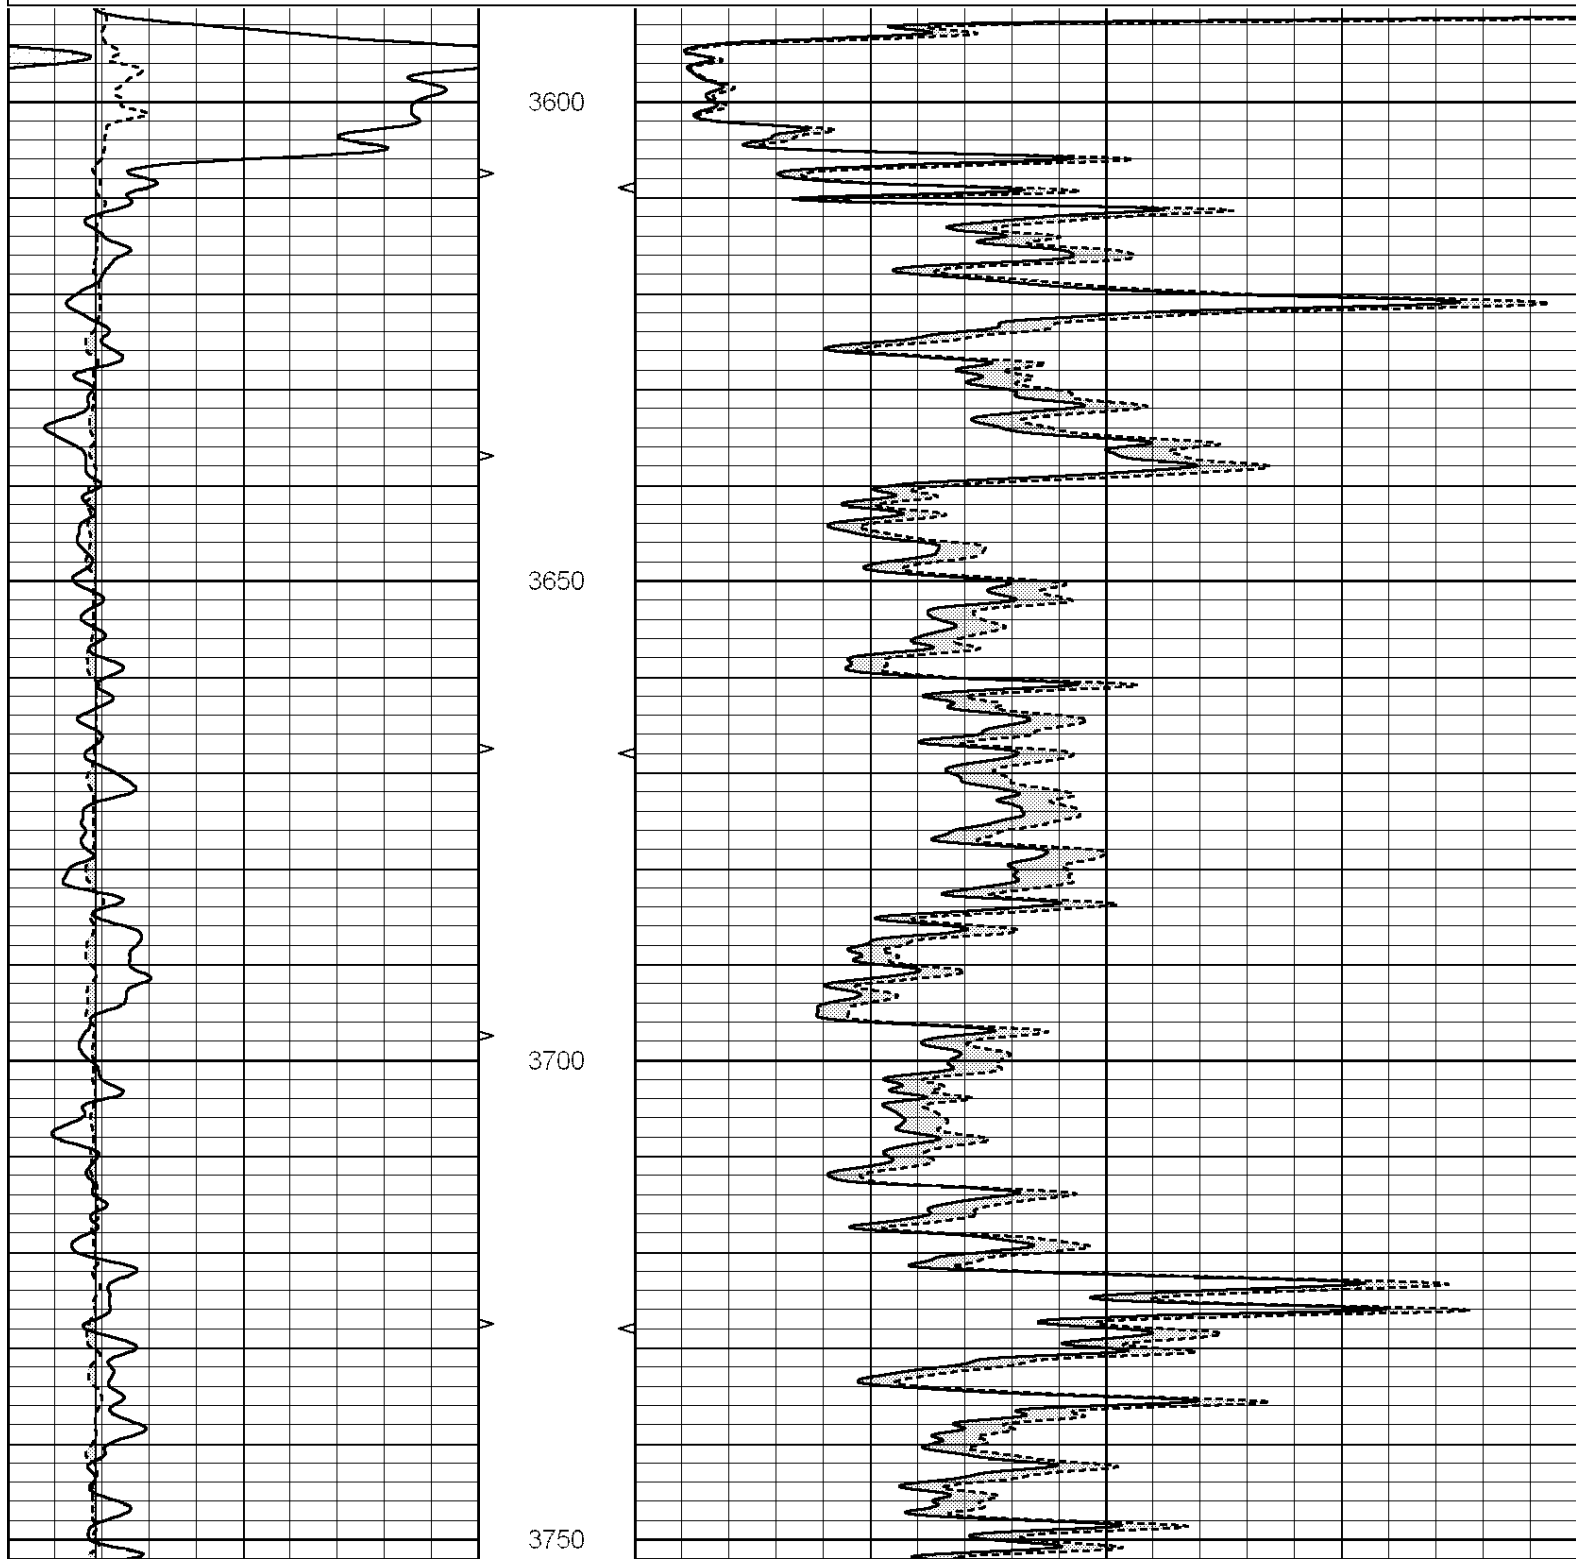

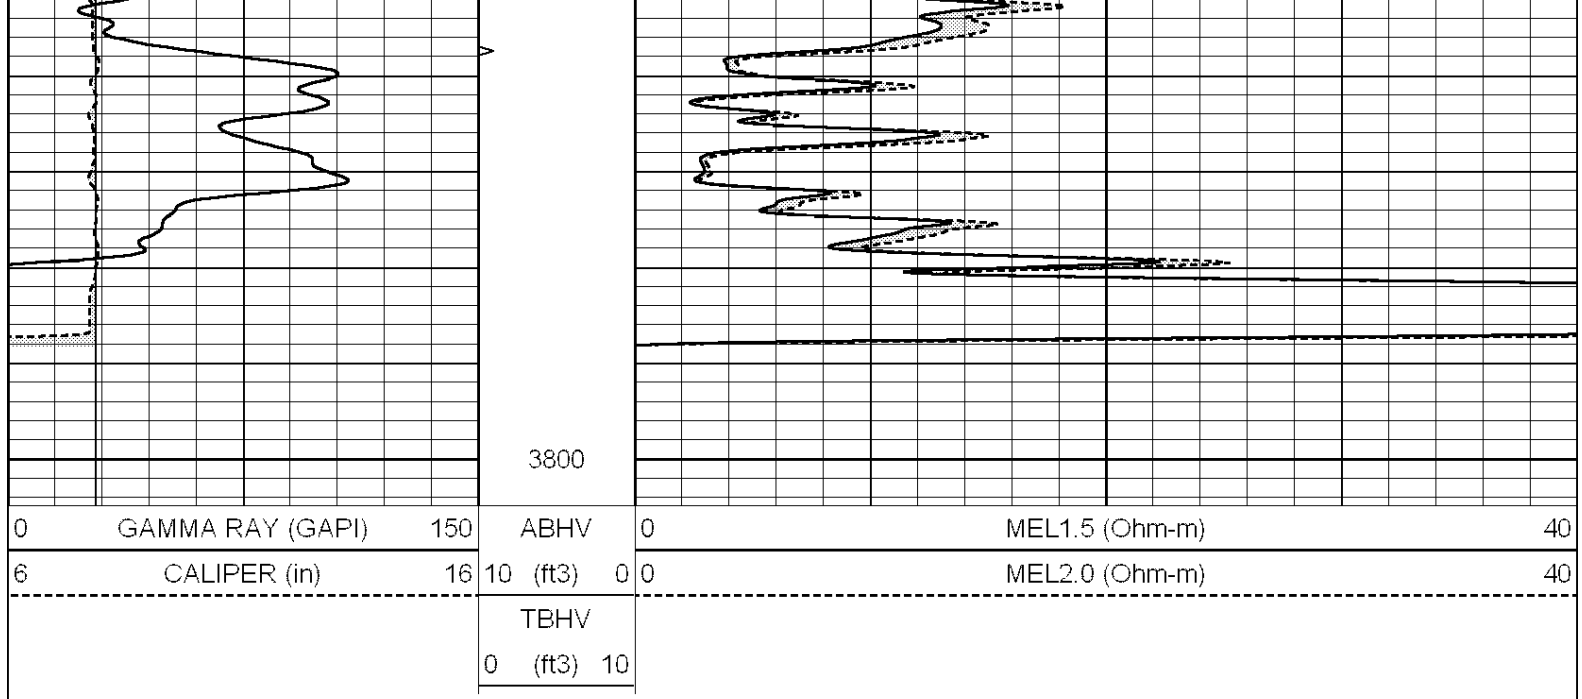

Calibration Report			
Database File:	010949ddn.db		
Dataset Pathname:	pass6.1		
Dataset Creation:	Wed Oct 23 21:24:51 2013 by Calc Open-Cased 090629		
MICRO Calibration Report			
Serial Number:	2		
Tool Model:	PROBE		
Performed:	Wed Sep 07 15:52:58 2011		
Caliper Calibration:	Gain=4.953	Offset=-0.885	
	Low Cal	High Cal	
References	14.000	22.000	
Readings	2.688	4.303	
1.5" Calibration:	Gain=35.000	Offset=-0.800	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.015	0.458	
2" Calibration:	Gain=90.106	Offset=-2.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	0.905	
Gamma Ray Calibration Report			
Serial Number:	GR6		
Tool Model:	OPEN		
Performed:	Thu Mar 10 03:46:42 2011		
Calibrator Value:	150.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	276.0	cps	
Sensitivity:	0.8335	GAPI/cps	